

# TEST REPORT

Product Name: VISIBLE EAR WAX REMOVER  
FCC ID: 2AYJD-DZ2102  
Trademark: N/A  
Model Number: DZ2102  
Prepared For: Shenzhen Dianzhui Culture Technology Co., Ltd.  
Address: 320, Block A, Baoyuan Huafeng Headquarter Economic Building,  
Xixiang Street, Baoan District, Shenzhen China  
Manufacturer: Shenzhen Dianzhui Culture Technology Co., Ltd.  
Address: 320, Block A, Baoyuan Huafeng Headquarter Economic Building,  
Xixiang Street, Baoan District, Shenzhen China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community,  
Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Mar. 4, 2022  
Sample tested Date: Mar. 4, 2022 to Mar. 14, 2022  
Issue Date: Mar. 14, 2022  
Report No.: CTB220307031RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	8
4.3 Support Equipment .....	8
4.4 Channel List .....	9
4.5 Test Mode .....	9
4.6 Test Environment .....	9
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	10
5.1 Test Facility .....	10
5.2 Test Instrument Used .....	10
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	13
6.1 Block Diagram Of Test Setup .....	13
6.2 Limit .....	13
6.3 Test procedure .....	13
6.4 Test Result .....	15
<b>7. RADIATED SPURIOUS EMISSION</b> .....	17
7.1 Block Diagram Of Test Setup .....	17
7.2 Limit .....	17
7.3 Test procedure .....	18
7.4 Test Result .....	19
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	41
8.1 Block Diagram Of Test Setup .....	41
8.2 Limit .....	41
8.3 Test procedure .....	41
8.4 Test Result .....	42
<b>9. CONDUCTED OUTPUT POWER</b> .....	50
9.1 Block Diagram Of Test Setup .....	50
9.2 Limit .....	50
9.3 Test procedure .....	50
9.4 Test Result .....	51
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	52
10.1 Block Diagram Of Test Setup .....	52
10.2 Limit .....	52
10.3 Test procedure .....	52
10.4 Test Result .....	53
<b>11. POWER SPECTRAL DENSITY</b> .....	58
11.1 Block Diagram Of Test Setup .....	58
11.2 Limit .....	58
11.3 Test procedure .....	58



11.4 Test Result ..... 59

**12. ANTENNA REQUIREMENT ..... 64**

**13. EUT PHOTOGRAPHS ..... 65**

**14. EUT TEST SETUP PHOTOGRAPHS ..... 66**

*(Note: N/A means not applicable)*

## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB220307031RFX	Mar. 14, 2022	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.



### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s):	DZ2102
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	LW-3701-V2.3
Software Version:	DZ_LW3701_UDU Earpick-xxxx_CH3_BK7231U_V1.6_0x9c750e7f
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.655dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : 1.0dBi
Ratings:	USB DC 5V 1000mAh Battery DC 3.7V, 250mAh

## 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

## 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	AC adapter	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05




Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

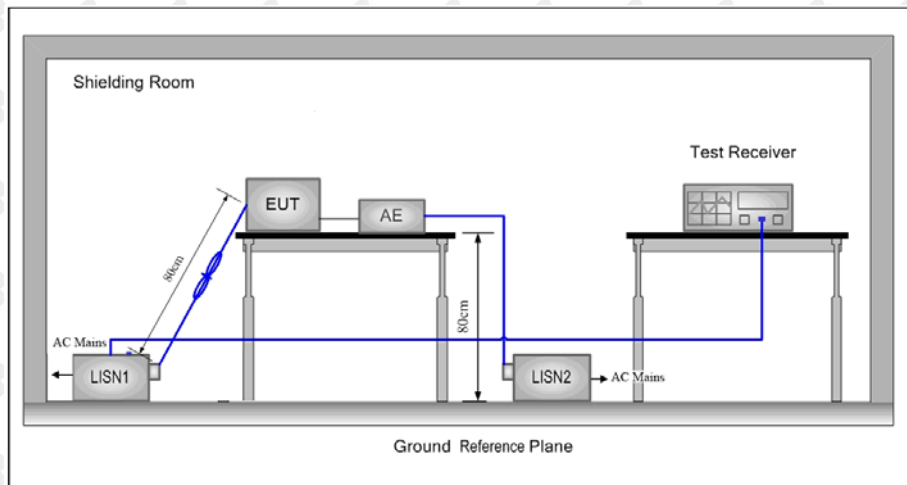

### 6.2 Limit

**Table 4 - AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed

0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.



### 6.4 Test Result

Test Specification: Line  
AC 120V 60Hz

80.0 dBuV

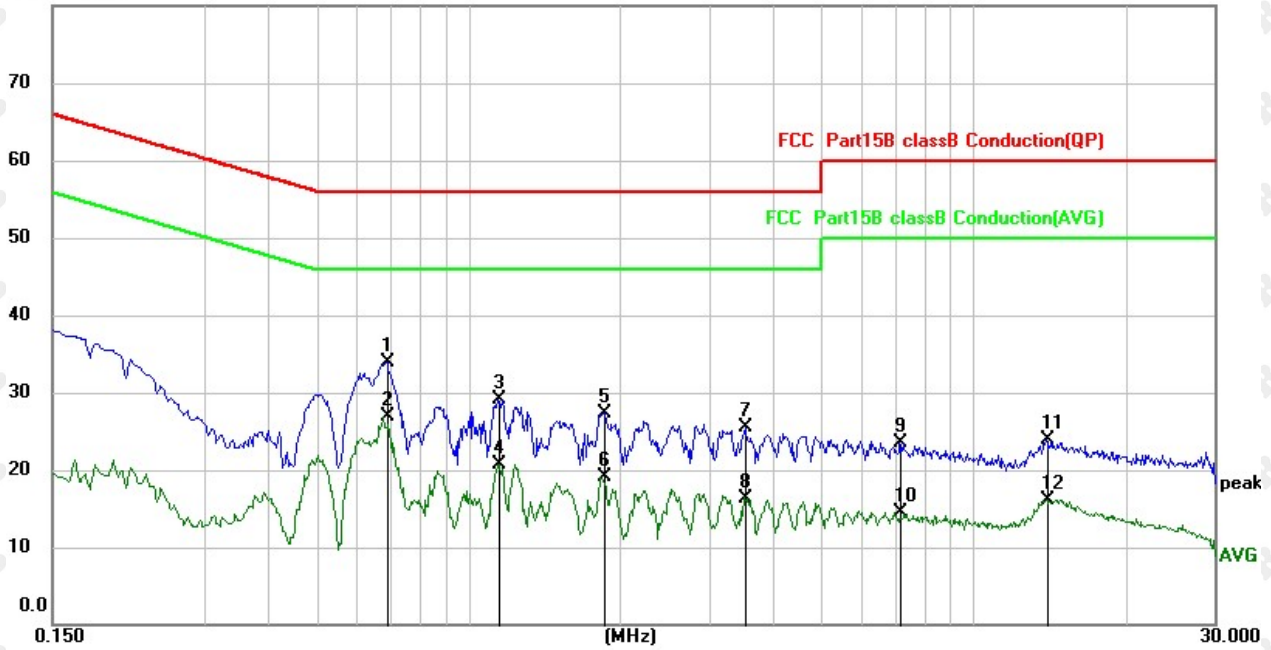


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.6900	23.41	10.56	33.97	56.00	-22.03	QP
2	*	0.6900	16.25	10.56	26.81	46.00	-19.19	AVG
3		1.1460	18.46	10.62	29.08	56.00	-26.92	QP
4		1.1460	10.16	10.62	20.78	46.00	-25.22	AVG
5		1.8580	16.68	10.63	27.31	56.00	-28.69	QP
6		1.8580	8.49	10.63	19.12	46.00	-26.88	AVG
7		3.5380	14.77	10.64	25.41	56.00	-30.59	QP
8		3.5380	5.60	10.64	16.24	46.00	-29.76	AVG
9		7.1620	12.78	10.72	23.50	60.00	-36.50	QP
10		7.1620	3.72	10.72	14.44	50.00	-35.56	AVG
11		13.9860	13.09	10.89	23.98	60.00	-36.02	QP
12		13.9860	5.25	10.89	16.14	50.00	-33.86	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral  
AC 120V 60Hz

80.0 dBuV

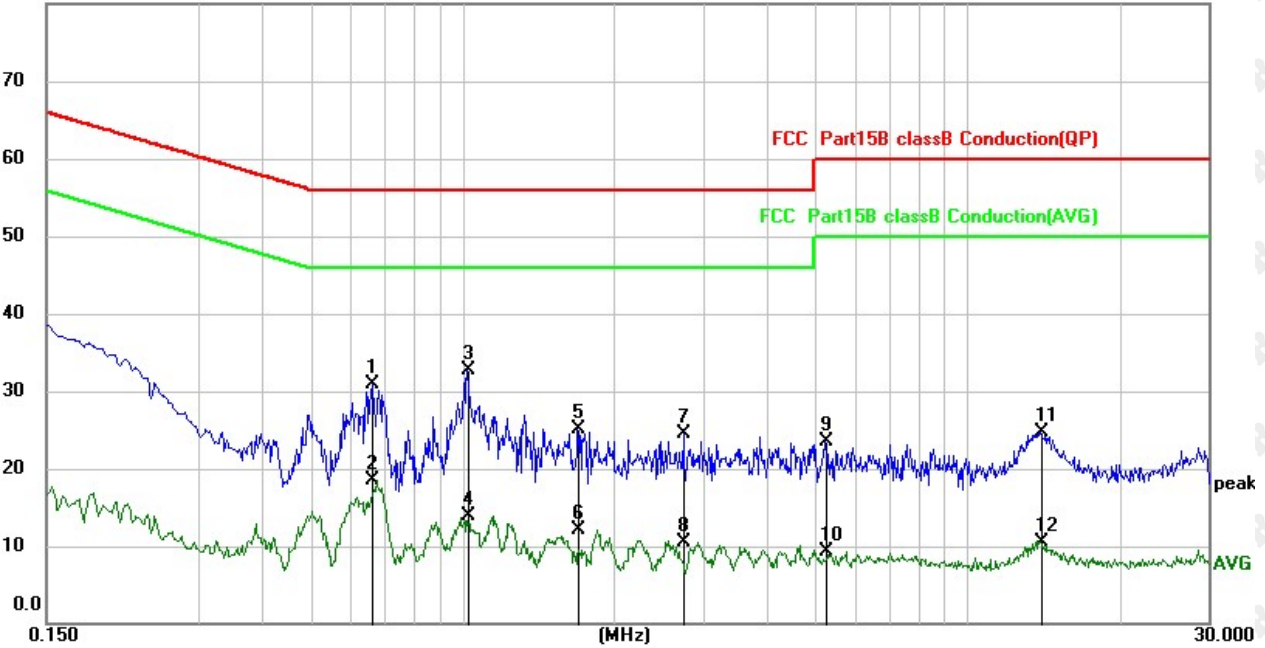

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1		0.6620	20.32	10.55	30.87	56.00	-25.13	QP
2		0.6620	8.02	10.55	18.57	46.00	-27.43	AVG
3	*	1.0220	22.07	10.62	32.69	56.00	-23.31	QP
4		1.0220	3.35	10.62	13.97	46.00	-32.03	AVG
5		1.6900	14.54	10.63	25.17	56.00	-30.83	QP
6		1.6900	1.53	10.63	12.16	46.00	-33.84	AVG
7		2.7380	13.78	10.63	24.41	56.00	-31.59	QP
8		2.7380	-0.19	10.63	10.44	46.00	-35.56	AVG
9		5.2420	12.91	10.66	23.57	60.00	-36.43	QP
10		5.2420	-1.43	10.66	9.23	50.00	-40.77	AVG
11		13.9340	13.85	10.89	24.74	60.00	-35.26	QP
12		13.9340	-0.45	10.89	10.44	50.00	-39.56	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

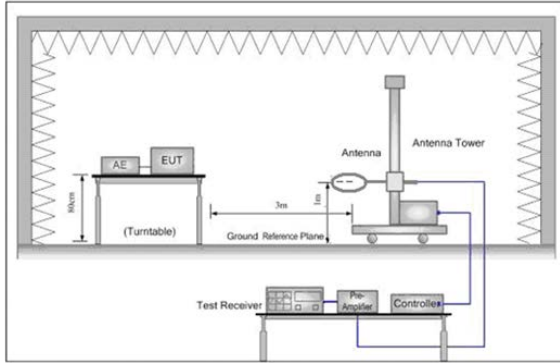


Figure 1. Below 30MHz

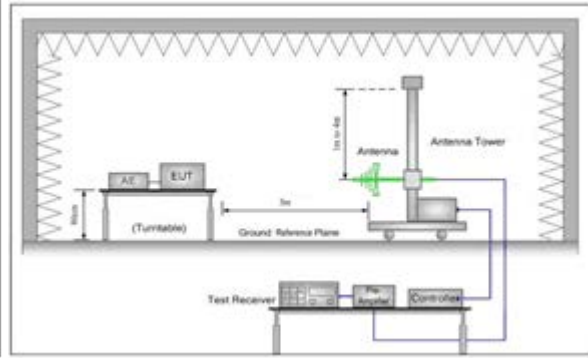


Figure 2. 30MHz to 1GHz

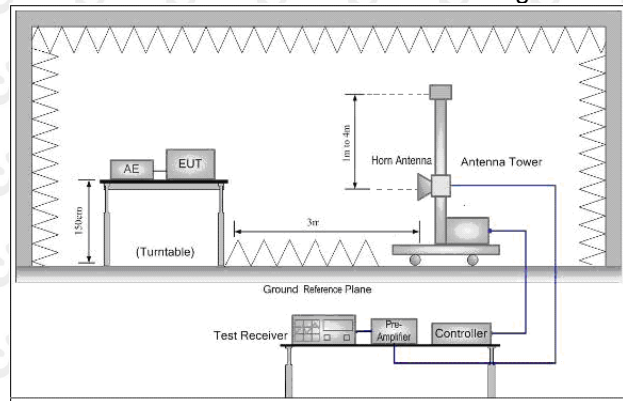


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H

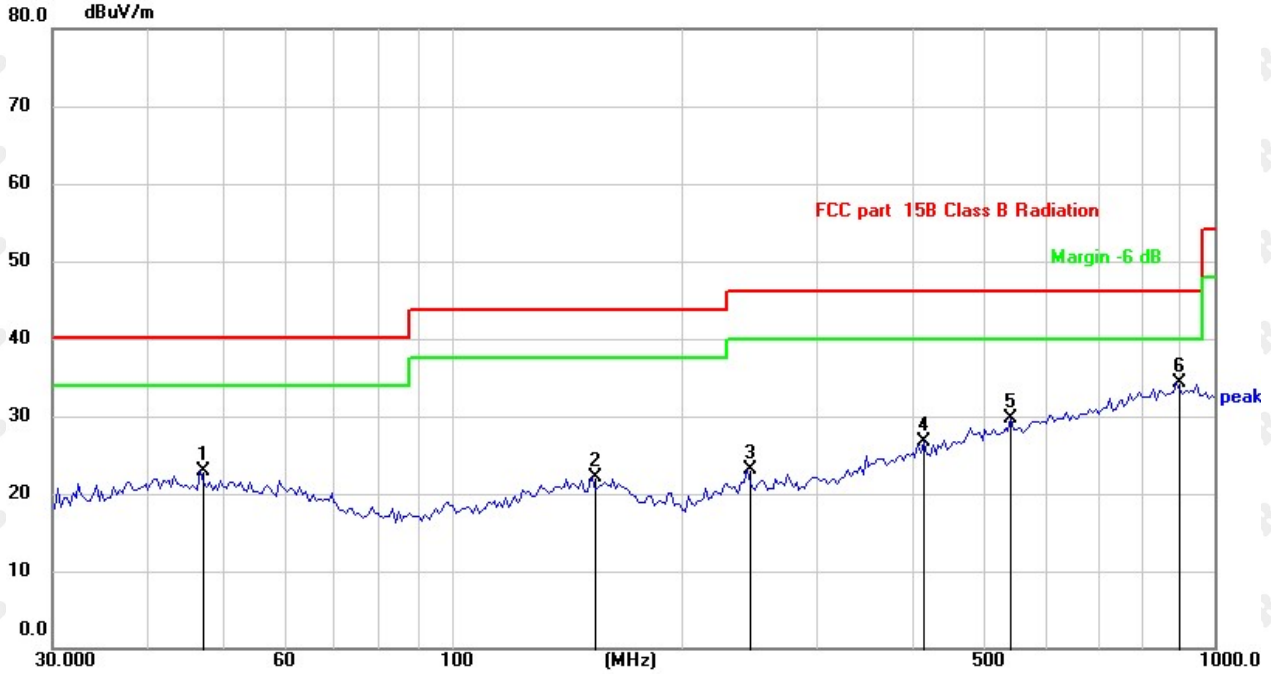

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.9125	28.41	-5.53	22.88	40.00	-17.12	QP
2		153.2004	27.63	-5.52	22.11	43.50	-21.39	QP
3		243.8043	28.87	-5.76	23.11	46.00	-22.89	QP
4		416.1791	27.95	-1.29	26.66	46.00	-19.34	QP
5		541.3725	28.25	1.48	29.73	46.00	-16.27	QP
6	*	892.2909	28.03	6.20	34.23	46.00	-11.77	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

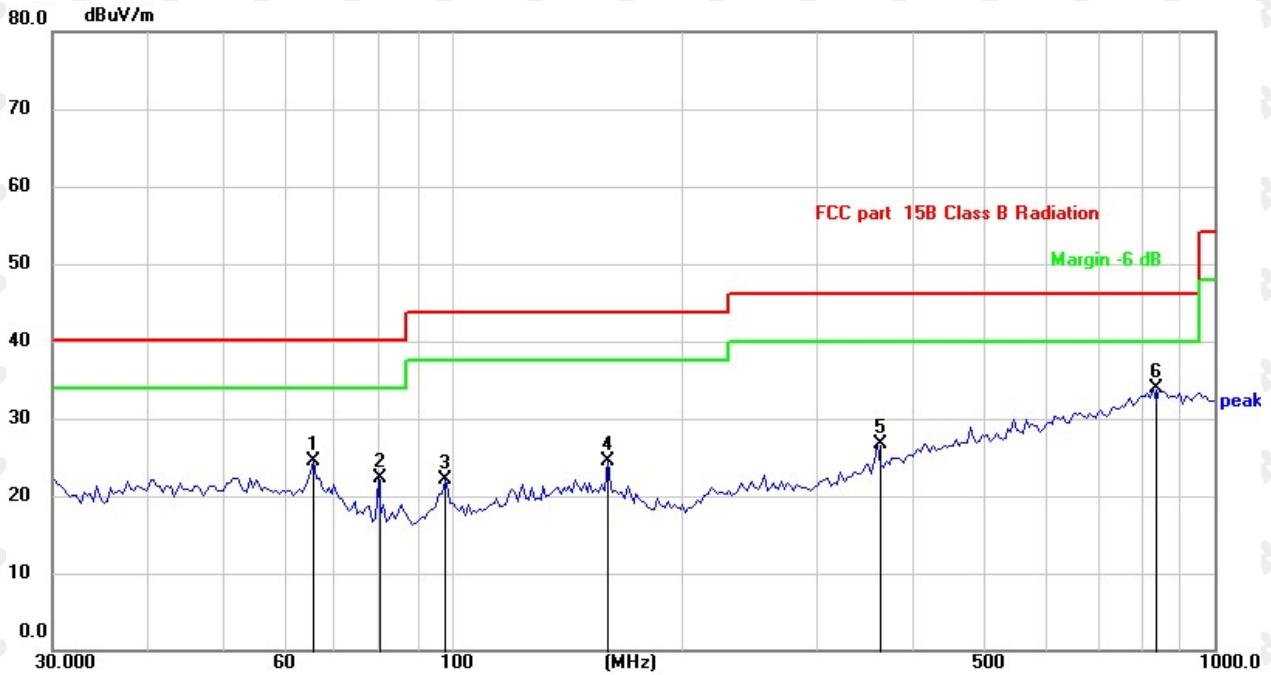

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		66.0342	31.67	-7.23	24.44	40.00	-15.56	QP
2		80.0806	32.15	-9.76	22.39	40.00	-17.61	QP
3		97.9699	31.05	-8.86	22.19	43.50	-21.31	QP
4		160.0648	30.17	-5.57	24.60	43.50	-18.90	QP
5		361.7139	29.79	-3.04	26.75	46.00	-19.25	QP
6	*	831.8574	27.75	6.09	33.84	46.00	-12.16	QP

- Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level
1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: TM1 (the worst)
  2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: TM1 (the worst)
  3. After pre-scanning three directions, the report recorded the worst case Test Mode: TM1 (the worst)



## Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	64.88	-3.64	61.24	74	-12.76	peak
4824	50.96	-3.64	47.32	54	-6.68	AVG
7236	59.24	-0.95	58.29	74	-15.71	peak
7236	43.86	-0.95	42.91	54	-11.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.76	-3.64	62.12	74	-11.88	peak
4824	47.27	-3.64	43.63	54	-10.37	AVG
7236	57.27	-0.95	56.32	74	-17.68	peak
7236	43.10	-0.95	42.15	54	-11.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	63.84	-3.51	60.33	74	-13.67	peak
4874	48.80	-3.51	45.29	54	-8.71	AVG
7311	58.72	-0.82	57.90	74	-16.10	peak
7311	45.00	-0.82	44.18	54	-9.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	63.36	-3.51	59.85	74	-14.15	peak
4874	47.06	-3.51	43.55	54	-10.45	AVG
7311	57.64	-0.82	56.82	74	-17.18	peak
7311	44.23	-0.82	43.41	54	-10.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	64.50	-3.43	61.07	74	-12.93	peak
4924	47.06	-3.43	43.63	54	-10.37	AVG
7386	60.01	-0.75	59.26	74	-14.74	peak
7386	42.97	-0.75	42.22	54	-11.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	64.32	-3.43	60.89	74	-13.11	peak
4924	47.09	-3.43	43.66	54	-10.34	AVG
7386	57.68	-0.75	56.93	74	-17.07	peak
7386	42.76	-0.75	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.03	-3.64	61.39	74	-12.61	peak
4824	49.81	-3.64	46.17	54	-7.83	AVG
7236	58.00	-0.95	57.05	74	-16.95	peak
7236	45.03	-0.95	44.08	54	-9.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.34	-3.64	59.70	74	-14.30	peak
4824	47.00	-3.64	43.36	54	-10.64	AVG
7236	59.31	-0.95	58.36	74	-15.64	peak
7236	44.01	-0.95	43.06	54	-10.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	63.56	-3.51	60.05	74	-13.95	peak
4874	47.85	-3.51	44.34	54	-9.66	AVG
7311	58.05	-0.82	57.23	74	-16.77	peak
7311	44.21	-0.82	43.39	54	-10.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	63.49	-3.51	59.98	74	-14.02	peak
4874	47.81	-3.51	44.30	54	-9.70	AVG
7311	56.73	-0.82	55.91	74	-18.09	peak
7311	42.01	-0.82	41.19	54	-12.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	65.35	-3.43	61.92	74	-12.08	peak
4924	49.59	-3.43	46.16	54	-7.84	AVG
7386	58.16	-0.75	57.41	74	-16.59	peak
7386	43.57	-0.75	42.82	54	-11.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	63.38	-3.43	59.95	74	-14.05	peak
4924	46.92	-3.43	43.49	54	-10.51	AVG
7386	57.63	-0.75	56.88	74	-17.12	peak
7386	41.61	-0.75	40.86	54	-13.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	63.90	-3.64	60.26	74	-13.74	peak
4824	47.06	-3.64	43.42	54	-10.58	AVG
7236	59.45	-0.95	58.50	74	-15.50	peak
7236	43.00	-0.95	42.05	54	-11.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	65.73	-3.64	62.09	74	-11.91	peak
4824	50.84	-3.64	47.20	54	-6.80	AVG
7236	60.65	-0.95	59.70	74	-14.30	peak
7236	45.30	-0.95	44.35	54	-9.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874.00	63.73	-3.51	60.22	74.00	-13.78	peak
4874.00	49.17	-3.51	45.66	54.00	-8.34	AVG
7311.00	58.14	-0.82	57.32	74.00	-16.68	peak
7311.00	45.42	-0.82	44.60	54.00	-9.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874.00	62.30	-3.51	58.79	74.00	-15.21	peak
4874.00	46.86	-3.51	43.35	54.00	-10.65	AVG
7311.00	58.38	-0.82	57.56	74.00	-16.44	peak
7311.00	44.02	-0.82	43.20	54.00	-10.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.39	-3.43	58.96	74	-15.04	peak
4924	48.49	-3.43	45.06	54	-8.94	AVG
7386	56.99	-0.75	56.24	74	-17.76	peak
7386	43.84	-0.75	43.09	54	-10.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.34	-3.43	61.91	74	-12.09	peak
4924	44.80	-3.43	41.37	54	-12.63	AVG
7386	56.72	-0.75	55.97	74	-18.03	peak
7386	42.43	-0.75	41.68	54	-12.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.54	-3.63	61.91	74	-12.09	peak
4844	48.31	-3.63	44.68	54	-9.32	AVG
7266	58.20	-0.94	57.26	74	-16.74	peak
7266	45.65	-0.94	44.71	54	-9.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.07	-3.63	61.44	74	-12.56	peak
4844	49.27	-3.63	45.64	54	-8.36	AVG
7266	57.96	-0.94	57.02	74	-16.98	peak
7266	45.63	-0.94	44.69	54	-9.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.05	-3.51	60.54	74	-13.46	peak
4874	47.72	-3.51	44.21	54	-9.79	AVG
7311	58.20	-0.82	57.38	74	-16.62	peak
7311	44.73	-0.82	43.91	54	-10.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	62.25	-3.51	58.74	74	-15.26	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.28	-0.82	42.46	54	-11.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	62.21	-3.43	58.78	74	-15.22	peak
4904	48.80	-3.43	45.37	54	-8.63	AVG
7356	57.49	-0.75	56.74	74	-17.26	peak
7356	43.73	-0.75	42.98	54	-11.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	62.24	-3.43	58.81	74	-15.19	peak
4904	47.30	-3.43	43.87	54	-10.13	AVG
7356	57.56	-0.75	56.81	74	-17.19	peak
7356	43.81	-0.75	43.06	54	-10.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report



**Restricted bands around fundamental frequency (Radiated)**

 Operation Mode:  
 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.54	-5.81	51.73	74	-22.27	peak
2390	/	-5.81	/	54	/	AVG
2399	64.41	-5.84	58.57	74	-15.43	peak
2399	48.86	-5.84	43.02	54	-10.98	AVG

 Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
 Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	55.98	-5.81	50.17	74	-23.83	peak
2390	/	-5.81	/	54	/	AVG
2399	63.09	-5.84	57.25	74	-16.75	peak
2399	47.38	-5.84	41.54	54	-12.46	AVG

 Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
 Margin = Emission level - Limits

Operation Mode:  
802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.70	-5.65	52.05	74	-21.95	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.40	-5.65	50.75	74	-23.25	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

## Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.88	-5.81	52.07	74	-21.93	peak
2390	/	-5.81	/	54	/	AVG
2399	62.35	-5.84	56.51	74	-17.49	peak
2399	47.01	-5.84	41.17	54	-12.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.01	-5.81	51.20	74	-22.80	peak
2390	/	-5.81	/	54	/	AVG
2399	62.76	-5.84	56.92	74	-17.08	peak
2399	45.64	-5.84	39.80	54	-14.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.18	-5.65	51.53	74	-22.47	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.82	-5.65	51.17	74	-22.83	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

## Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.67	-5.81	51.86	74	-22.14	peak
2390	/	-5.81	/	54	/	AVG
2399	62.37	-5.84	56.53	74	-17.47	peak
2399	48.43	-5.84	42.59	54	-11.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	56.07	-5.81	50.26	74	-23.74	peak
2390	/	-5.81	/	54	/	AVG
2399	60.21	-5.84	54.37	74	-19.63	peak
2399	47.89	-5.84	42.05	54	-11.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.92	-5.65	51.27	74	-22.73	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.28	-5.65	49.63	74	-24.37	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.77	-5.81	52.96	74	-21.04	peak
2390	/	-5.81	/	54	/	AVG
2399	63.70	-5.84	57.86	74	-16.14	peak
2399	45.76	-5.84	39.92	54	-14.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.10	-5.81	52.29	74	-21.71	peak
2390	/	-5.81	/	54	/	AVG
2399	62.06	-5.84	56.22	74	-17.78	peak
2399	47.07	-5.84	41.23	54	-12.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	58.34	-5.65	52.69	74	-21.31	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	55.95	-5.65	50.30	74	-23.70	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

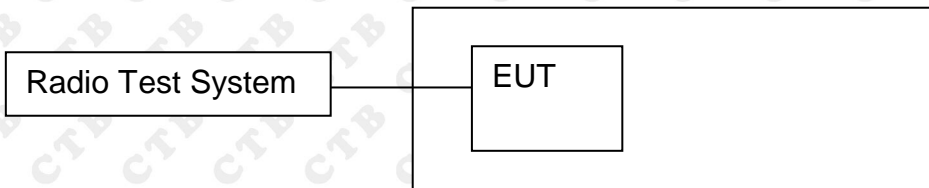

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold




### 8.4 Test Result




## BAND EDGE Graphs


802.11g/LCH



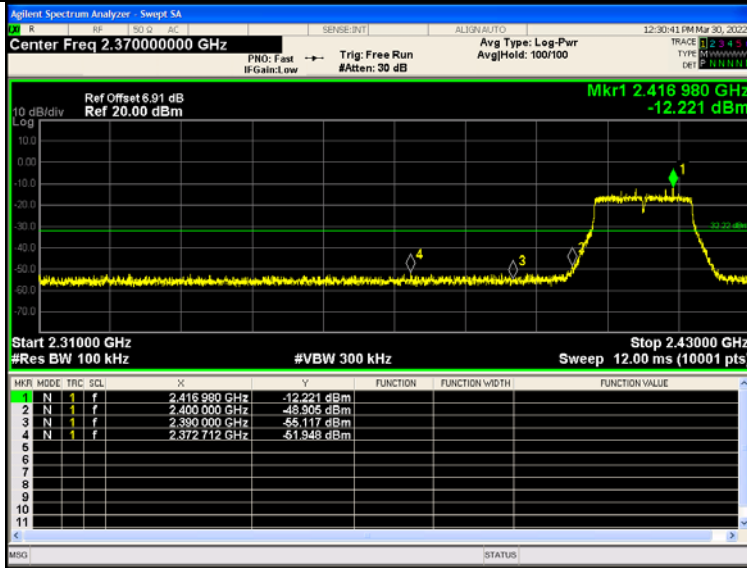


802.11g/HCH

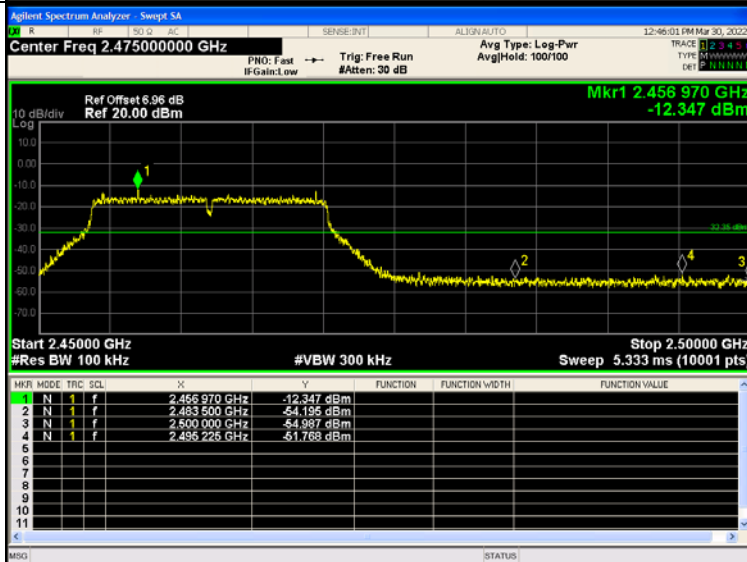

802.11n(HT20)/L  
CH

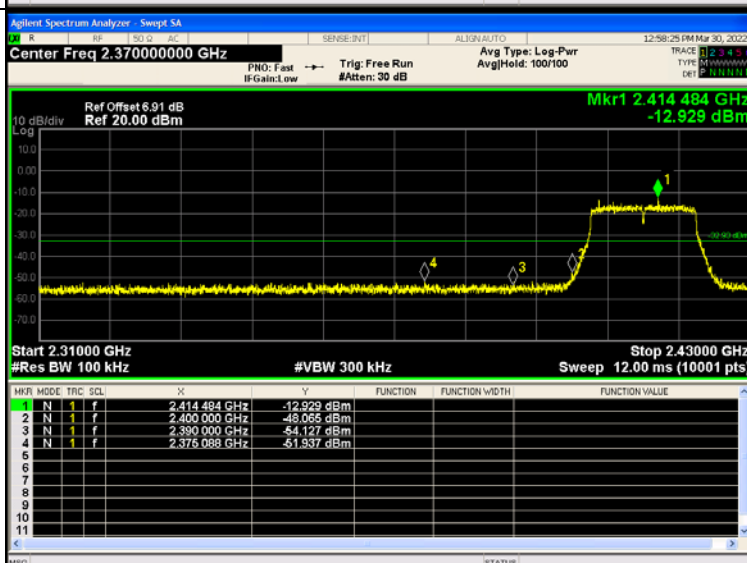

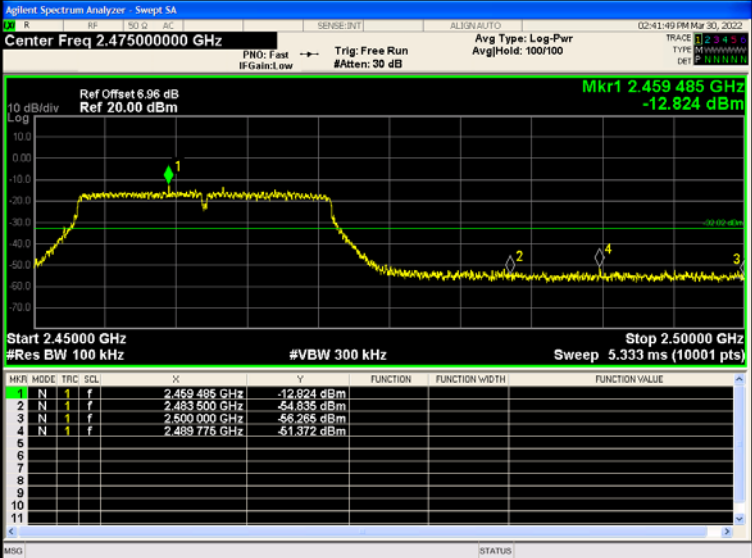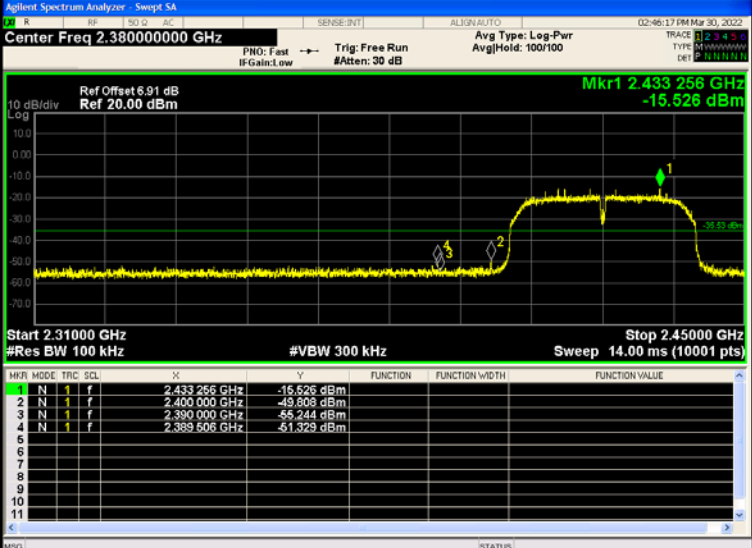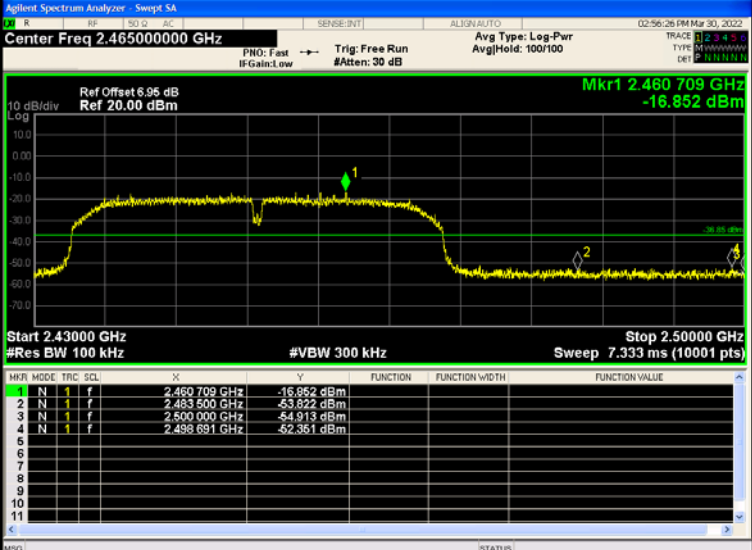
<p>802.11n(HT20)/H CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.475000000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.459 485 GHz -12.824 dBm</p> <p>Start 2.45000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.50000 GHz Sweep 5.333 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.459 485 GHz</td> <td>-12.824 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-54.835 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-56.285 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 776 GHz</td> <td>-51.372 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 485 GHz	-12.824 dBm				2	N	1	f	2.483 500 GHz	-54.835 dBm				3	N	1	f	2.500 000 GHz	-56.285 dBm				4	N	1	f	2.489 776 GHz	-51.372 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.459 485 GHz	-12.824 dBm																																									
2	N	1	f	2.483 500 GHz	-54.835 dBm																																									
3	N	1	f	2.500 000 GHz	-56.285 dBm																																									
4	N	1	f	2.489 776 GHz	-51.372 dBm																																									
<p>802.11n(HT40)/L CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.380000000 GHz</p> <p>Ref Offset 6.91 dB Ref 20.00 dBm</p> <p>Mkr1 2.433 256 GHz -15.526 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.45000 GHz Sweep 14.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.433 256 GHz</td> <td>-15.526 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-49.808 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-55.244 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.389 506 GHz</td> <td>-51.329 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.433 256 GHz	-15.526 dBm				2	N	1	f	2.400 000 GHz	-49.808 dBm				3	N	1	f	2.390 000 GHz	-55.244 dBm				4	N	1	f	2.389 506 GHz	-51.329 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.433 256 GHz	-15.526 dBm																																									
2	N	1	f	2.400 000 GHz	-49.808 dBm																																									
3	N	1	f	2.390 000 GHz	-55.244 dBm																																									
4	N	1	f	2.389 506 GHz	-51.329 dBm																																									
<p>802.11n(HT40)/H CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.465000000 GHz</p> <p>Ref Offset 6.95 dB Ref 20.00 dBm</p> <p>Mkr1 2.460 709 GHz -16.852 dBm</p> <p>Start 2.43000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.50000 GHz Sweep 7.333 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460 709 GHz</td> <td>-16.852 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-53.822 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-54.913 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.498 691 GHz</td> <td>-52.351 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 709 GHz	-16.852 dBm				2	N	1	f	2.483 500 GHz	-53.822 dBm				3	N	1	f	2.500 000 GHz	-54.913 dBm				4	N	1	f	2.498 691 GHz	-52.351 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.460 709 GHz	-16.852 dBm																																									
2	N	1	f	2.483 500 GHz	-53.822 dBm																																									
3	N	1	f	2.500 000 GHz	-54.913 dBm																																									
4	N	1	f	2.498 691 GHz	-52.351 dBm																																									






## RF Conducted Spurious Emissions Graphs


802.11b/LCH

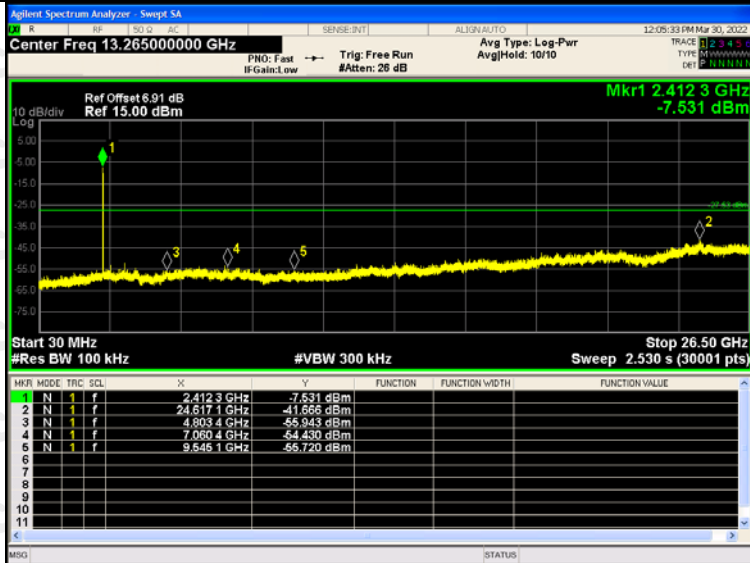

802.11b/MCH

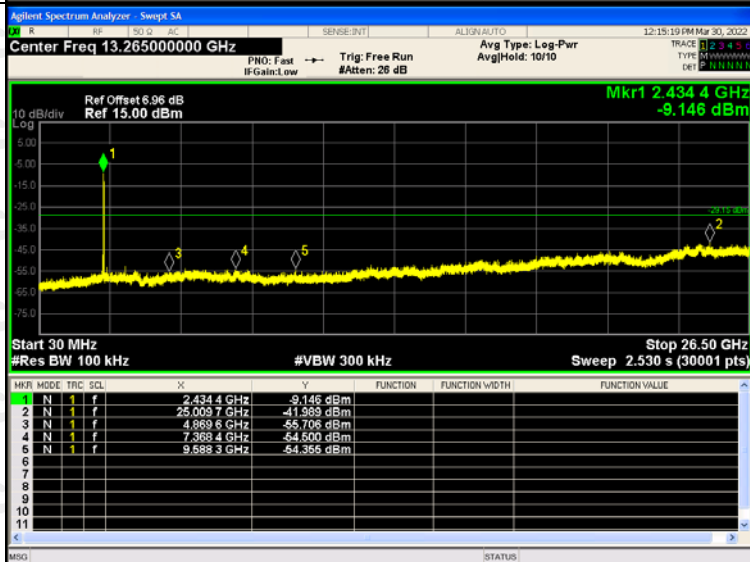


802.11b/HCH

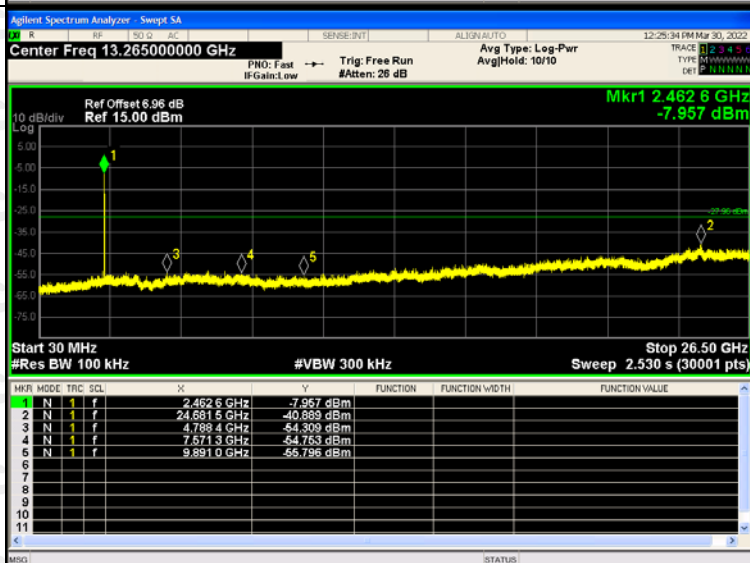


## RF Conducted Spurious Emissions Graphs


802.11g/LCH

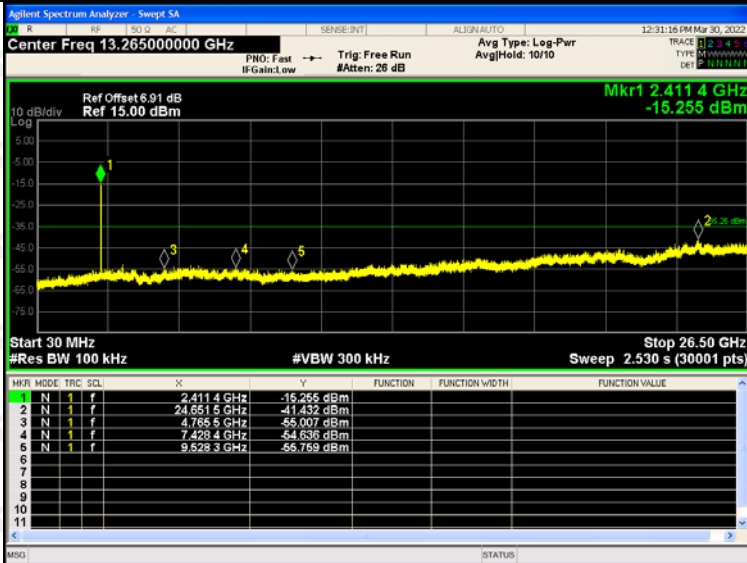

802.11g/MCH

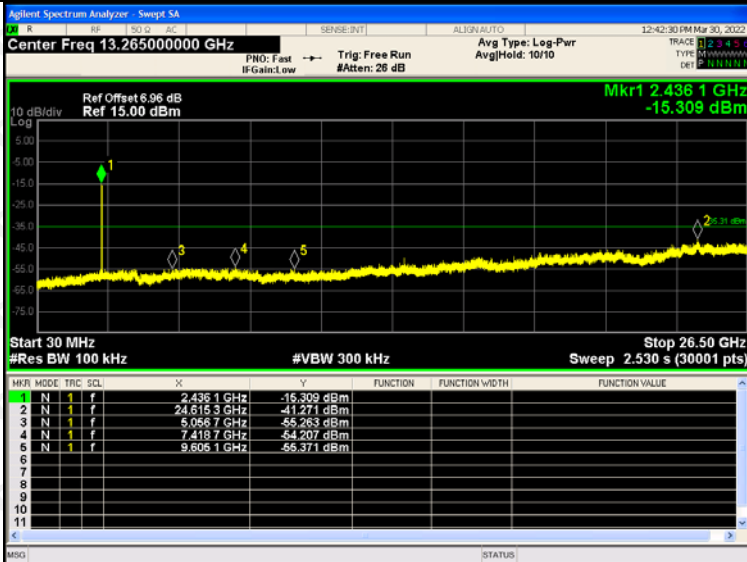


802.11g/HCH

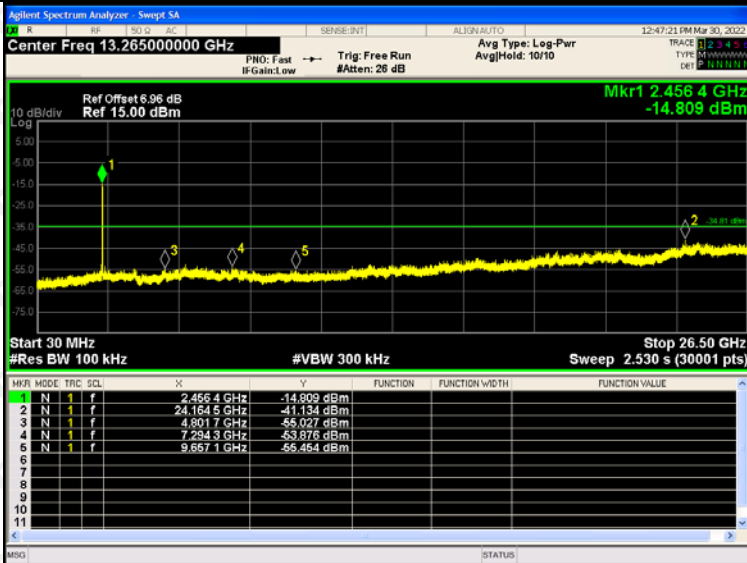




## RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH



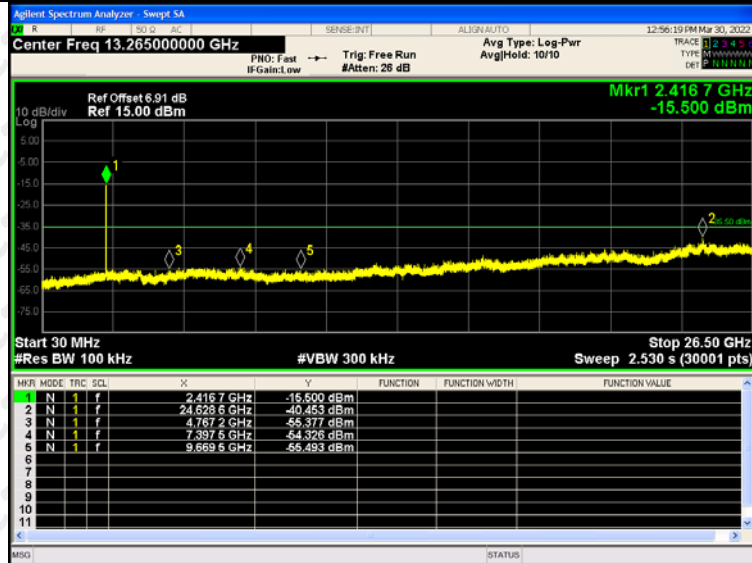


802.11 n(HT20)/MCH

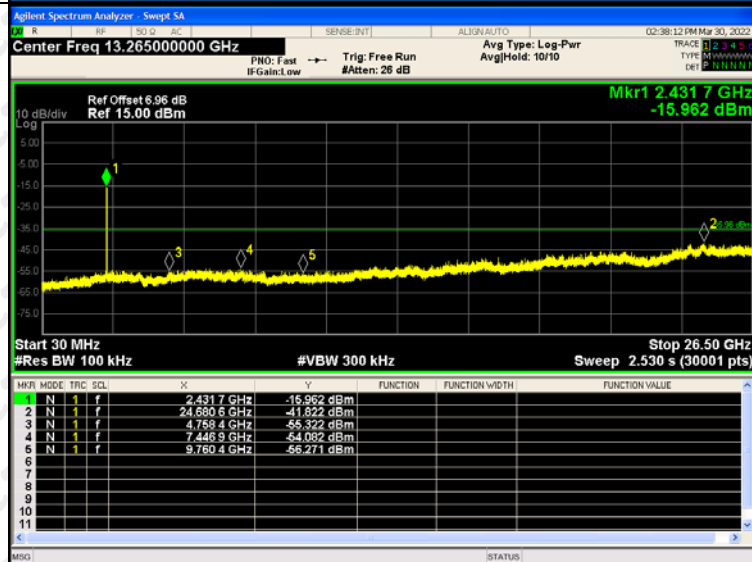

802.11 n(HT20)/HCH

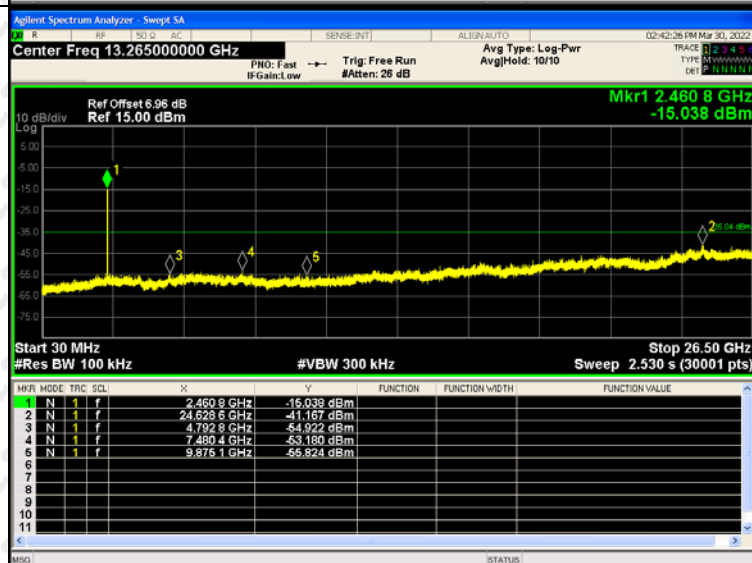
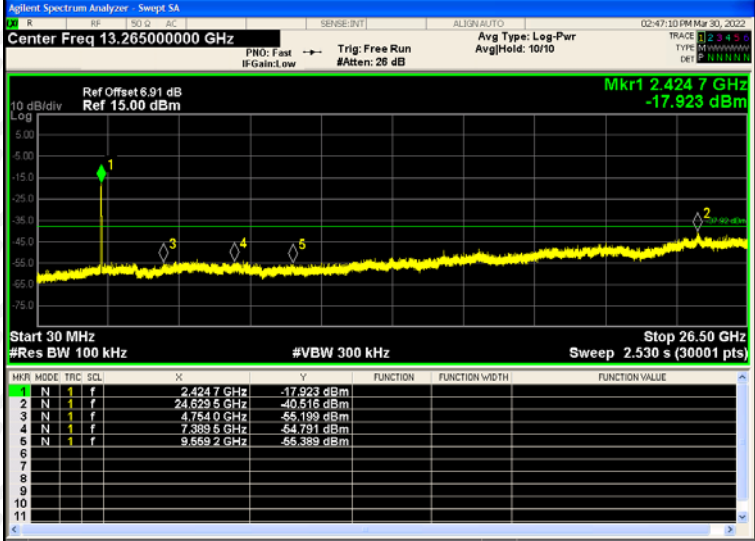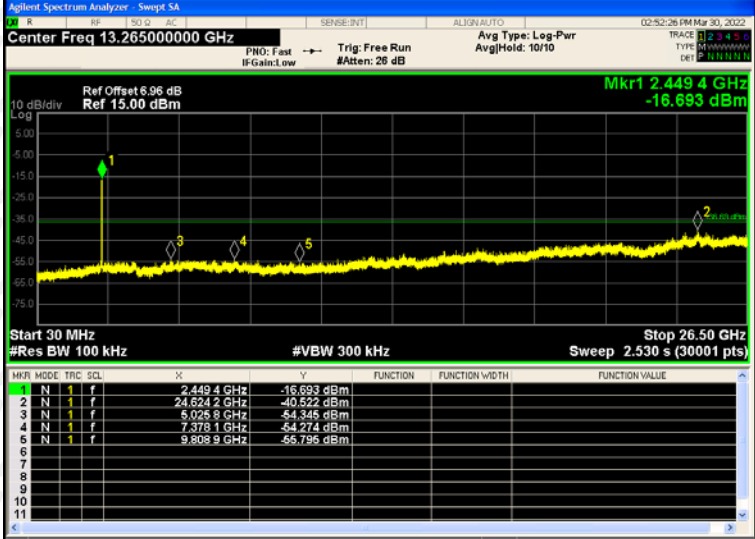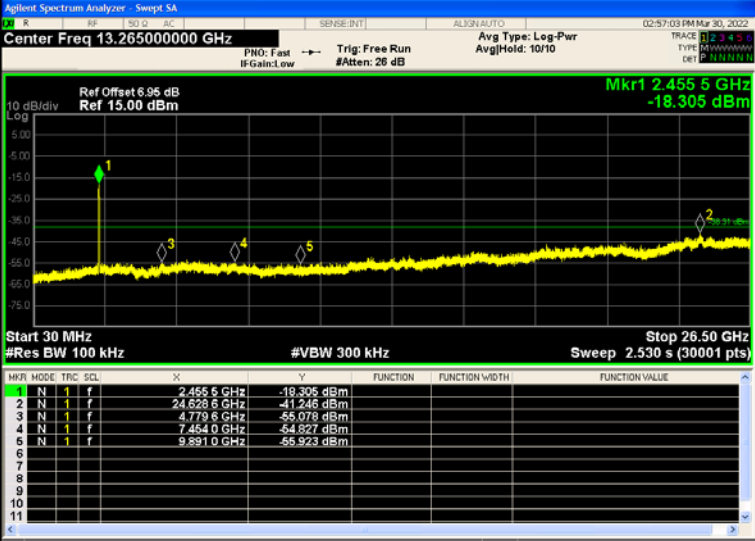
<p>802.11n(HT40)/LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4247 GHz</td> <td>-17.923 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.639 GHz</td> <td>-40.516 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.754 GHz</td> <td>-55.199 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.389 GHz</td> <td>-54.791 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.559 GHz</td> <td>-55.389 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4247 GHz	-17.923 dBm				2	N	1	f	24.639 GHz	-40.516 dBm				3	N	1	f	4.754 GHz	-55.199 dBm				4	N	1	f	7.389 GHz	-54.791 dBm				5	N	1	f	9.559 GHz	-55.389 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4247 GHz	-17.923 dBm																																																		
2	N	1	f	24.639 GHz	-40.516 dBm																																																		
3	N	1	f	4.754 GHz	-55.199 dBm																																																		
4	N	1	f	7.389 GHz	-54.791 dBm																																																		
5	N	1	f	9.559 GHz	-55.389 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4494 GHz</td> <td>-16.693 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.624 GHz</td> <td>-40.522 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.025 GHz</td> <td>-54.345 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.378 GHz</td> <td>-54.274 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.808 GHz</td> <td>-55.795 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4494 GHz	-16.693 dBm				2	N	1	f	24.624 GHz	-40.522 dBm				3	N	1	f	5.025 GHz	-54.345 dBm				4	N	1	f	7.378 GHz	-54.274 dBm				5	N	1	f	9.808 GHz	-55.795 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4494 GHz	-16.693 dBm																																																		
2	N	1	f	24.624 GHz	-40.522 dBm																																																		
3	N	1	f	5.025 GHz	-54.345 dBm																																																		
4	N	1	f	7.378 GHz	-54.274 dBm																																																		
5	N	1	f	9.808 GHz	-55.795 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4555 GHz</td> <td>-18.305 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.628 GHz</td> <td>-41.246 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.779 GHz</td> <td>-55.078 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.454 GHz</td> <td>-54.827 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.891 GHz</td> <td>-55.923 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4555 GHz	-18.305 dBm				2	N	1	f	24.628 GHz	-41.246 dBm				3	N	1	f	4.779 GHz	-55.078 dBm				4	N	1	f	7.454 GHz	-54.827 dBm				5	N	1	f	9.891 GHz	-55.923 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4555 GHz	-18.305 dBm																																																		
2	N	1	f	24.628 GHz	-41.246 dBm																																																		
3	N	1	f	4.779 GHz	-55.078 dBm																																																		
4	N	1	f	7.454 GHz	-54.827 dBm																																																		
5	N	1	f	9.891 GHz	-55.923 dBm																																																		

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure

1. The EUT was directly connected to the Power meter




## 9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.521	30	PASS
	MCH	7.286	30	PASS
	HCH	7.655	30	PASS
802.11g	LCH	6.51	30	PASS
	MCH	6.523	30	PASS
	HCH	6.596	30	PASS
802.11n(HT20)	LCH	6.126	30	PASS
	MCH	6.189	30	PASS
	HCH	6.539	30	PASS
802.11n(HT40)	LCH	5.546	30	PASS
	MCH	6.185	30	PASS
	HCH	5.26	30	PASS

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

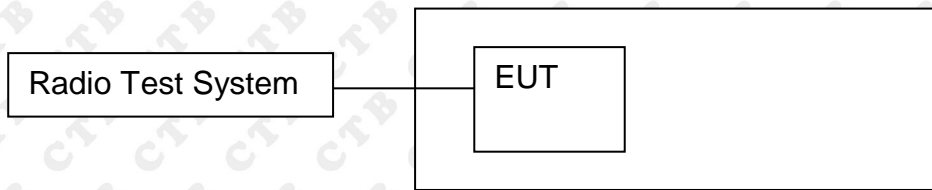

### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.757	500	PASS
	MCH	9.575	500	PASS
	HCH	9.337	500	PASS
802.11g	LCH	16.412	500	PASS
	MCH	16.369	500	PASS
	HCH	16.381	500	PASS
802.11n(HT20)	LCH	17.61	500	PASS
	MCH	17.609	500	PASS
	HCH	17.68	500	PASS
802.11n(HT40)	LCH	31.595	500	PASS
	MCH	29.972	500	PASS
	HCH	32.614	500	PASS



Test Graph:



<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.420211 GHz -19.453 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.30 dBm</td> </tr> <tr> <td><b>16.495 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>5.378 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.41 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.30 dBm	<b>16.495 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	5.378 kHz			x dB Bandwidth	x dB	-6.00 dB	16.41 MHz		
Occupied Bandwidth	Total Power	5.30 dBm																	
<b>16.495 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
5.378 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
16.41 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.44519 GHz -18.875 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.36 dBm</td> </tr> <tr> <td><b>16.490 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>6.023 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.37 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.36 dBm	<b>16.490 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	6.023 kHz			x dB Bandwidth	x dB	-6.00 dB	16.37 MHz		
Occupied Bandwidth	Total Power	5.36 dBm																	
<b>16.490 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
6.023 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
16.37 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.470175 GHz -17.658 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.45 dBm</td> </tr> <tr> <td><b>16.505 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-15.850 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.38 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.45 dBm	<b>16.505 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	-15.850 kHz			x dB Bandwidth	x dB	-6.00 dB	16.38 MHz		
Occupied Bandwidth	Total Power	5.45 dBm																	
<b>16.505 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
-15.850 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
16.38 MHz																			


<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz      Center Freq: 2.412000000 GHz      Radio Std: None</p> <p>Trig: Free Run      #Atten: 30 dB      AvgHold: 100/100      Radio Device: BTS</p> <p>Ref Offset 6.91 dB      Ref 26.91 dBm      Mkr3 2.420809 GHz      -19.883 dBm</p> <p>Center 2.412 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.98 dBm</td> </tr> <tr> <td><b>17.680 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>4.519 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.61 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.98 dBm	<b>17.680 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	4.519 kHz	x dB	-6.00 dB	x dB Bandwidth			17.61 MHz		
Occupied Bandwidth	Total Power	4.98 dBm																	
<b>17.680 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
4.519 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.61 MHz																			
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz      Center Freq: 2.437000000 GHz      Radio Std: None</p> <p>Trig: Free Run      #Atten: 30 dB      AvgHold: 100/100      Radio Device: BTS</p> <p>Ref Offset 6.96 dB      Ref 26.96 dBm      Mkr3 2.445811 GHz      -20.102 dBm</p> <p>Center 2.437 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.02 dBm</td> </tr> <tr> <td><b>17.680 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>6.208 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.61 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.02 dBm	<b>17.680 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	6.208 kHz	x dB	-6.00 dB	x dB Bandwidth			17.61 MHz		
Occupied Bandwidth	Total Power	5.02 dBm																	
<b>17.680 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
6.208 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.61 MHz																			
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz      Center Freq: 2.462000000 GHz      Radio Std: None</p> <p>Trig: Free Run      #Atten: 30 dB      AvgHold: 100/100      Radio Device: BTS</p> <p>Ref Offset 6.96 dB      Ref 26.96 dBm      Mkr3 2.470825 GHz      -19.680 dBm</p> <p>Center 2.462 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.23 dBm</td> </tr> <tr> <td><b>17.695 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-14.906 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.68 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.23 dBm	<b>17.695 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	-14.906 kHz	x dB	-6.00 dB	x dB Bandwidth			17.68 MHz		
Occupied Bandwidth	Total Power	5.23 dBm																	
<b>17.695 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
-14.906 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.68 MHz																			



<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz      Center Freq: 2.422000000 GHz      Radio Std: None</p> <p>Ref Offset 6.91 dB      Ref 26.91 dBm      Mkr3 2.437813 GHz -23.332 dBm</p> <p>Center 2.422 GHz      #Res BW 100 kHz      #VBW 300 kHz      Span 60 MHz      Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.66 dBm</td> </tr> <tr> <td><b>33.848 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>15.551 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>31.59 MHz</td> <td>x dB -6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	4.66 dBm	<b>33.848 MHz</b>			Transmit Freq Error	15.551 kHz	OBW Power 99.00 %	x dB Bandwidth	31.59 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	4.66 dBm											
<b>33.848 MHz</b>													
Transmit Freq Error	15.551 kHz	OBW Power 99.00 %											
x dB Bandwidth	31.59 MHz	x dB -6.00 dB											
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz      Center Freq: 2.437000000 GHz      Radio Std: None</p> <p>Ref Offset 6.96 dB      Ref 26.96 dBm      Mkr3 2.452008 GHz -21.588 dBm</p> <p>Center 2.437 GHz      #Res BW 100 kHz      #VBW 300 kHz      Span 60 MHz      Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.20 dBm</td> </tr> <tr> <td><b>33.714 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>21.615 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>29.97 MHz</td> <td>x dB -6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	5.20 dBm	<b>33.714 MHz</b>			Transmit Freq Error	21.615 kHz	OBW Power 99.00 %	x dB Bandwidth	29.97 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	5.20 dBm											
<b>33.714 MHz</b>													
Transmit Freq Error	21.615 kHz	OBW Power 99.00 %											
x dB Bandwidth	29.97 MHz	x dB -6.00 dB											
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz      Center Freq: 2.452000000 GHz      Radio Std: None</p> <p>Ref Offset 6.95 dB      Ref 26.95 dBm      Mkr3 2.468257 GHz -21.519 dBm</p> <p>Center 2.452 GHz      #Res BW 100 kHz      #VBW 300 kHz      Span 60 MHz      Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.39 dBm</td> </tr> <tr> <td><b>33.834 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-50.031 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>32.61 MHz</td> <td>x dB -6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	4.39 dBm	<b>33.834 MHz</b>			Transmit Freq Error	-50.031 kHz	OBW Power 99.00 %	x dB Bandwidth	32.61 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	4.39 dBm											
<b>33.834 MHz</b>													
Transmit Freq Error	-50.031 kHz	OBW Power 99.00 %											
x dB Bandwidth	32.61 MHz	x dB -6.00 dB											

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

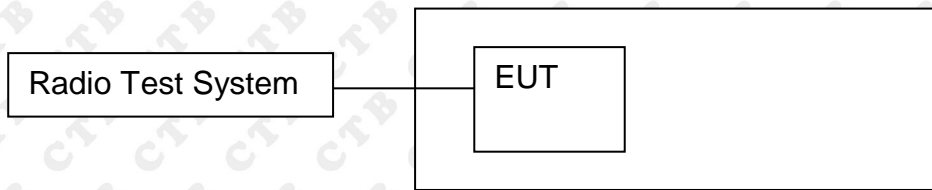

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.897	8	PASS
	MCH	-21.21	8	PASS
	HCH	-21.036	8	PASS
802.11g	LCH	-25.975	8	PASS
	MCH	-26.13	8	PASS
	HCH	-25.603	8	PASS
802.11n(H T20)	LCH	-27.265	8	PASS
	MCH	-25.478	8	PASS
	HCH	-25.513	8	PASS
802.11n(H T40)	LCH	-27.986	8	PASS
	MCH	-27.054	8	PASS
	HCH	-28.608	8	PASS



Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset 6.91 dB          Ref 20.00 dBm          Mkr1 2.410 50 GHz          -21.897 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.436 82 GHz          -21.210 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.461 82 GHz          -21.036 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset 6.91 dB          Ref 20.00 dBm          Mkr1 2.406 09 GHz          -25.975 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.442 94 GHz          -26.130 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.456 09 GHz          -25.603 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.41317 GHz -27.265 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.43637 GHz -25.478 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.46257 GHz -25.513 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>



<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Mkr1 2.423 50 GHz -27.986 dBm Ref Offset 6.91 dB Ref 20.00 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Mkr1 2.438 50 GHz -27.054 dBm Ref Offset 6.96 dB Ref 20.00 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Mkr1 2.443 84 GHz -28.608 dBm Ref Offset 6.96 dB Ref 20.00 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### **EUT Antenna:**

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.



### 13. EUT PHOTOGRAPHS

EUT Photo 1

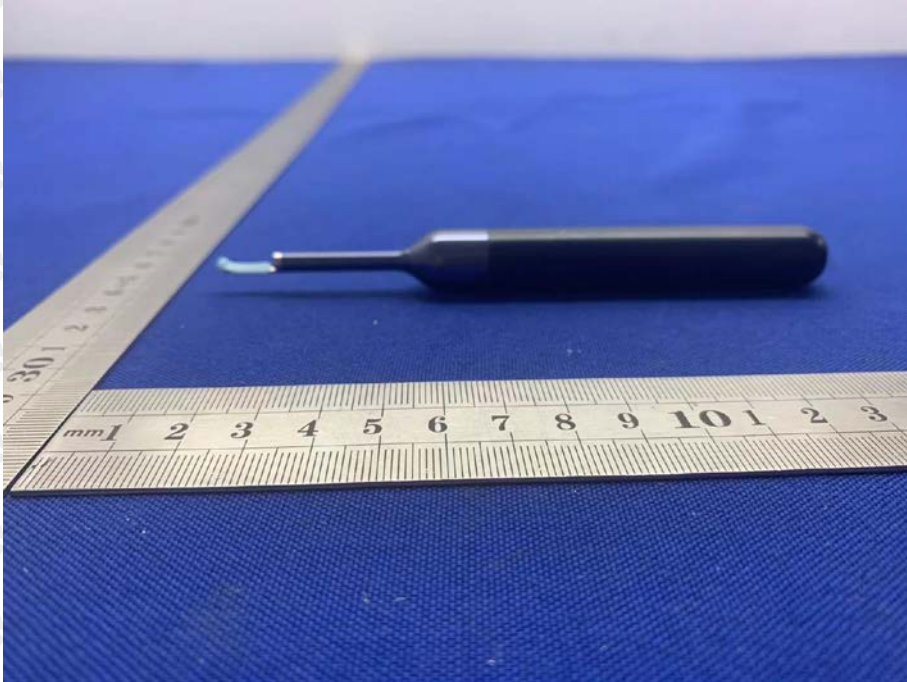


EUT Photo 2





## 14. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

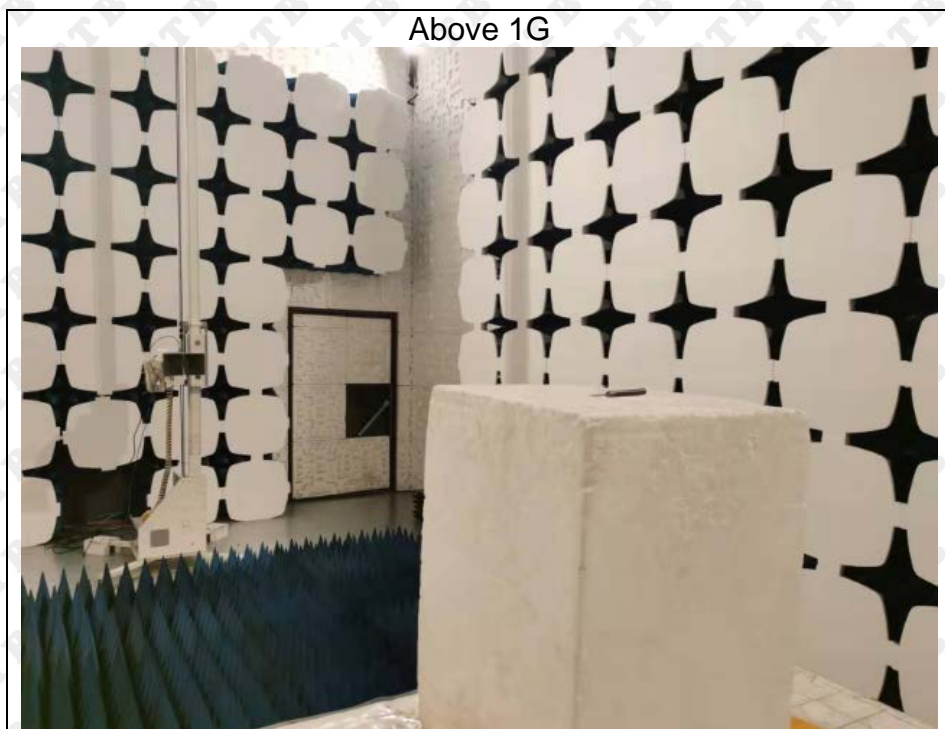

## Conducted Emission



XXXXXXXX END OF REPORT XXXXXXXX