



TEST REPORT

FOR FCC PART 15 SUBPART C 15.249

Report Reference No. : CTL2101041021-WF

Compiled by: Happy Guo
(position+printed name+signature) (File administrators)

Happy Guo

Tested by: Nice Nong
(position+printed name+signature) (Test Engineer)

Nice Nong

Approved by: Ivan Xie
(position+printed name+signature) (Manager)

Ivan Xie

Product Name : Baby Monitor

Model/Type reference : HM25BU

List Model(s)..... : N/A

Trade Mark..... : N/A

FCC ID..... : 2AYM8-HM25BU

Applicant's name : **SHENZHEN LIANHUA ELECTRONIC CO.,LTD**
3/F, Building D, Dakan Science & Technology Park, Xili
Address of applicant : Sub-district, NanShan, Shenzhen, Guangdong, P. R. China.
P.C:518055

Test Firm..... : **Shenzhen CTL Testing Technology Co., Ltd.**
Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification :
Standard : **FCC Part 15.249**:Operation within the bands 920-928 MHz,
2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.
TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.
Master TRF..... : Dated 2011-01

Date of receipt of test item : Jan. 08, 2021
Date of sampling : Jan. 08, 2021
Date of Test Date..... : Jan. 08, 2021–Jan. 26, 2021
Data of Issue..... : Jan. 26, 2021
Result..... : **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL2101041021-WF	Jan. 26, 2021
	Date of issue

Equipment under Test : Baby Monitor

Sample No. CTL210104102-1-S001

Model /Type : HM25BU

Applicant : SHENZHEN LIANHUA ELECTRONIC CO.,LTD

Address : 3/F, Building D, Dakan Science & Technology Park,
Xili Sub-district, NanShan, Shenzhen, Guangdong, P.
R. China. P.C:518055

Manufacturer : SHENZHEN LIANHUA ELECTRONIC CO.,LTD

Address : 3/F, Building D, Dakan Science & Technology Park,
Xili Sub-district, NanShan, Shenzhen, Guangdong, P.
R. China. P.C:518055

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT(S)	8
2.6. MODIFICATIONS	8
3. TEST CONDITIONS AND RESULTS	9
3.1. CONDUCTED EMISSIONS TEST	9
3.2. RADIATED EMISSIONS AND BAND EDGE	12
3.3. OCCUPIED BANDWIDTH MEASUREMENT	19
3.4. ANTENNA REQUIREMENT	21
4. TEST SETUP PHOTOS OF THE EUT	22
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	23

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.203	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9518B on Jan. 22, 2019.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Baby Monitor
Model/Type reference:	HM25BU
Power supply:	AC 120V/60Hz from AC/DC adapter
2.4GHz Wireless	
Modulation:	GFSK
Operation frequency:	2410.875-2471.625MHz
Channel number:	19
Channel separation:	3.375MHz
Antenna type:	Monopole antenna
Antenna gain:	0 dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting mode for testing .There are 19 channels provided to the EUT and Channel 01/10/19were selected for testing.

Operation Frequency List :

Channel	Frequency (MHz)
01	2410.875
02	2414.250
03	2417.625
⋮	⋮
10	2441.25
⋮	⋮
17	2464.875
18	2468.250
19	2471.625

Note: The line display in grey is the channel selected to perform test.

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2020/05/15	2021/05/14
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2020/04/08	2021/04/07
EMI Test Receiver	R&S	ESCI	1166.5950.03	2020/05/18	2021/05/17
Spectrum Analyzer	Agilent	E4407B	MY41440676	2020/05/14	2021/05/13
Spectrum Analyzer	Agilent	N9020A	US46220290	2020/05/14	2021/05/13
Spectrum Analyzer	Keysight	N9020A	MY53420874	2020/05/14	2021/05/13
Controller	EM Electronics	EM 1000	060859	2020/05/20	2021/05/19
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2020/05/20	2021/05/19
Active Loop Antenna	Da Ze	ZN30900A	/	2020/05/20	2021/05/19
Amplifier	Agilent	8449B	3008A02306	2020/05/15	2021/05/14
Amplifier	Agilent	8447D	2944A10176	2020/05/15	2021/05/14
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/05/16	2021/05/15
Power Sensor	Agilent	U2021XA	MY55130004	2020/05/14	2021/05/13
Power Sensor	Agilent	U2021XA	MY55130006	2020/05/14	2021/05/13
Spectrum Analyzer	RS	FSP	1164.4391.38	2020/05/15	2021/05/14
Test Software					
Name of Software			Version		
TST-PASS			1.0.5		
ES-K1(Below 1GHz)			V1.71		
e3(Above 1GHz)			6.111221a		

The calibration interval was one year

2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

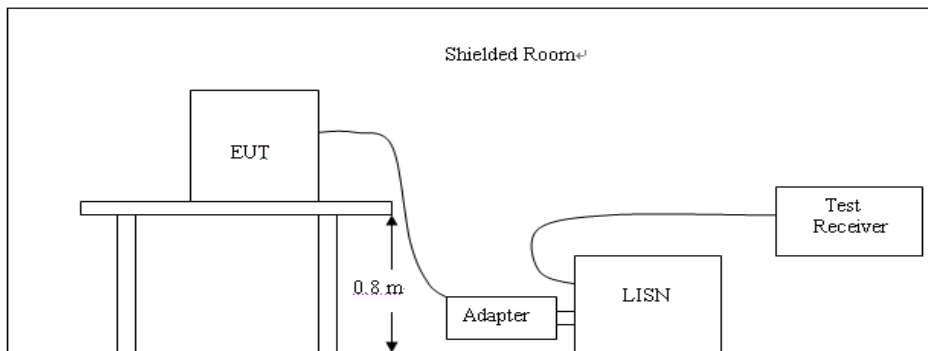


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

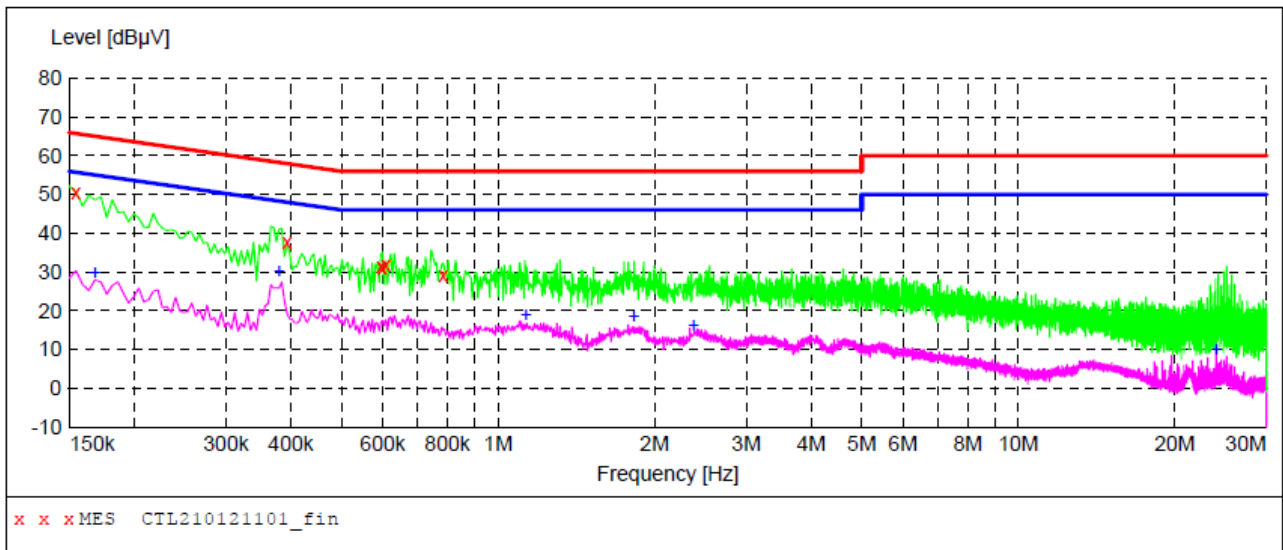

MEASUREMENT RESULT: "CTL210121101_fin"

1/21/2021 1:48PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154500	50.40	11.2	66	15.4	QP	L1	GND
0.393000	37.60	11.2	58	20.4	QP	L1	GND
0.595500	31.60	11.2	56	24.4	QP	L1	GND
0.600000	31.20	11.2	56	24.8	QP	L1	GND
0.609000	31.90	11.2	56	24.1	QP	L1	GND
0.784500	29.00	11.2	56	27.0	QP	L1	GND


MEASUREMENT RESULT: "CTL210121101_fin2"

1/21/2021 1:48PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.168000	29.80	11.2	55	25.3	AV	L1	GND
0.379500	30.20	11.2	48	18.1	AV	L1	GND
1.131000	19.10	11.2	46	26.9	AV	L1	GND
1.824000	18.60	11.2	46	27.4	AV	L1	GND
2.373000	16.50	11.3	46	29.5	AV	L1	GND
24.000000	10.00	11.3	50	40.0	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

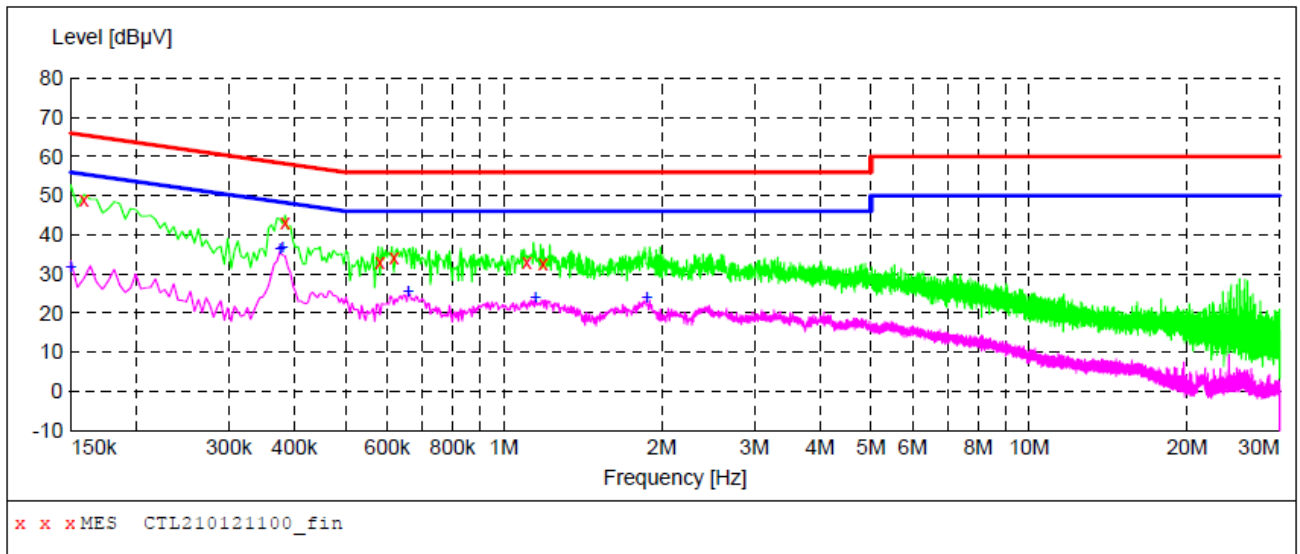

MEASUREMENT RESULT: "CTL210121100_fin"

1/21/2021 1:51PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.159000	48.90	11.2	66	16.6	QP	N	GND
0.384000	43.30	11.2	58	14.9	QP	N	GND
0.582000	33.00	11.2	56	23.0	QP	N	GND
0.618000	34.40	11.2	56	21.6	QP	N	GND
1.108500	32.90	11.2	56	23.1	QP	N	GND
1.189500	32.60	11.2	56	23.4	QP	N	GND

MEASUREMENT RESULT: "CTL210121100_fin2"

1/21/2021 1:51PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	31.70	11.2	56	24.3	AV	N	GND
0.375000	36.50	11.2	48	11.9	AV	N	GND
0.379500	36.80	11.2	48	11.5	AV	N	GND
0.658500	25.80	11.2	46	20.2	AV	N	GND
1.149000	24.00	11.2	46	22.0	AV	N	GND
1.873500	23.90	11.2	46	22.1	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dB μ V/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

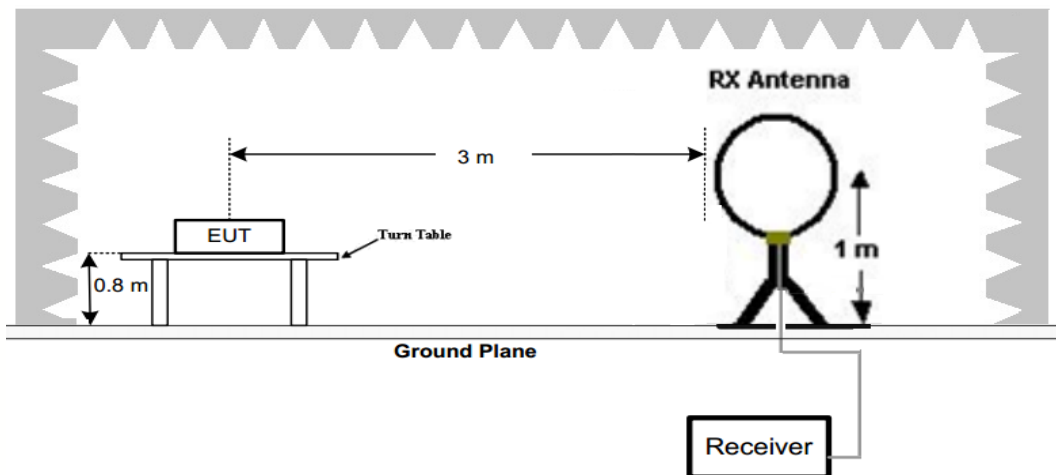

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

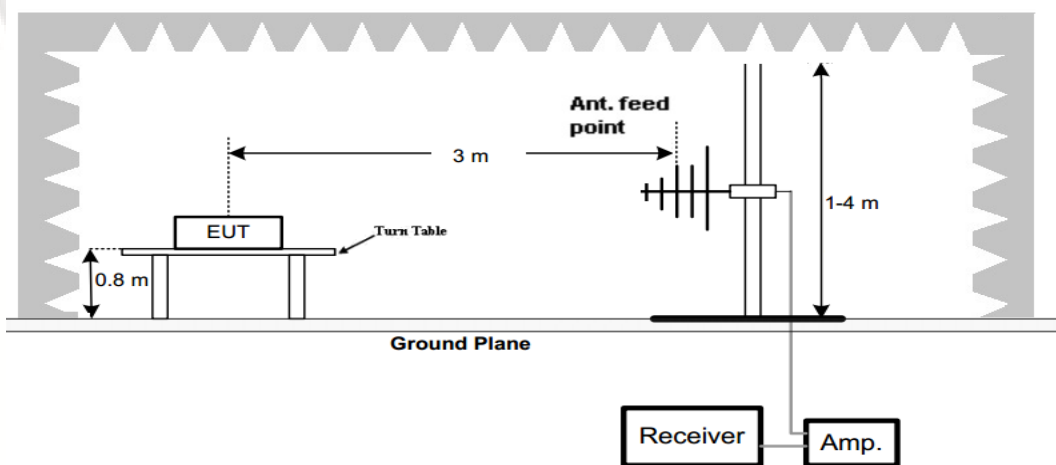

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

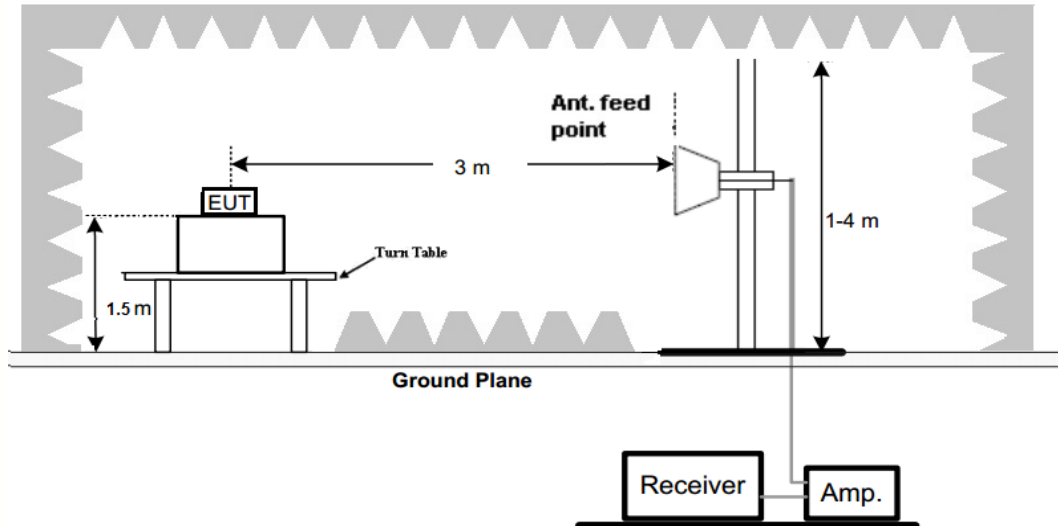**Test Procedure**

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS**Remark:**


- We measured Radiated Emission at GFSK mode from 9 KHz to 25GHz and recorded worst case.
- For below 1GHz testing recorded worst at GFSK low channel.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	VULB9168 20200407

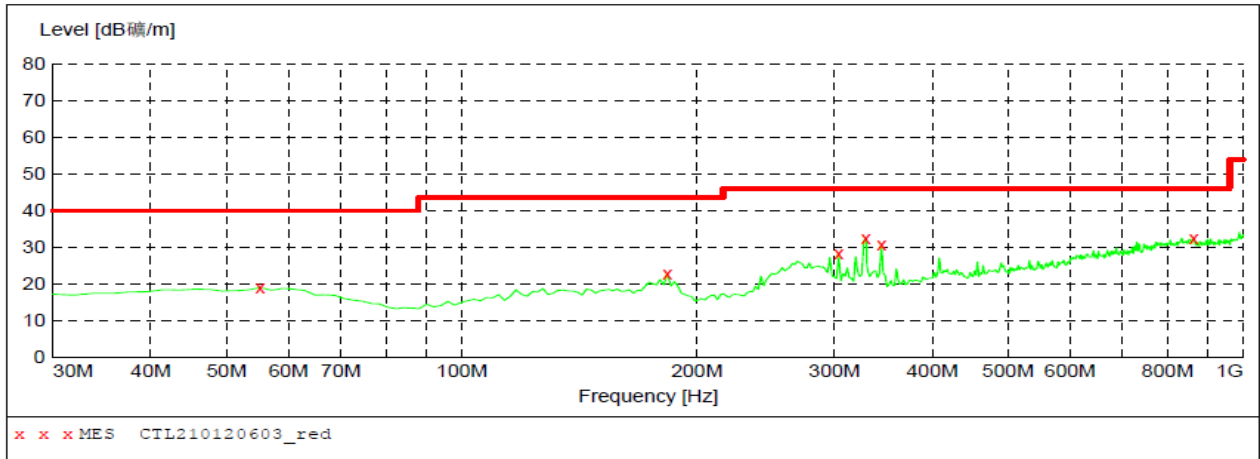

MEASUREMENT RESULT: "CTL210120603_red"


2021-1-20 17:10

Frequency MHz	Level dB磁/m	Transd dB	Limit dB磁/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	19.00	14.8	40.0	21.0	---	0.0	0.00	HORIZONTAL
183.260000	22.70	12.3	43.5	20.8	---	0.0	0.00	HORIZONTAL
303.540000	28.30	15.0	46.0	17.7	---	0.0	0.00	HORIZONTAL
328.760000	32.50	15.6	46.0	13.5	---	0.0	0.00	HORIZONTAL
344.280000	30.50	16.0	46.0	15.5	---	0.0	0.00	HORIZONTAL
864.200000	32.50	26.4	46.0	13.5	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	VULB9168 20200407

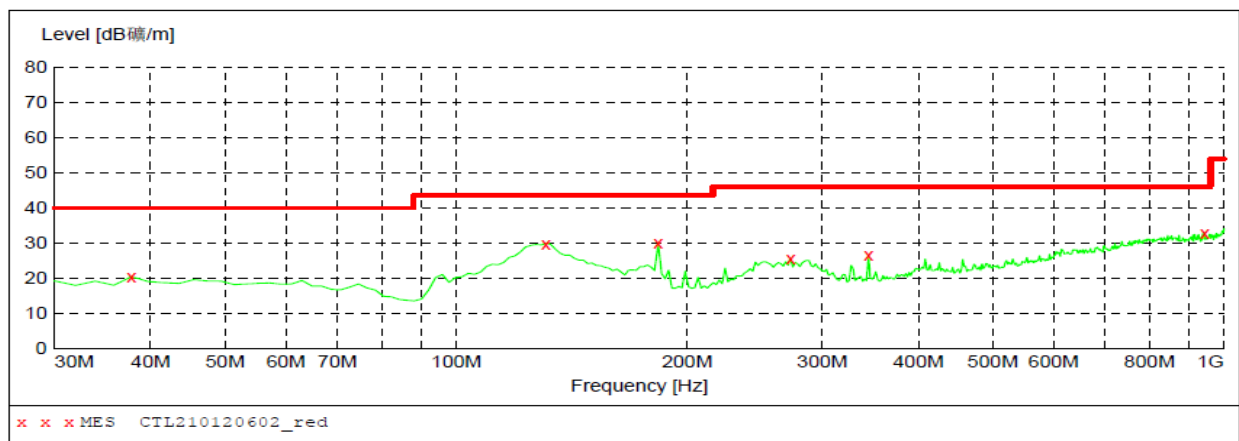

MEASUREMENT RESULT: "CTL210120602_red"

2021-1-20 17:08

Frequency MHz	Level dB磁/m	Transd dB	Limit dB磁/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	20.40	14.4	40.0	19.6	---	0.0	0.00	VERTICAL
130.880000	29.80	14.0	43.5	13.7	---	0.0	0.00	VERTICAL
183.260000	29.90	12.3	43.5	13.6	---	0.0	0.00	VERTICAL
272.500000	25.60	14.0	46.0	20.4	---	0.0	0.00	VERTICAL
344.280000	26.40	16.0	46.0	19.6	---	0.0	0.00	VERTICAL
943.740000	32.90	26.9	46.0	13.1	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

Frequency(MHz):			2410.875		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4821.75	46.84	PK	74.00	27.16	40.59	33.60	6.95	34.30	6.25
4821.75	--	AV	54.00	--	--	--	--	--	--
5246.15	43.21	PK	74.00	30.79	35.58	34.57	7.16	34.10	7.63
5246.15	--	AV	54.00	--	--	--	--	--	--
7232.63	44.75	PK	74.00	29.25	33.06	37.46	9.23	35.00	11.69
7232.63	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2410.875		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4821.75	47.06	PK	74.00	26.94	40.81	33.60	6.95	34.30	6.25
4821.75	--	AV	54.00	--	--	--	--	--	--
5246.15	42.66	PK	74.00	31.34	35.03	34.57	7.16	34.10	7.63
5246.15	--	AV	54.00	--	--	--	--	--	--
7232.63	46.58	PK	74.00	27.42	34.89	37.46	9.23	35.00	11.69
7232.63	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2441.25		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.50	48.73	PK	74	25.27	42.37	33.60	6.95	34.19	6.36
4882.50	--	AV	54	--	--	--	--	--	--
5232.05	45.15	PK	74	28.85	38.06	34.05	7.51	34.47	7.09
5232.05	--	AV	54	--	--	--	--	--	--
7323.75	46.01	PK	74	27.99	34.32	37.46	9.23	35.00	11.69
7323.75	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441.25		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.50	47.14	PK	74	26.86	40.78	33.60	6.95	34.19	6.36
4882.50	--	AV	54	--	--	--	--	--	--
5232.05	43.94	PK	74	30.06	36.85	34.05	7.51	34.47	7.09
5232.05	--	AV	54	--	--	--	--	--	--
7323.75	45.18	PK	74	28.82	33.49	37.46	9.23	35.00	11.69
7323.75	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2471.625		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4943.25	47.35	PK	74	26.65	42.43	33.84	7.00	35.92	4.92
4943.25	--	AV	54	--	--	--	--	--	--
5149.15	45.64	PK	74	28.36	37.60	34.87	7.29	34.12	8.04
5149.15	--	AV	54	--	--	--	--	--	--
7414.88	43.52	PK	74	30.48	31.57	37.64	9.28	34.97	11.95
7414.88	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2471.625		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4943.25	48.26	PK	74	25.74	43.34	33.84	7.00	35.92	4.92
4943.25	--	AV	54	--	--	--	--	--	--
5149.15	44.73	PK	74	29.27	36.69	34.87	7.29	34.12	8.04
5149.15	--	AV	54	--	--	--	--	--	--
7414.88	44.08	PK	74	29.92	32.13	37.64	9.28	34.97	11.95
7414.88	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Frequency(MHz):			2410.875		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2410.88	96.05	PK	114	17.95	62.66	28.78	4.61	0	33.39
2410.88	87.53	AV	94	6.47	54.14	28.78	4.61	0	33.39
2348.75	43.91	PK	74	30.09	10.7	28.63	4.58	0	33.21
2348.75	--	AV	54	--	--	--	--	--	--
2390.00	45.42	PK	74	28.58	12.1	28.72	4.60	0	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	46.33	PK	74	27.67	12.94	28.78	4.61	0	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2410.875		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2410.88	96.34	PK	114	17.66	62.95	28.78	4.61	0	33.39
2410.88	91.07	AV	94	2.93	57.68	28.78	4.61	0	33.39
2348.75	45.12	PK	74	28.88	11.91	28.63	4.58	0	33.21
2348.75	--	AV	54	--	--	--	--	--	--
2390.00	46.89	PK	74	27.11	13.57	28.72	4.60	0	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	43.05	PK	74	30.95	9.66	28.78	4.61	0	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441.25		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2441.25	94.17	PK	114	19.83	60.78	28.78	4.61	0.00	33.39
2441.25	86.72	AV	94	7.28	53.33	28.78	4.61	0.00	33.39
2483.50	43.08	PK	74	30.92	9.45	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2390.00	43.85	PK	74.00	30.15	10.53	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--
2400.00	43.62	PK	74.00	30.38	10.23	28.78	4.61	0.00	33.39
2400.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2441.25		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2441.25	94.52	PK	114	19.48	61.13	28.78	4.61	0.00	33.39
2441.25	86.66	AV	94	7.34	53.27	28.78	4.61	0.00	33.39
2483.50	43.75	PK	74	30.25	10.12	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2390.00	43.32	PK	74.00	30.68	10.00	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--
2400.00	43.74	PK	74.00	30.26	10.35	28.78	4.61	0.00	33.39
2400.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2471.625		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2471.63	94.62	PK	114	19.38	61.00	28.92	4.70	0	33.62
2471.63	87.46	AV	94	6.54	53.84	28.92	4.70	0	33.62
2483.50	43.04	PK	74	30.96	9.41	28.93	4.70	0	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2496.05	43.11	PK	74	30.89	9.45	28.95	4.71	0	33.66
2496.05	--	AV	54	--	--	--	--	--	--
2500.00	43.95	PK	74	30.05	10.27	28.96	4.72	0	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2471.625		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2471.63	93.08	PK	114	20.92	59.46	28.92	4.70	0	33.62
2471.63	86.47	AV	94	7.53	52.85	28.92	4.70	0	33.62
2483.50	43.34	PK	74	30.66	9.71	28.93	4.70	0	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2496.05	42.91	PK	74	31.09	9.25	28.95	4.71	0	33.66
2496.05	--	AV	54	--	--	--	--	--	--
2500.00	43.68	PK	74	30.32	10	28.96	4.72	0	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

3.3. Occupied Bandwidth Measurement

Limit

N/A

Test Configuration



Test Procedure


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Results


Modulation	Channel	99% OBW (MHz)	20dB bandwidth (MHz)	Result
GFSK	CH01	3.6261	3.769	Pass
	CH10	4.2742	3.596	
	CH19	3.5944	3.317	

Test plot as follows:

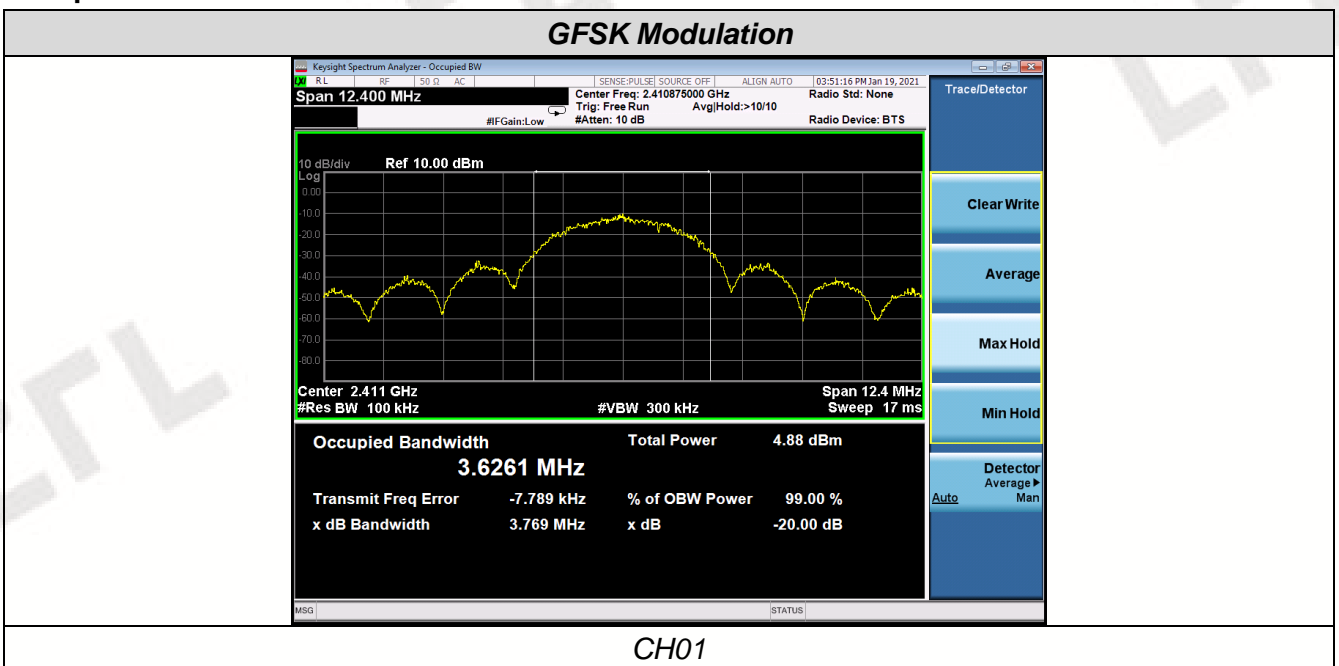



CH10

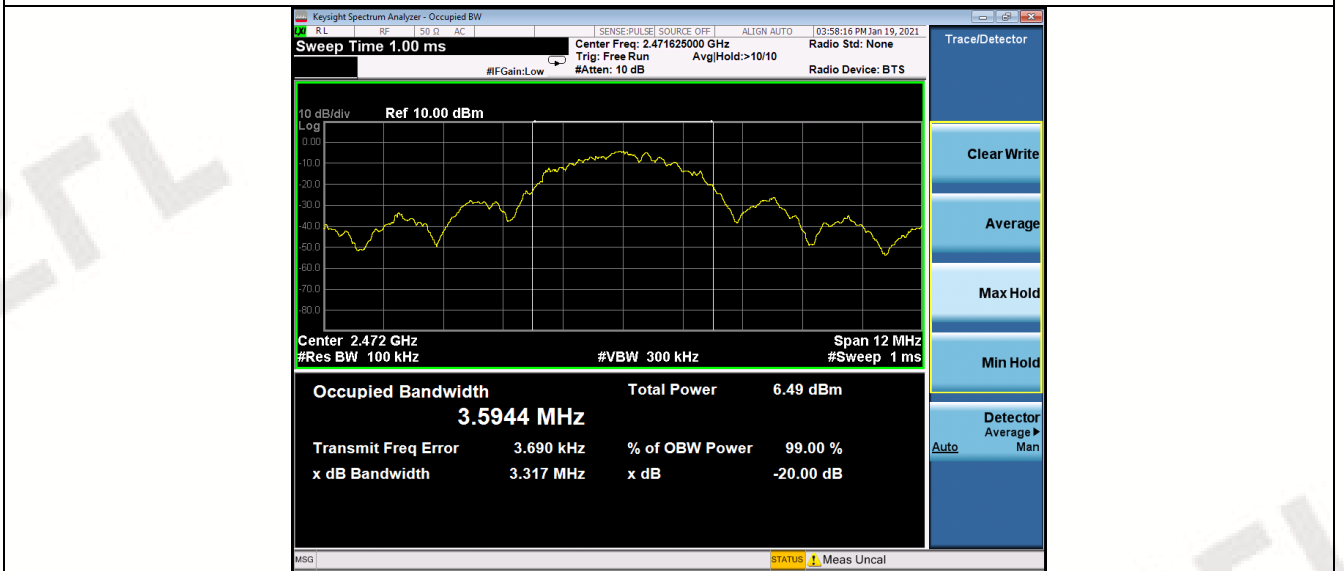

CH19

3.4. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction



The antenna used in this product is a Monopole Antenna, The directional gains of antenna used for transmitting is 0dBi.




4. Test Setup Photos of the EUT




5. External and Internal Photos of the EUT




External Photos of EUT

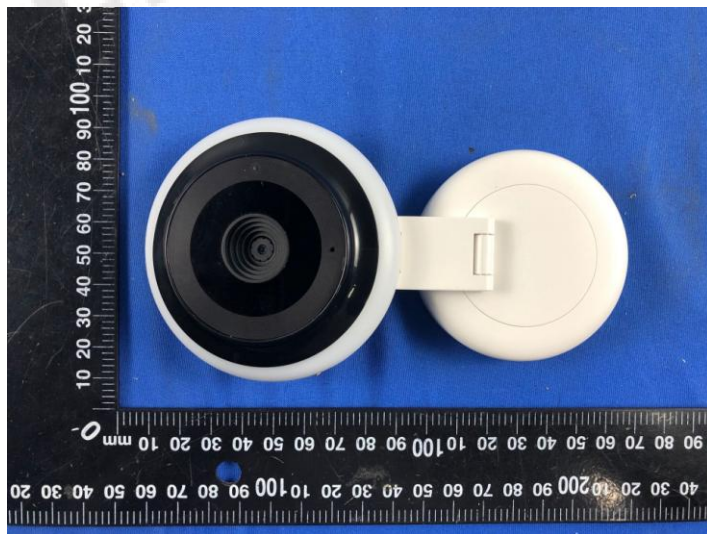
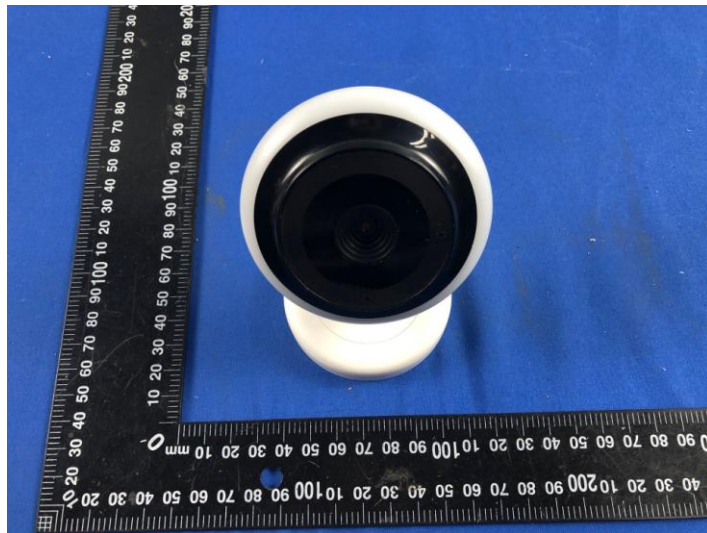


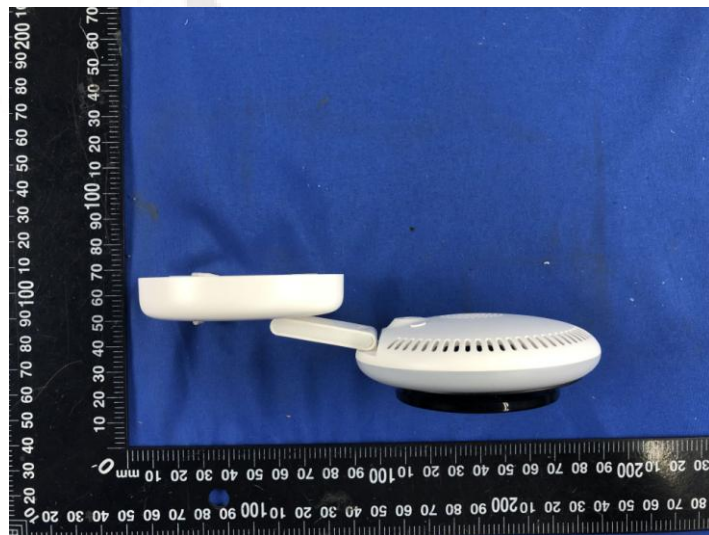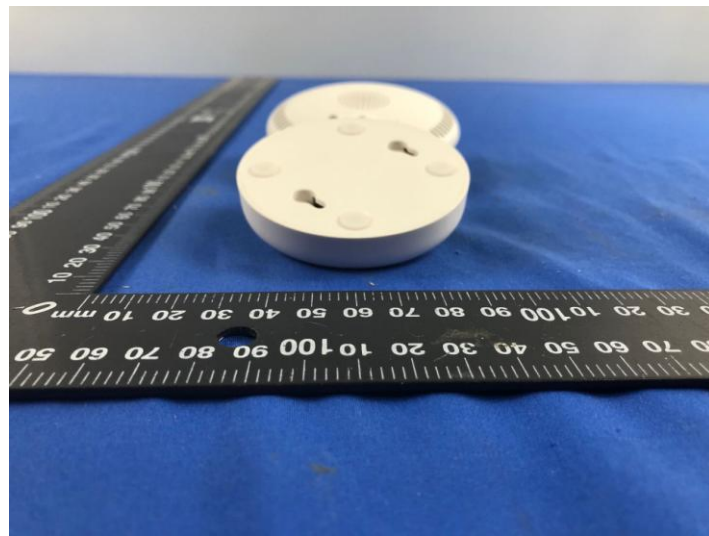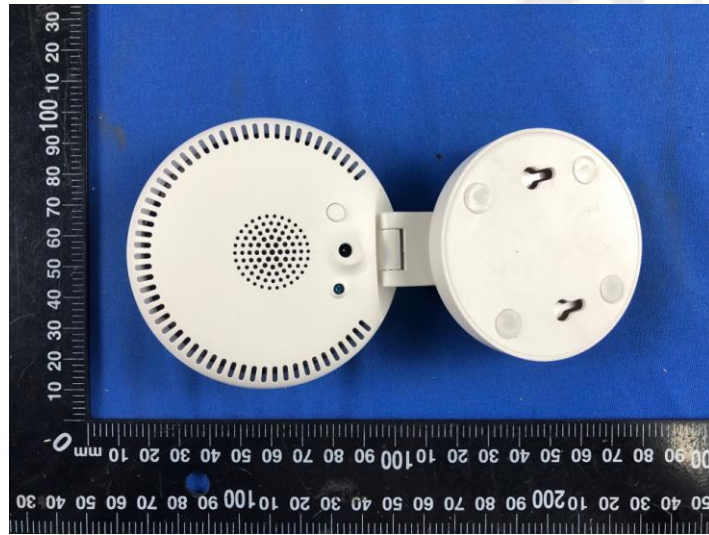

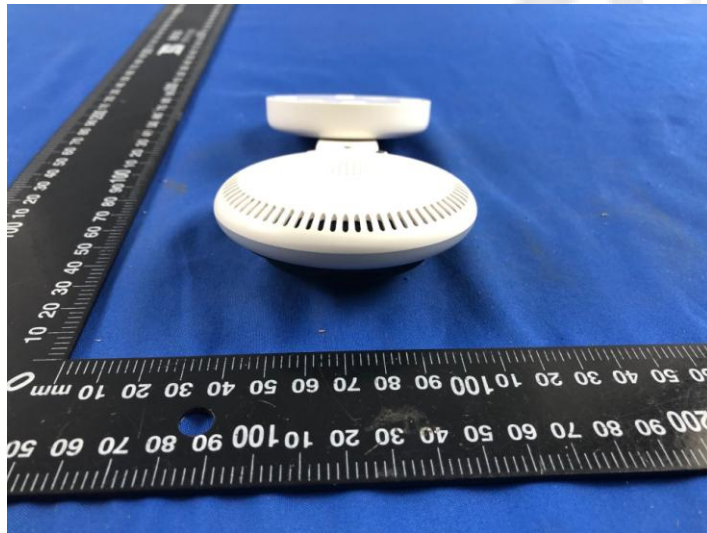


Internal Photos of EUT

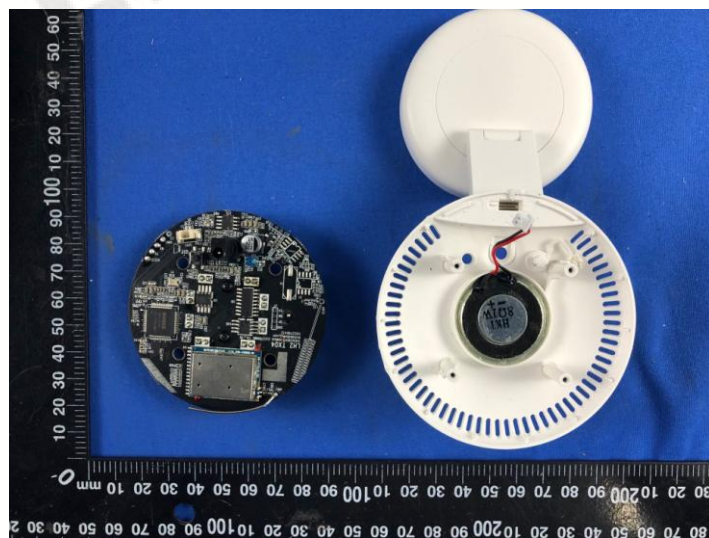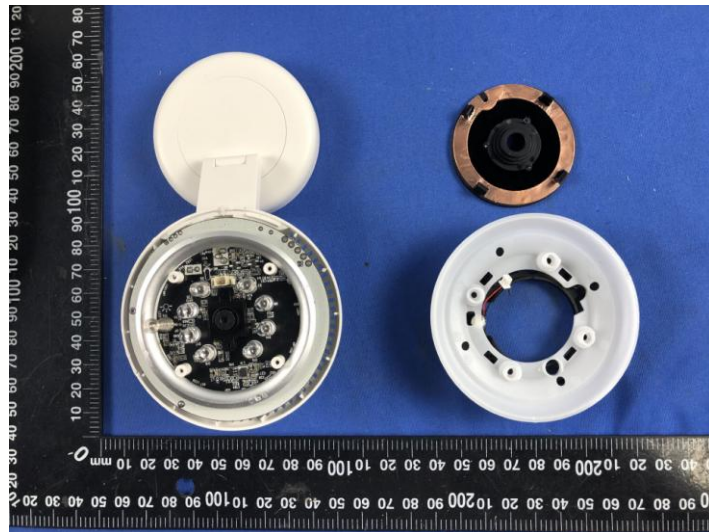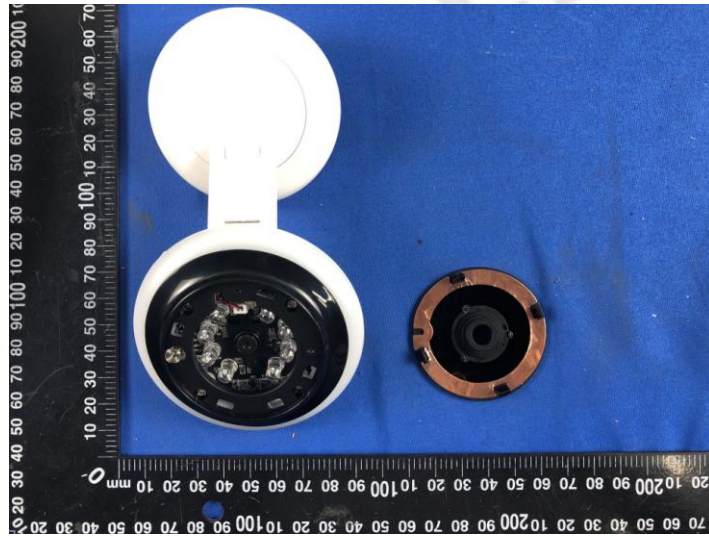

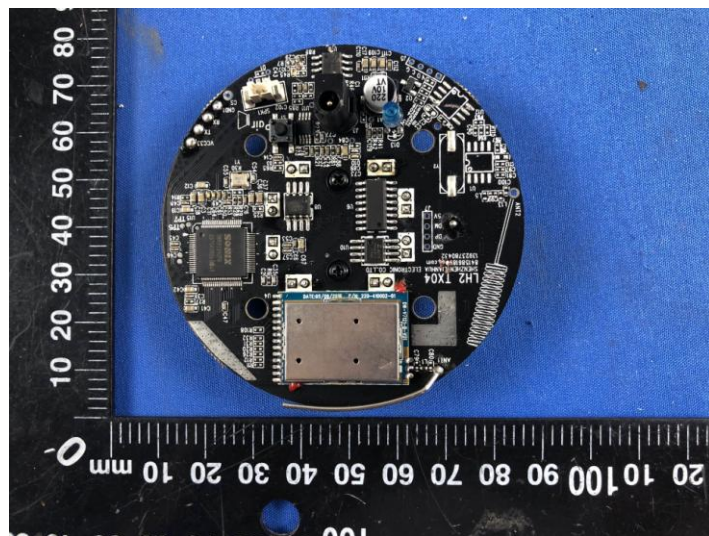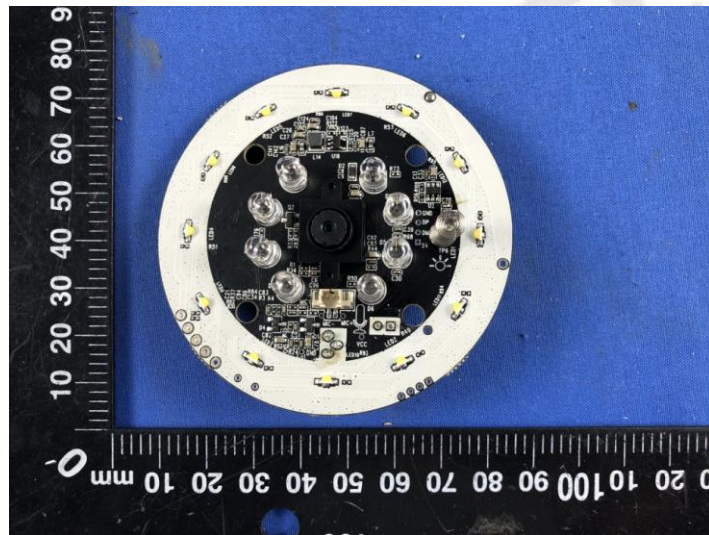

Antenna

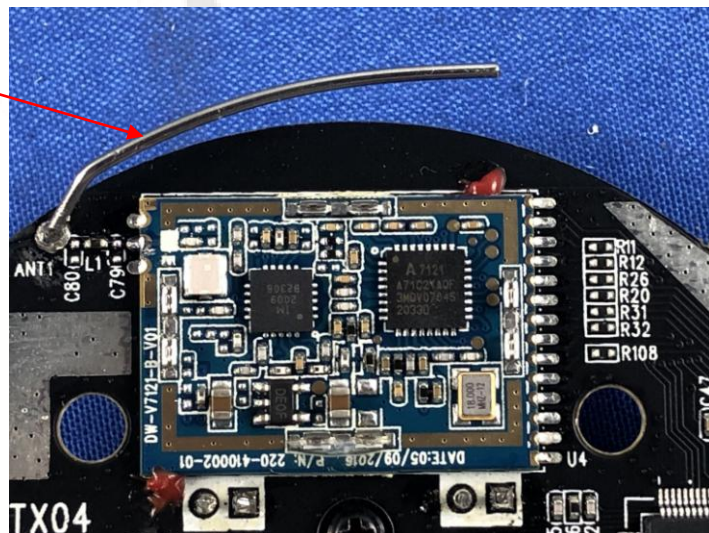

***** End of Report *****