

PCB 板载蓝牙天线测试报告

PCB BT Antenna Test Report


一、天线简介/ Introduction of antenna

我司使用的蓝牙模块的蓝牙天线直接采用做在主板 PCB 板上的方式，
铜箔厚度：1OZ，板材为 FR—4 厚度 1.0mm 材料。

Our Bluetooth speaker's antenna is directly made on the Main PCB
board. Copper foil thickness: 1OZ, sheet material is FR - 4 thickness 1.0mm
material.

二、天线外形/ Antenna shape

1. 尺寸图/Size :

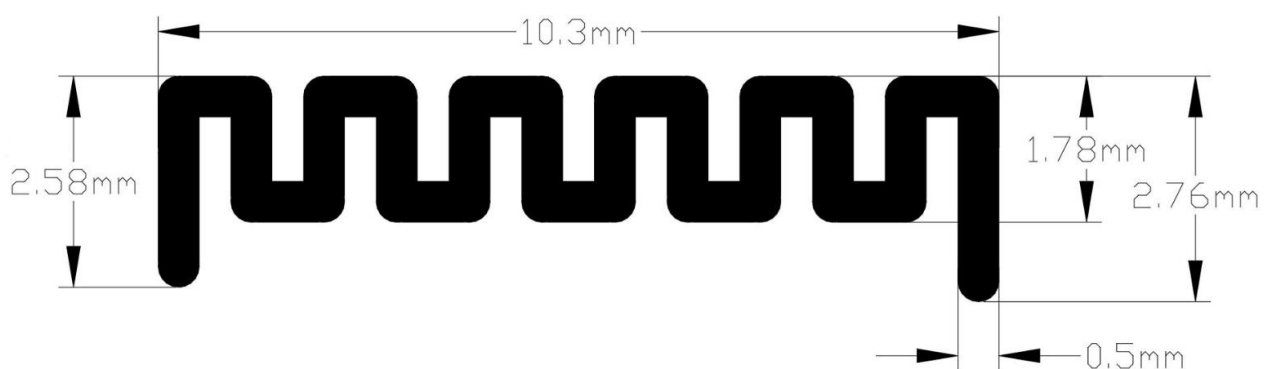

三、天线参数/Antenna parameters

蓝牙天线工作频率在 2402-2480MHz，在此频段产生谐振。下表为天线的主要参数。

The Bluetooth antenna operates at 2402-2480MHz and generates resonance in this frequency band. The next table is the main parameter of the antenna.

蓝牙内置天线/ Bluetooth built-in antenna	
Frequency(MHz)	2402 ~ 2480 MHz
VSWR	≤ 1.92
Impedance	50 Ohm Nominal
Return Loss	-8.5 dB Max
Radiation	Omni-directional
Gain (Peak)	1.84 dB
Polarization	Linear, Vertical
Admitted Power	2W
Connector	Tin

四、天线增益检测报告/Antenna gain detection report

Spectrum Detector:	Agilent E5071B	Test Date :	Sep 28, 2024
Test By:	Tang	Temperature :	21°C
Test Result:	PASS	Humidity :	65 %
Modulation:	GFSK		

最大增益值/Maximum gain value

Frequency VNA (MHz)	Max Gain(dB)
2400	1.45
2410	1.35

2420	1.1
2430	1.19
2440	1.84
2450	1.39
2460	1.12
2470	1.18
2480	1.00
2490	1.28
2500	1.32

方向图/Directional map:

