

# SAR TEST REPORT


ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**Laptop**

ISSUED TO  
E&S International Enterprises, Inc.

7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

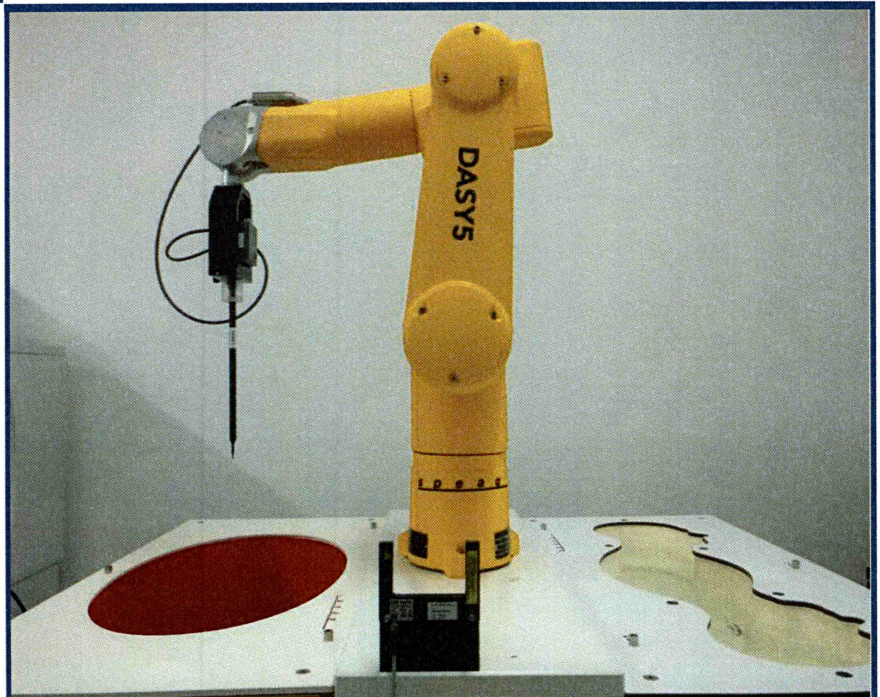

Tested by: Miao Yan  
Miao Yan  
Date: Nov. 04, 2021

Approved by: [Signature]  
Liao Jianming  
(Technical Director)  
Date: Nov. 04, 2021

Report No.: BL-SZ2190990-701  
EUT Name: Laptop  
Model Name: GWCC71416-BK (refer section 2.4)  
Brand Name: Gateway  
FCC ID: 2AYPE-GWCC71416  
Test Standard: FCC 47 CFR Part 2.1093  
ANSI C95.1-1992, IEEE Std. 1528-2013  
(refer section 3.1)  
Maximum SAR: Body 2.4GHz(1 g): 0.818 W/kg  
Body 5GHz(1 g): 1.173 W/kg  
Test Conclusion: Pass  
Test Date: Oct. 09, 2021 ~ Oct. 19, 2021  
Date of Issue: Nov. 04, 2021

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*



### Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Nov. 04, 2021</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	GENERAL INFORMATION .....	4
1.1	Identification of the Testing Laboratory .....	4
1.2	Identification of the Responsible Testing Location .....	4
1.3	Test Environment Condition .....	4
1.4	Announce .....	4
2	PRODUCT INFORMATION .....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information .....	5
2.3	Factory Information .....	5
2.4	General Description for Equipment under Test (EUT) .....	5
2.5	Ancillary Equipment .....	6
2.6	Technical Information .....	6
3	SUMMARY OF TEST RESULT .....	7
3.1	Test Standards .....	7
3.2	Device Category and SAR Limit .....	8
3.3	Test Result Summary .....	9
3.4	Test Uncertainty .....	10
4	MEASUREMENT SYSTEM .....	11
4.1	Specific Absorption Rate (SAR) Definition .....	11
4.2	DASY SAR System .....	12
5	SYSTEM VERIFICATION .....	20
5.1	Purpose of System Check .....	20
5.2	System Check Setup .....	20
6	TEST POSITION CONFIGURATIONS .....	21
6.1	Laptop Exposure Condition .....	21
6.2	Tablet Exposure Condition .....	21
7	MEASUREMENT PROCEDURE .....	22
7.1	Measurement Process Diagram .....	22

7.2	SAR Scan General Requirement .....	23
7.3	Measurement Procedure.....	24
7.4	Area & Zoom Scan Procedure .....	24
8	CONDUCTED RF OUPUT POWER.....	25
8.1	WIFI.....	25
8.2	Bluetooth (Aux. Antenna) .....	33
9	TEST EXCLUSION CONSIDERATION.....	34
9.1	Laptop Mode antenna location sketch.....	34
9.2	Tablet Mode antenna location sketch.....	35
9.3	SAR Test Consideration Table.....	36
10	TEST RESULT .....	41
10.1	Bluetooth .....	41
10.2	WIFI 2.4GHZ.....	41
10.3	WIFI 5GHZ.....	41
11	Measurement Variability .....	42
12	SIMULTANEOUS TRANSMISSION .....	43
12.1	Simultaneous Transmission Mode for Body SAR .....	43
12.2	Sum SAR of Simultaneous Transmission .....	44
13	TEST EQUIPMENTS LIST .....	45
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT .....	46
ANNEX B	SYSTEM CHECK RESULT .....	47
ANNEX C	TEST DATA.....	52
ANNEX D	EUT EXTERNAL PHOTOS.....	60
ANNEX E	SAR TEST SETUP PHOTOS.....	60
ANNEX F	CALIBRATION REPORT .....	60

# 1 GENERAL INFORMATION

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Test Environment Condition

Ambient Temperature	21°C to 23°C
Ambient Relative Humidity	32% to 49%
Ambient Pressure	100KPa to 102KPa

## 1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

### 2.2 Manufacturer Information

Manufacturer	Shenzhen Yuko Technology Co., Ltd.
Address	6th, A9 Bldg, Tianrui Industrial Park, Fuyuan 1st Rd, Fuyong, Baoan, Shenzhen, China.

### 2.3 Factory Information

Factory	Shenzhen Yuko Technology Co., Ltd.
Address	6th, A9 Bldg, Tianrui Industrial Park, Fuyuan 1st Rd, Fuyong, Baoan, Shenzhen, China.

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	Laptop
Model Name Under Test	GWCC71416-BK
Series Model Name	147, 147WB, T147WB, GWCC71416-GR, GWCC71416-BL, GWCC71416-RD, GWCC71416, C141, U141, I141, C143, U143, T143, T147, K147, C147, C148, U148, K148, T148, T149
Description of Model Name Differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name and color.
Hardware Version	TU140TR130
Software Version	Windows 11 Home 21H2
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	5376275P
	Serial No.	N/A
	Capacitance	4500 mAh
	Rated Voltage	11.4 V
	Limited Voltage	13.05 V

## 2.6 Technical Information

Network and Wireless connectivity	WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160) Bluetooth (BR+EDR)
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN, 5G WLAN, Bluetooth	
Frequency Range	802.11b/g/n(HT20/HT40)	2412 MHz ~ 2483.5 MHz
	802.11a/n(HT20/HT40) /ac(VHT20/VHT40/VHT80/VHT160)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
	Bluetooth	2402 MHz ~ 2480 MHz
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
EUT Stage	Portable Device	
Product	Type	
	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v07	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
8	KDB 616217 D04v01r02	SAR for laptop and tablets

### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ ControlledExposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

**NOTE:**

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.



### 3.3 Test Result Summary

#### 3.3.1 Highest SAR (1 g Value)

Frequency Band		Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
		Body	Body
WIFI	2.4 G MIMO	0.818	1.173
	5.3 G MIMO	1.154	
	5.6 G MIMO	1.154	
	5.8 G MIMO	<b>1.173</b>	
Bluetooth	DH5 Aux. Antenna	0.159	
Limits (W/kg)		1.6	
Test Verdict		Pass	

### 3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.173 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

## 4 MEASUREMENT SYSTEM

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,

$\rho$  is the mass density of the tissue and  $E$  is the RMS electrical field strength.

## 4.2 DASY SAR System

### 4.2.1 DASY SAR System Diagram

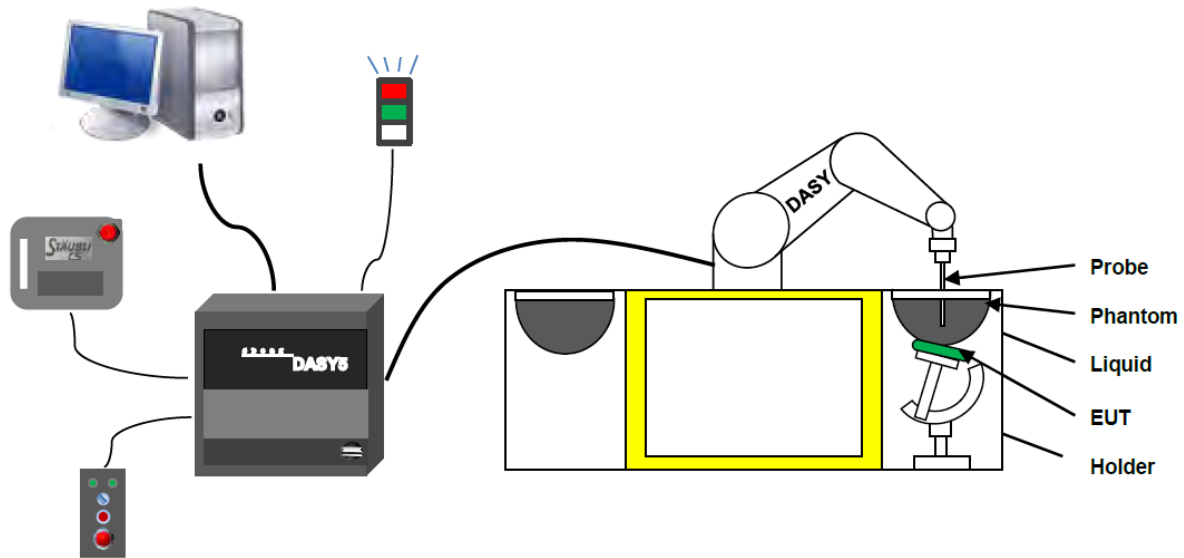

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision  
(repeatability  $\pm 0.02$  mm)
- High reliability  
(industrial design)
- Low maintenance costs  
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements  
(brush less synchron motors; no stepper motors)
- Low ELF interference  
(motor control fields shielded via the closed metallic construction shields)



### 4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN: 7510 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) ; $\pm 0.4$ dB in HSL (rotation normal to probe axis)
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



#### E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

#### 4.2.4 Data Acquisition Electronics

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M $\Omega$
- The Inputs: Symmetrical and Floating
- Common Mode Rejection: Above 80dB

### 4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Serial Number	Material	Length	Height
SN 1857 SAM	Vinylester, glass fiber reinforced	1000	500

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.



· Flat phantom

Photo of Phantom SN1012



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis ( mm )
SN 1012 ELI4	2.0 ± 0.2	600	500

#### 4.2.6 Device Holder

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than  $1^\circ$ .



#### 4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
5200	78.60	21.40			/		5.54	47.86
5800	78.50	21.40			0.1		6.0	48.20


## 5 SYSTEM VERIFICATION

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

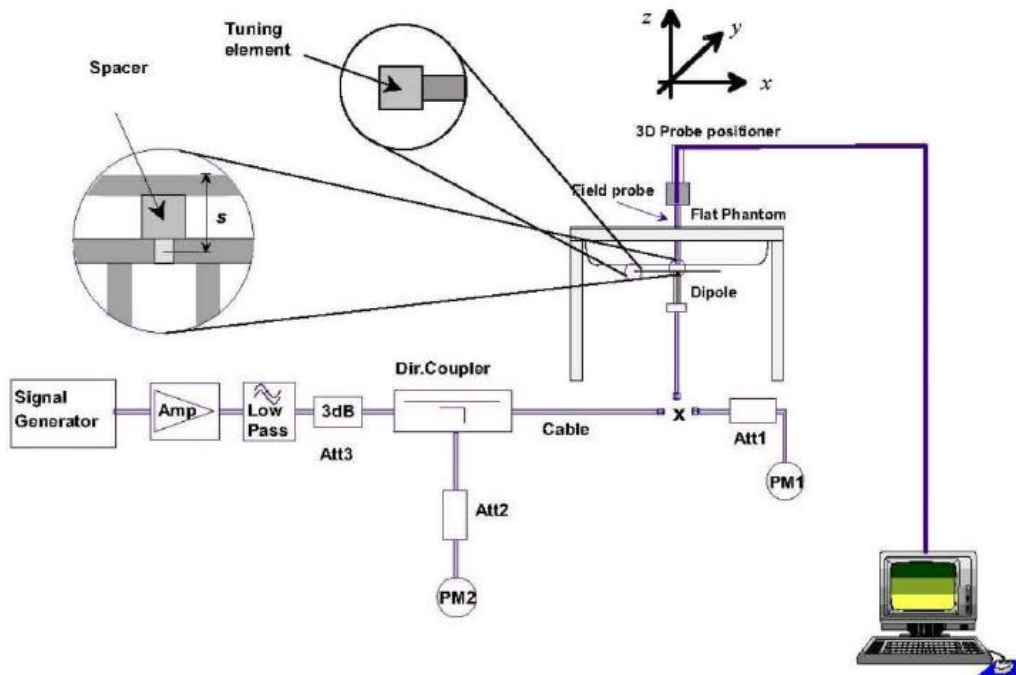

## 6 TEST POSITION CONFIGURATIONS

### 6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

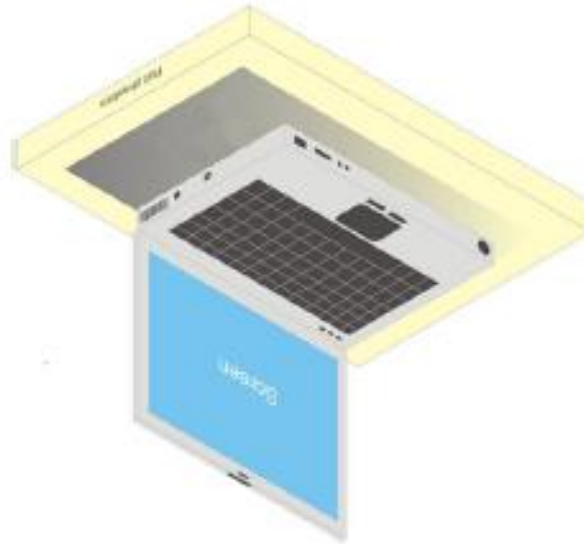

### 6.2 Tablet Exposure Condition

This DUT was tested in four different positions. They are back side, left edge, right edge and top edge in these positions, the surface of DUT is touching with phantom 0mm.


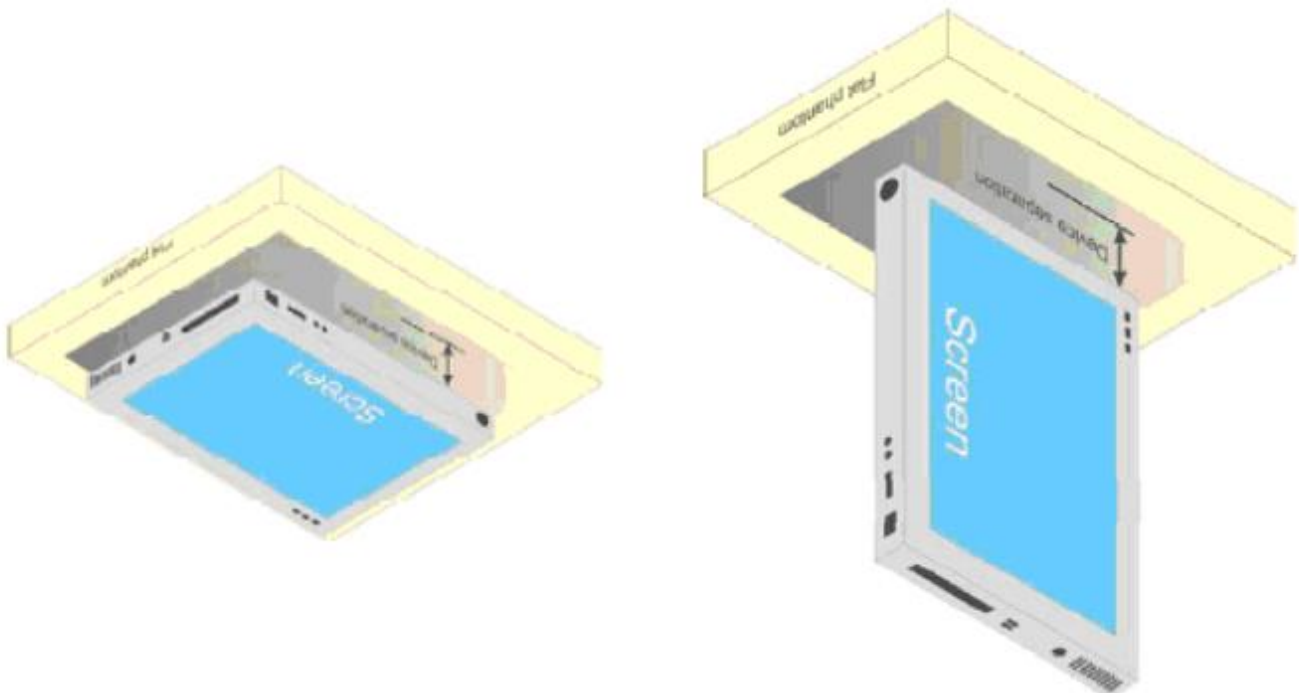


Fig Illustration for Lap-touching Position

## 7 MEASUREMENT PROCEDURE

### 7.1 Measurement Process Diagram

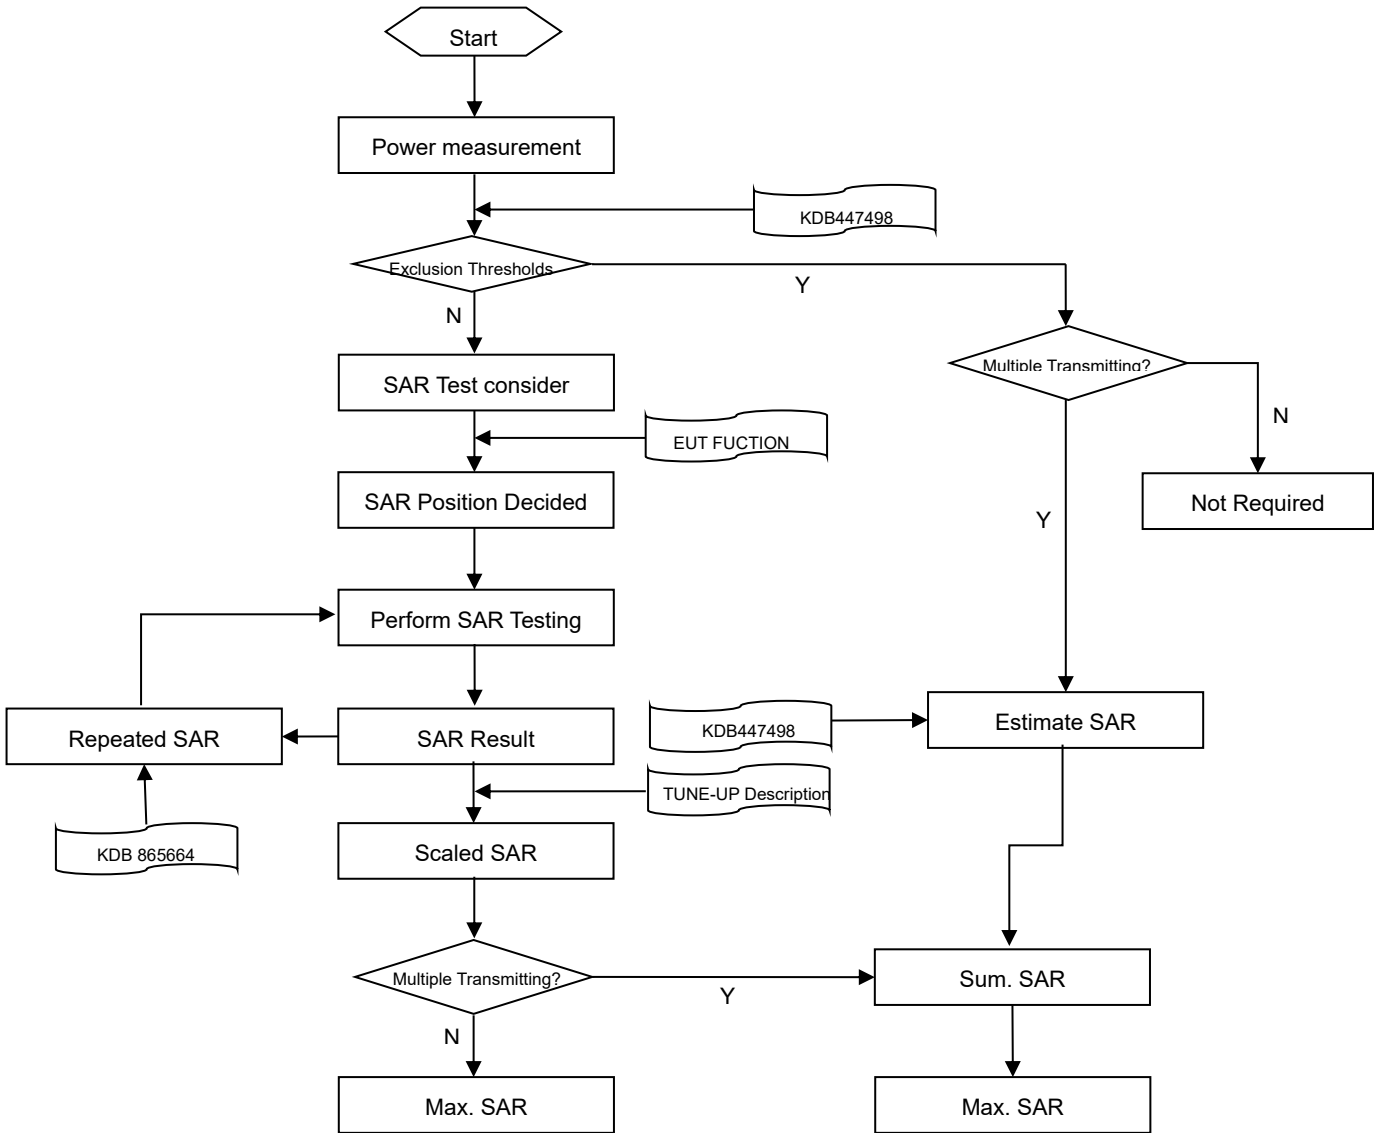

## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

		≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30°±1°	20°±1°
Maximum area scan spatial resolution: $\Delta x$ Area , $\Delta y$ Area		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x$ Zoom , $\Delta y$ Zoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z$ Zoom (n)	≤ 5 mm	3–4 GHz: ≤ 4 mm
			4–5 GHz: ≤ 3 mm
			5–6 GHz: ≤ 2 mm
	graded grid	$\Delta z$ Zoom (1): between 1st two points closest to phantom surface  $\Delta z$ Zoom (n>1): between subsequent points	≤ 4 mm
4–5 GHz: ≤ 2.5 mm 5–6 GHz: ≤ 2 mm			
Minimum zoom scan volume	x, y, z	≥30 mm	3–4 GHz: ≥ 28 mm
			4–5 GHz: ≥ 25 mm
			5–6 GHz: ≥ 22 mm
<b>Note:</b> <ol style="list-style-type: none"> <li><math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</li> <li>* When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</li> </ol>			



### 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 8 CONDUCTED RF OUTPUT POWER

### 8.1 WIFI

#### 8.1.1 2.4G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	13.50	14.00	No
		6	2437	13.64	14.00	No
		11	2462	13.61	14.00	No
	802.11g	1	2412	13.32	14.00	No
		6	2437	13.41	14.00	No
		11	2462	13.39	14.00	No
	802.11n(HT20)	1	2412	13.63	14.00	No
		6	2437	13.34	14.00	No
		11	2462	13.36	14.00	No
	802.11n(HT40)	3	2422	13.45	14.00	No
		6	2437	13.56	14.00	No
		9	2452	13.64	14.00	No

Note: WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode.

#### 8.1.2 2.4G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	13.52	14.00	No
		6	2437	13.40	14.00	No
		11	2462	13.31	14.00	No
	802.11g	1	2412	13.27	14.00	No
		6	2437	13.61	14.00	No
		11	2462	13.55	14.00	No
	802.11n(HT20)	1	2412	13.71	14.00	No
		6	2437	13.56	14.00	No
		11	2462	13.51	14.00	No
	802.11n(HT40)	3	2422	13.32	14.00	No
		6	2437	13.27	14.00	No
		9	2452	13.25	14.00	No

Note: WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode.

## 8.1.3 2.4G WIFI (MIMO)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	16.50	17.00	Yes
		6	2437	16.43	17.00	Yes
		11	2462	16.42	17.00	Yes
	802.11g	1	2412	16.71	17.00	No
		6	2437	16.44	17.00	No
		11	2462	16.43	17.00	No
	802.11n(HT20)	1	2412	16.62	17.00	No
		6	2437	16.63	17.00	No
		11	2462	16.59	17.00	No
	802.11n(HT40)	3	2422	16.35	17.00	No
		6	2437	16.39	17.00	No
		9	2452	16.42	17.00	No

## Note:

1. WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode.

2. According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Adjusted SAR = Report SAR \* (max power (OFDM)/ max power (DSSS)) = 0.818 \* (50.12 mw)/(50.12 mw) =0.818 W/kg, so the 2.4GHz OFDM SAR test is not required.

## 8.1.4 5G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	11.55	12.00	No
		40	5200	11.43	12.00	No
		48	5240	11.43	12.00	No
	802.11n(HT20)	36	5180	11.62	12.00	No
		40	5200	11.36	12.00	No
		48	5240	11.66	12.00	No
	802.11n(HT40)	38	5190	11.39	12.00	No
		46	5230	11.56	12.00	No
	802.11ac(VHT20)	36	5180	11.65	12.00	No
		40	5200	11.58	12.00	No
		48	5240	11.64	12.00	No
	802.11ac(VHT40)	38	5190	11.66	12.00	No
		46	5230	11.49	12.00	No
802.11ac(VHT80)	42	5210	11.68	12.00	No	
802.11ac(VHT 160)	50	5250	11.63	12.00	No	
5.3 (5.25~5.35)	802.11a	52	5260	11.49	12.00	No
		60	5300	11.62	12.00	No
		64	5320	11.64	12.00	No
	802.11n(HT20)	52	5260	11.52	12.00	No
		60	5300	11.66	12.00	No
		64	5320	11.42	12.00	No
	802.11n(HT40)	54	5270	11.66	12.00	No
		62	5310	11.69	12.00	No
	802.11ac(VHT20)	52	5260	11.43	12.00	No
		60	5300	11.51	12.00	No
		64	5320	11.47	12.00	No
	802.11ac(VHT40)	54	5270	11.45	12.00	No
		62	5310	11.53	12.00	No
802.11ac(VHT80)	58	5290	11.42	12.00	No	
5.6 (5.47~5.725)	802.11a	100	5500	11.51	12.00	No
		116	5580	11.59	12.00	No
		140	5700	11.56	12.00	No
	802.11n(HT20)	100	5500	11.62	12.00	No
		116	5580	11.50	12.00	No
		140	5700	11.49	12.00	No
	802.11n(HT40)	102	5510	11.62	12.00	No
		110	5550	11.57	12.00	No
		134	5670	11.42	12.00	No
	802.11ac(VHT20)	100	5500	11.41	12.00	No
		116	5580	11.56	12.00	No
		140	5700	11.54	12.00	No
	802.11ac(VHT40)	102	5510	11.46	12.00	No
110		5550	11.43	12.00	No	

		134	5670	11.47	12.00	No
	802.11ac(VHT80)	106	5530	11.39	12.00	No
		122	5610	11.60	12.00	No
		138	5690	11.67	12.00	No
	802.11ac(VHT 160)	114	5570	11.43	12.00	No
5.8 (5.725~5.850)	802.11a	149	5745	11.66	12.00	No
		157	5785	11.36	12.00	No
		165	5825	11.36	12.00	No
	802.11n(HT20)	149	5745	11.42	12.00	No
		157	5785	11.52	12.00	No
		165	5825	11.69	12.00	No
	802.11n(HT40)	151	5755	11.62	12.00	No
		159	5795	11.39	12.00	No
	802.11ac(VHT20)	149	5745	11.62	12.00	No
		157	5785	11.58	12.00	No
		165	5825	11.50	12.00	No
	802.11ac(VHT40)	151	5755	11.40	12.00	No
		159	5795	11.60	12.00	No
	802.11ac(VHT80)	155	5775	11.49	12.00	No

Note: WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode.



## 8.1.5 5G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	11.60	12.00	No
		40	5200	11.38	12.00	No
		48	5240	11.37	12.00	No
	802.11n(HT20)	36	5180	11.44	12.00	No
		40	5200	11.52	12.00	No
		48	5240	11.45	12.00	No
	802.11n(HT40)	38	5190	11.48	12.00	No
		46	5230	11.48	12.00	No
	802.11ac(VHT20)	36	5180	11.68	12.00	No
		40	5200	11.58	12.00	No
		48	5240	11.57	12.00	No
	802.11ac(VHT40)	38	5190	11.71	12.00	No
		46	5230	11.50	12.00	No
802.11ac(VHT80)	42	5210	11.55	12.00	No	
802.11ac(VHT 160)	50	5250	11.64	12.00	No	
5.3 (5.25~5.35)	802.11a	52	5260	11.53	12.00	No
		60	5300	11.60	12.00	No
		64	5320	11.54	12.00	No
	802.11n(HT20)	52	5260	11.60	12.00	No
		60	5300	11.45	12.00	No
		64	5320	11.64	12.00	No
	802.11n(HT40)	54	5270	11.39	12.00	No
		62	5310	11.49	12.00	No
	802.11ac(VHT20)	52	5260	11.67	12.00	No
		60	5300	11.45	12.00	No
		64	5320	11.59	12.00	No
	802.11ac(VHT40)	54	5270	11.61	12.00	No
		62	5310	11.60	12.00	No
802.11ac(VHT80)	58	5290	11.55	12.00	No	
5.6 (5.47~5.725)	802.11a	100	5500	11.68	12.00	No
		116	5580	11.36	12.00	No
		140	5700	11.63	12.00	No
	802.11n(HT20)	100	5500	11.41	12.00	No
		116	5580	11.66	12.00	No
		140	5700	11.54	12.00	No
	802.11n(HT40)	102	5510	11.62	12.00	No
		110	5550	11.47	12.00	No
		134	5670	11.52	12.00	No
	802.11ac(VHT20)	100	5500	11.41	12.00	No
		116	5580	11.59	12.00	No
		140	5700	11.41	12.00	No
	802.11ac(VHT40)	102	5510	11.63	12.00	No
110		5550	11.72	12.00	No	

		134	5670	11.59	12.00	No
	802.11ac(VHT80)	106	5530	11.66	12.00	No
		122	5610	11.51	12.00	No
		138	5690	11.43	12.00	No
	802.11ac(VHT 160)	114	5570	11.62	12.00	No
5.8 (5.725~5.850)	802.11a	149	5745	11.36	12.00	No
		157	5785	11.50	12.00	No
		165	5825	11.39	12.00	No
	802.11n(HT20)	149	5745	11.43	12.00	No
		157	5785	11.42	12.00	No
		165	5825	11.54	12.00	No
	802.11n(HT40)	151	5755	11.65	12.00	No
		159	5795	11.43	12.00	No
	802.11ac(VHT20)	149	5745	11.61	12.00	No
		157	5785	11.50	12.00	No
		165	5825	11.48	12.00	No
	802.11ac(VHT40)	151	5755	11.71	12.00	No
		159	5795	11.49	12.00	No
	802.11ac(VHT80)	155	5775	11.54	12.00	No

Note: WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode.

## 8.1.6 5G WIFI (MIMO)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	14.58	15.00	No
		40	5200	14.63	15.00	No
		48	5240	14.58	15.00	No
	802.11n(HT20)	36	5180	14.62	15.00	No
		40	5200	14.57	15.00	No
		48	5240	14.39	15.00	No
	802.11n(HT40)	38	5190	14.50	15.00	No
		46	5230	14.56	15.00	No
	802.11ac(VHT20)	36	5180	14.49	15.00	No
		40	5200	14.56	15.00	No
		48	5240	14.41	15.00	No
	802.11ac(VHT40)	38	5190	14.42	15.00	No
		46	5230	14.57	15.00	No
802.11ac(VHT80)	42	5210	14.55	15.00	No	
802.11ac(VHT 160)	50	5250	14.54	15.00	No	
5.3 (5.25~5.35)	802.11a	52	5260	14.55	15.00	No
		60	5300	14.60	15.00	No
		64	5320	14.62	15.00	No
	802.11n(HT20)	52	5260	14.54	15.00	No
		60	5300	14.67	15.00	No
		64	5320	14.54	15.00	No
	802.11n(HT40)	54	5270	14.54	15.00	No
		62	5310	14.57	15.00	No
	802.11ac(VHT20)	52	5260	14.68	15.00	No
		60	5300	14.51	15.00	No
		64	5320	14.58	15.00	No
	802.11ac(VHT40)	54	5270	14.42	15.00	No
		62	5310	14.48	15.00	No
802.11ac(VHT80)	58	5290	<b>14.56</b>	15.00	Yes	
5.6 (5.47~5.725)	802.11a	100	5500	14.61	15.00	No
		116	5580	14.57	15.00	No
		140	5700	14.58	15.00	No
	802.11n(HT20)	100	5500	14.62	15.00	No
		116	5580	14.54	15.00	No
		140	5700	14.45	15.00	No
	802.11n(HT40)	102	5510	14.49	15.00	No
		110	5550	14.57	15.00	No
		134	5670	14.65	15.00	No
	802.11ac(VHT20)	100	5500	14.52	15.00	No
		116	5580	14.52	15.00	No
		140	5700	14.55	15.00	No
	802.11ac(VHT40)	102	5510	14.39	15.00	No
110		5550	14.53	15.00	No	

		134	5670	14.47	15.00	No	
	802.11ac(VHT80)	106	5530	14.47	15.00	No	
		122	5610	14.42	15.00	No	
		138	5690	14.38	15.00	No	
	802.11ac(VHT 160)	114	5570	<b>14.88</b>	15.00	Yes	
5.8 (5.725~5.850)	802.11a	149	5745	14.59	15.00	No	
		157	5785	14.64	15.00	No	
		165	5825	14.50	15.00	No	
	802.11n(HT20)	149	5745	14.65	15.00	No	
		157	5785	14.58	15.00	No	
		165	5825	14.55	15.00	No	
	802.11n(HT40)	151	5755	14.53	15.00	No	
		159	5795	14.67	15.00	No	
	802.11ac(VHT20)	149	5745	14.58	15.00	No	
		157	5785	14.59	15.00	No	
		165	5825	14.69	15.00	No	
	802.11ac(VHT40)	151	5755	14.60	15.00	No	
		159	5795	14.63	15.00	No	
		802.11ac(VHT80)	155	5775	<b>14.31</b>	15.00	Yes

**Note:**

1. WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode.
2. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.


## 8.2 Bluetooth (Aux. Antenna)

Mode	GFSK			π/4-DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Conducted Power (dBm)	4.70	4.52	<b>4.75</b>	4.71	4.55	4.50
Tune-Up Limit (dBm)	6.00			6.00		
Mode	8-DPSK			BLE		
Channel	0	39	78	0	19	39
Frequency (MHz)	2402	2441	2480	2402	2440	2480
Conducted Power (dBm)	4.71	4.54	4.50	3.83	3.68	3.71
Tune-Up Limit (dBm)	6.00			5.00		

Note: The Bluetooth duty cycle is 76.94% as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.


### Duty Cycle

#### Bluetooth-GFSK

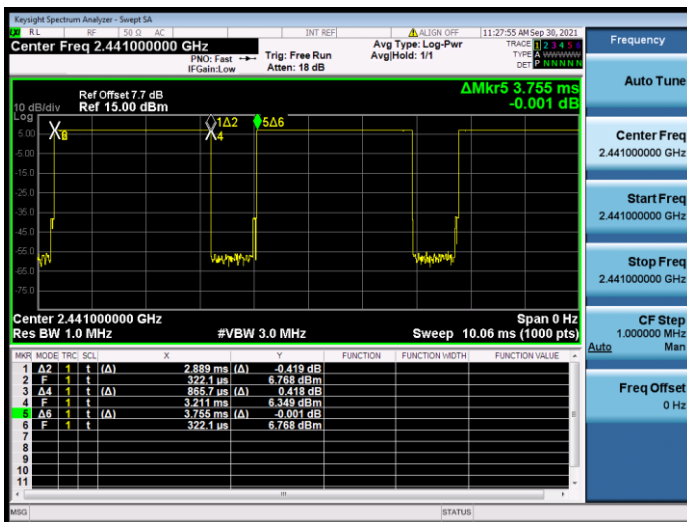


## 9 TEST EXCLUSION CONSIDERATION

### 9.1 Laptop Mode antenna location sketch

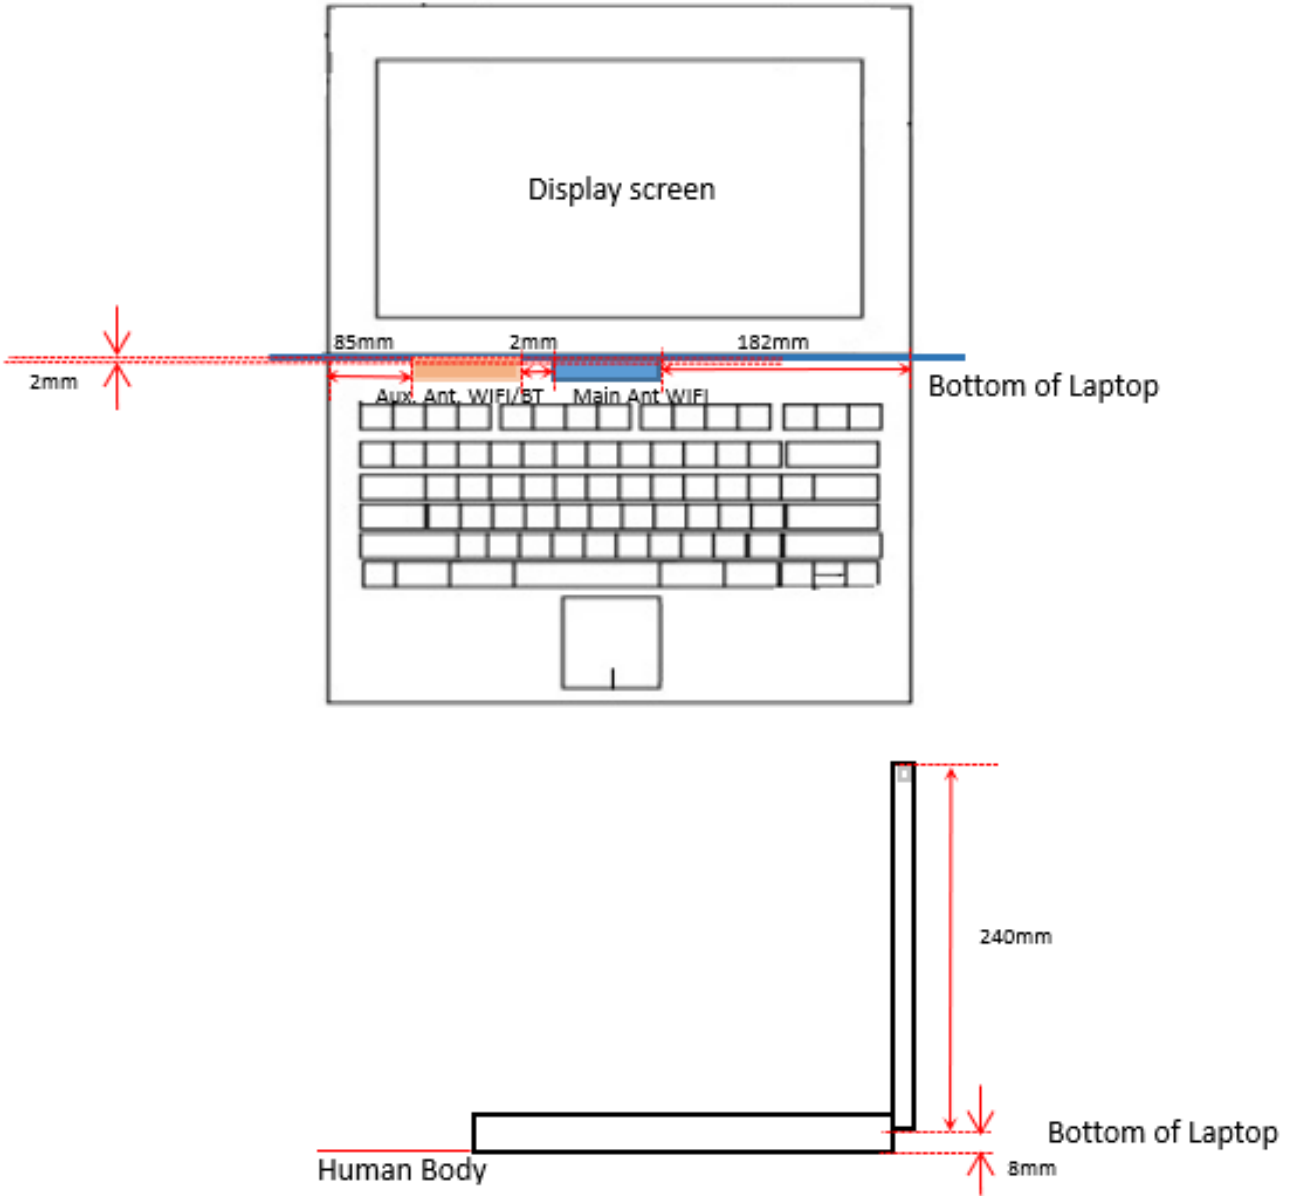

## 9.2 Tablet Mode antenna location sketch

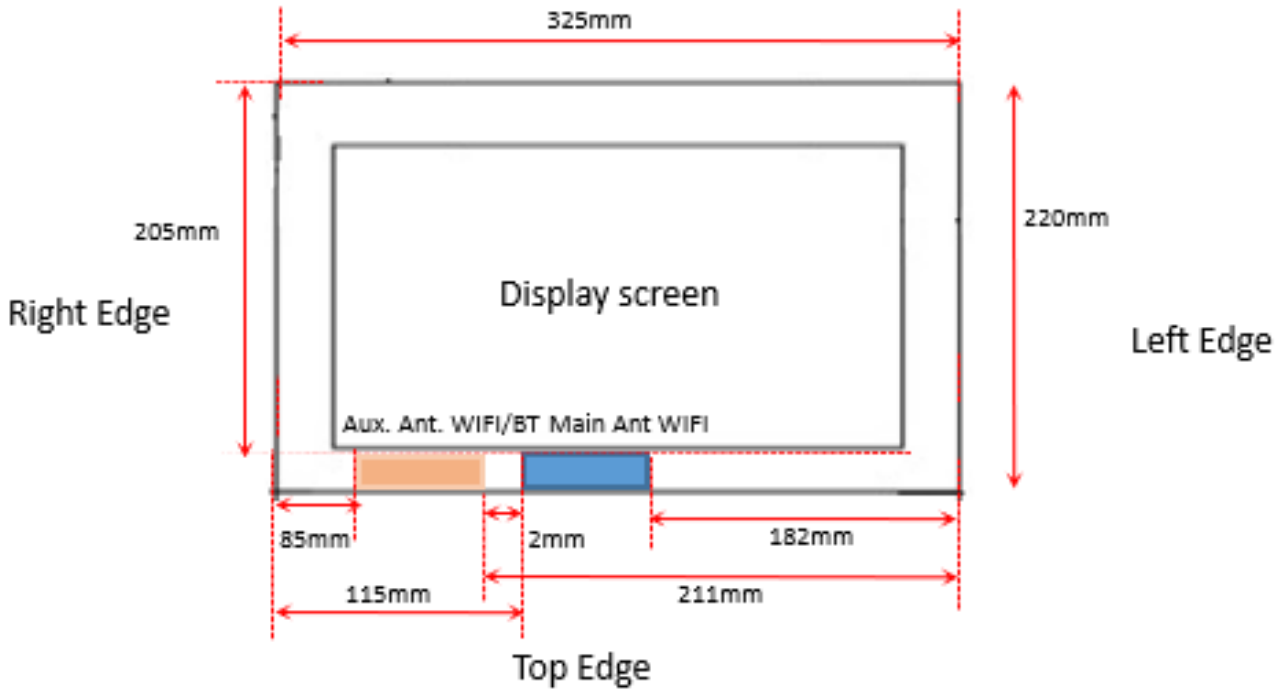

Main Antenna

Position	Back Side	Left Edge	Right Edge	Top Edge	Bottom Edge
Distance(mm)	<5	182	115	<5	205

Aux. Antenna

Position	Back Side	Left Edge	Right Edge	Top Edge	Bottom Edge
Distance(mm)	<5	211	85	<5	205

EUT Side View



Aux. Antenna WLAN/BT



Main Antenna WLAN



### 9.3 SAR Test Consideration Table

According with FCC KDB 447498 D01, Appendix B, The SAR-based exemption formula applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold Pth (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). The following table shows the power threshold from 5mm to 50mm.

Power Thresholds (mW)					
Frequency (MHz)	At separation distance of $\leq 5$ mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
300	39 mW	65 mW	88 mW	110 mW	129 mW
450	22 mW	44 mW	67 mW	89 mW	112 mW
835	9 mW	25 mW	44 mW	66 mW	90 mW
1900	3 mW	12 mW	26 mW	44 mW	66 mW
2450	3 mW	10 mW	22 mW	38 mW	59 mW
3600	2 mW	8 mW	18 mW	32 mW	49 mW
5800	1 mW	6 mW	14 mW	25 mW	40 mW
Frequency (MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of 50 mm
300	148 mW	166 mW	184 mW	201 mW	217 mW
450	135 mW	158 mW	180 mW	203 mW	226 mW
835	116 mW	145 mW	175 mW	207 mW	240 mW
1900	92 mW	122 mW	157 mW	195 mW	236 mW
2450	83 mW	111 mW	143 mW	179 mW	219 mW
3600	71 mW	96 mW	125 mW	158 mW	195 mW
5800	58 mW	80 mW	106 mW	136 mW	169 mW

### 9.3.1 Laptop mode SAR Test Exclusion Consideration

#### Aux. Antenna

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	WLAN 5.2&5.3GHz	WLAN 5.6GHz	WLAN 5.8GHz
Bottom of Laptop	Distance to User (mm)	<5				
	Max. Peak Power (dBm)	6.00	14.00	13.00	13.00	13.00
	Max. Peak Power (mW)	3.98	25.12	19.95	19.95	19.95
	Exclusion Threshold	3.0	3.0	1.0	1.0	1.0
	SAR Test Required	Yes	Yes	Yes	Yes	Yes

#### Main Antenna

Test Position Configurations	Mode	WLAN 2.4GHz	WLAN 5.2&5.3GHz	WLAN 5.6GHz	WLAN 5.8GHz
Bottom of Laptop	Distance to User (mm)	<5			
	Max. Peak Power (dBm)	14.00	13.00	13.00	13.00
	Max. Peak Power (mW)	25.12	19.95	19.95	19.95
	Exclusion Threshold (mW)	3.0	1.0	1.0	1.0
	SAR Test Required	Yes	Yes	Yes	Yes

## 9.3.2 Tablet mode SAR Test Exclusion Consideration

## Aux Antenna

Band	Mode	Max. Peak Power		Test Position Configurations				
		dBm	mW	Back Side (with keyboard)	Left Edge	Right Edge	Top Edge	Bottom Edge
Distance to User (mm)				<5	211	85	<5	205
WLAN 2.4 G	Exclusion Threshold			3.0	3389.0	601.0	3.0	3207.0
	802.11b	14.00	25.12	Yes	No	No	Yes	No
	802.11g	14.00	25.12	No	No	No	No	No
	802.11n(HT20)	14.00	25.12	No	No	No	No	No
	802.11n(HT40)	14.00	25.12	No	No	No	No	No
WLAN 5.2 G	Exclusion Threshold			1.0	3422.0	512.0	1.0	3222.0
	802.11a	12.00	15.85	No	No	No	No	No
	802.11n(HT20)	12.00	15.85	No	No	No	No	No
	802.11n(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT20)	12.00	15.85	No	No	No	No	No
	802.11ac(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT80)	12.00	15.85	No	No	No	No	No
WLAN 5.3G	Exclusion Threshold			1.0	3422.0	512.0	1.0	3222.0
	802.11a	12.00	15.85	No	No	No	No	No
	802.11n(HT20)	12.00	15.85	No	No	No	No	No
	802.11n(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT20)	12.00	15.85	No	No	No	No	No
	802.11ac(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT80)	12.00	15.85	Yes	No	No	Yes	No
WLAN 5.6 G	Exclusion Threshold			1.0	3422.0	512.0	1.0	3222.0
	802.11a	12.00	15.85	No	No	No	No	No
	802.11n(HT20)	12.00	15.85	No	No	No	No	No
	802.11n(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT20)	12.00	15.85	No	No	No	No	No
	802.11ac(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT80)	12.00	15.85	No	No	No	No	No
WLAN 5.8 G	Exclusion Threshold			1.0	3422.0	512.0	1.0	3222.0
	802.11a	12.00	15.85	No	No	No	No	No
	802.11n(HT20)	12.00	15.85	No	No	No	No	No
	802.11n(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT20)	12.00	15.85	No	No	No	No	No
	802.11ac(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT80)	12.00	15.85	Yes	No	No	Yes	No
Bluetooth	Exclusion Threshold			3.0	3389.0	601.0	3.0	3207.0
	BR/EDR	6.00	3.98	Yes	No	No	Yes	No
	BLE	5.00	3.16	No	No	No	No	No

## Main Antenna

Band	Mode	Max. Peak Power		Test Position Configurations				
		dBm	mW	Back Side	Left	Right	Top	Bottom
				(with keyboard)	Edge	Edge	Edge	Edge
Distance to User (mm)				<5	182	115	<5	205
WLAN 2.4 G	SAR Test Required							
	Exclusion Threshold			3.0	2557.0	1066.0	3.0	3207.0
	802.11b	14.00	25.12	Yes	No	No	Yes	No
	802.11g	14.00	25.12	No	No	No	No	No
	802.11n(HT20)	14.00	25.12	No	No	No	No	No
	802.11n(HT40)	14.00	25.12	No	No	No	No	No
WLAN 5.2 G	Exclusion Threshold			1.0	2513.0	963.0	1.0	3222.0
	802.11a	14.00	25.12	No	No	No	No	No
	802.11n(HT20)	14.00	25.12	No	No	No	No	No
	802.11n(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT20)	14.00	25.12	No	No	No	No	No
	802.11ac(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT80)	14.00	25.12	No	No	No	No	No
	802.11ac(HT160)	14.00	25.12	No	No	No	No	No
WLAN 5.3G	Exclusion Threshold			1.0	2513.0	963.0	1.0	3222.0
	802.11a	14.00	25.12	No	No	No	No	No
	802.11n(HT20)	14.00	25.12	No	No	No	No	No
	802.11n(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT20)	14.00	25.12	No	No	No	No	No
	802.11ac(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT80)	14.00	25.12	Yes	No	No	Yes	No
WLAN 5.6 G	Exclusion Threshold			1.0	2513.0	963.0	1.0	3222.0
	802.11a	14.00	25.12	No	No	No	No	No
	802.11n(HT20)	14.00	25.12	No	No	No	No	No
	802.11n(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT20)	14.00	25.12	No	No	No	No	No
	802.11ac(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT80)	14.00	25.12	No	No	No	No	No
	802.11ac(HT160)	14.00	25.12	Yes	No	No	Yes	No
WLAN 5.8 G	Exclusion Threshold			1.0	2513.0	963.0	1.0	3222.0
	802.11a	14.00	25.12	No	No	No	No	No
	802.11n(HT20)	14.00	25.12	No	No	No	No	No
	802.11n(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT20)	14.00	25.12	No	No	No	No	No
	802.11ac(HT40)	14.00	25.12	No	No	No	No	No
	802.11ac(HT80)	14.00	25.12	Yes	No	No	Yes	No

Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
2. Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D01, for separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive), the threshold Pth (mW) is given by Following:

$$P_{th} (mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20cm \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20cm}\sqrt{f}} \right)$$

- a. f(GHz) is the RF channel transmit frequency in GHz
- b. d is the separation distance (cm), The result is rounded to one decimal place for comparison
- c.  $ERP_{20cm}$  are determined by:

$$ERP_{20cm}(mW) = f(x) = \begin{cases} 2040f & 0.3GHz \leq f < 1.5GHz \\ 3060 & 1.5GHz \leq f \leq 6GHz \end{cases}$$

5. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
6. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
  - a. When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
7. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
  - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
  - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

# 10 TEST RESULT

## 10.1 Bluetooth

Mode	Antenna	Test state	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>															
DH5	Aux.	Laptop	Bottom of Laptop	0	78	2480	0.13	0.053	4.75	6.00	1.334	76.94	1.300	0.092	/
		Tablet	Back Side	0	78	2480	0.08	0.049	4.75	6.00	1.334	76.94	1.300	0.085	/
			Top Edge	0	78	2480	0.05	0.092	4.75	6.00	1.334	76.94	1.300	<b>0.159</b>	1#
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

## 10.2 WIFI 2.4GHz

Mode	Antenna	Test state	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>															
802.11 b	MIMO	Laptop	Bottom of Laptop	0	1	2412	-0.03	0.407	16.50	17.00	1.122	99.32	1.007	0.460	/
		Tablet	Top Edge	0	1	2412	-0.05	0.348	16.50	17.00	1.122	99.32	1.007	0.393	/
			Back Side	0	1	2412	0.02	0.724	16.50	17.00	1.122	99.32	1.007	<b>0.818</b>	2#
				0	6	2437	-0.02	0.688	16.43	17.00	1.140	99.32	1.007	0.790	/
				0	11	2462	0.17	0.703	16.42	17.00	1.143	99.32	1.007	0.809	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

## 10.3 WIFI 5GHz

Fre. Band	Mode	Antenna	Test state	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																
5.3G	802.11 ac(VHT80)	MIMO	Laptop	Bottom of Laptop	0	58	5290	0.10	0.326	14.56	15.00	1.107	97.81	1.022	0.369	/
			Tablet	Top Edge	0	58	5290	-0.07	0.823	14.56	15.00	1.107	97.81	1.022	0.931	/
				Back Side	0	58	5290	-0.19	1.020	14.56	15.00	1.107	97.81	1.022	<b>1.154</b>	3#
5.6G	802.11 ac(VHT160)	MIMO	Laptop	Bottom of Laptop	0	114	5570	-0.09	0.348	14.88	15.00	1.028	98.00	1.020	0.365	/
			Tablet	Top Edge	0	114	5570	0.05	0.836	14.88	15.00	1.028	98.00	1.020	0.877	/
				Back Side	0	114	5570	0.01	1.100	14.88	15.00	1.028	98.00	1.020	<b>1.154</b>	4#
5.8G	802.11 ac(VHT80)	MIMO	Laptop	Bottom of Laptop	0	155	5775	-0.02	0.382	14.31	15.00	1.172	97.81	1.022	0.458	/
			Tablet	Top Edge	0	155	5775	-0.04	0.623	14.31	15.00	1.172	97.81	1.022	0.747	/
				Back Side	0	155	5775	0.20	0.979	14.31	15.00	1.172	97.81	1.022	<b>1.173</b>	5#
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

## 11 Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	Antenna	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
5290	802.11 ac(VHT80)	MIMO	Body	Back Side	1.020	Yes	0.986	1.03
5570	802.11 ac(VHT160)	MIMO	Body	Back Side	1.100	Yes	1.040	1.06
5690	802.11 ac(VHT80)	MIMO	Body	Back Side	0.979	Yes	0.942	1.04

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is  $< 1.20$ , the second repeated measurement is not required.



## 12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D01v07, simultaneous transmission:

- a)  $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$  (min. separation distance, mm), and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.  
 SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.  
 SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

### 12.1 Simultaneous Transmission Mode for Body SAR

NO.	Mode	Body
1	2.4 G WLAN (Main Antenna)	+ 2.4 G WLAN (Auxiliary Antenna)
2	2.4 G WLAN (Main Antenna)	+ Bluetooth (Auxiliary Antenna)
3	5 G WLAN (Main Antenna)	+ 5 G WLAN (Auxiliary Antenna)
4	5 G WLAN (Main Antenna)	+ Bluetooth (Auxiliary Antenna)
5	5 G WLAN (Main Antenna)	+ 5 G WLAN (Auxiliary Antenna) + Bluetooth (Auxiliary Antenna)

Note:

1. The EUT supports the Aux. Antenna with TX/RX diversity function for WLAN and Bluetooth, the Main Antenna with TX/RX diversity function for WLAN and Bluetooth.
2. WLAN SAR testing was performed on dual antenna, due to the single antenna RF power in MIMO mode is greater or equal to the single antenna RF power in SISO mode. So when calculating simultaneous Transmission, we use SAR under MIMO to replace single antenna SAR.
3. WLAN 2.4GHz and Bluetooth will not be transmitting from the Aux. Antenna at same time.

## 12.2 Sum SAR of Simultaneous Transmission

### 12.2.1 Highest Bluetooth and WLAN Sum Body SAR of Simultaneous Transmission

Test state	Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)	SPLSR Num.
Body (Separation 0 mm)						
Laptop	2.4 G WLAN (Main Antenna) + 2.4 G WLAN (Auxiliary Antenna)	2.4 G WLAN (Main Antenna)	0.460	0.460	No	/
		2.4 G WLAN (Auxiliary Antenna)				
	2.4 G WLAN (Main Antenna) + Bluetooth (Auxiliary Antenna)	2.4 G WLAN (Main Antenna)	0.460	0.552	No	/
		Bluetooth (Auxiliary Antenna)	0.092			
	5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna)	5 G WLAN (Main Antenna)	0.458	0.458	No	/
		5 G WLAN (Auxiliary Antenna)				
	5 G WLAN (Main Antenna) + Bluetooth (Auxiliary Antenna)	5 G WLAN (Main Antenna)	0.458	<b>0.550</b>	No	/
		Bluetooth (Auxiliary Antenna)	0.092			
	5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna) + Bluetooth (Auxiliary Antenna)	5 G WLAN (Main Antenna)	0.458	<b>0.550</b>	No	/
		5 G WLAN (Auxiliary Antenna)				
		Bluetooth (Auxiliary Antenna)				

Test state	Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)	SPLSR Num.
Body (Separation 0 mm)						
Tablet	2.4 G WLAN (Main Antenna) + 2.4 G WLAN (Auxiliary Antenna)	2.4 G WLAN (Main Antenna)	0.818	0.818	No	/
		2.4 G WLAN (Auxiliary Antenna)				
	2.4 G WLAN (Main Antenna) + Bluetooth (Auxiliary Antenna)	2.4 G WLAN (Main Antenna)	0.818	0.977	No	/
		Bluetooth (Auxiliary Antenna)	0.159			
	5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna)	5 G WLAN (Main Antenna)	1.173	1.173	No	/
		5 G WLAN (Auxiliary Antenna)				
	5 G WLAN (Main Antenna) + Bluetooth (Auxiliary Antenna)	5 G WLAN (Main Antenna)	1.173	<b>1.332</b>	No	/
		Bluetooth (Auxiliary Antenna)	0.159			
	5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna) + Bluetooth (Auxiliary Antenna)	5 G WLAN (Main Antenna)	1.173	<b>1.332</b>	No	/
		5 G WLAN (Auxiliary Antenna)				
		Bluetooth (Auxiliary Antenna)				

## 13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY5	52.8.8.1222	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2021/05/19	2024/05/18
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2021/05/18	2024/05/17
E-Field Probe	Speag	EX3DV4	SN: 7510	2020/11/30	2021/11/29
Data Acquisition Electronics	Speag	DAE4	SN: 1454	2020/11/06	2021/11/05
Signal Generator	R&S	SMB100A	182396	2020/12/21	2021/12/20
Power Meter	R&S	NRVD-B2	7250BJ-0112/2011	2021/09/08	2022/09/07
Power Sensor	R&S	NRV-Z4	100381	2021/09/07	2022/09/08
Network Analyzer	Agilent	E5071B	MY42404001	2021/04/01	2022/03/31
Thermometer	Elitech	RC-4HC	EF720B004820	2020/12/24	2021/12/23
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	N/A	N/A
Phantom1	Speag	SAM	SN: 1857	N/A	N/A
Phantom2	Speag	ELI4	SN: 1012	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

## ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity ( $\sigma$ ) (S/m)	Meas. Permittivity ( $\epsilon$ )	Target Conductivity ( $\sigma$ ) (S/m)	Target Permittivity ( $\epsilon$ )	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2021.10.19	Head	2450	21.4	1.84	39.91	1.80	39.20	2.22	1.81
2021.10.18	Head	5250	21.4	4.60	36.80	4.71	35.93	-2.34	2.42
2021.10.17	Head	5600	21.4	4.99	36.11	5.07	35.53	-1.58	1.63
2021.10.18	Head	5750	21.4	5.17	35.76	5.22	35.36	-0.96	1.13

Note: The tolerance limit of Conductivity and Permittivity is  $\pm 5\%$ .

## ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2021.10.19	Head	2450	100	5.310	53.10	53.00	0.19
2021.10.18	Head	5250	100	7.380	73.80	77.80	-5.14
2021.10.17	Head	5600	100	8.360	83.60	81.20	2.96
2021.10.18	Head	5750	100	7.920	79.20	77.20	2.59

Note: The tolerance limit of System validation  $\pm 10\%$ .

## System Performance Check Data (2450MHz)

Date: 2021.10.19

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.839$  S/m;  $\epsilon_r = 39.906$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.54, 7.54, 7.54); Calibrated: 2020.11.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2450 100mW/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.18 W/kg


**CW 2450 100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.27 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 11.0 W/kg

**SAR(1 g) = 5.31 W/kg; SAR(10 g) = 2.42 W/kg**

Maximum value of SAR (measured) = 6.11 W/kg

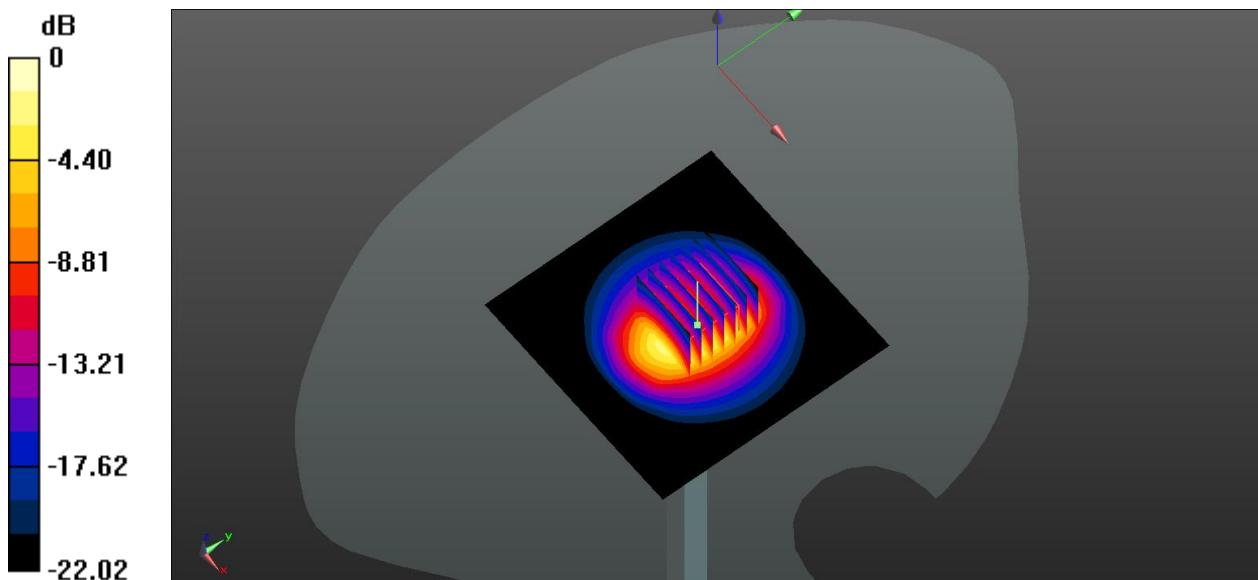

0 dB = 6.11 W/kg

## System Performance Check Data (5250MHz)

Date: 2021.10.18

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.597$  S/m;  $\epsilon_r = 36.804$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.46, 5.46, 5.46); Calibrated: 2020.11.30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5250 100mW/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.11 W/kg


**CW 5250 100mW/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 36.55 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 31.8 W/kg

**SAR(1 g) = 7.38 W/kg; SAR(10 g) = 2.14 W/kg**

Maximum value of SAR (measured) = 18.2 W/kg

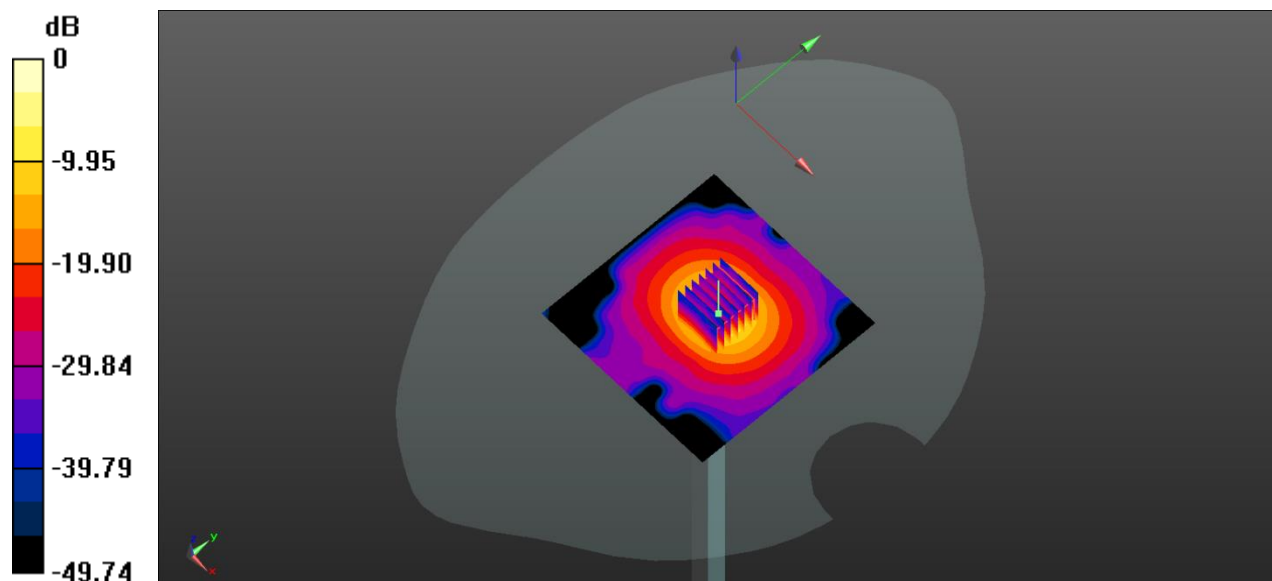

0 dB = 18.2 W/kg

## System Performance Check Data (5600MHz)

Date: 2021.10.17

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.992$  S/m;  $\epsilon_r = 36.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.89, 4.89, 4.89); Calibrated: 2020.11.30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5600 100mW /Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.13 W/kg


**CW 5600 100mW /Zoom Scan (7x7x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 22.84 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 38.21 W/kg

**SAR(1 g) = 8.36 W/kg; SAR(10 g) = 2.28 W/kg**

Maximum value of SAR (measured) = 21.5 W/kg

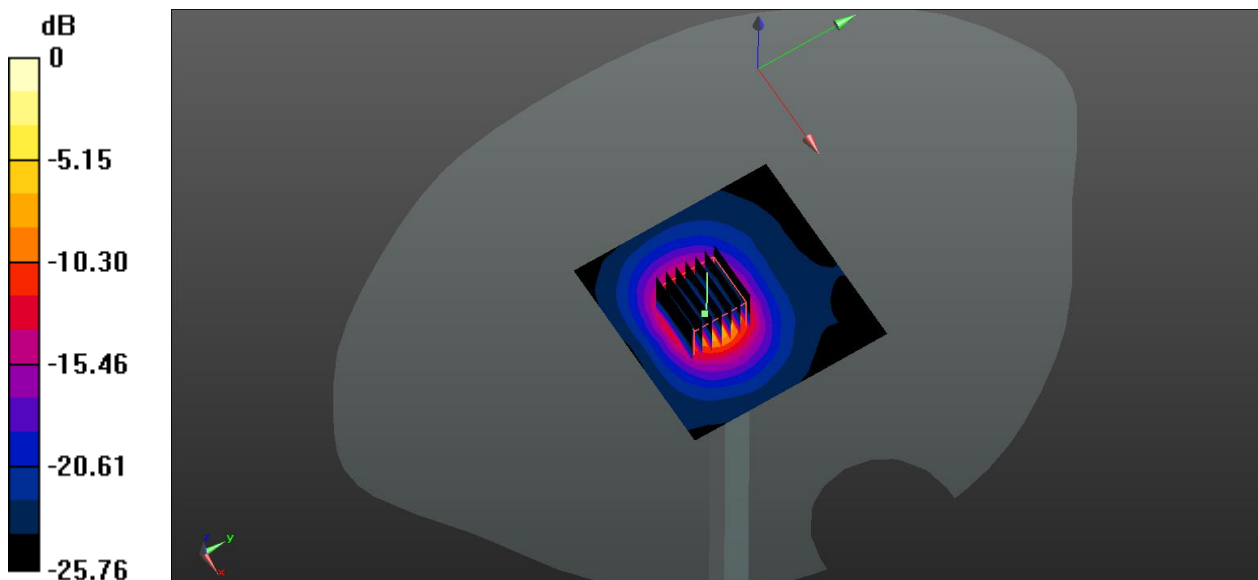

0 dB = 21.5 W/kg



## System Performance Check Data (5750MHz)

Date: 2021.10.18

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.17$  S/m;  $\epsilon_r = 35.763$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.96, 4.96, 4.96); Calibrated: 2020.11.30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW5750 HEAD 100mW/Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.48 W/kg


**CW5750 HEAD 100mW/Zoom Scan (8x8x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 36.33 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 35.42 W/kg

**SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

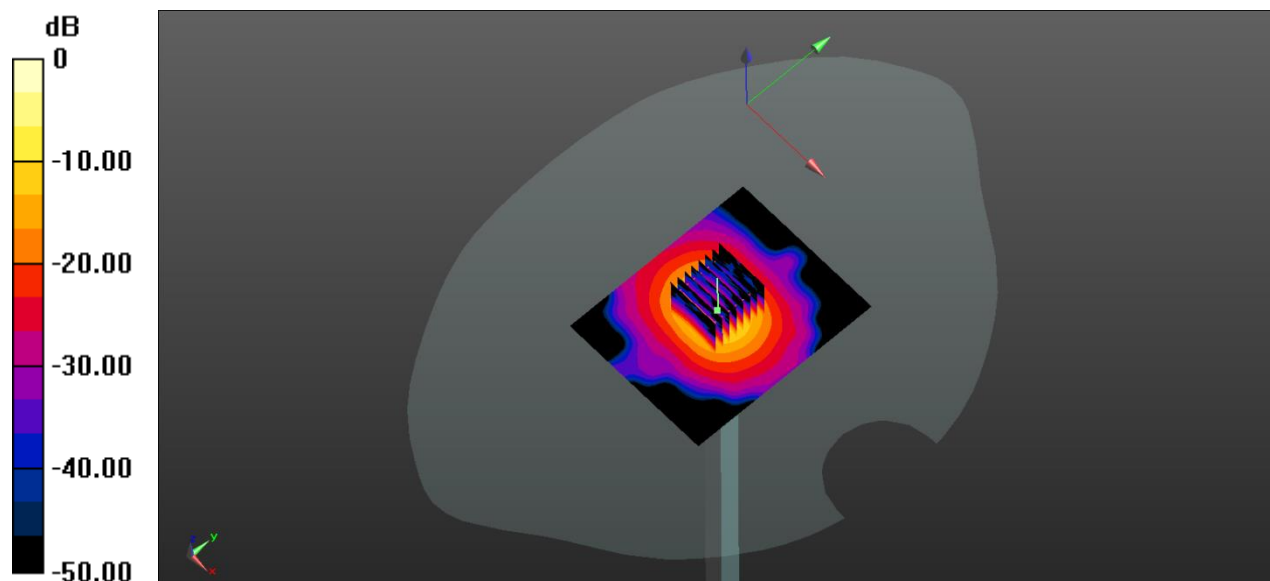

0 dB = 16.7 W/kg

## ANNEX C TEST DATA

### MEAS.1 Body Plane with Back Side 0mm on High Channel in Bluetooth mode with Antenna Auxiliary

Date: 2021.10.19

Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium parameters used (interpolated):  $f = 2480$  MHz;  $\sigma = 1.879$  S/m;  $\epsilon_r = 39.667$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.54, 7.54, 7.54); Calibrated: 2020.11.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch78/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.171 W/kg


**Ch78/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.173 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

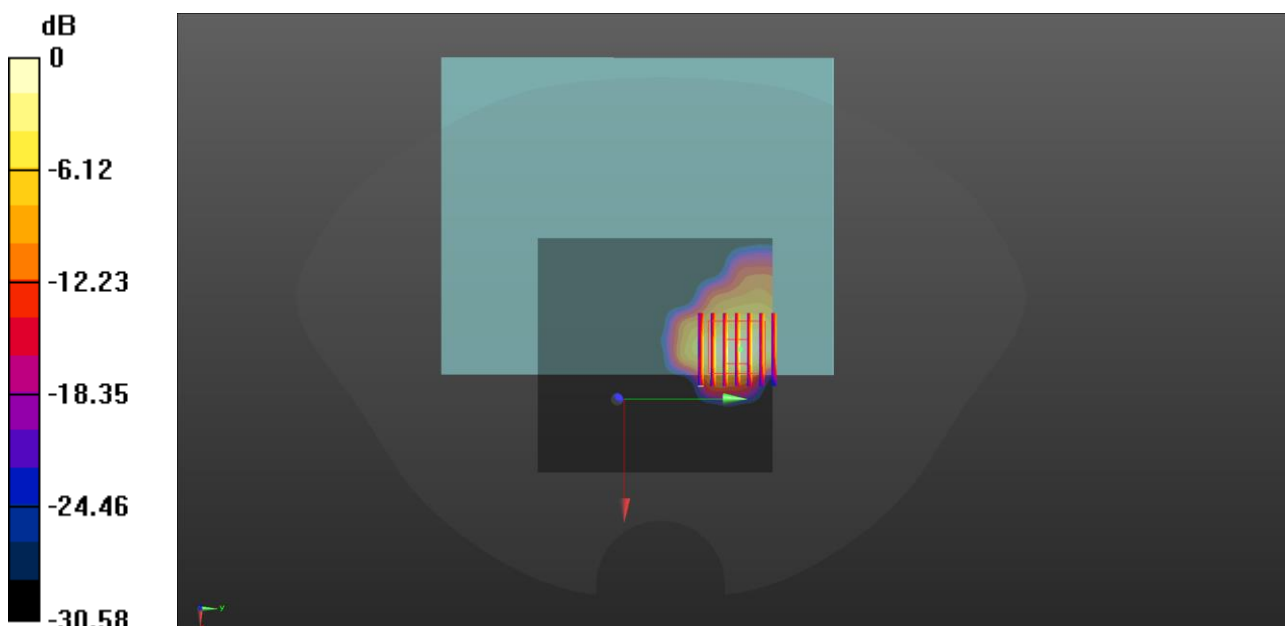

0 dB = 0.141 W/kg

**MEAS.2 Body Plane with Back Side 0mm on Low Channel in IEEE802.11b mode with MIMO**

Date: 2021.10.19

Communication System Band: WLAN(b); Frequency: 2412 MHz; Duty Cycle: 1:1.007

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.795$  S/m;  $\epsilon_r = 40.226$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.54, 7.54, 7.54); Calibrated: 2020.11.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.946 W/kg

**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.75 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.287 W/kg**

Maximum value of SAR (measured) = 0.875 W/kg


**Ch1/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.75 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.230 W/kg**

Maximum value of SAR (measured) = 0.600 W/kg

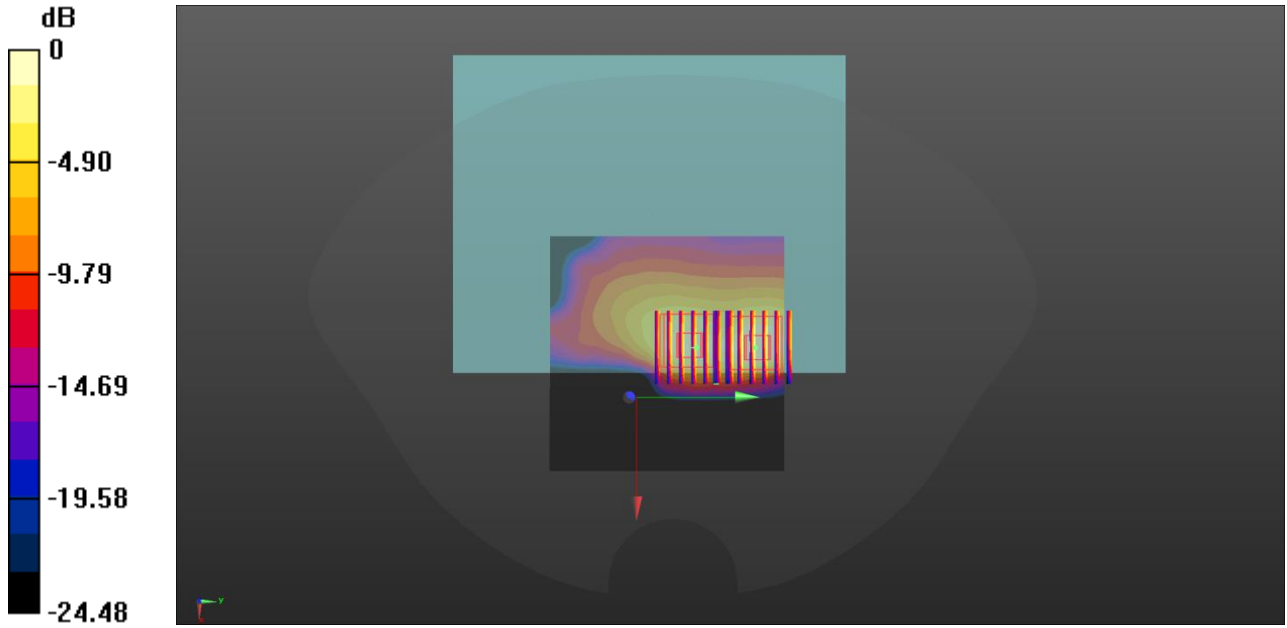

0 dB = 0.600 W/kg

**MEAS.3 Body Plane with Back Side 0mm on Channel 58 in IEEE802.11ac(VHT80) mode with MIMO**

Date: 2021.10.18

Communication System Band: WLAN(ac)80MHz; Frequency: 5290 MHz; Duty Cycle: 1:1.022

Medium parameters used (interpolated):  $f = 5290$  MHz;  $\sigma = 4.657$  S/m;  $\epsilon_r = 36.543$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.46, 5.46, 5.46); Calibrated: 2020.11.30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch58/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.14 W/kg

**Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.63 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 4.29 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.307 W/kg**

Maximum value of SAR (measured) = 2.08 W/kg



**Ch58/Zoom Scan (7x7x12)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.63 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 4.17 W/kg

**SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.232 W/kg**

Maximum value of SAR (measured) = 1.87 W/kg

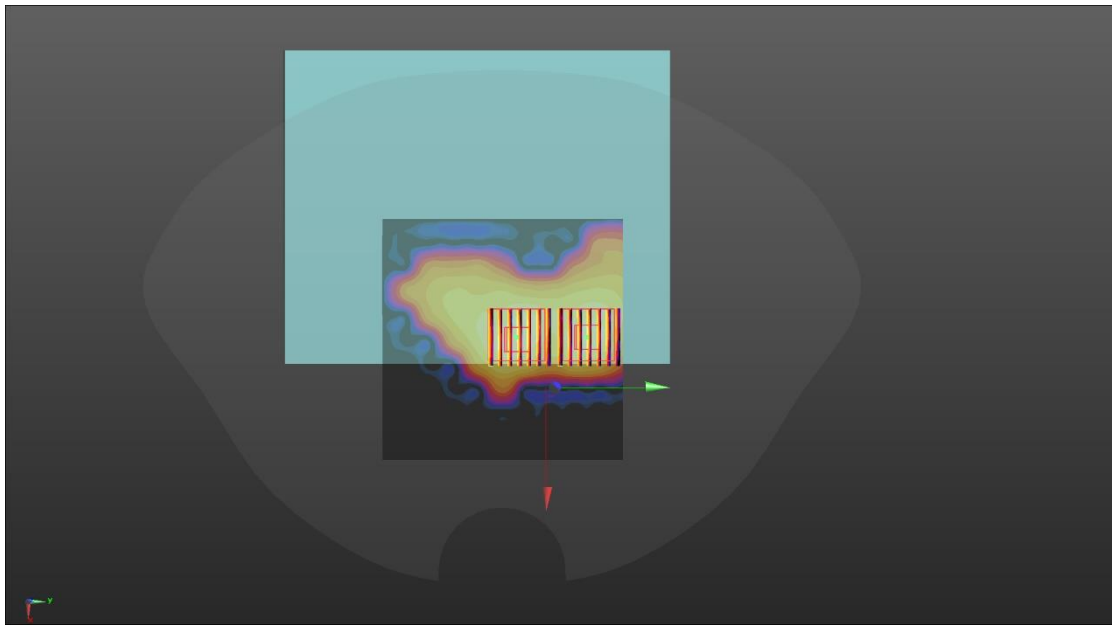

0 dB = 1.87 W/kg

**MEAS.4 Body Plane with Back Side 0mm on Channel 114 in IEEE802.11ac(VHT160) mode with MIMO**

Date: 2021.10.17

Communication System Band: WLAN(ac)160MHz; Frequency: 5570 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated):  $f = 5570$  MHz;  $\sigma = 4.944$  S/m;  $\epsilon_r = 36.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.89, 4.89, 4.89); Calibrated: 2020.11.30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD00P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch114/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.27 W/kg

**Ch114/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.341 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 5.22 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.307 W/kg**

Maximum value of SAR (measured) = 2.23 W/kg



**Ch114/Zoom Scan (7x7x12)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.341 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.72 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.297 W/kg**

Maximum value of SAR (measured) = 2.16 W/kg

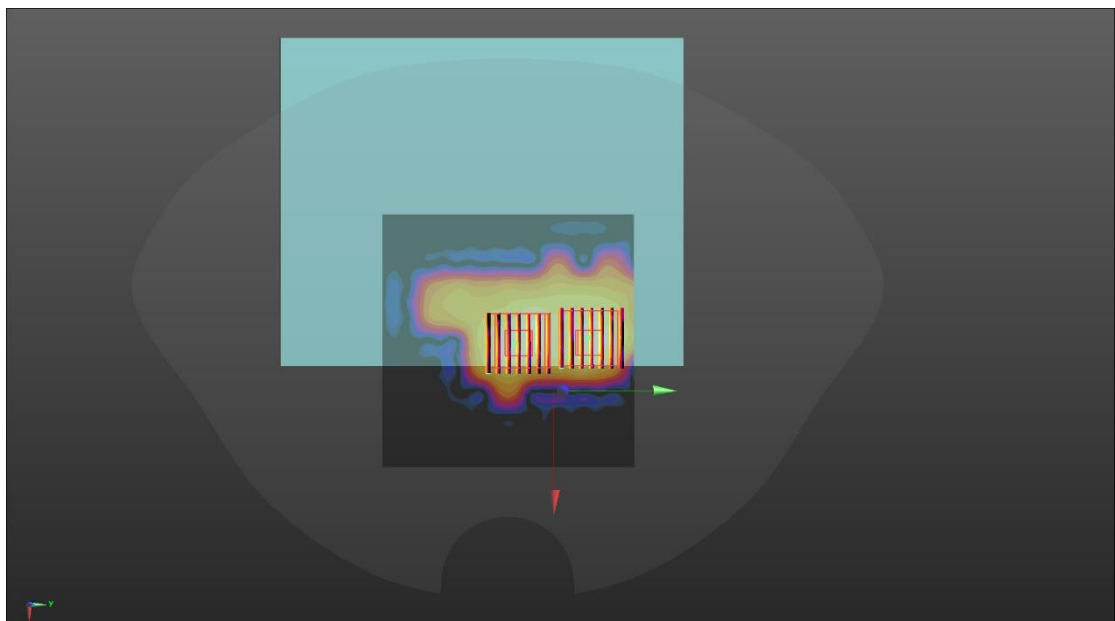

0 dB = 2.16 W/kg

**MEAS.5 Body Plane with Back Side 0mm on Channel 155 in IEEE802.11ac(VHT80) mode with MIMO**

Date: 2021.10.18

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz; Duty Cycle: 1:1.022

Medium parameters used (interpolated):  $f = 5775$  MHz;  $\sigma = 5.218$  S/m;  $\epsilon_r = 35.711$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.96, 4.96, 4.96); Calibrated: 2020.11.30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2020.11.06
- Phantom: SAM (20deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.11 W/kg

**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.672 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 4.89 W/kg

**SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.261 W/kg**

Maximum value of SAR (measured) = 2.16 W/kg

**Ch155/Zoom Scan (7x7x12)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.672 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 3.80 W/kg

**SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 1.59 W/kg



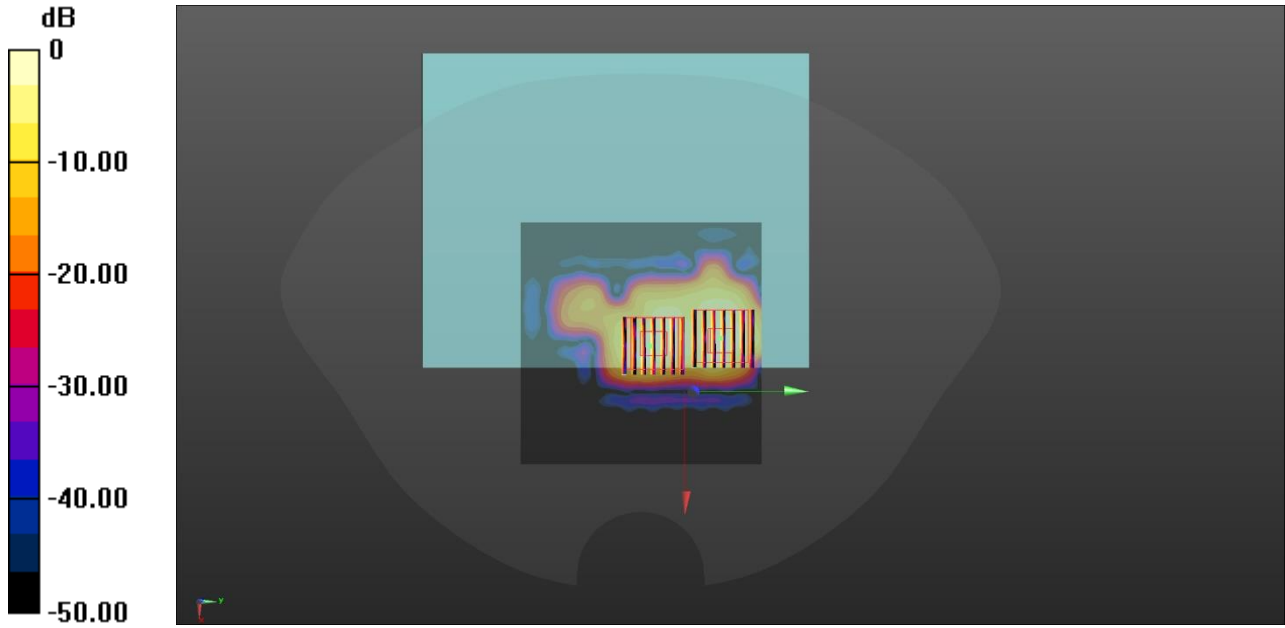

0 dB = 1.59 W/kg

## **ANNEX D EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2190990-AW.pdf".

## **ANNEX E SAR TEST SETUP PHOTOS**

Please refer the document "BL-SZ2190990-AS.pdf".

## **ANNEX F CALIBRATION REPORT**

Please refer the document "CALIBRATION REPORT.pdf".

--END OF REPORT--