

Wi-Fi 2.4GHz Antenna

02102073-08042E1

Engineering Data Sheets

Galtronics Embedded Antenna

8930 S. Beck Avenue Suite #103
Tempe, Arizona 85284-2891 USA
Tel: 1-480-496-5100
Fax: 1-480-598-2766

WE'RE MAKING WAVES

Revision History (Required)

Revisions	Date	Note
S1	Jan 4, 2024	Initial draft

Disclaimers

The document is proprietary, which may be changed without notice. Please communicate with Galtronics sale team to verify before finalizing your product design.

WE'RE MAKING WAVES

Contents

1. Galtronics Wi-Fi 2.4GHz Antenna..... 4
2. Features 4
3. Specifications and Interface..... 4
4. Return Loss..... 5
5. Gain, Directivity and Efficiency 5
6. Radiation Pattern..... 6

Figures

Figure 1 Return Loss 5
Figure 2 Radiation Patterns..... 8

WE'RE MAKING WAVES

1. Galtronics Wi-Fi 2.4GHz Antenna

The Galtronics 02102073-08042E1 antenna is a balanced dipole type Wi-Fi 2.4GHz Antenna that operates in 2400-2500 MHz band. It provides high efficient radiation with good cost benefit. The antenna can be mounted on a customer device with double sided adhesive foam tape or antenna carrier and connected to the radio through a cable with U.FL connector.

2. Features

- Operates in 2400-2500MHz band
- Peak gain: 4.04 dBi in 2400 MHz band
- High efficiency
- U.FL connector interface
- Mounted by double sided adhesive foam tape or antenna carrier

3. Specifications and Interface

Standard	Wi-Fi 2.4GHz Band
Frequency Range	2400 – 2500 MHz
Peak Gain	4.04 dBi in 2400 MHz band
VSWR	2:1
Feed Impedance	50Ω
Power Handling	30 dBm
Interface	U.FL
Antenna Dimensions	25.2 x 10.2 x 0.84 mm (L x W x T)
Temperature Range	Operating: -20° C to +60° C (-4° F to +140° F) Storage: -20° C to +60° C (-4° F to +140° F)
Humidity Range	Operating: 10% to 85% non-condensing Storage: 5% to 90% non-condensing

WE'RE MAKING WAVES

4. Return Loss

The antenna was mounted inside the housing and cable loss is included in test results.



Figure 1 Return Loss

5. Gain, Directivity and Efficiency

Table 1. Peak Gain, Directivity and Efficiency


	Freq (MHz)	Peak Gain (dBi)	Antenna Directivity (dBi)	Terminal Efficiency (%)
2.4GHz	2400	4.29	5.75	71.45%
	2450	4.14	5.72	69.58%
	2500	4.18	5.79	68.97%
Average				70.00%

6. Radiation Pattern


The antenna measurement coordinate system in anechoic chamber. Azimuth plane is XY plane ($\Theta=0^\circ$), Elevation 1 plane is XZ plane ($\Phi=0^\circ$) and Elevation 2 plane is YZ plane ($\Phi=90^\circ$).

WE'RE MAKING WAVES

Figure 2 (A), (B) and (C) show the radiation pattern in three major planes.

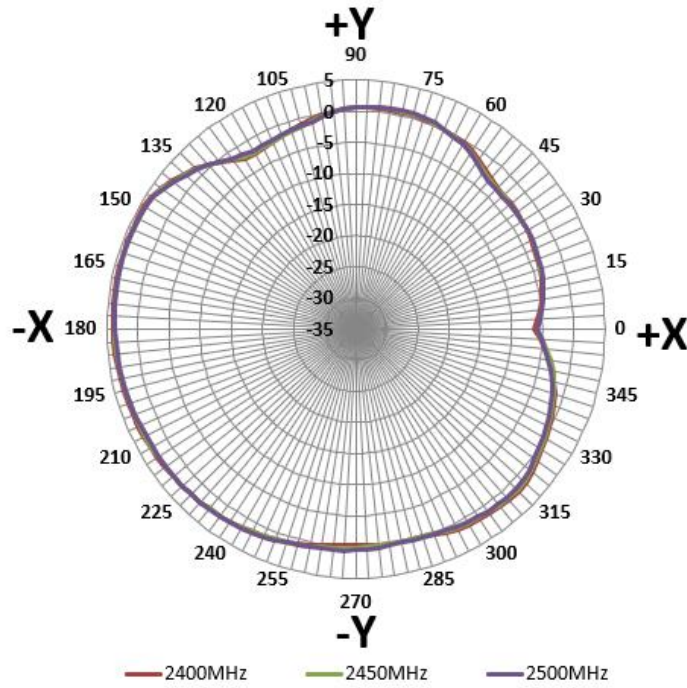


(A). Azimuth plane (XY plane) radiation pattern

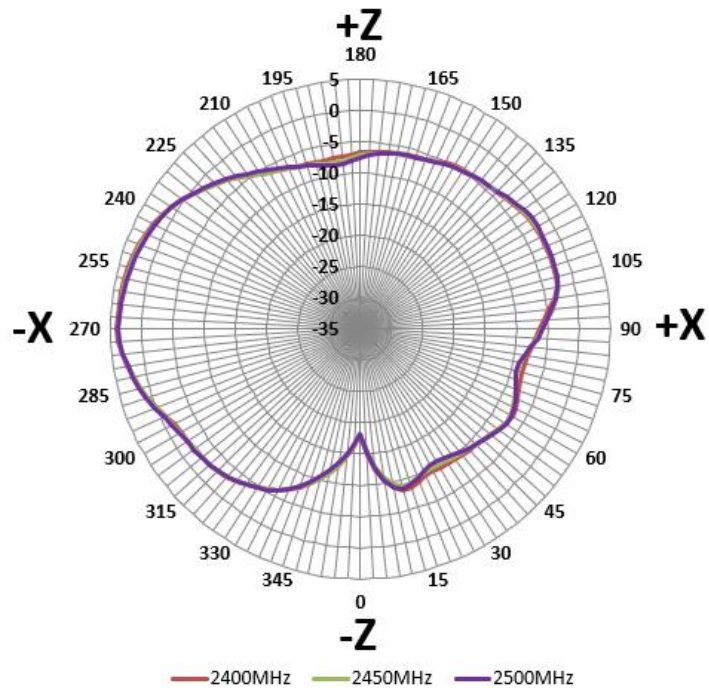

(B). Elevation 1 plane (XZ plane) radiation pattern

WE'RE MAKING WAVES

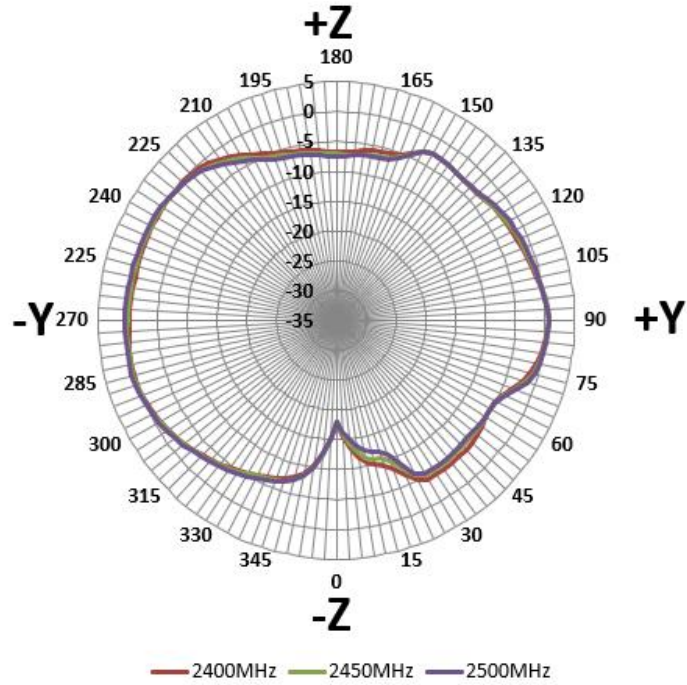

(C). Elevation 2 plane (YZ plane) radiation pattern

Figure 2 Radiation Patterns of Wi-Fi 2.4GHz Antenna