




# RADIO TEST REPORT

**FCC ID** : 2AYRA-08451  
**Equipment** : Linksys Velop Pro 7 10G  
**Brand Name** : Linksys  
**Model Name** : LN1400, LN14, LN14EC, LN14WH, LN14MS, SPNLN14, MBE7100, MBE71, SPNMBE71  
**Applicant** : Linksys USA, Inc.  
121 Theory, Irvine, CA. 92617, USA  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Dec. 01, 2022, and testing was started from Dec. 14, 2022 and completed on Feb. 06, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

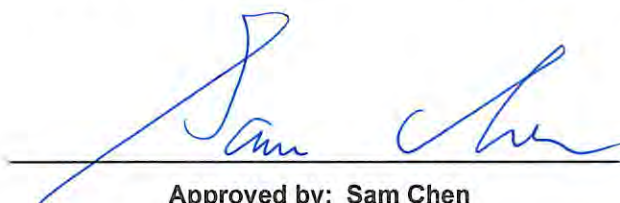

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**  
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

**History of this test report.....3**

**Summary of Test Result.....4**

**1 General Description .....5**

1.1 Information.....5

1.2 Applicable Standards .....9

1.3 Testing Location Information .....9

1.4 Measurement Uncertainty .....10

**2 Test Configuration of EUT .....11**

2.1 Test Channel Mode .....11

2.2 The Worst Case Measurement Configuration .....12

2.3 EUT Operation during Test .....13

2.4 Accessories .....14

2.5 Support Equipment.....14

2.6 Test Setup Diagram .....15

**3 Transmitter Test Result .....18**

3.1 AC Power-line Conducted Emissions .....18

3.2 DTS Bandwidth.....20

3.3 Maximum Conducted Output Power .....21

3.4 Power Spectral Density .....24

3.5 Emissions in Non-restricted Frequency Bands .....26

3.6 Emissions in Restricted Frequency Bands.....27

**4 Test Equipment and Calibration Data .....31**

**Appendix A. Test Results of AC Power-line Conducted Emissions**

**Appendix B. Test Results of DTS Bandwidth**

**Appendix C. Test Results of Maximum Conducted Output Power**

**Appendix D. Test Results of Power Spectral Density**

**Appendix E. Test Results of Emissions in Non-restricted Frequency Bands**

**Appendix F. Test Results of Emissions in Restricted Frequency Bands**

**Appendix G. Test Photos**

**Photographs of EUT v01**



## History of this test report

Report No.	Version	Description	Issued Date
FR291415-02AC	01	Initial issue of report	Jun. 04, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Note: Reference to Sporton Project No.: 291415

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen**

**Report Producer: Lavender Zeng**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4G	BT-LE(1Mbps)	1	1
2.4G	BT-LE(2Mbps)	2	1

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz	5GHz	6GHz	Bluetooth Zigbee					
1	1	1	-	-	Galtronics	02102140-07691-1	PCB Antenna	I-PEX	Note1
2	2	2	-	-	Galtronics	02102140-07691-2	PCB Antenna	I-PEX	
3	-	-	2	-	Galtronics	02102475-07691-2	PCB Antenna	I-PEX	
4	-	-	1	-	Galtronics	02102475-07691-1	PCB Antenna	I-PEX	
5	-	-	-	1	Galtronics	02102073-07691-2	PCB Antenna	I-PEX	

Note1:

Ant.	Antenna Gain (dBi)									
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 6	WLAN 6GHz UNII 7	WLAN 6GHz UNII 8	Bluetooth Zigbee
1	2.626	3.600	3.535	3.323	3.333	-	-	-	-	-
2	2.626	3.600	3.535	3.323	3.333	-	-	-	-	-
3	-	-	-	-	-	3.076	3.246	3.429	3.429	-
4	-	-	-	-	-	3.076	3.246	3.429	3.429	-
5	-	-	-	-	-	-	-	-	-	1.095

Note2: The above information was declared by manufacturer.

<For 2.4GHz function>

For IEEE 802.11b/g/n/VHT/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For Bluetooth/Zigbee function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

Port 1 could transmit/receive simultaneously.



Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional\ IGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$Directional\ IGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$Directional\ IGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ IGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ;$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) )^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) )^2 / N_{ANT}] => 10 \log[(10^{G1/20} + 10^{G2/20} )^2 / N_{ANT}]$$

Where ;

2.4G G1= 2.626 dBi ;2.4G G2= 2.626 dBi ;DG= 5.636dBi

5G UNII-1 G1= 3.6 dBi ;5G UNII-1 G2= 3.6 dBi ;DG= 6.610dBi

5G UNII-2A G1= 3.535 dBi ;5G UNII-2A G2= 3.535 dBi ;DG= 6.545dBi

5G UNII-2C G1= 3.323 dBi ;5G UNII-2C G2= 3.323 dBi ;DG= 6.333dBi

5G UNII-3 G1= 3.33 dBi ;5G UNII-3 G2= 3.33 dBi ;DG= 6.343dBi

6G UNII-5 G1= 3.076 dBi ;6G UNII-5 G2= 3.076 dBi ;DG= 6.086dBi

6G UNII-6 G1= 3.246 dBi ;6G UNII-6 G2= 3.246 dBi ;DG= 6.256dBi

6G UNII-7 G1= 3.429 dBi ;6G UNII-7 G2= 3.429 dBi ;DG= 6.439dBi

6G UNII-8 G1= 3.429 dBi ;6G UNII-7 G2= 3.429 dBi ;DG= 6.439dBi



**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)
BT-LE(1Mbps)	1	0	n/a (DC>=0.98)
BT-LE(2Mbps)	1	0	n/a (DC>=0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

<b>EUT Power Type</b>	From Power Adapter		
<b>Function</b>	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point	
<b>Test Software Version</b>	QSPR V5.0-00202		
<b>Support Mode</b>	<input checked="" type="checkbox"/> LE 1M PHY: 1 Mb/s		
	<input type="checkbox"/> LE Coded PHY (S=2): 500 Kb/s		
	<input type="checkbox"/> LE Coded PHY (S=8): 125 Kb/s		
	<input checked="" type="checkbox"/> LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

The model names in the following table are all refer to the identical product. The differences in models are listed in the table below:

Model Name	Description
LN1400	For retail store
LN14	For online store
LN14EC	For e-commerce
LN14WH	For Warehouse
LN14MS	For Supermarket
SPNLN14	For Service provider A
MBE7100	Sell on Linksys.com (multipack)
MBE71	Sell on Linksys.com (multipack)
SPNMBE71	For Service provider B

Note 1: From the above models, model: LN1400 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.





### 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15.247
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 558074 D01 v05r02
- ◆ FCC KDB 414788 D01 v01r01

### 1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Owen Hsu	23.1-24.1 / 52-63	Dec. 14, 2022~ May 04, 2023
Radiated <Below 1GHz>	03CH04-CB	Paul Hu	21-22 / 56-59	Jan. 31, 2024~ Feb. 06, 2024
Radiated <Above 1GHz-other frequency>	03CH03-CB	Roy Mai	21.7~22.7 / 61~63	Mar. 08, 2023~ May 03, 2023
Radiated <Above 1GHz-2480GHz(2Mbps)>	03CH04-CB	Paul Hu	21-22 / 56-59	Jan. 31, 2024~ Feb. 06, 2024
AC Conduction	CO01-CB	Elvin Yeh	23~24 / 56~57	Jan. 24, 2024

Note: The tested sample of Radiated below 1GHz, Radiated above 1GHz-2480GHz(2Mbps) and AC Conduction test item was received on Dec. 21, 2023.



## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

### Test Date: Before Jun. 01, 2023

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.2 dB	Confidence levels of 95%
Bandwidth Measurement	2.0 %	Confidence levels of 95%

### Test Date: After May 31, 2023

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	10
2440MHz	10
2480MHz	10
BT-LE(2Mbps)	-
2402MHz	10
2440MHz	10
2480MHz	10



## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Normal Link
1	EUT (WiFi+Bluetooth) + Adapter 1
2	EUT (WiFi+Bluetooth) + Adapter 2
3	EUT (WiFi+Bluetooth) + Adapter 3
Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.	
4	EUT (WiFi+Zigbee) + Adapter 3
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains



<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	CTX
After evaluating, the worst case was found at Z axis from Radiated Emission test Above 1GHz., So the measurement will follow this same test configuration.	
1	EUT in Z axis + WLAN 2.4GHz + Adapter 1
2	EUT in Z axis + WLAN 2.4GHz + Adapter 2
3	EUT in Z axis + WLAN 2.4GHz + Adapter 3
Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4~7 will follow this same test mode.	
4	EUT in Z axis + WLAN 5GHz + Adapter 3
5	EUT in Z axis + WLAN 6GHz + Adapter 3
6	EUT in Z axis + Bluetooth + Adapter 3
7	EUT in Z axis + Zigbee + Adapter 3
For operating mode 3 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	CTX
After evaluating, the worst case was found at Z axis from Radiated Emission test Above 1GHz., So the measurement will follow this same test configuration.	
1	EUT in Z axis

<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
<b>Operating Mode</b>	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Zigbee
Refer to Sporton Test Report No.: FA291415-02 for Co-location RF Exposure Evaluation.	

### 2.3 EUT Operation during Test

**For CTX Mode:**

The EUT was programmed to be in continuously transmitting mode.

**For Normal Link Mode:**

During the test, the EUT operation to normal function.



## 2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1 (Removable plug)	Ktec	KSA-36W-120300D5	Input: 100-240V ~ 50/60Hz, 1.0A Output: 12.0V, 3.0A, 36.0W
Adapter 2	Ktec	KSA-36W-120300HU	Input: 100-240V ~ 50/60Hz, 1.0A Output: 12V, 3.0A
Adapter 3	MOSO	V30-V3000R120-036T0-US	Input: 100-240V ~ 50/60Hz, 1.0A max. Output: 12.0V, 3.0A
Others			
RJ-45 cable*1, non-shielded, 0.9m			
Plug*1 (Equip with Adapter 1 use only)			

## 2.5 Support Equipment

### For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	WAN PC	DELL	OPTIPLEX 3010	N/A
C	2.4G NB	DELL	E6430	N/A
D	5G NB	DELL	E6430	N/A
E	6G NB	DELL	E6430	N/A
F	6G AP	INTEL	AX210NGW	PD9AX210NG
G	Smart phone	Samsung	Galaxy J2	N/A


### For Radiated:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	Lenovo	L440	N/A


### For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

## 2.6 Test Setup Diagram

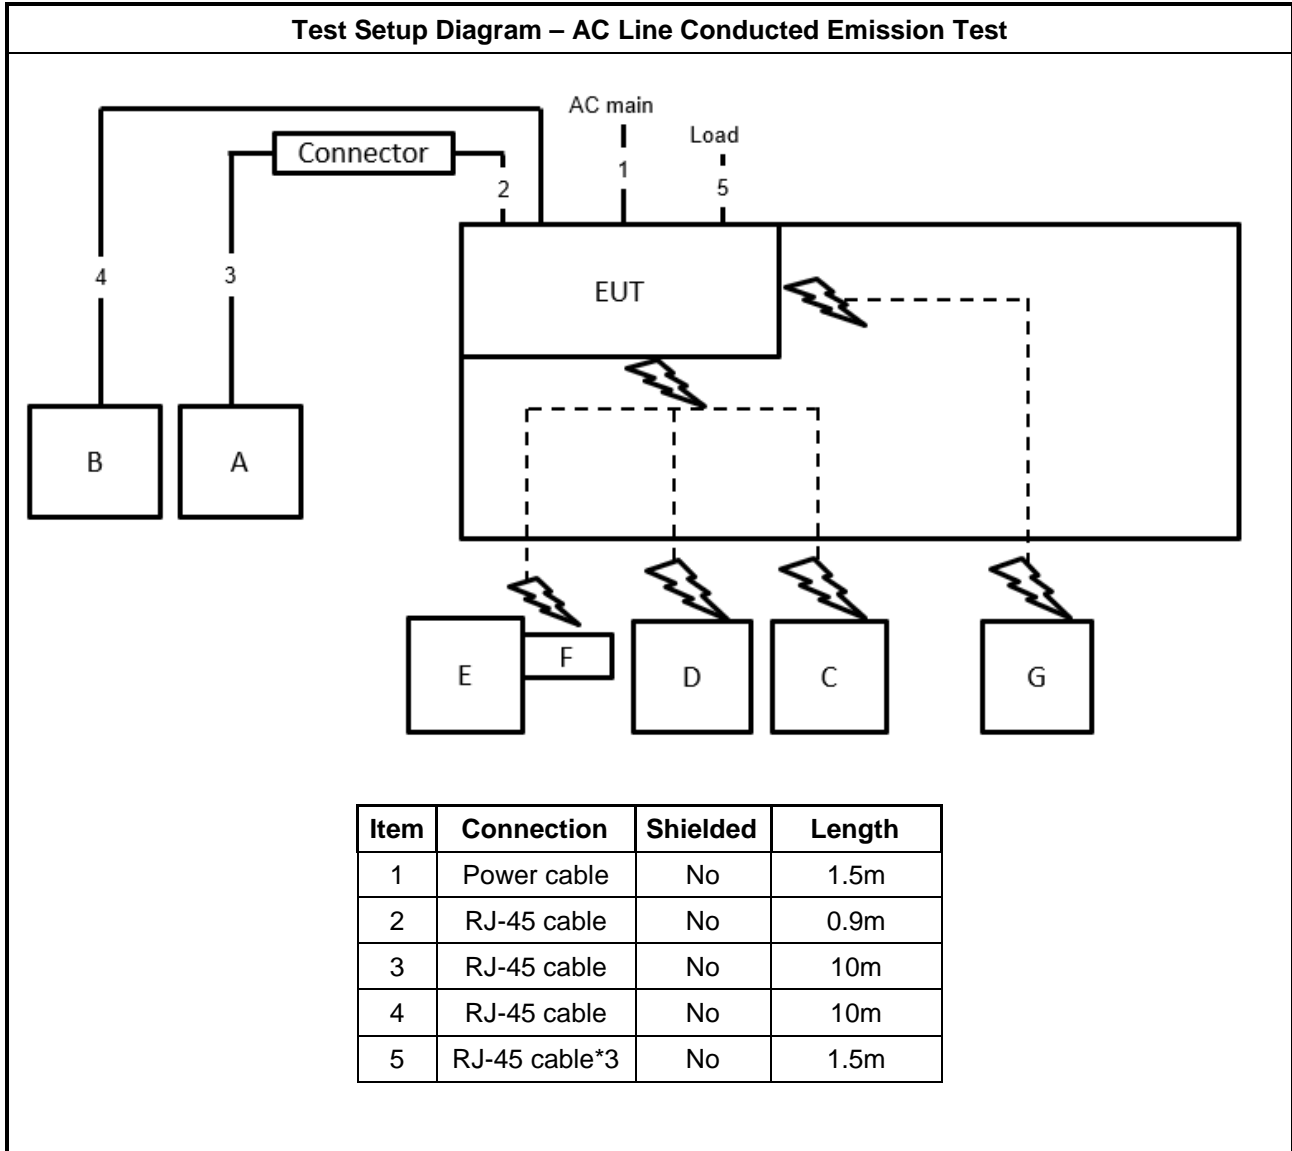


**Test Setup Diagram - Radiated Test < 1GHz**

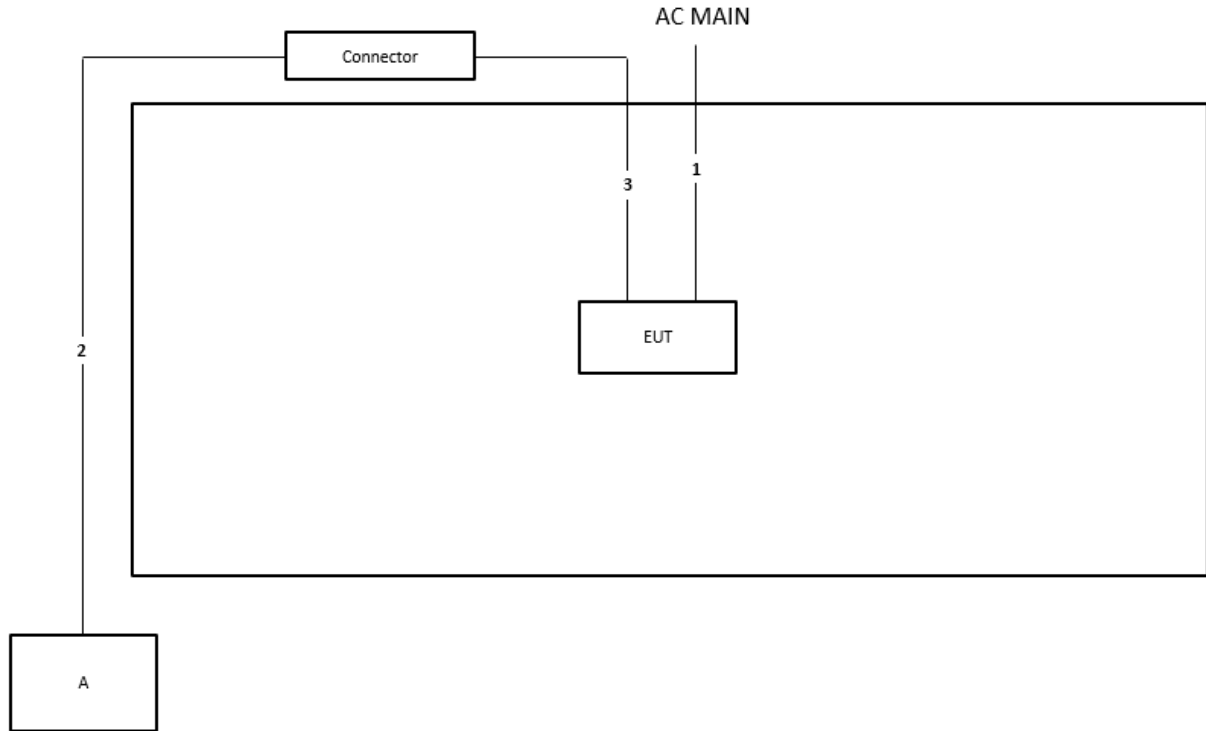

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	0.9m



**Test Setup Diagram - Radiated Test > 1GHz**

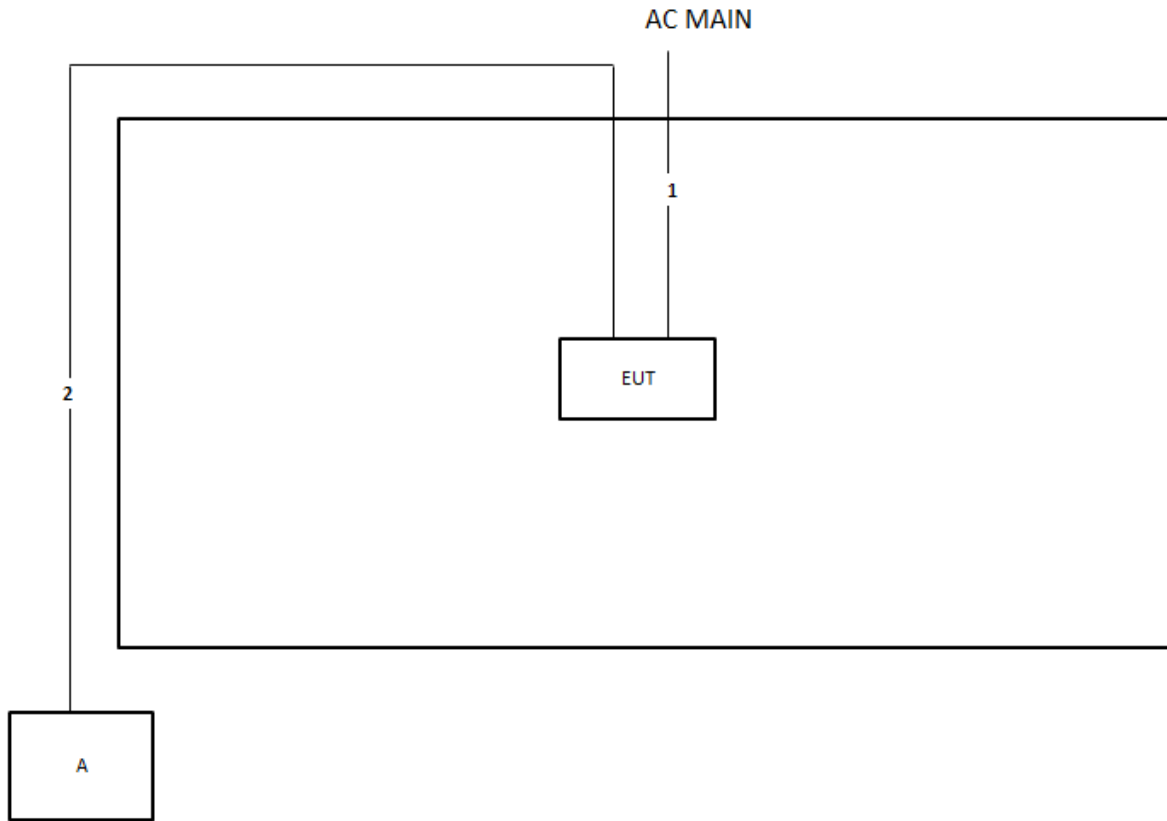

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

### 3.1.4 Test Setup

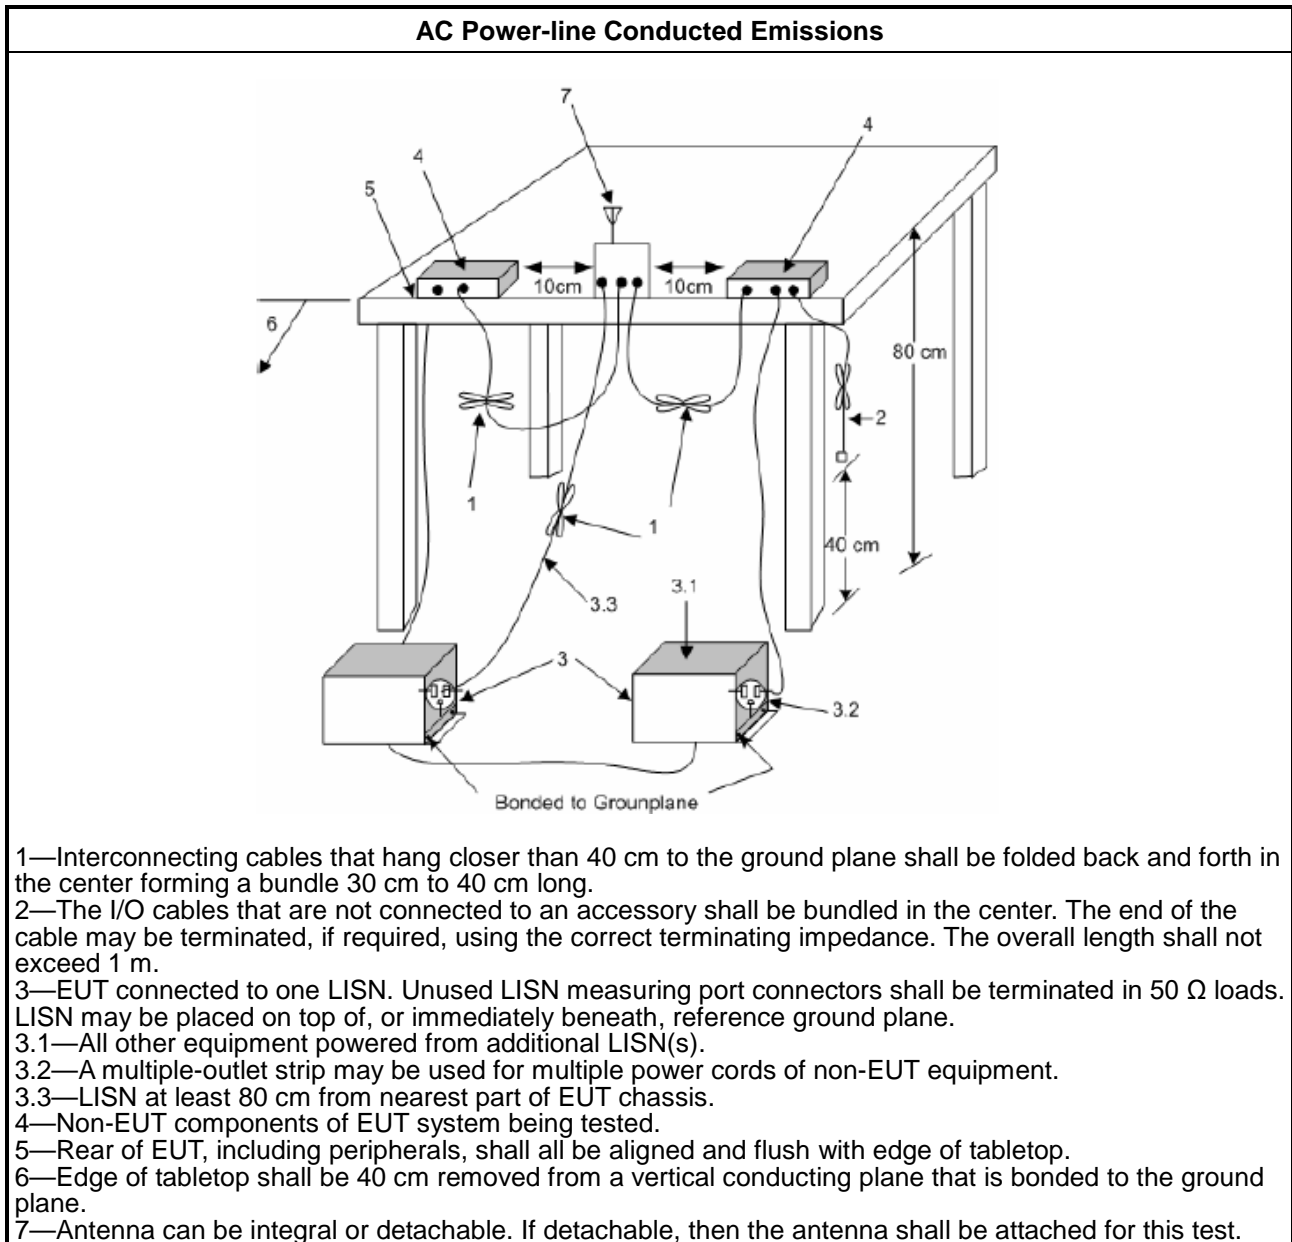

#### 1.1.1. Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

#### 3.2.4 Test Setup

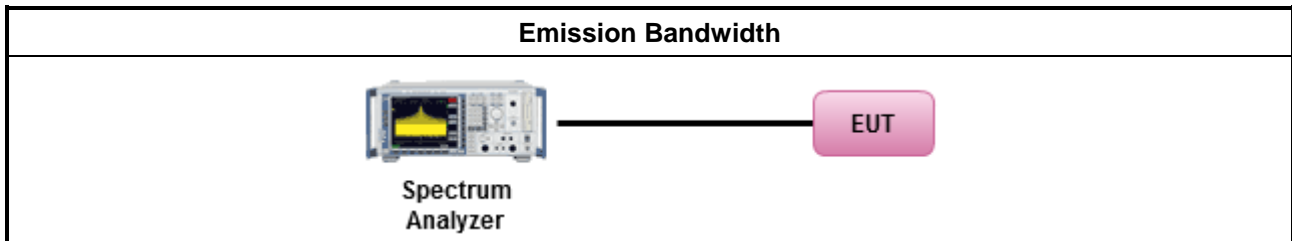

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
<p><math>P_{Out}</math> = maximum peak conducted output power or maximum conducted output power in dBm,  <math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.</p>	

#### 3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



**3.3.3 Test Procedures**

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> <li>▪ Maximum Conducted Output Power</li> </ul>	
[duty cycle ≥ 98% or external video / power trigger]	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>            (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>

### 3.3.4 Test Setup

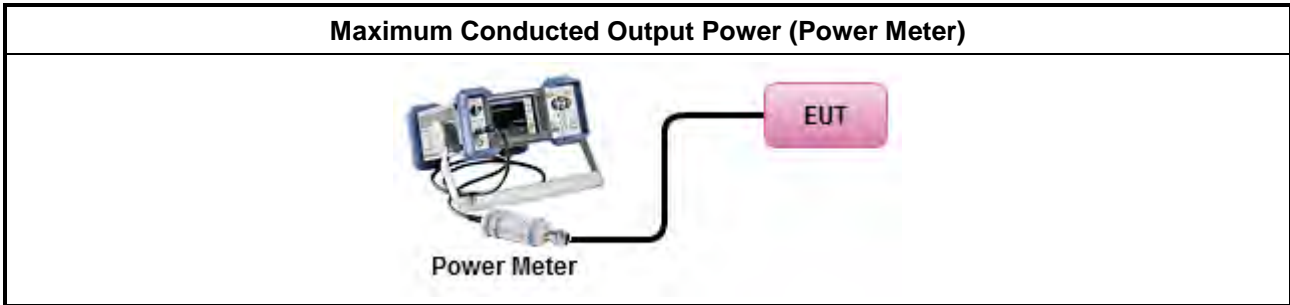

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle ≥ 98% or external video / power trigger]
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>
<ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:               <ul style="list-style-type: none"> <li> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.                 </li> <li> <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                 </li> <li> <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                 </li> </ul> </li> </ul>



### 3.4.4 Test Setup

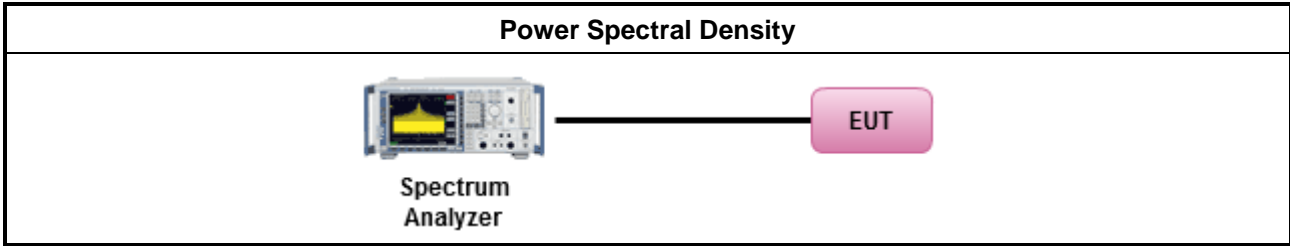

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

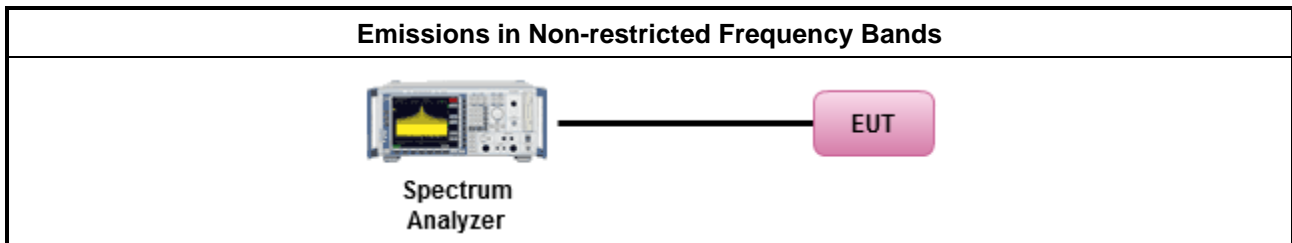

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




**3.6.3 Test Procedures**

<b>Test Method</b>	
<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.</li> </ul>
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle ≥98%).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW≥1/T).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074 clause 8.7 &amp; c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below:                (1) Measure and sum the spectra across the outputs or                (2) Measure and add 10 log(N) dB             </li> </ul>
	<ul style="list-style-type: none"> <li>▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>

**3.6.4 Test Setup**

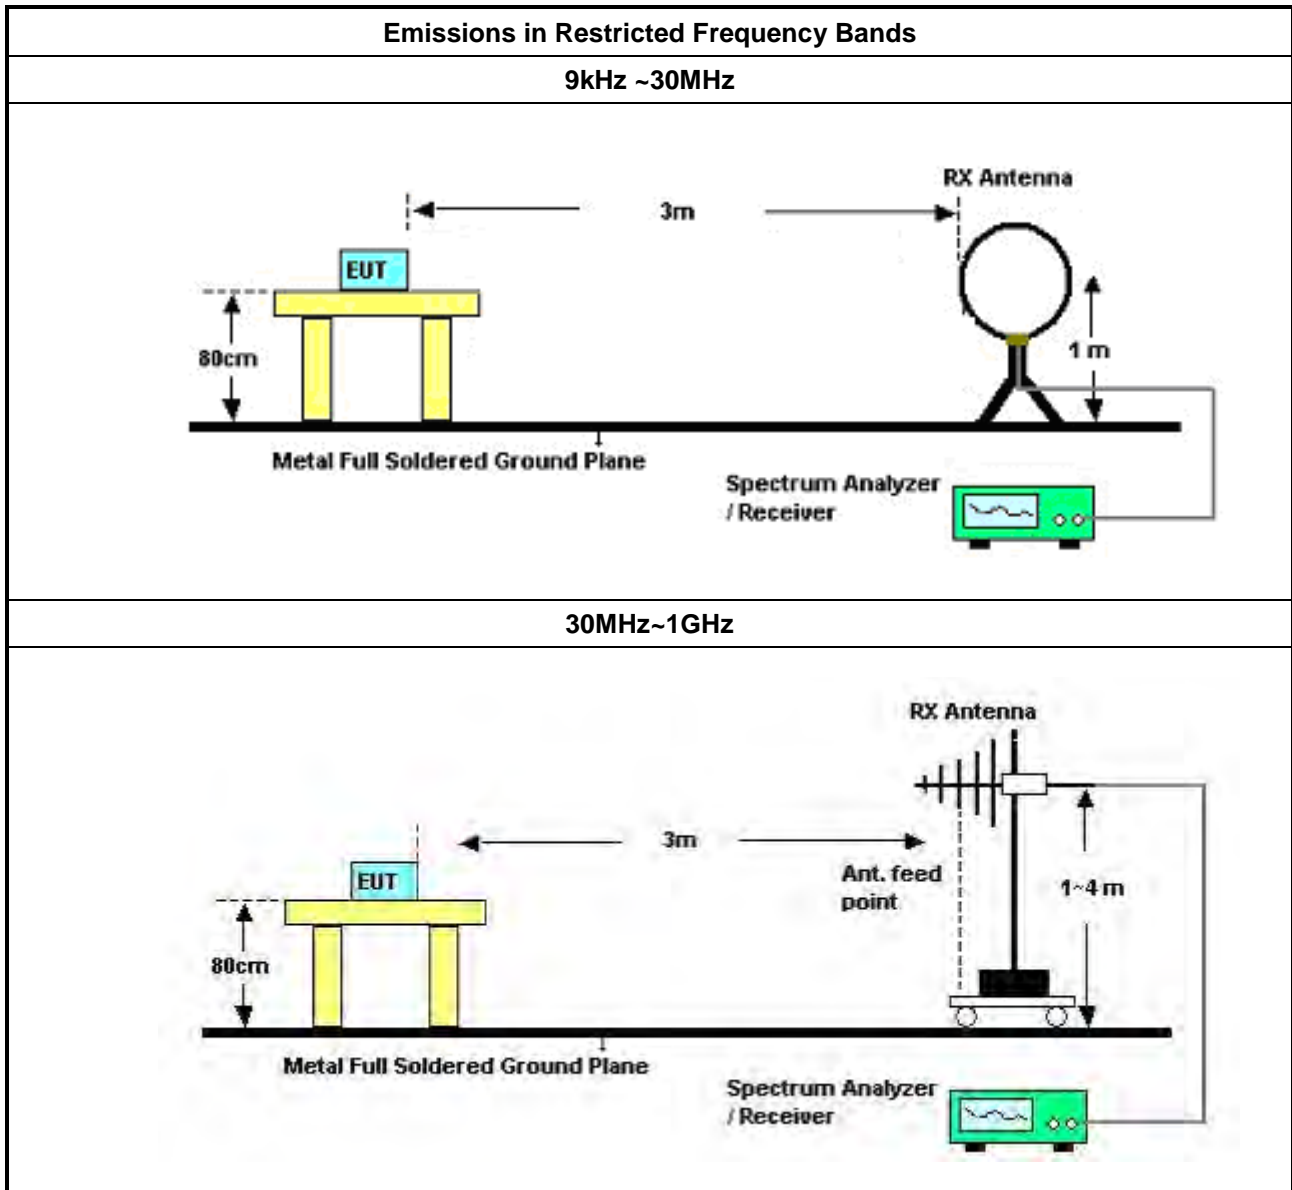

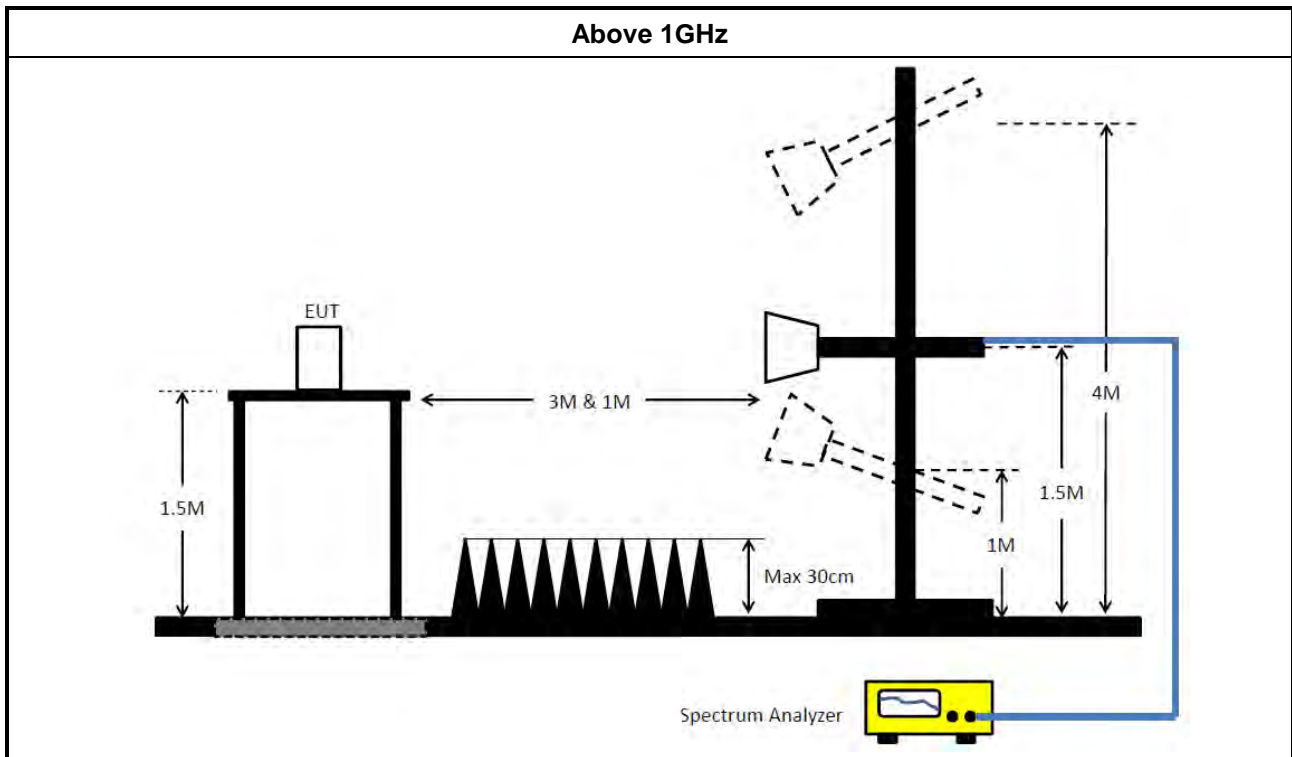

### 3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

### 3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 20, 2023	Feb. 19, 2024	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 16, 2023	Feb. 15, 2024	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 27, 2023	Apr. 26, 2024	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 09, 2023	Feb. 08, 2024	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 17, 2023	Oct. 16, 2024	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 13, 2023	Oct. 12, 2024	Radiation (03CH04-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Aug. 01, 2023	Jul. 31, 2024	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 23, 2023	Feb. 22, 2024	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N 0607	30MHz ~ 1GHz	Oct. 07, 2023	Oct. 06, 2024	Radiation (03CH04-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Oct. 04, 2023	Oct. 03, 2024	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91702 52	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH04-CB)
Pre-Amplifier	EMCI	EMC330N	980391	20MHz ~ 3GHz	May 23, 2023	May 22, 2024	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270063	0.5GHz ~ 26.5GHz	Jun. 30, 2023	Jun. 29, 2024	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 21, 2023	Mar. 20, 2024	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 13, 2023	Jun. 12, 2024	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+67	30MHz – 1GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	High Cable
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 05, 2022	May 04, 2023	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 03, 2023	Feb. 02, 2024	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91702 52	15GHz ~ 40GHz	Aug. 22, 2022	Aug. 21, 2023	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 01, 2022	Jun. 30, 2023	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 16, 2022	Nov. 15, 2023	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 10, 2022	Jun. 09, 2023	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	May 27, 2022	May 26, 2023	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 04, 2022	Sep. 03, 2023	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 04, 2022	Sep. 03, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-11	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-12	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-13	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1 GHz ~26.5 GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R means Non-Calibration required.







**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 3	Pass	QP	159k	59.18	65.52	-6.34	Neutral

## Mode 3

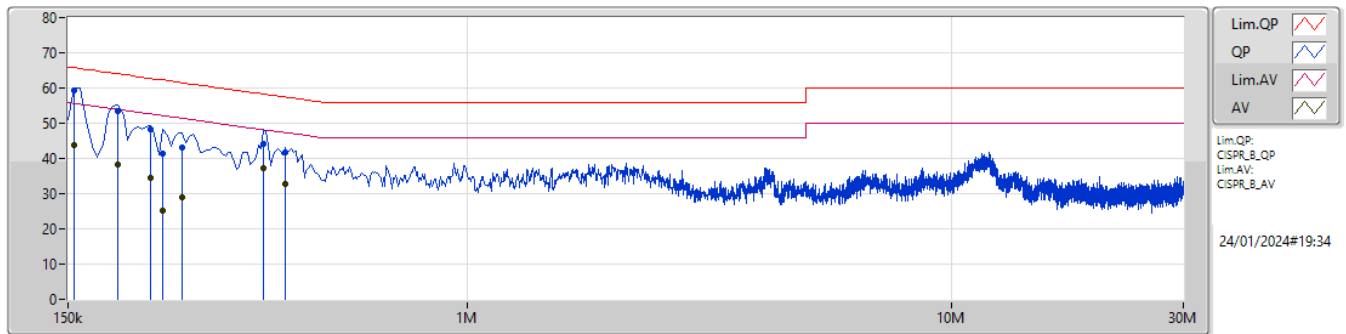

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	154.5k	59.39	65.75	-6.36	9.98	Line	"Worst"	49.41	0.09	0.02	9.87
AV	154.5k	43.77	55.75	-11.98	9.98	Line	-	33.79	0.09	0.02	9.87
QP	190.5k	53.58	64.01	-10.43	9.96	Line	-	43.62	0.08	0.02	9.86
AV	190.5k	38.32	54.01	-15.69	9.96	Line	-	28.36	0.08	0.02	9.86
QP	222k	48.18	62.75	-14.57	9.97	Line	-	38.21	0.08	0.02	9.87
AV	222k	34.62	52.75	-18.13	9.97	Line	-	24.65	0.08	0.02	9.87
QP	235.5k	41.26	62.25	-20.99	9.97	Line	-	31.29	0.08	0.02	9.87
AV	235.5k	25.05	52.25	-27.20	9.97	Line	-	15.08	0.08	0.02	9.87
QP	258k	43.03	61.49	-18.46	9.97	Line	-	33.06	0.08	0.02	9.87
AV	258k	29.00	51.49	-22.49	9.97	Line	-	19.03	0.08	0.02	9.87
QP	379.5k	44.19	58.29	-14.10	10.01	Line	-	34.18	0.09	0.02	9.90
AV	379.5k	37.22	48.29	-11.07	10.01	Line	-	27.21	0.09	0.02	9.90
QP	420k	41.66	57.45	-15.79	10.01	Line	-	31.65	0.09	0.02	9.90
AV	420k	32.81	47.45	-14.64	10.01	Line	-	22.80	0.09	0.02	9.90

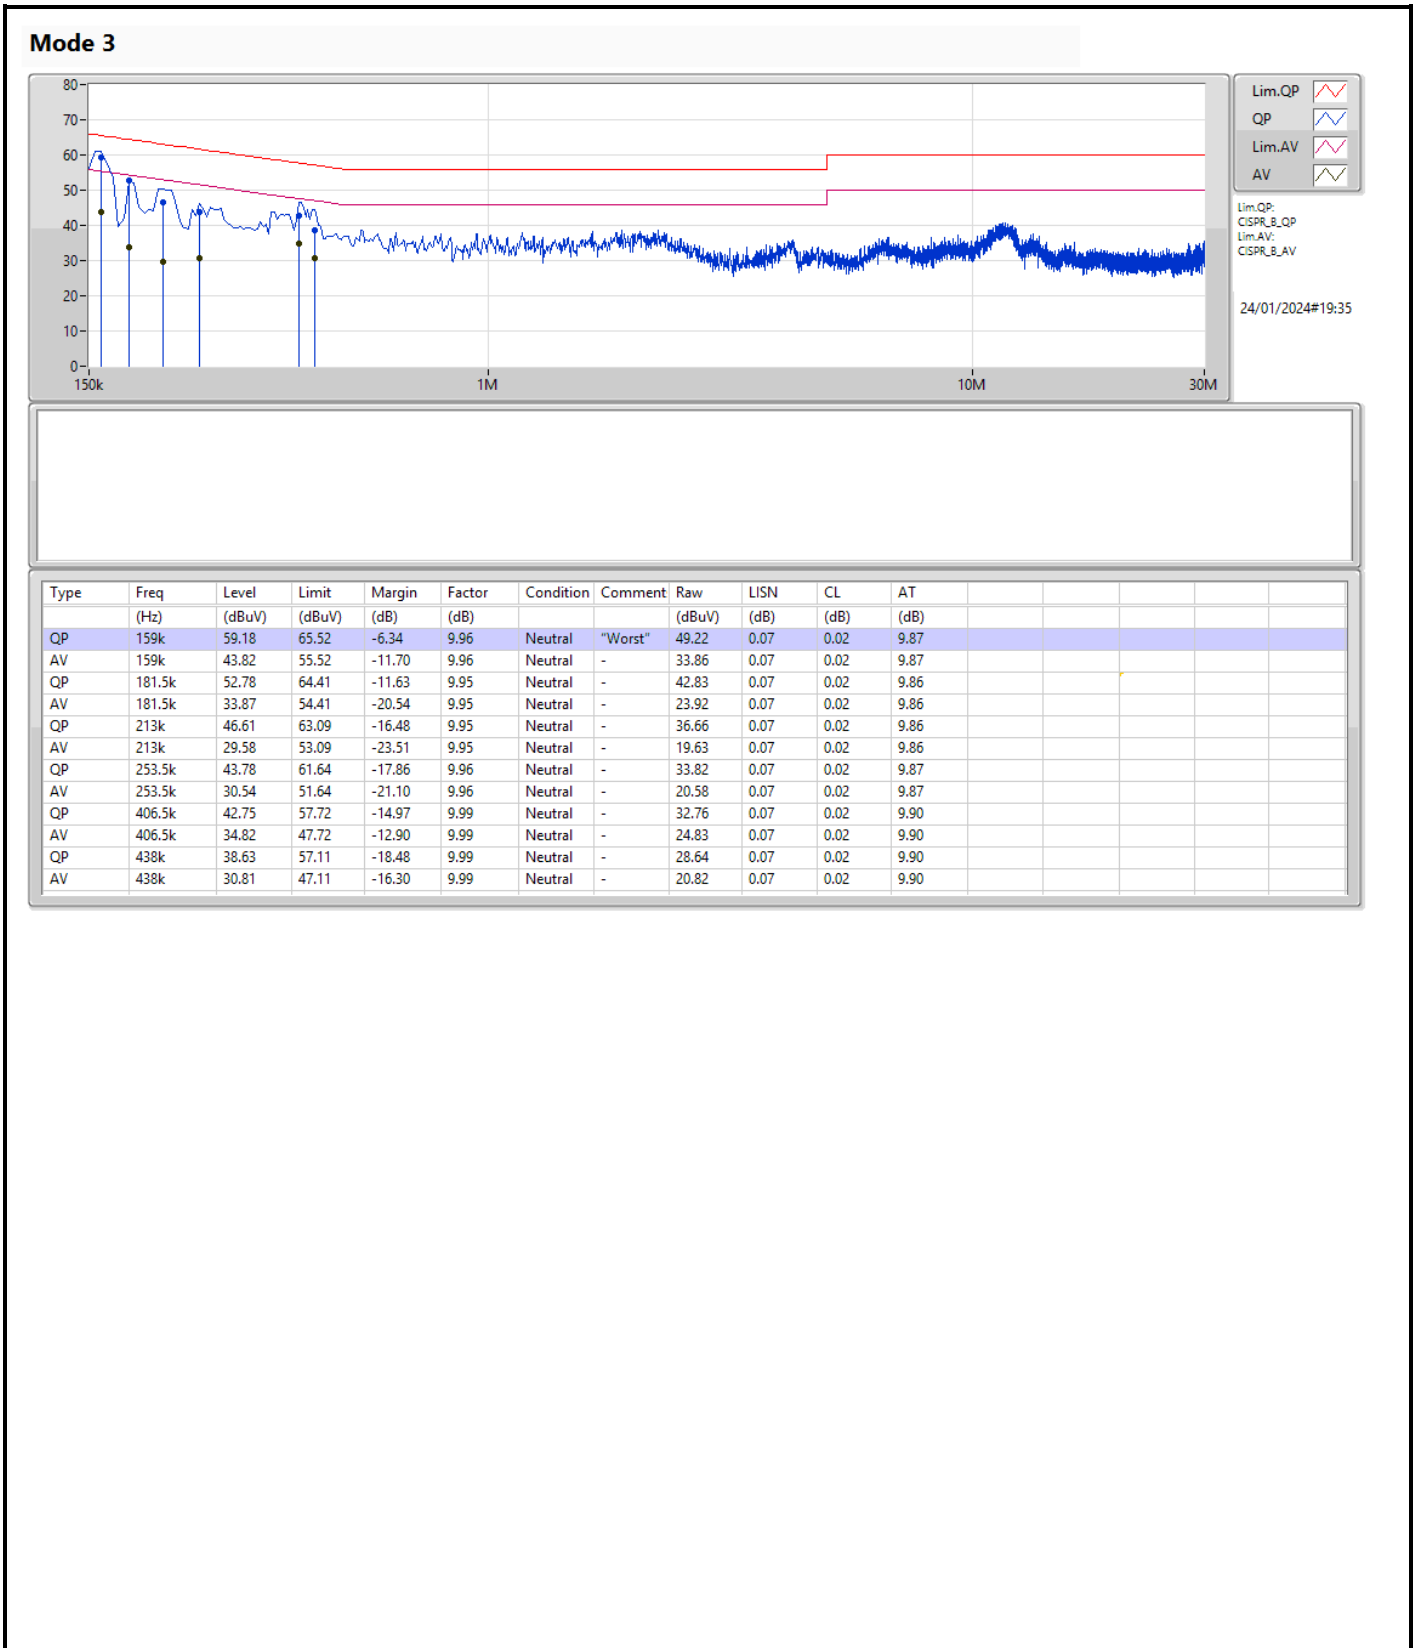



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	711.25k	1.03M	1M03F1D	705k	1.024M
BT-LE(2Mbps)	1.38M	2.047M	2M05F1D	1.368M	2.034M



Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	711.25k	1.026M
2440MHz	Pass	500k	705k	1.024M
2480MHz	Pass	500k	710k	1.03M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.368M	2.034M
2440MHz	Pass	500k	1.38M	2.034M
2480MHz	Pass	500k	1.38M	2.047M

Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

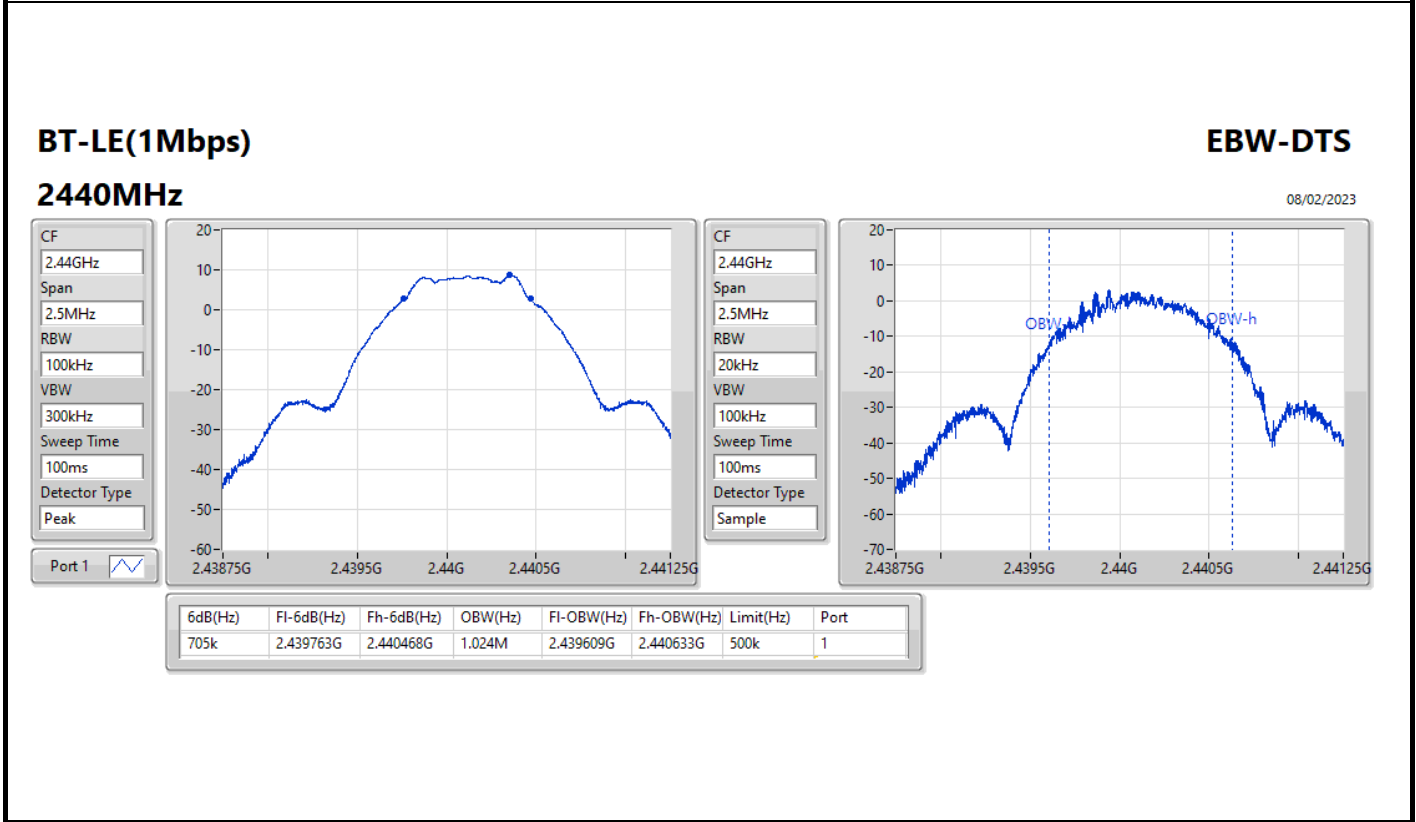
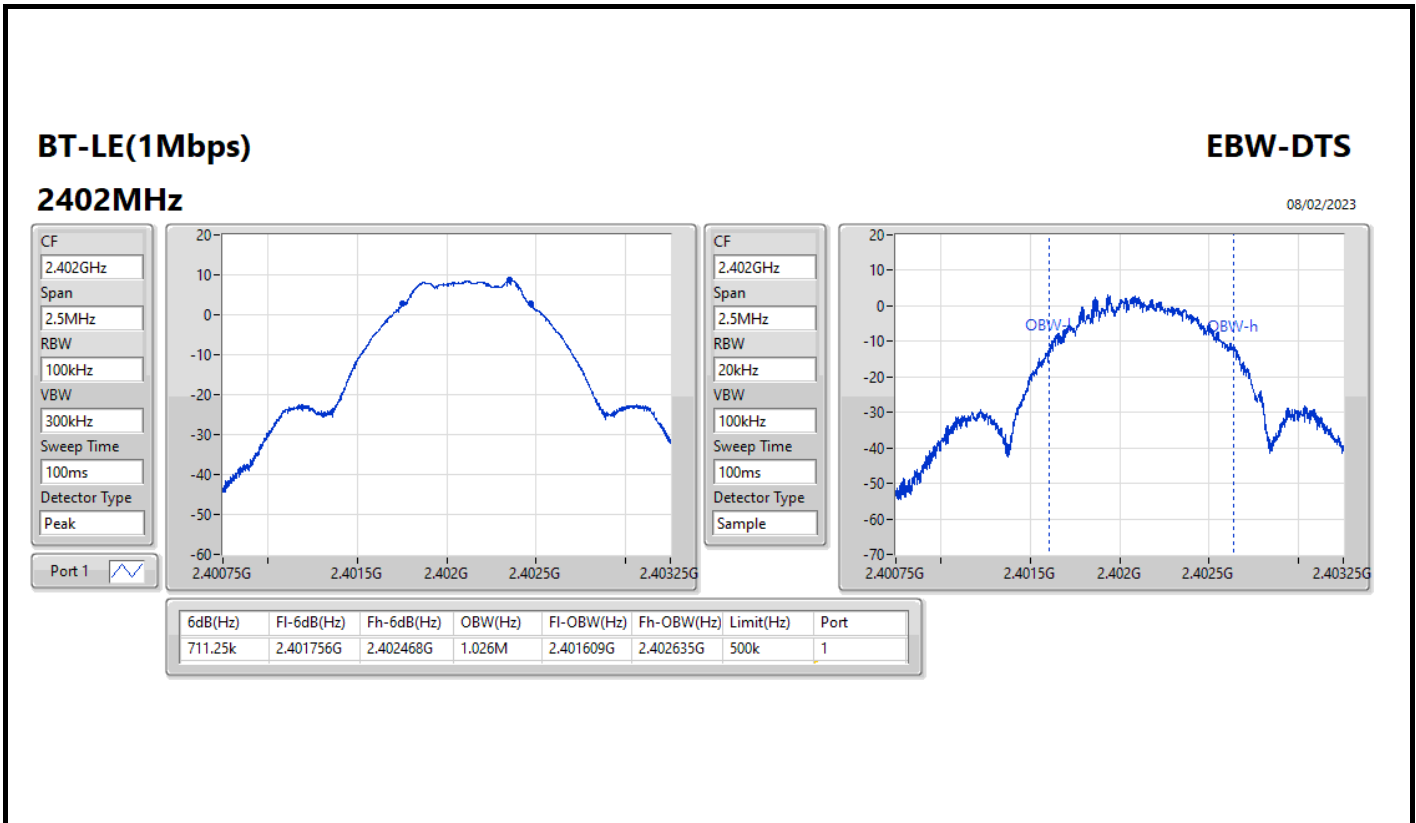


2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS

2480MHz

04/05/2023

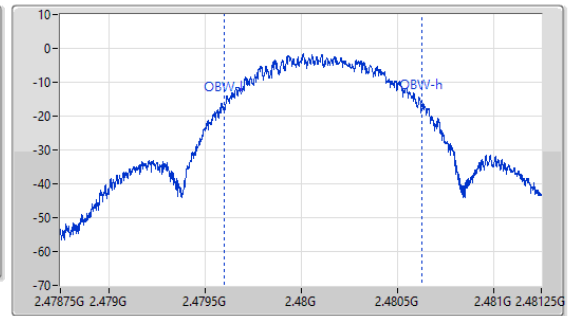
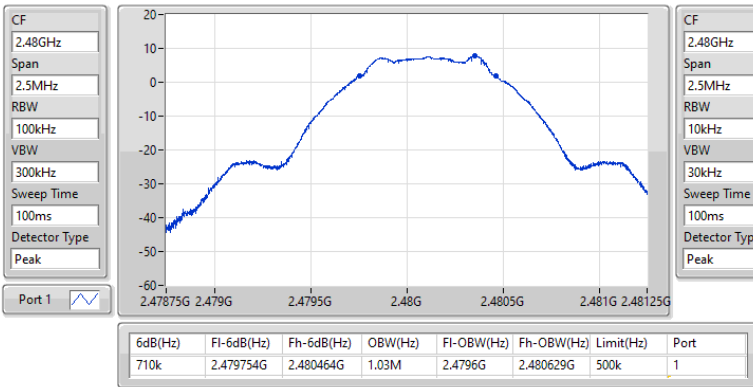




BT-LE(2Mbps)

EBW-DTS

2402MHz

08/02/2023

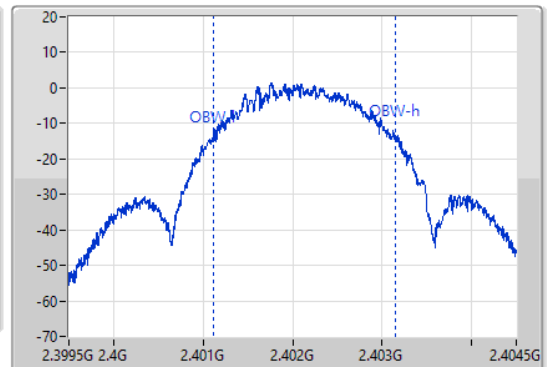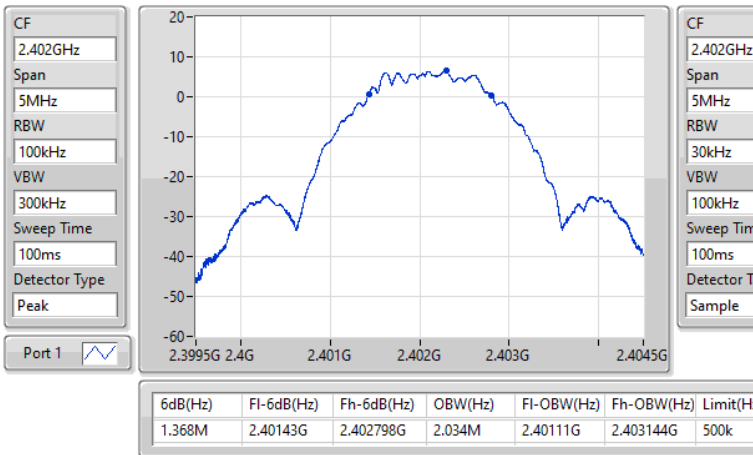

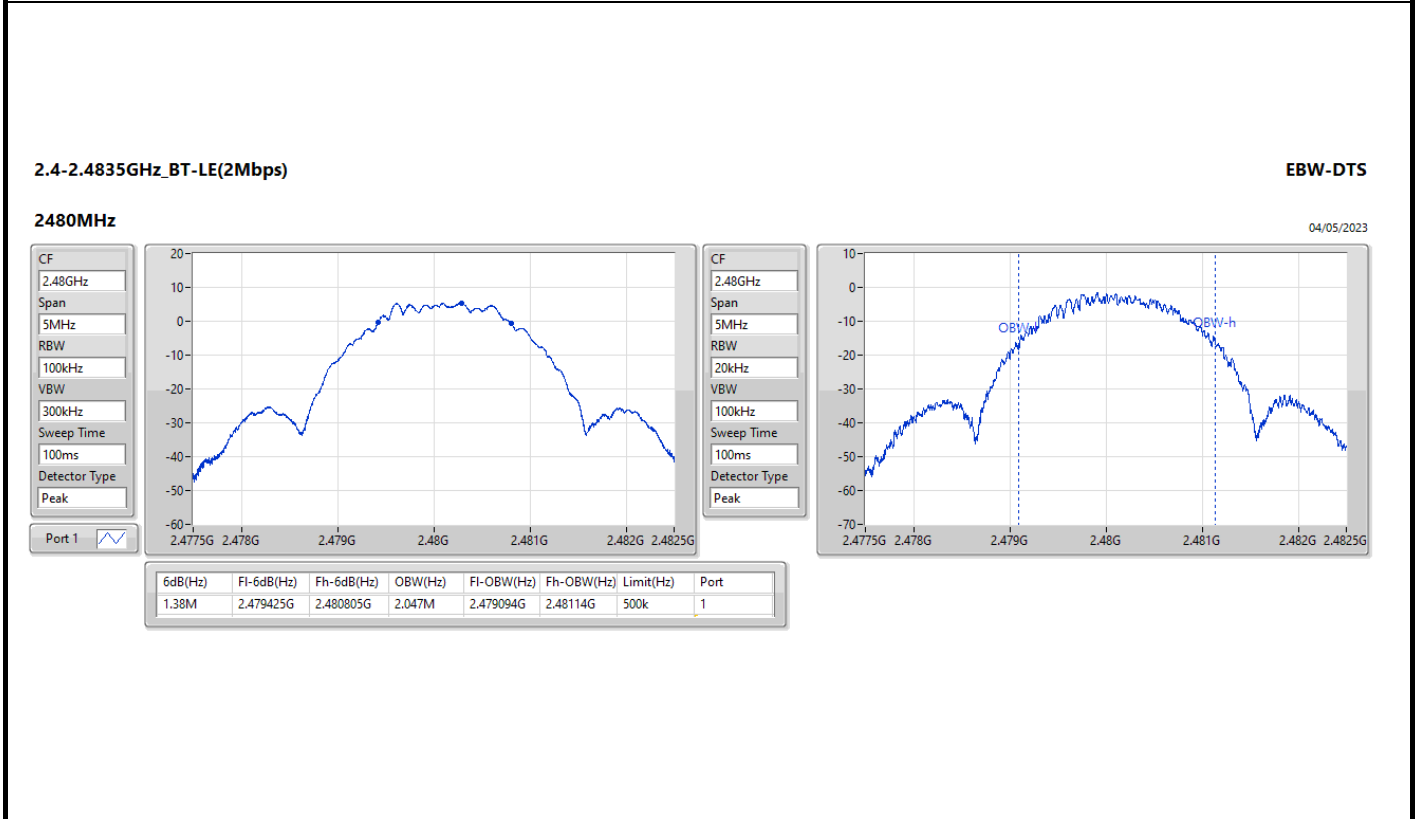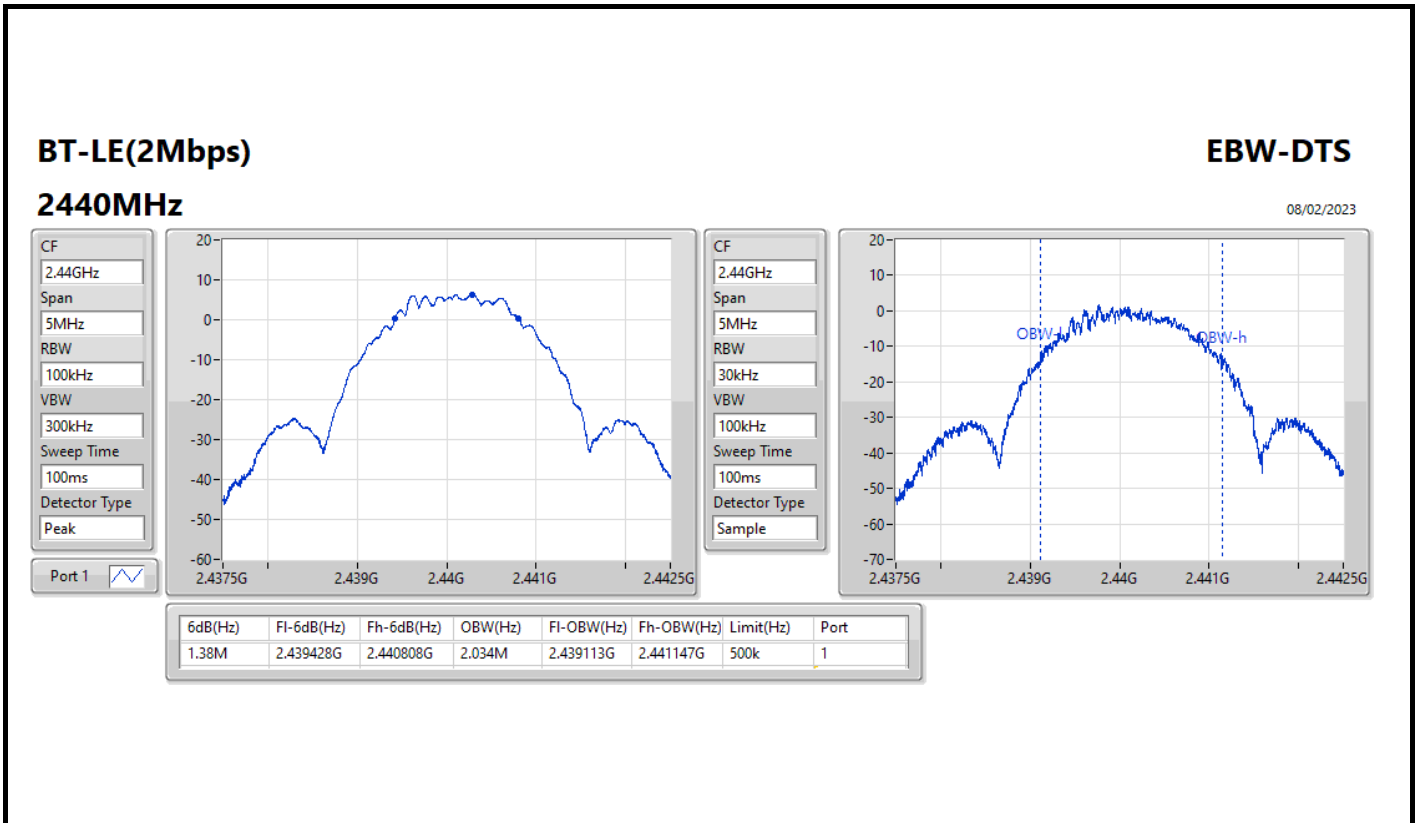





**Summary**

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.34	0.00859
BT-LE(2Mbps)	9.32	0.00855



Result

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.095	9.34	30.00
2440MHz	Pass	1.095	9.33	30.00
2480MHz	Pass	1.095	9.22	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	1.095	9.32	30.00
2440MHz	Pass	1.095	9.27	30.00
2480MHz	Pass	1.095	9.23	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-7.87
BT-LE(2Mbps)	-13.11



RBW = 3kHz:





Result

Mode	Result	DG (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.095	-7.87	8.00
2440MHz	Pass	1.095	-7.89	8.00
2480MHz	Pass	1.095	-8.86	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	1.095	-13.11	8.00
2440MHz	Pass	1.095	-13.21	8.00
2480MHz	Pass	1.095	-13.93	8.00

DG = Directional Gain; RBW = 3kHz;  
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

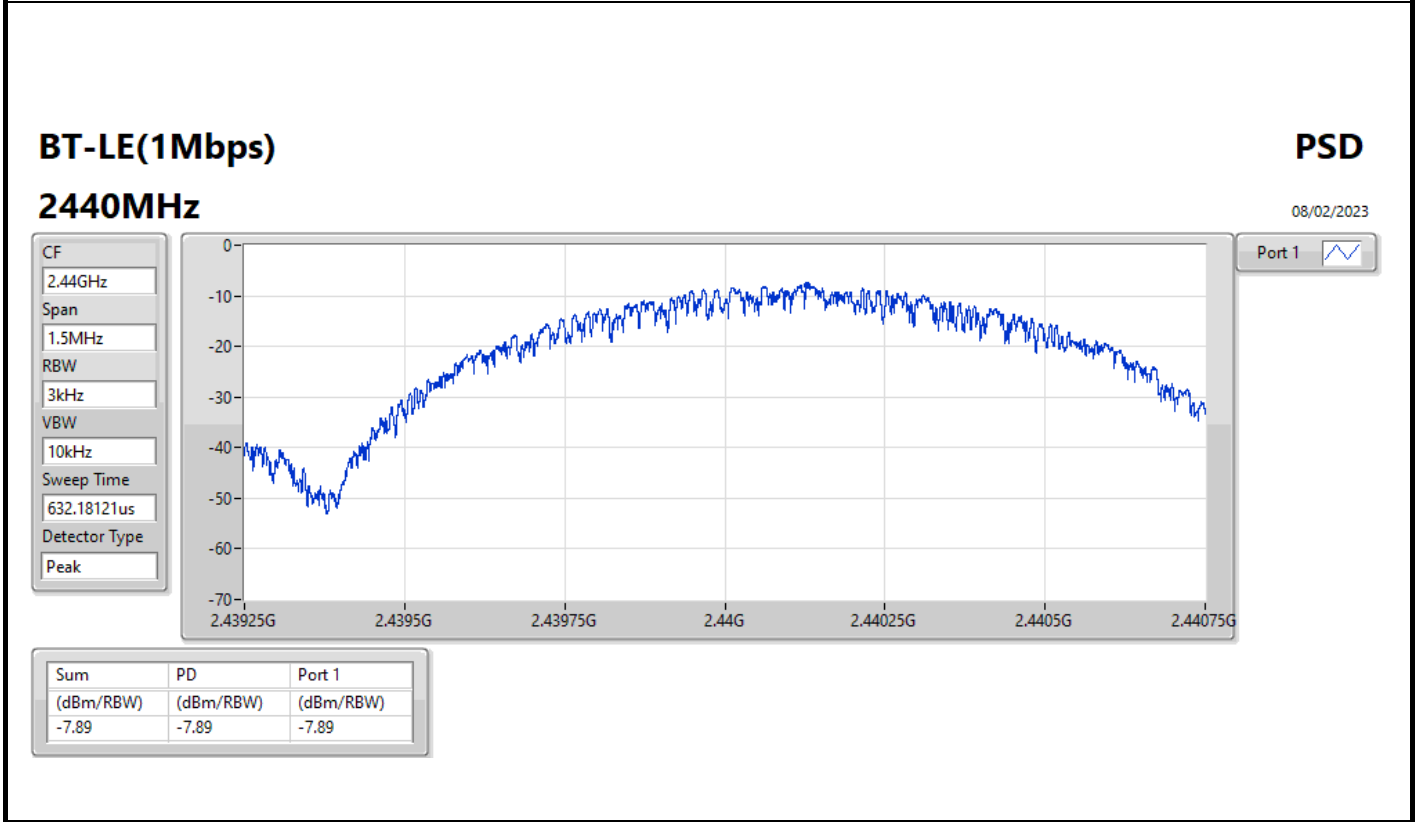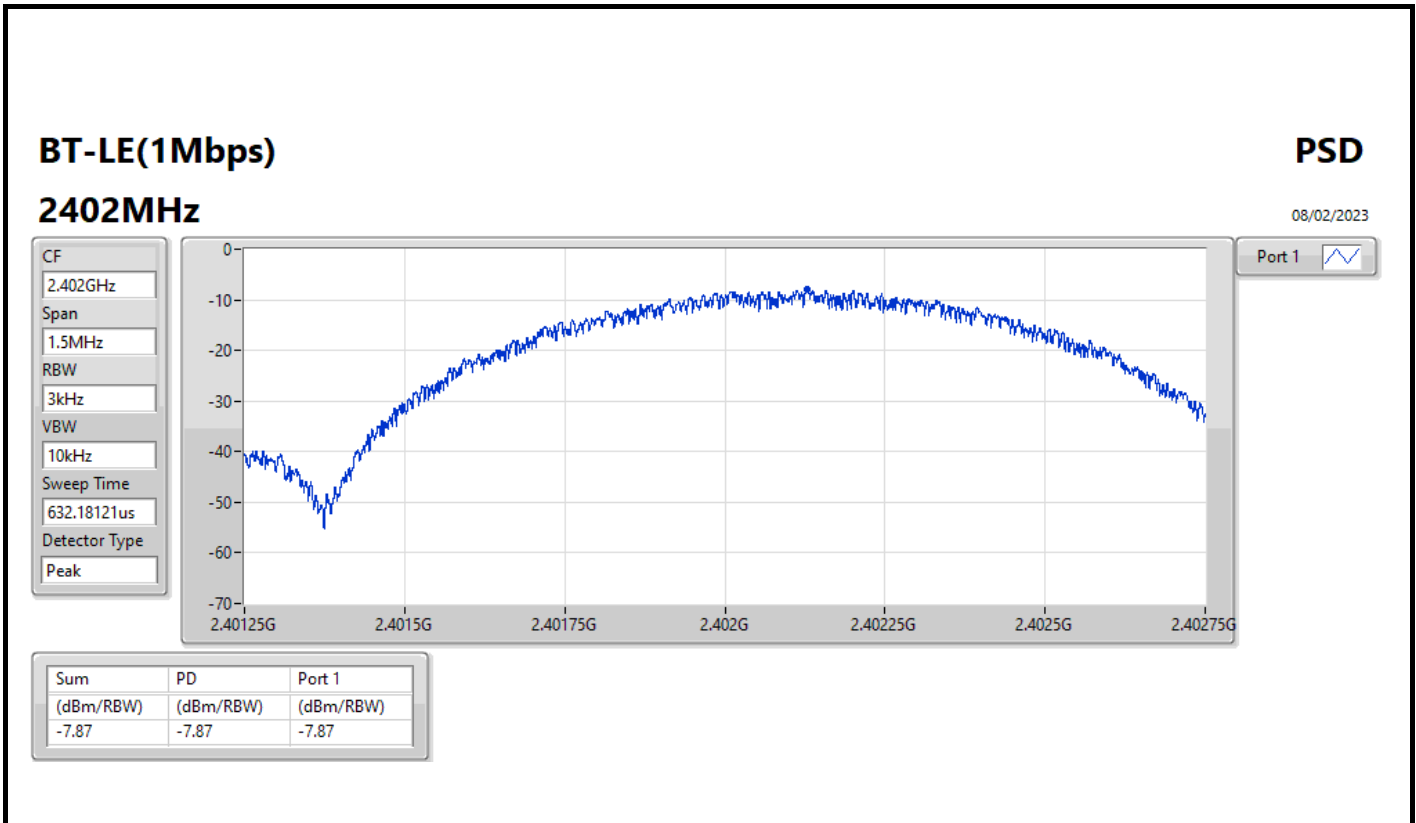

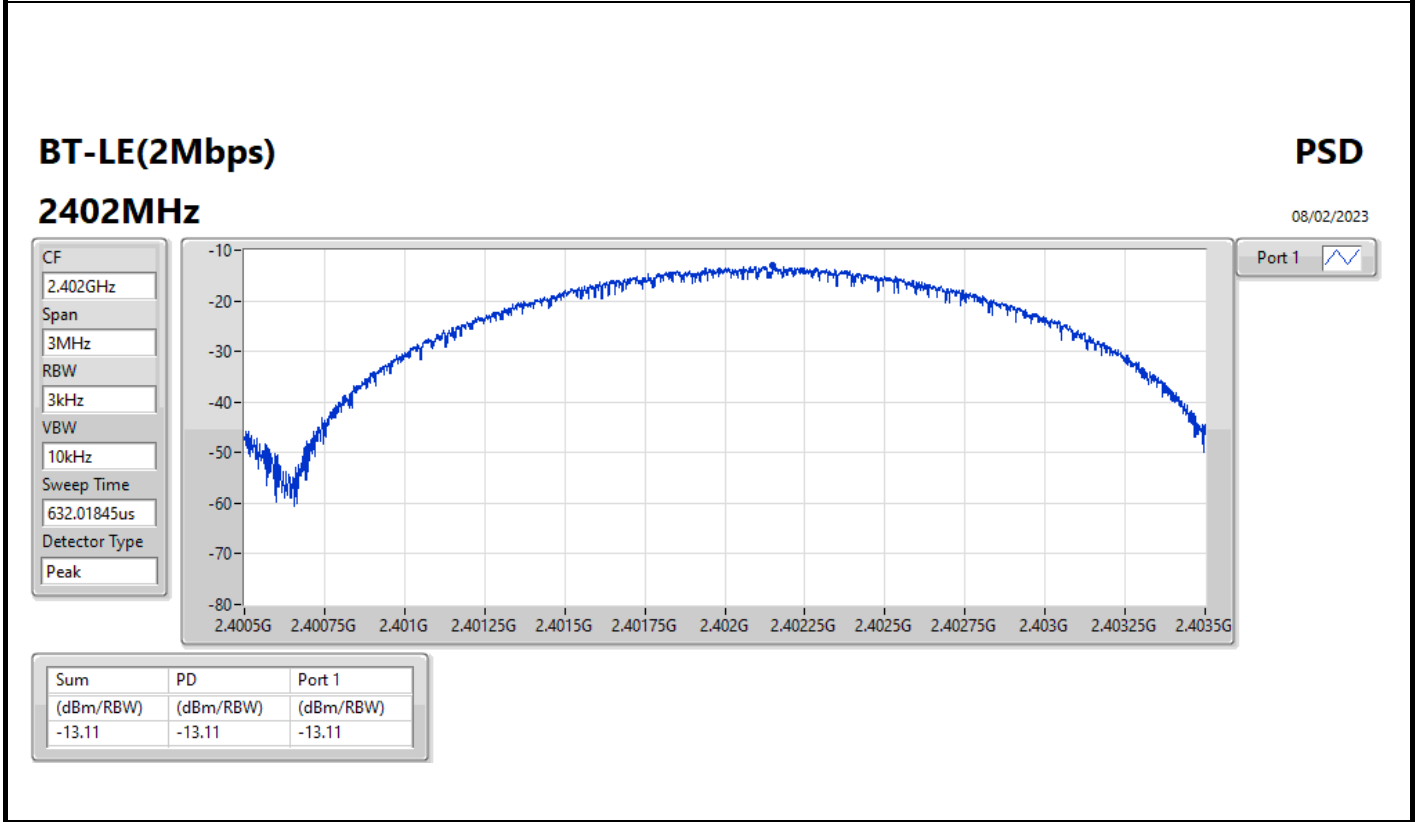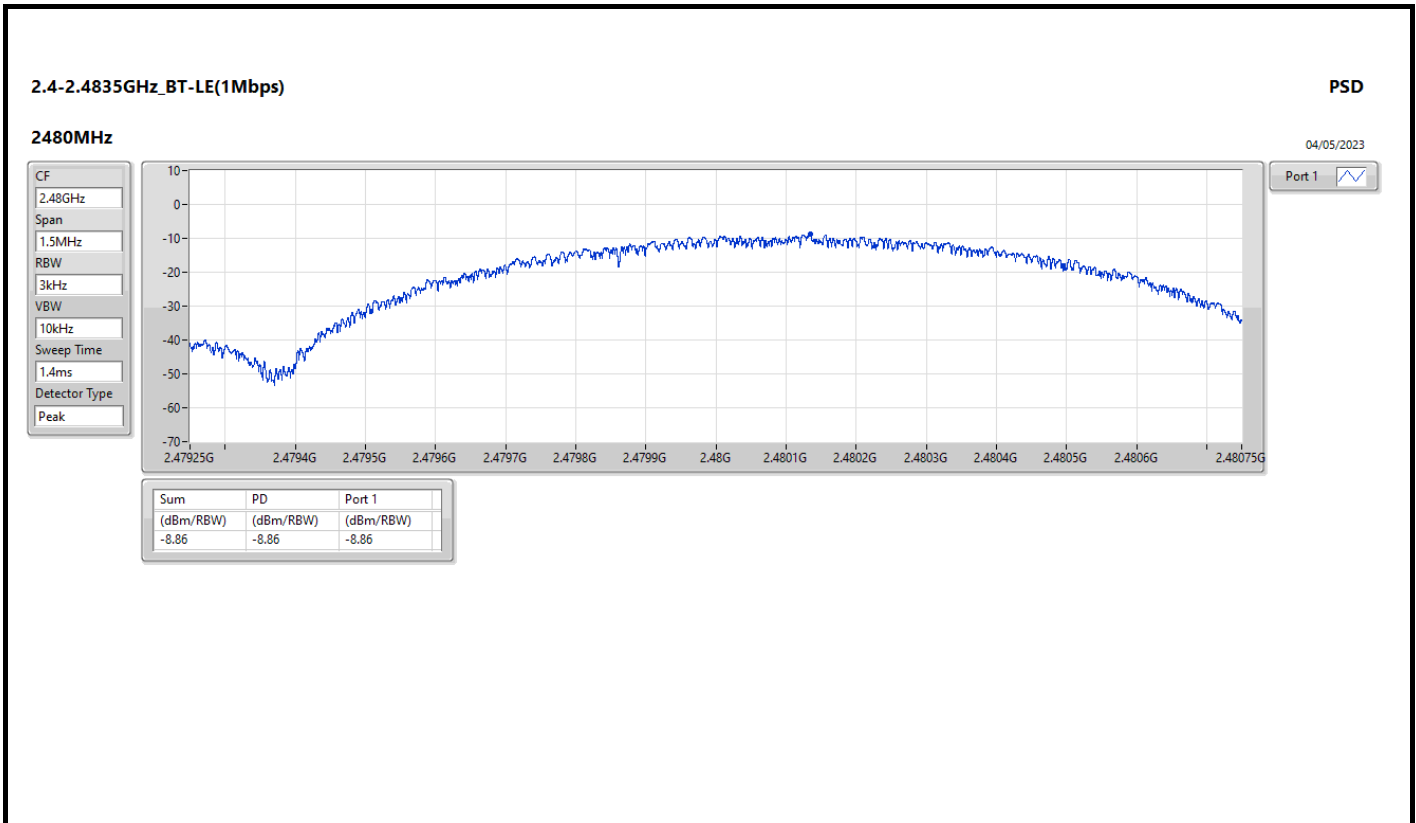

### BT-LE(2Mbps)

### PSD

2440MHz

08/02/2023

CF  
2.44GHz


Span  
3MHz


RBW  
3kHz

VBW  
10kHz

Sweep Time  
632.01845us

Detector Type  
Peak

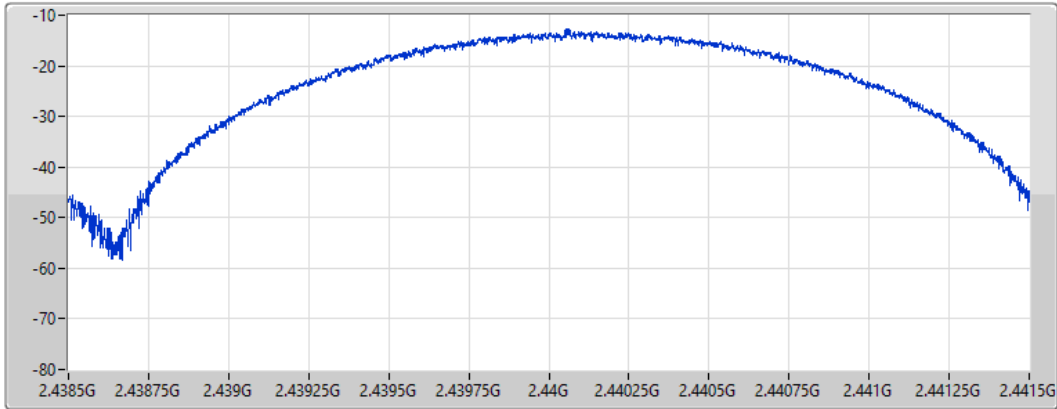

Port 1 

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.21	-13.21	-13.21

### 2.4-2.4835GHz\_BT-LE(2Mbps)

### PSD

2480MHz

04/05/2023

CF  
2.48GHz


Span  
3MHz


RBW  
3kHz

VBW  
10kHz

Sweep Time  
1.4ms

Detector Type  
Peak

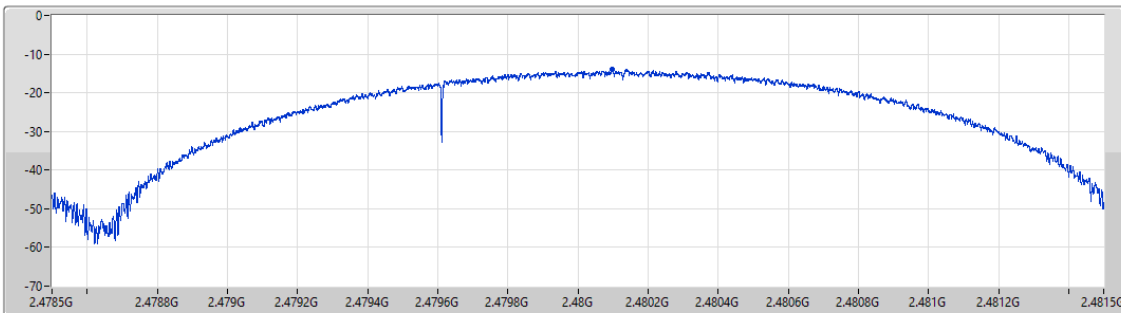

Port 1 

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.93	-13.93	-13.93





Summary



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.40234G	8.93	-21.07	803.15M	-52.18	2.4G	-47.53	2.4G	-47.74	2.50254G	-51.88	17.64083G	-46.10	1
BT-LE(2Mbps)	Pass	2.40217G	6.69	-23.31	1.97698G	-52.34	2.4G	-29.24	2.4G	-26.25	2.50018G	-51.79	6.99155G	-46.73	1





Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40234G	8.93	-21.07	803.15M	-52.18	2.4G	-47.53	2.4G	-47.74	2.50254G	-51.88	17.64083G	-46.10	1
2440MHz	Pass	2.40234G	8.93	-21.07	203.9M	-52.46	2.39324G	-51.29	2.4G	-52.89	2.50114G	-51.49	17.67739G	-46.89	1
2480MHz	Pass	2.40234G	8.93	-21.07	66.43M	-52.98	2.39508G	-51.71	2.4G	-57.05	2.50158G	-51.60	21.53273G	-47.29	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40217G	6.69	-23.31	1.97698G	-52.34	2.4G	-29.24	2.4G	-26.25	2.50018G	-51.79	6.99155G	-46.73	1
2440MHz	Pass	2.40217G	6.69	-23.31	2.192G	-51.06	2.39404G	-50.99	2.4G	-53.00	2.50038G	-50.78	6.78908G	-46.68	1
2480MHz	Pass	2.40217G	6.69	-23.31	1.63858G	-53.87	2.39596G	-51.65	2.4G	-56.52	2.5027G	-51.76	21.51304G	-47.44	1

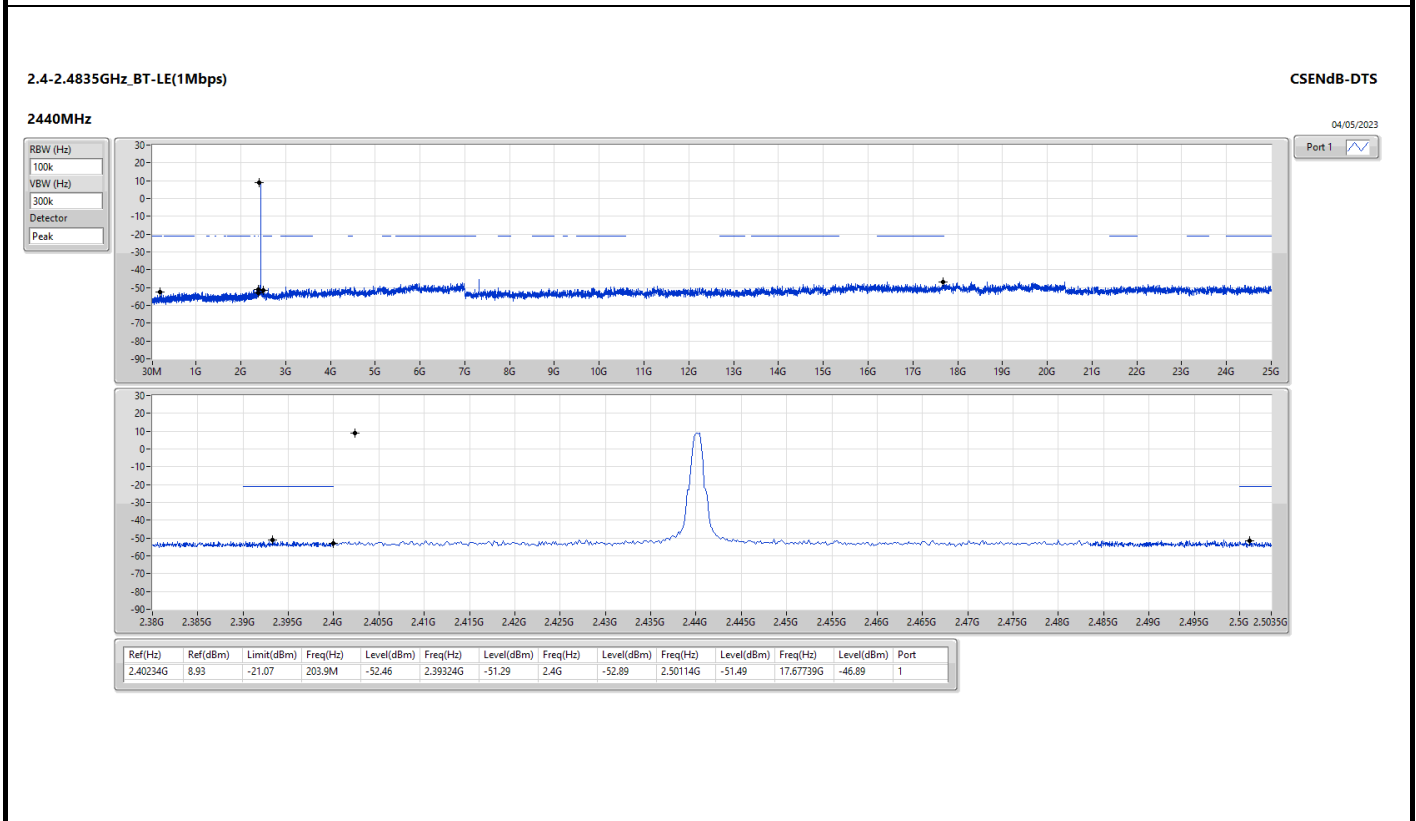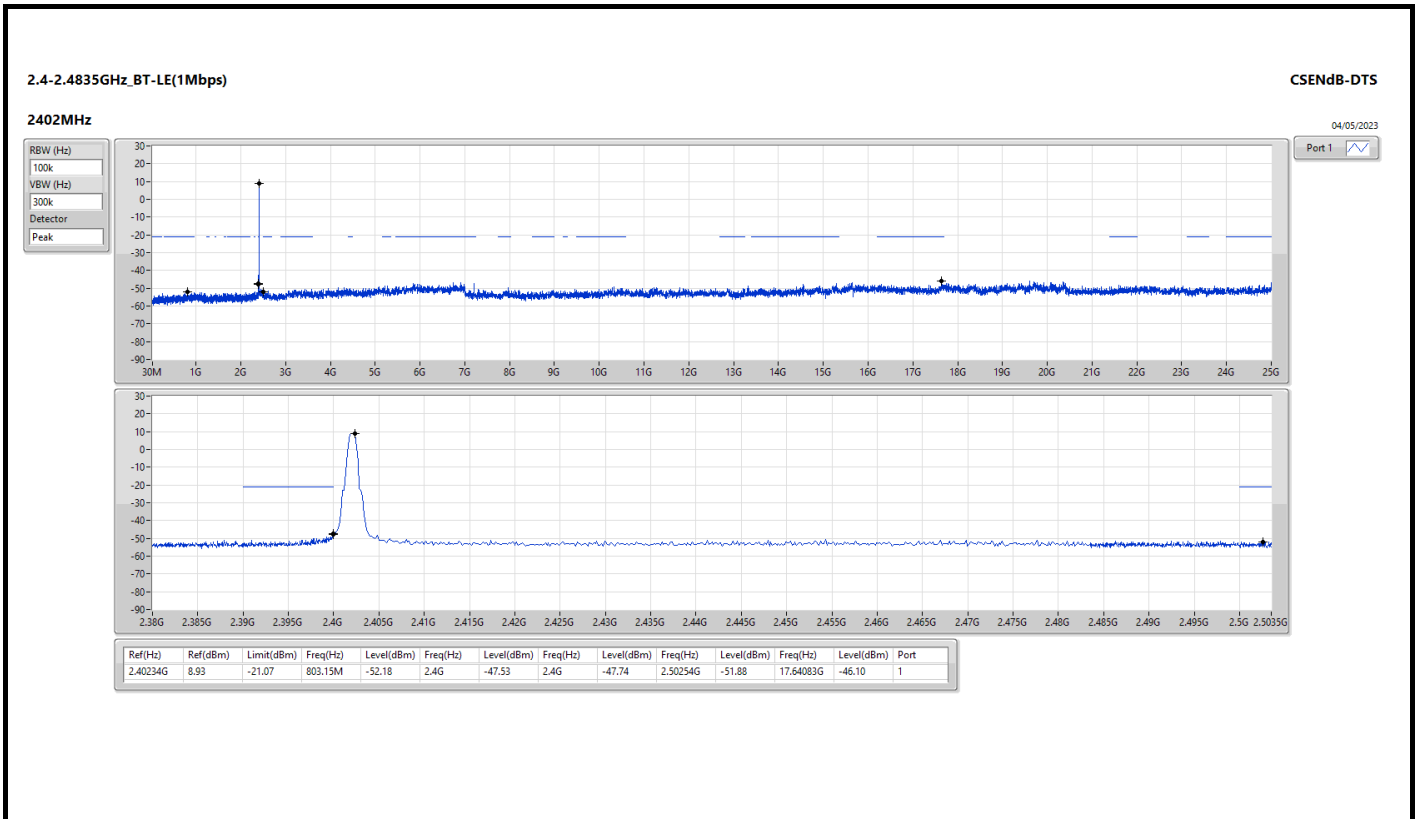

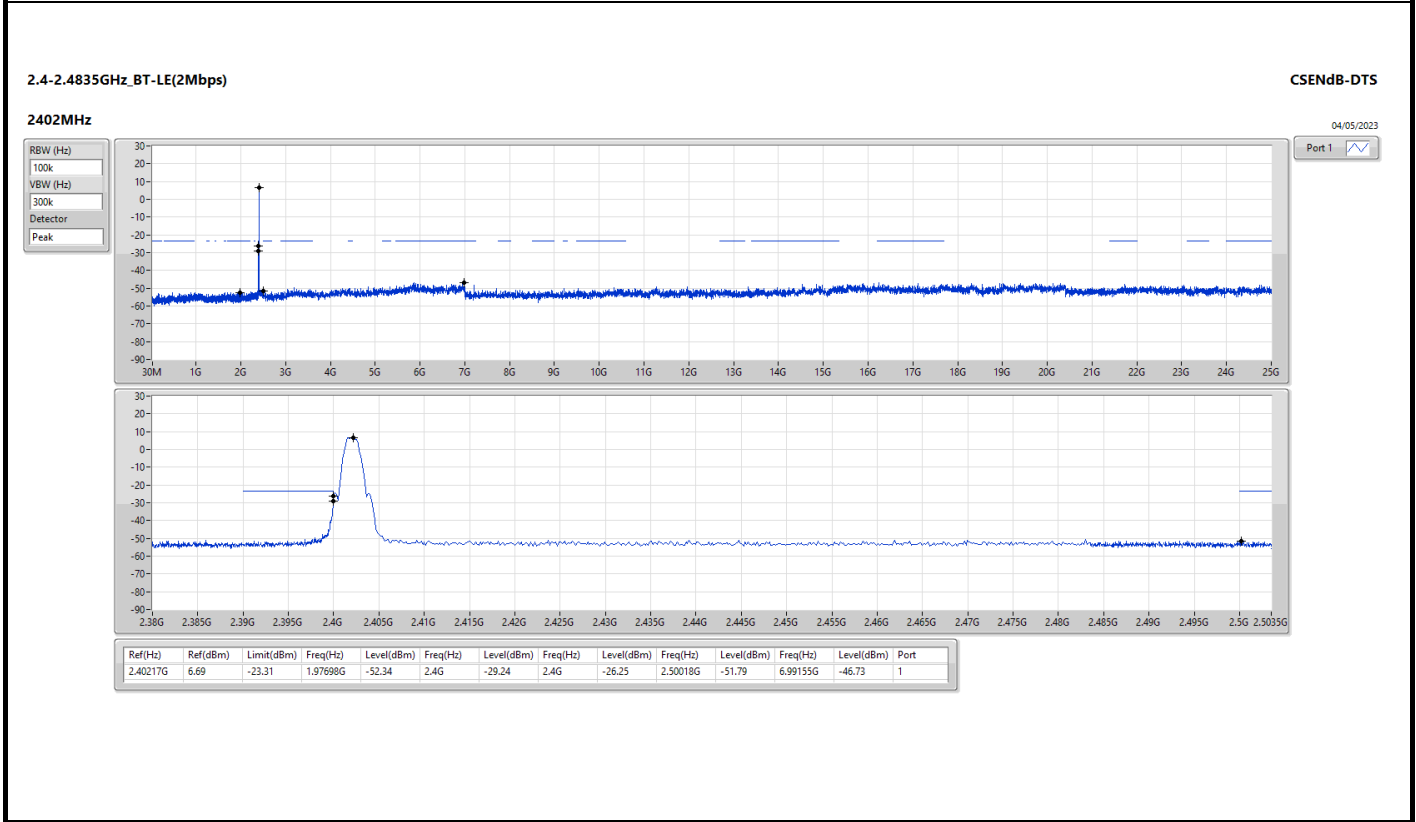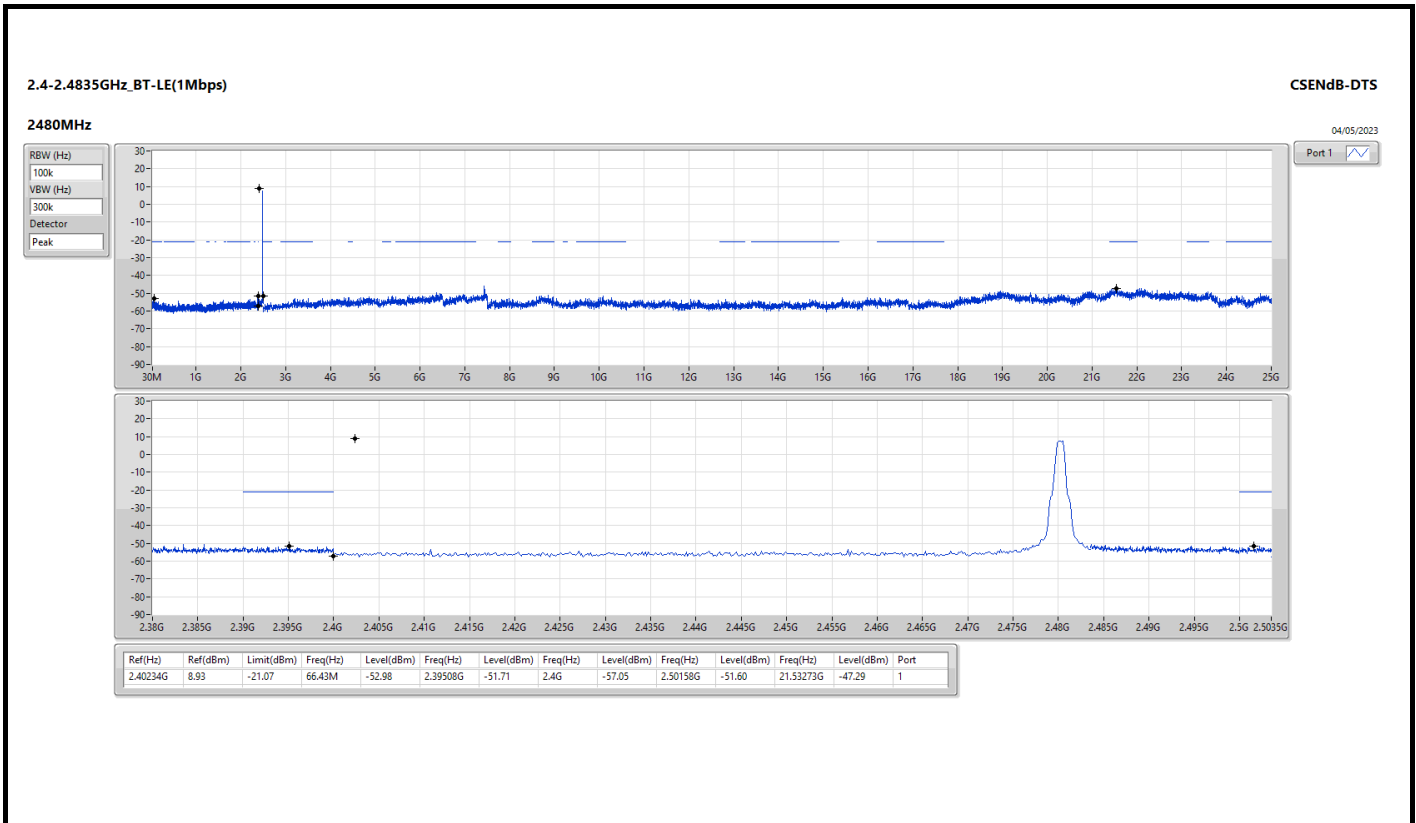

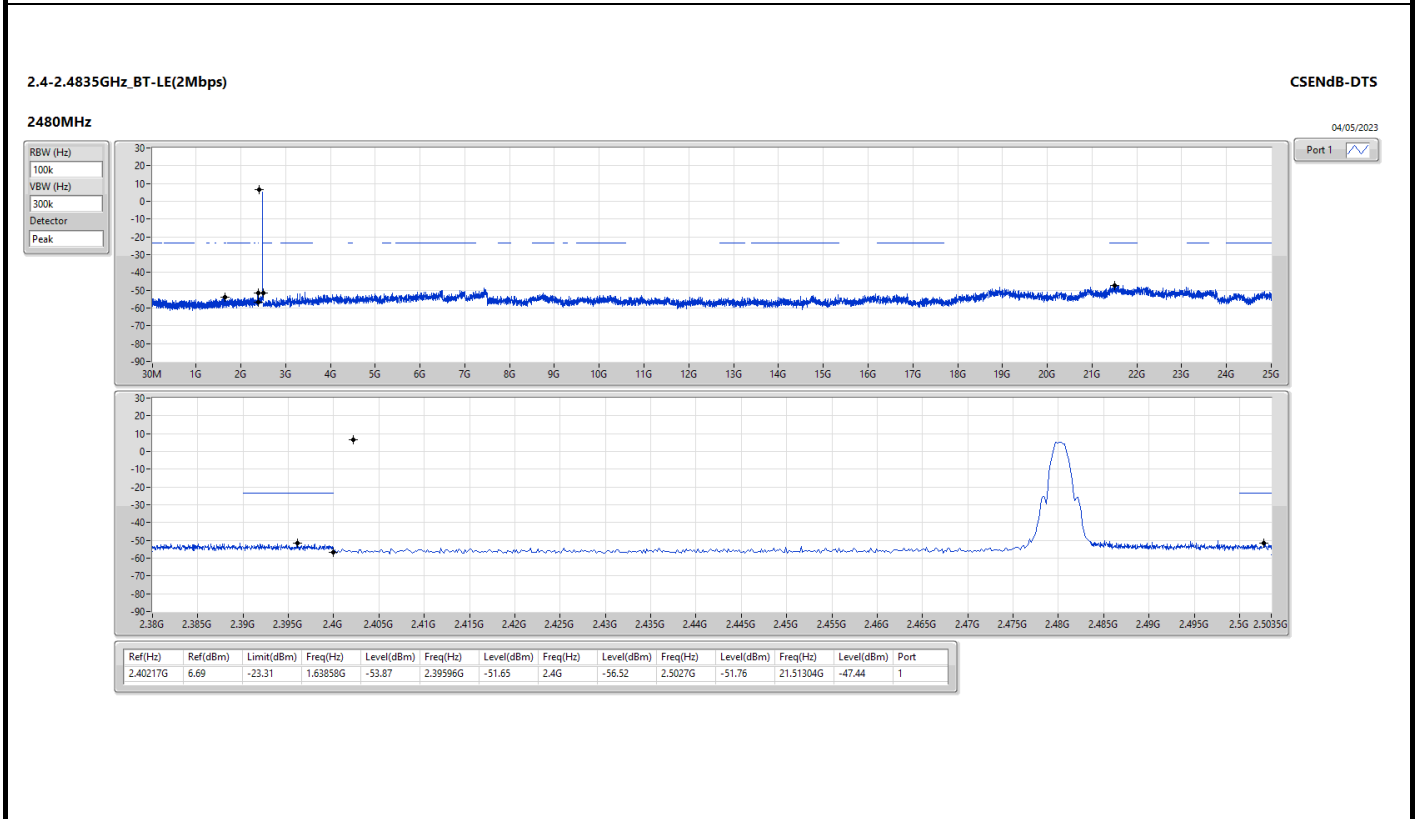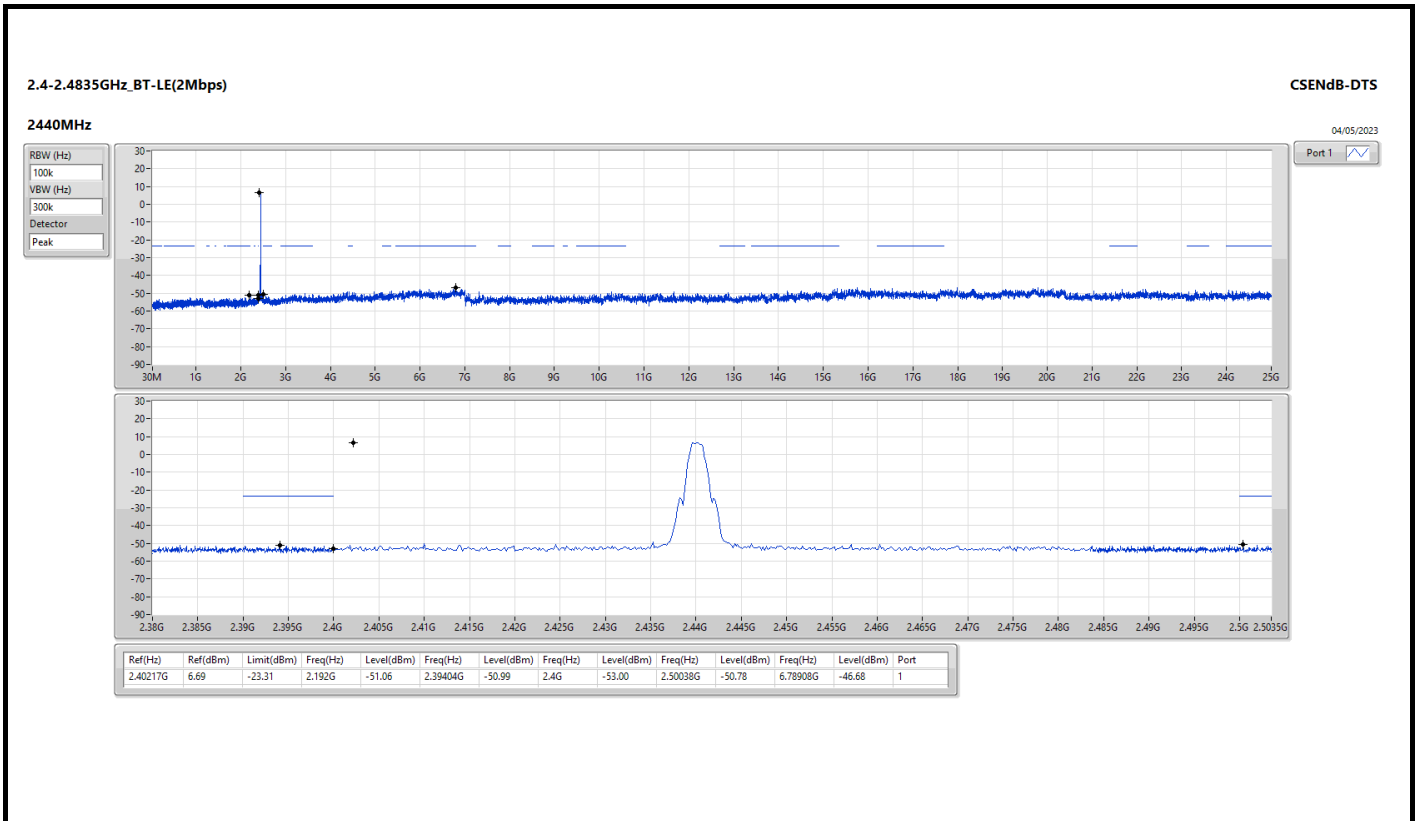




**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	PK	30M	36.93	40.00	-3.07	Horizontal

Mode 3

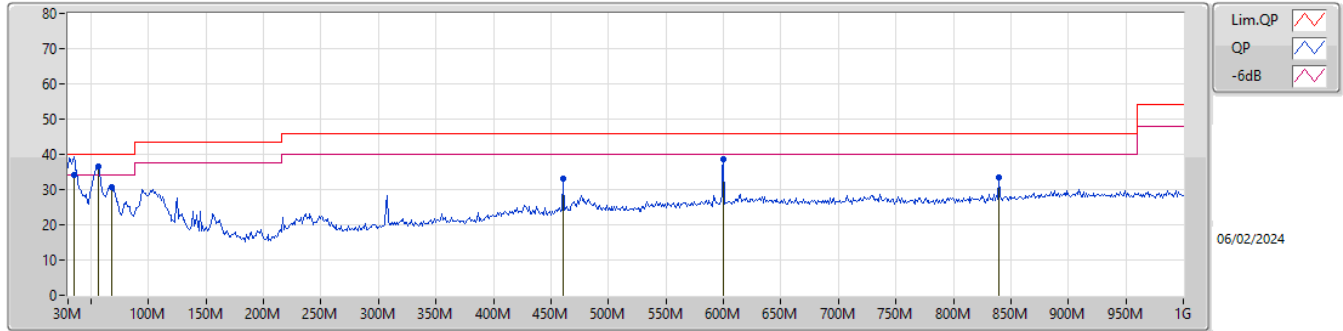

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	34.85M	34.12	40.00	-5.88	-9.63	3	Vertical	192	1.00	-	43.75	21.32	0.37	31.32
PK	56.19M	36.68	40.00	-3.32	-18.16	3	Vertical	360	1.00	"Worst"	54.84	12.97	0.57	31.70
PK	67.83M	30.72	40.00	-9.28	-18.72	3	Vertical	360	1.00	-	49.44	12.38	0.64	31.74
PK	460.68M	33.05	46.00	-12.95	-7.02	3	Vertical	109	1.00	-	40.07	22.93	2.13	32.08
PK	600.36M	38.76	46.00	-7.24	-4.91	3	Vertical	230	1.00	-	43.67	24.82	2.42	32.15
PK	839.95M	33.30	46.00	-12.70	-3.20	3	Vertical	167	1.25	-	36.50	26.20	2.93	32.33

Mode 3

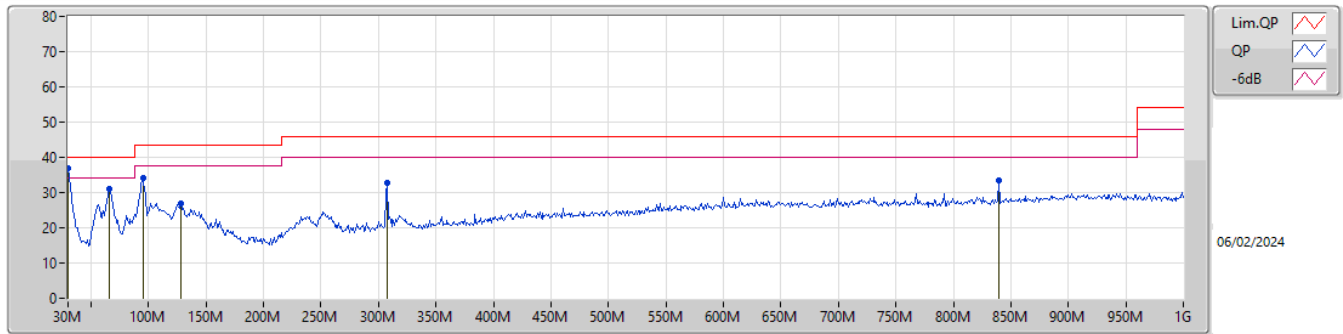

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	30M	36.93	40.00	-3.07	-7.26	3	Horizontal	122	1.25	"Worst"	44.19	23.56	0.33	31.15
PK	65.89M	30.92	40.00	-9.08	-18.78	3	Horizontal	0	3.00	-	49.70	12.34	0.63	31.75
PK	94.99M	34.31	43.50	-9.19	-14.61	3	Horizontal	104	2.00	-	48.92	16.19	0.80	31.60
PK	127.97M	26.91	43.50	-16.59	-12.19	3	Horizontal	305	2.00	-	39.10	18.53	1.00	31.72
PK	307.42M	32.89	46.00	-13.11	-10.82	3	Horizontal	136	1.00	-	43.71	19.32	1.69	31.83
PK	839.95M	33.35	46.00	-12.65	-3.20	3	Horizontal	360	1.25	-	36.55	26.20	2.93	32.33




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4835G	50.34	54.00	-3.66	3	Vertical	230	1.95	-



2.4-2.4835GHz\_BT-LE(1Mbps)

2402MHz\_TX

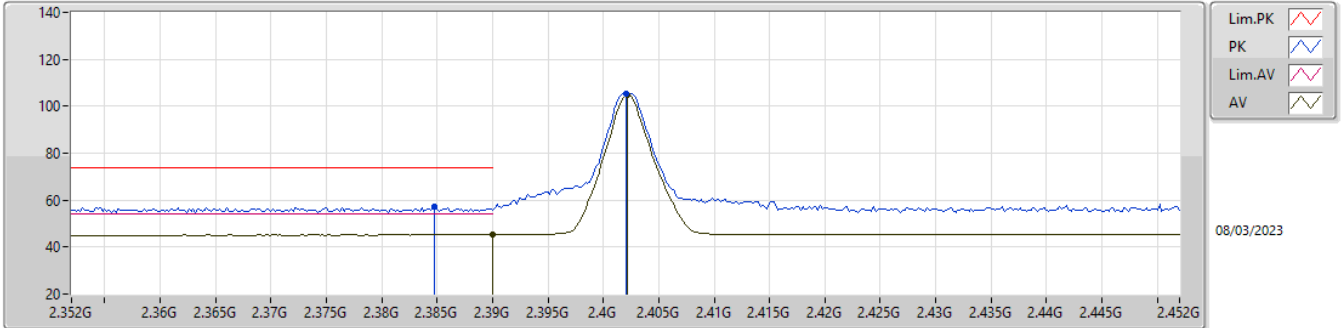


EUTZ\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3848G	57.23	74.00	-16.77	25.01	3	Vertical	231	1.80	-	28.24	3.98	-
AV	2.39G	45.27	54.00	-8.73	13.02	3	Vertical	231	1.80	-	28.26	3.99	-
PK	2.402G	105.58	Inf	-Inf	73.28	3	Vertical	231	1.80	-	28.30	4.00	-
AV	2.4022G	104.82	Inf	-Inf	72.52	3	Vertical	231	1.80	-	28.30	4.00	-

2.4-2.4835GHz\_BT-LE(1Mbps)

2402MHz\_TX

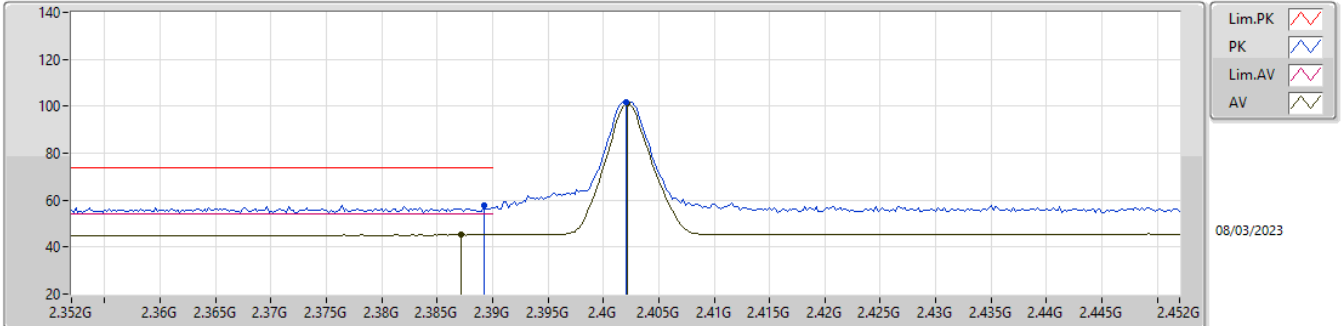


EUTZ\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	58.01	74.00	-15.99	25.76	3	Horizontal	114	1.46	-	28.26	3.99	-
AV	2.3872G	45.18	54.00	-8.82	12.94	3	Horizontal	114	1.46	-	28.25	3.99	-
PK	2.402G	101.84	Inf	-Inf	69.54	3	Horizontal	114	1.46	-	28.30	4.00	-
AV	2.4022G	101.07	Inf	-Inf	68.77	3	Horizontal	114	1.46	-	28.30	4.00	-

2.4-2.4835GHz\_BT-LE(1Mbps)

2402MHz\_TX

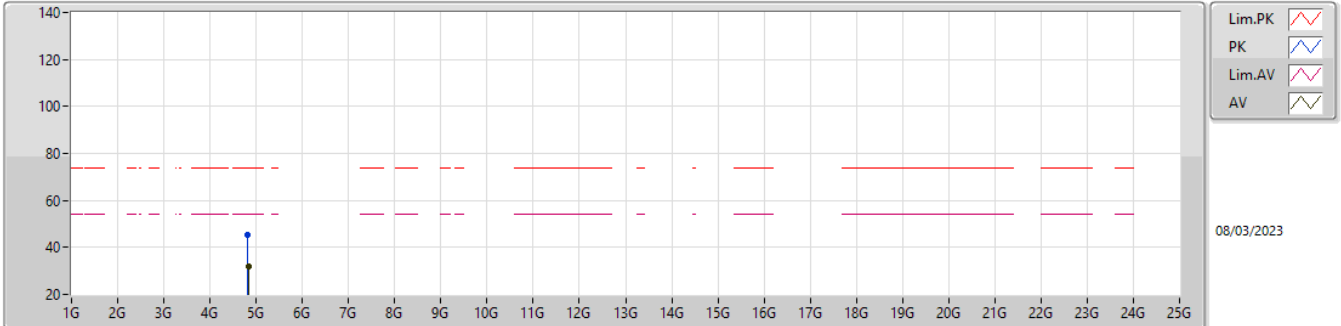


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.824G	45.45	74.00	-28.55	40.50	3	Vertical	339	1.16	-	33.34	6.51	34.90
AV	4.8394G	31.84	54.00	-22.16	26.78	3	Vertical	339	1.16	-	33.44	6.52	34.90

2.4-2.4835GHz\_BT-LE(1Mbps)

2402MHz\_TX

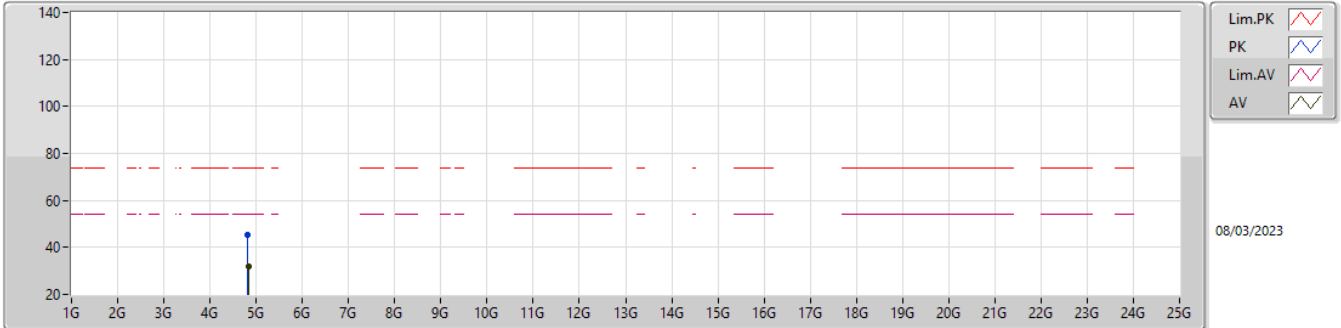


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8138G	45.35	74.00	-28.65	40.46	3	Horizontal	243	2.86	-	33.28	6.51	34.90
AV	4.8392G	31.76	54.00	-22.24	26.70	3	Horizontal	243	2.86	-	33.44	6.52	34.90

**BT-LE(1Mbps)**

**2440MHz\_TX**

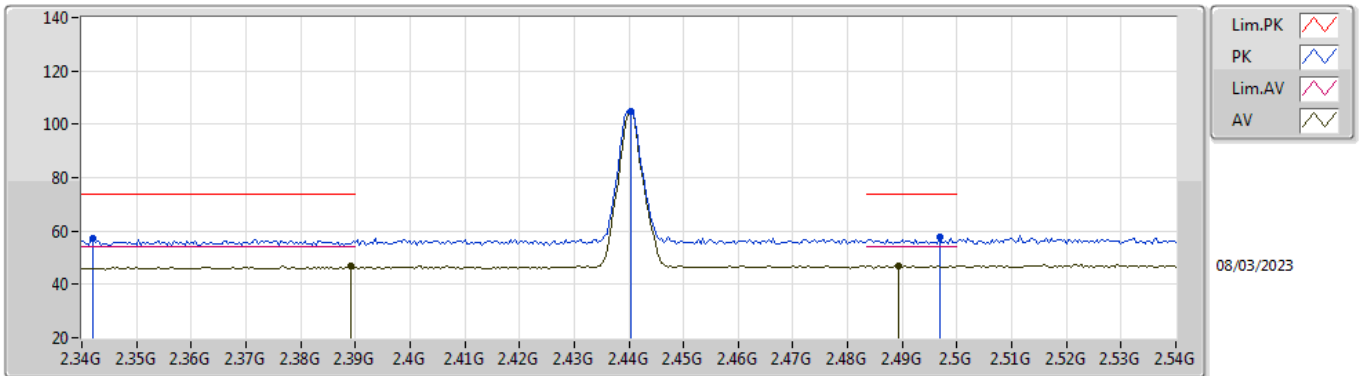


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.342G	57.09	74.00	-16.91	25.08	3	Vertical	227	1.86	-	28.07	3.94	-
AV	2.3892G	46.85	54.00	-7.15	14.60	3	Vertical	227	1.86	-	28.26	3.99	-
PK	2.4404G	105.05	Inf	-Inf	72.71	3	Vertical	227	1.86	-	28.30	4.04	-
AV	2.4404G	104.62	Inf	-Inf	72.28	3	Vertical	227	1.86	-	28.30	4.04	-
PK	2.4968G	57.67	74.00	-16.33	25.08	3	Vertical	227	1.86	-	28.49	4.10	-
AV	2.4892G	46.79	54.00	-7.21	14.24	3	Vertical	227	1.86	-	28.46	4.09	-

### BT-LE(1Mbps)

### 2440MHz\_TX

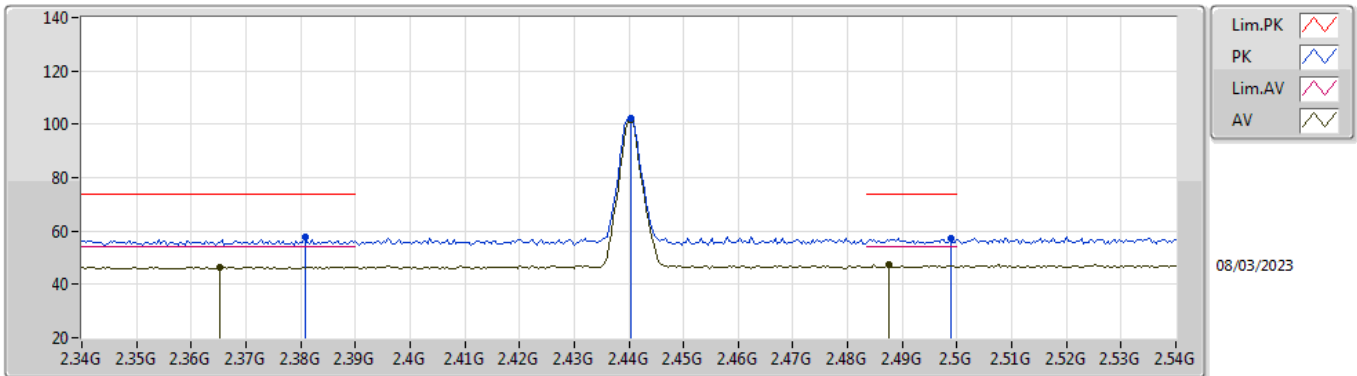


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3808G	57.56	74.00	-16.44	25.36	3	Horizontal	111	1.24	-	28.22	3.98	-
AV	2.3652G	46.58	54.00	-7.42	14.45	3	Horizontal	111	1.24	-	28.16	3.97	-
PK	2.4404G	102.03	Inf	-Inf	69.69	3	Horizontal	111	1.24	-	28.30	4.04	-
AV	2.4404G	101.62	Inf	-Inf	69.28	3	Horizontal	111	1.24	-	28.30	4.04	-
PK	2.4988G	57.42	74.00	-16.58	24.82	3	Horizontal	111	1.24	-	28.50	4.10	-
AV	2.4876G	47.28	54.00	-6.72	14.74	3	Horizontal	111	1.24	-	28.45	4.09	-

**BT-LE(1Mbps)**

**2440MHz\_TX**

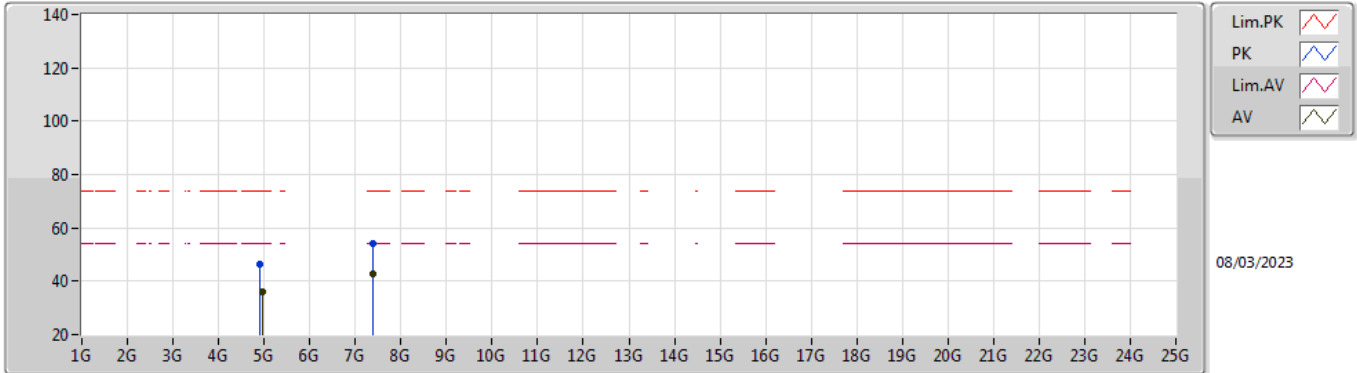


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.9088G	46.63	74.00	-27.37	41.25	3	Vertical	354	1.80	-	33.72	6.55	34.89
AV	4.9748G	35.85	54.00	-18.15	30.40	3	Vertical	354	1.80	-	33.75	6.59	34.89
PK	7.3764G	54.19	74.00	-19.81	43.66	3	Vertical	267	1.80	-	37.00	8.70	35.17
AV	7.3812G	42.68	54.00	-11.32	32.16	3	Vertical	267	1.80	-	37.00	8.70	35.18

### BT-LE(1Mbps)

### 2440MHz\_TX

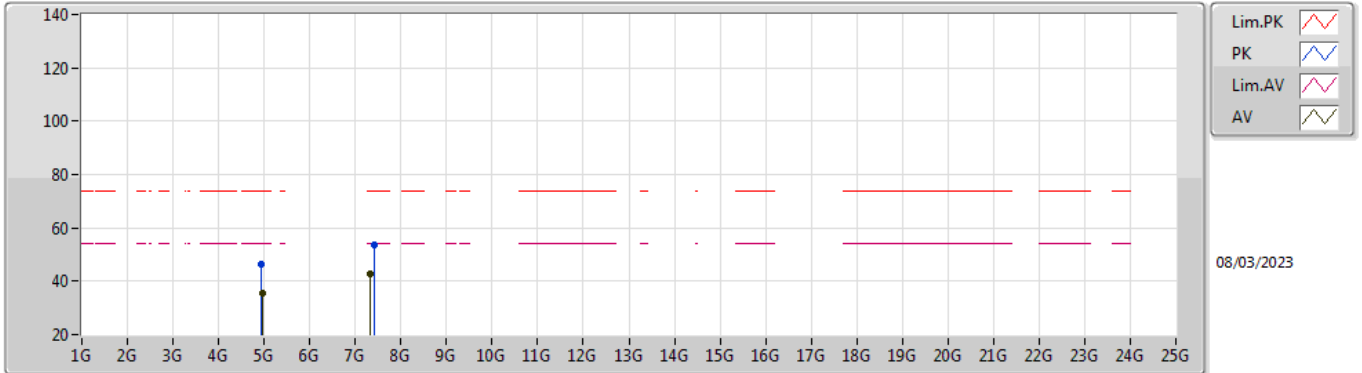


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.9404G	46.45	74.00	-27.55	40.99	3	Horizontal	57	2.05	-	33.78	6.57	34.89
AV	4.9544G	35.55	54.00	-18.45	30.07	3	Horizontal	57	2.05	-	33.79	6.58	34.89
PK	7.404G	53.72	74.00	-20.28	43.21	3	Horizontal	271	1.80	-	36.99	8.71	35.19
AV	7.3176G	42.67	54.00	-11.33	32.18	3	Horizontal	271	1.80	-	36.94	8.70	35.15



2.4-2.4835GHz\_BT-LE(1Mbps)

2480MHz\_TX

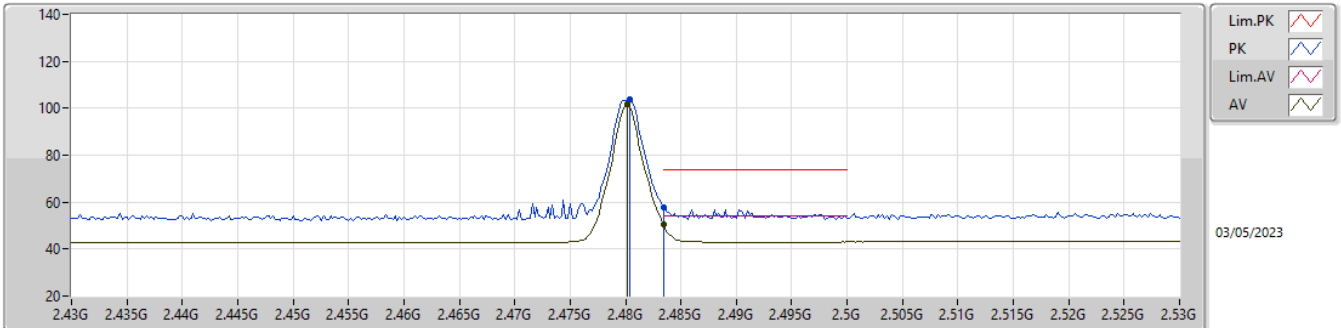


EUTZ\_1TX  
Setting 10  
04-E-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4804G	103.54	Inf	-Inf	72.44	3	Vertical	230	1.95	-	27.82	3.28	-
AV	2.4802G	101.91	Inf	-Inf	70.81	3	Vertical	230	1.95	-	27.82	3.28	-
PK	2.4835G	58.00	74.00	-16.00	26.89	3	Vertical	230	1.95	-	27.83	3.28	-
AV	2.4835G	50.34	54.00	-3.66	19.23	3	Vertical	230	1.95	-	27.83	3.28	-

2.4-2.4835GHz\_BT-LE(1Mbps)

2480MHz\_TX

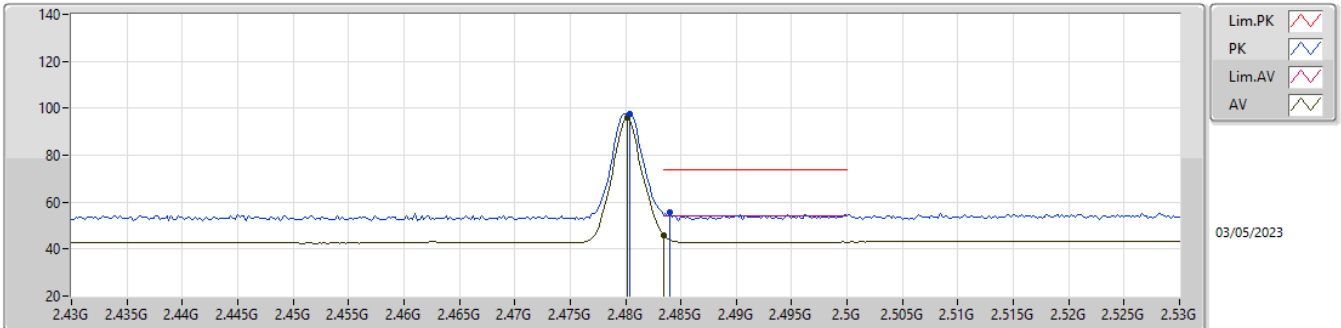


EUTZ\_1TX  
Setting 10  
04-E-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4804G	97.42	Inf	-Inf	66.32	3	Horizontal	259	2.01	-	27.82	3.28	-
AV	2.4802G	95.88	Inf	-Inf	64.78	3	Horizontal	259	2.01	-	27.82	3.28	-
PK	2.484G	55.45	74.00	-18.55	24.33	3	Horizontal	259	2.01	-	27.84	3.28	-
AV	2.4835G	45.99	54.00	-8.01	14.88	3	Horizontal	259	2.01	-	27.83	3.28	-

2.4-2.4835GHz\_BT-LE(1Mbps)

2480MHz\_TX

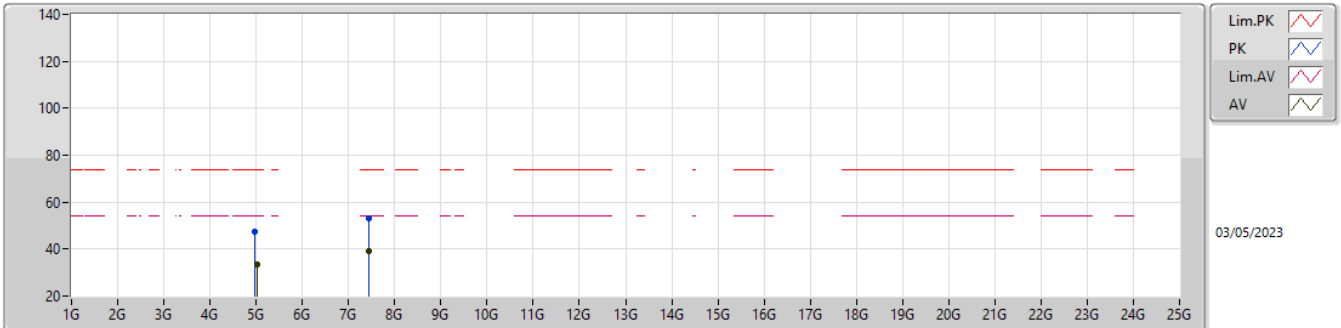


EUTZ\_1TX  
Setting 10  
04-E-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.9802G	47.18	74.00	-26.82	41.49	3	Vertical	235	1.80	-	32.96	5.30	32.57
AV	5.0088G	33.58	54.00	-20.42	27.83	3	Vertical	235	1.80	-	33.00	5.31	32.56
PK	7.4426G	53.00	74.00	-21.00	41.83	3	Vertical	110	1.84	-	37.41	7.02	33.26
AV	7.4378G	39.20	54.00	-14.80	28.02	3	Vertical	110	1.84	-	37.42	7.02	33.26

2.4-2.4835GHz\_BT-LE(1Mbps)

2480MHz\_TX

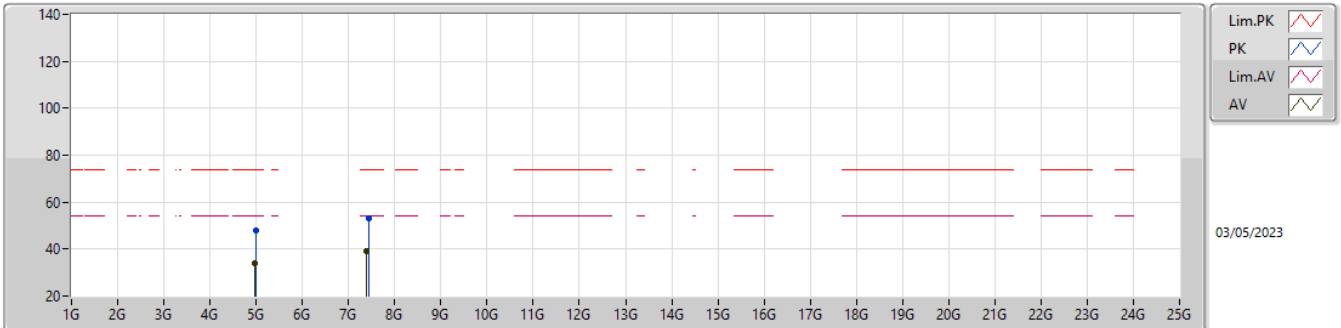


EUTZ\_1TX  
Setting 10  
04-E-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0064G	48.05	74.00	-25.95	42.30	3	Horizontal	136	1.76	-	33.00	5.31	32.56
AV	4.9672G	33.82	54.00	-20.18	28.17	3	Horizontal	136	1.76	-	32.93	5.30	32.58
PK	7.4372G	53.10	74.00	-20.90	41.91	3	Horizontal	265	1.80	-	37.43	7.02	33.26
AV	7.3906G	39.39	54.00	-14.61	28.10	3	Horizontal	265	1.80	-	37.54	6.99	33.24

### BT-LE(2Mbps)

### 2402MHz\_TX

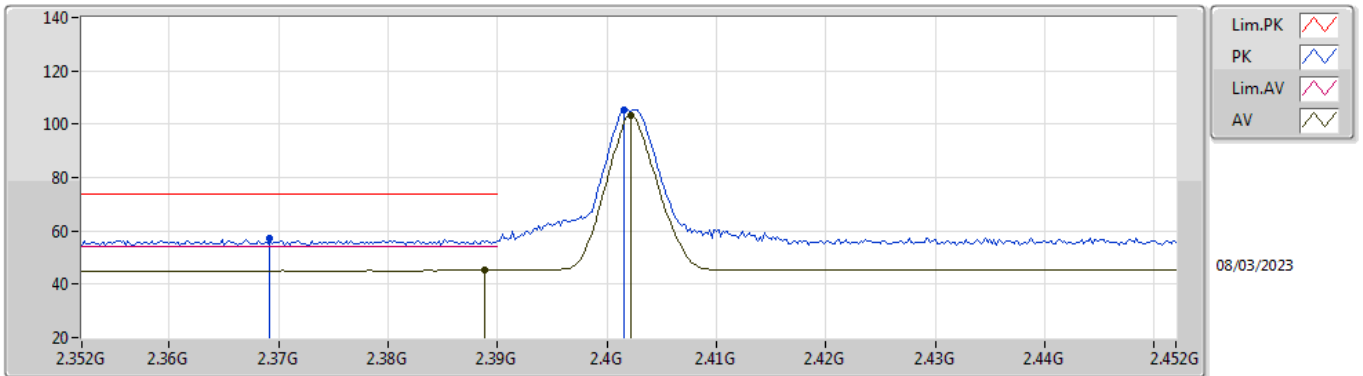


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3692G	57.44	74.00	-16.56	25.29	3	Vertical	233	1.80	-	28.18	3.97	-
AV	2.3888G	45.25	54.00	-8.75	13.00	3	Vertical	233	1.80	-	28.26	3.99	-
PK	2.4016G	105.37	Inf	-Inf	73.07	3	Vertical	233	1.80	-	28.30	4.00	-
AV	2.4022G	103.52	Inf	-Inf	71.22	3	Vertical	233	1.80	-	28.30	4.00	-

**BT-LE(2Mbps)**

**2402MHz\_TX**

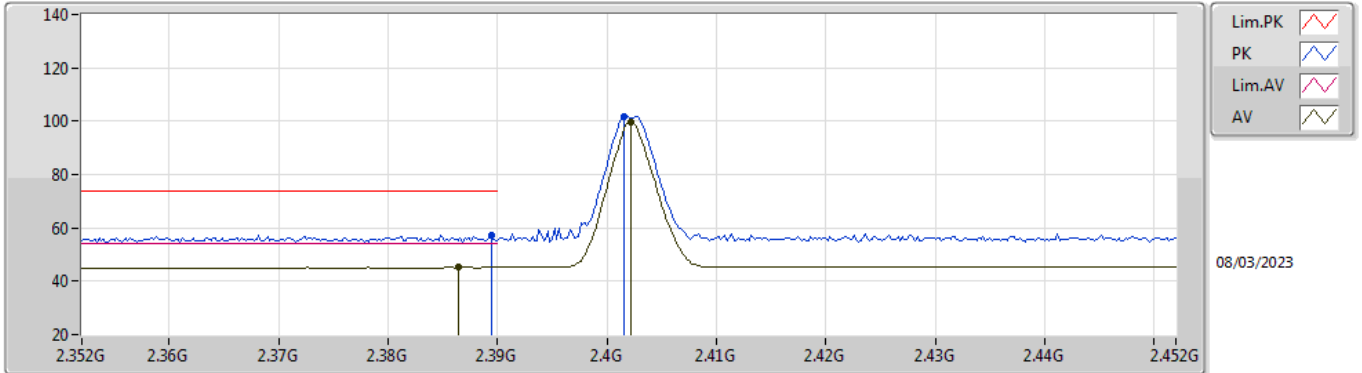


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	57.48	74.00	-16.52	25.23	3	Horizontal	116	1.86	-	28.26	3.99	-
AV	2.3864G	45.18	54.00	-8.82	12.94	3	Horizontal	116	1.86	-	28.25	3.99	-
PK	2.4016G	101.69	Inf	-Inf	69.39	3	Horizontal	116	1.86	-	28.30	4.00	-
AV	2.4022G	99.89	Inf	-Inf	67.59	3	Horizontal	116	1.86	-	28.30	4.00	-

### BT-LE(2Mbps)

### 2402MHz\_TX

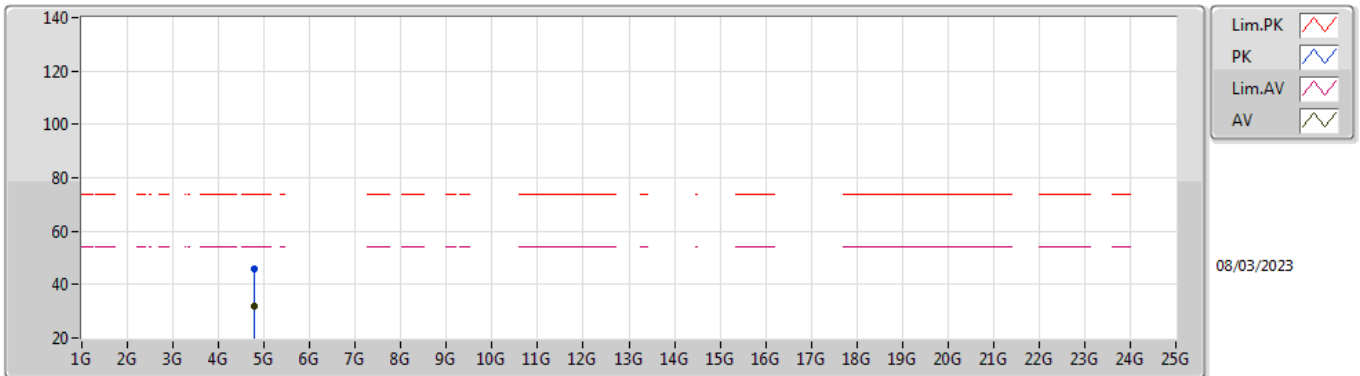


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.7714G	45.67	74.00	-28.33	40.82	3	Vertical	224	1.80	-	33.26	6.49	34.90
AV	4.7796G	31.82	54.00	-22.18	26.99	3	Vertical	224	1.80	-	33.24	6.49	34.90

**BT-LE(2Mbps)**

**2402MHz\_TX**

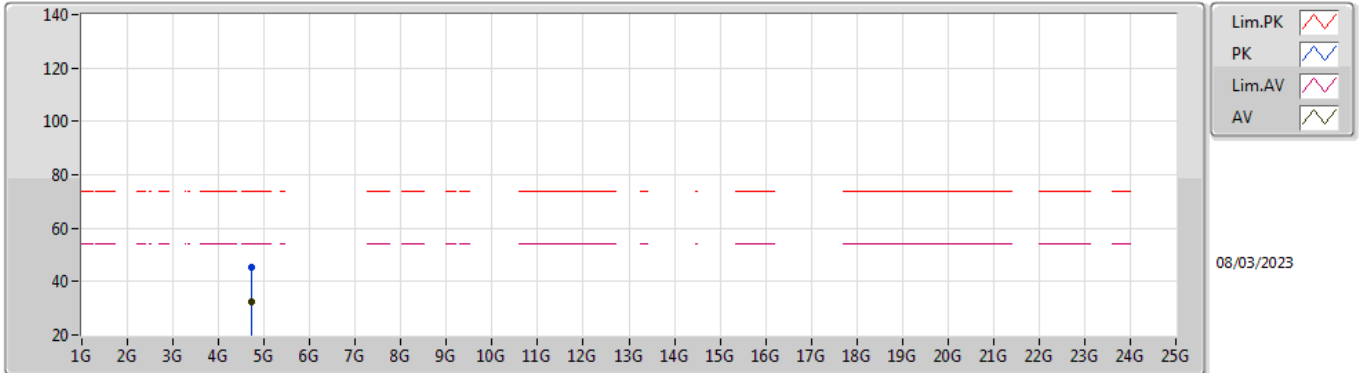


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.7376G	45.19	74.00	-28.81	40.37	3	Horizontal	103	1.44	-	33.25	6.47	34.90
AV	4.7294G	32.28	54.00	-21.72	27.50	3	Horizontal	103	1.44	-	33.22	6.46	34.90



**BT-LE(2Mbps)**

**2440MHz\_TX**

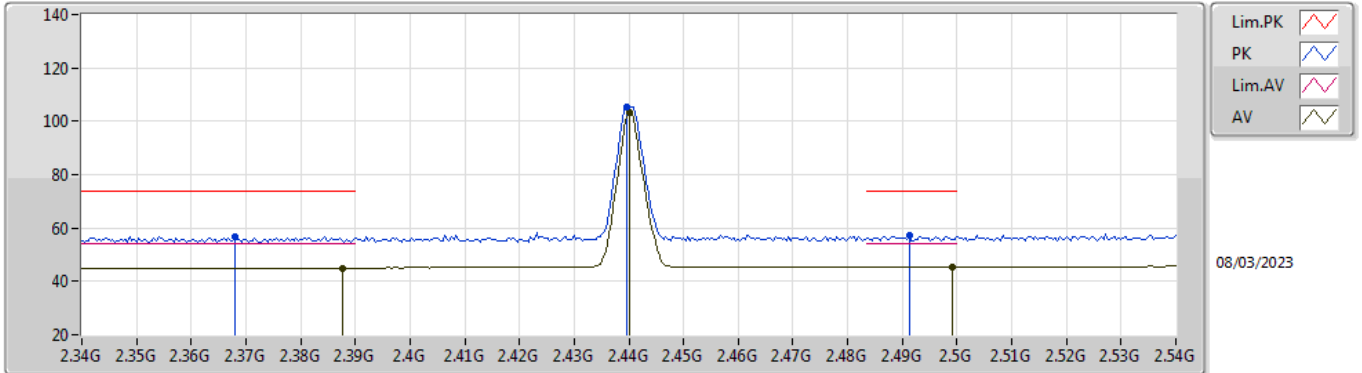


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.368G	56.83	74.00	-17.17	24.69	3	Vertical	228	1.84	-	28.17	3.97	-
AV	2.3876G	45.04	54.00	-8.96	12.80	3	Vertical	228	1.84	-	28.25	3.99	-
PK	2.4396G	105.23	Inf	-Inf	72.89	3	Vertical	228	1.84	-	28.30	4.04	-
AV	2.44G	103.45	Inf	-Inf	71.11	3	Vertical	228	1.84	-	28.30	4.04	-
PK	2.4912G	57.10	74.00	-16.90	24.55	3	Vertical	228	1.84	-	28.46	4.09	-
AV	2.4992G	45.47	54.00	-8.53	12.87	3	Vertical	228	1.84	-	28.50	4.10	-

**BT-LE(2Mbps)**

**2440MHz\_TX**

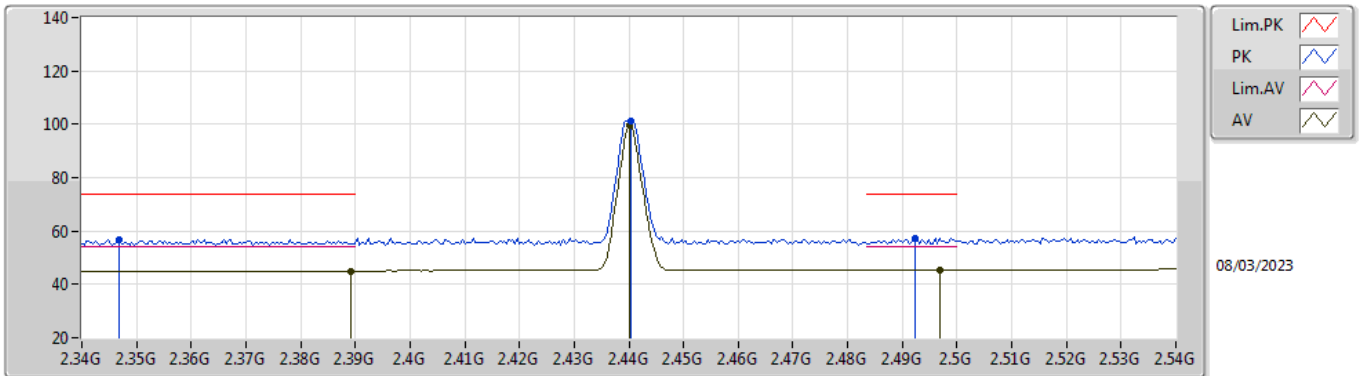


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3468G	56.93	74.00	-17.07	24.89	3	Horizontal	113	1.43	-	28.09	3.95	-
AV	2.3892G	45.05	54.00	-8.95	12.80	3	Horizontal	113	1.43	-	28.26	3.99	-
PK	2.4404G	101.35	Inf	-Inf	69.01	3	Horizontal	113	1.43	-	28.30	4.04	-
AV	2.44G	99.55	Inf	-Inf	67.21	3	Horizontal	113	1.43	-	28.30	4.04	-
PK	2.4924G	57.34	74.00	-16.66	24.78	3	Horizontal	113	1.43	-	28.47	4.09	-
AV	2.4968G	45.46	54.00	-8.54	12.87	3	Horizontal	113	1.43	-	28.49	4.10	-

**BT-LE(2Mbps)**

**2440MHz\_TX**

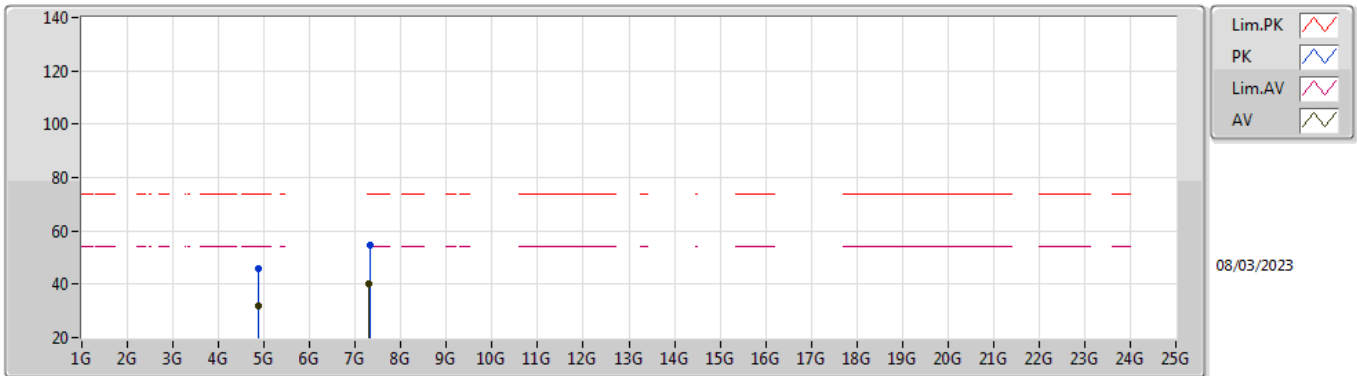


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87562G	46.10	74.00	-27.90	40.85	3	Vertical	239	1.80	-	33.60	6.54	34.89
AV	4.88894G	32.11	54.00	-21.89	26.80	3	Vertical	239	1.80	-	33.66	6.54	34.89
PK	7.31418G	54.82	74.00	-19.18	44.33	3	Vertical	357	1.80	-	36.93	8.70	35.14
AV	7.30956G	40.14	54.00	-13.86	29.66	3	Vertical	357	1.80	-	36.92	8.70	35.14

**BT-LE(2Mbps)**

**2440MHz\_TX**

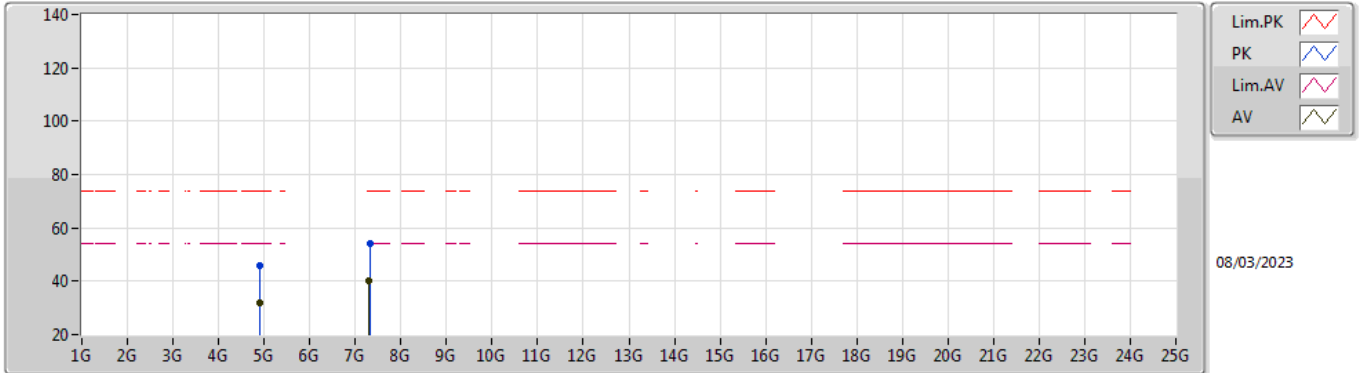


EUT\_Z\_1TX  
Setting 10  
03-F-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.89404G	45.78	74.00	-28.22	40.44	3	Horizontal	203	1.74	-	33.68	6.55	34.89
AV	4.89068G	32.00	54.00	-22.00	26.68	3	Horizontal	203	1.74	-	33.66	6.55	34.89
PK	7.31772G	53.92	74.00	-20.08	43.43	3	Horizontal	171	1.80	-	36.94	8.70	35.15
AV	7.30968G	40.09	54.00	-13.91	29.61	3	Horizontal	171	1.80	-	36.92	8.70	35.14

2.4-2.4835GHz\_BT-LE(2Mbps)

2480MHz\_TX

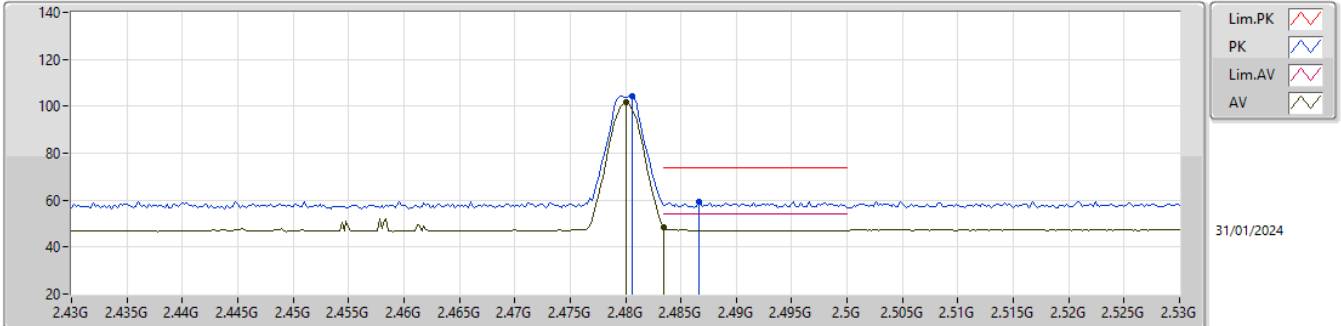


EUTZ\_1TX  
Setting 15  
04-P-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4806G	104.11	Inf	-Inf	73.11	3	Vertical	157	1.86	-	27.61	3.39	-
AV	2.48G	101.57	Inf	-Inf	70.58	3	Vertical	157	1.86	-	27.60	3.39	-
PK	2.4866G	59.40	74.00	-14.60	28.33	3	Vertical	157	1.86	-	27.67	3.40	-
AV	2.4835G	48.24	54.00	-5.76	17.20	3	Vertical	157	1.86	-	27.64	3.40	-

2.4-2.4835GHz\_BT-LE(2Mbps)

2480MHz\_TX

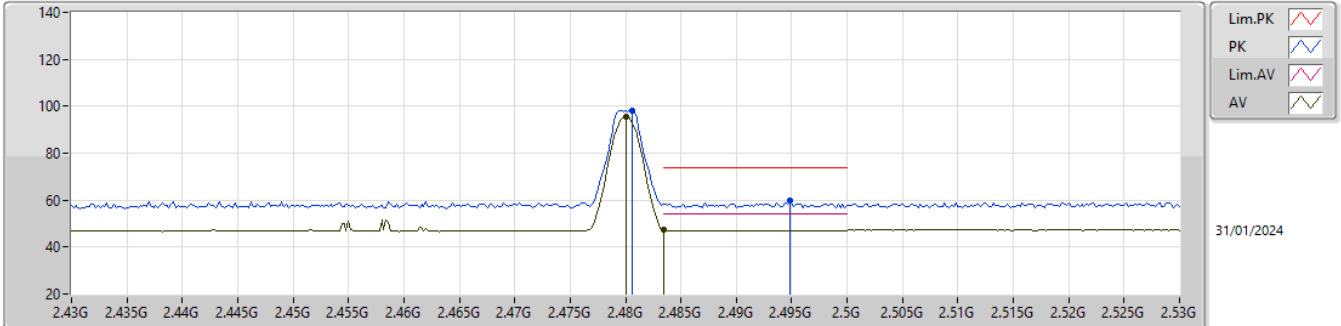


EUTZ\_1TX  
Setting 15  
04-P-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4806G	98.32	Inf	-Inf	67.32	3	Horizontal	131	1.94	-	27.61	3.39	-
AV	2.48G	95.73	Inf	-Inf	64.74	3	Horizontal	131	1.94	-	27.60	3.39	-
PK	2.4948G	59.91	74.00	-14.09	28.81	3	Horizontal	131	1.94	-	27.70	3.40	-
AV	2.4835G	47.36	54.00	-6.64	16.32	3	Horizontal	131	1.94	-	27.64	3.40	-

2.4-2.4835GHz\_BT-LE(2Mbps)

2480MHz\_TX

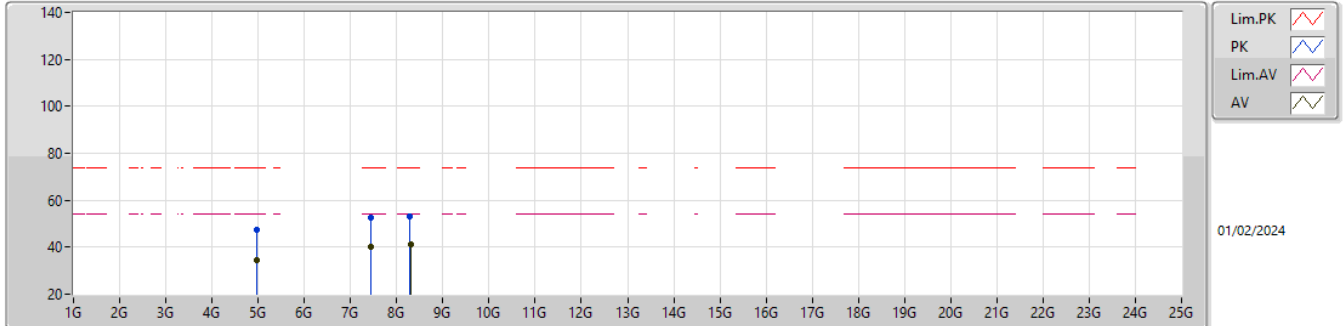


EUTZ\_1TX  
Setting 15  
04-P-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.97074G	47.16	74.00	-26.84	41.88	3	Vertical	171	2.30	-	32.70	5.80	33.22
AV	4.97242G	34.35	54.00	-19.65	29.06	3	Vertical	171	2.30	-	32.70	5.81	33.22
PK	7.43208G	52.78	74.00	-21.22	42.52	3	Vertical	214	1.83	-	37.20	7.20	34.14
AV	7.42818G	39.96	54.00	-14.04	29.70	3	Vertical	214	1.83	-	37.20	7.20	34.14
PK	8.28758G	53.36	74.00	-20.64	43.00	3	Vertical	122	1.33	-	37.10	7.64	34.38
AV	8.30098G	41.14	54.00	-12.86	30.78	3	Vertical	122	1.33	-	37.10	7.64	34.38

2.4-2.4835GHz\_BT-LE(2Mbps)

2480MHz\_TX

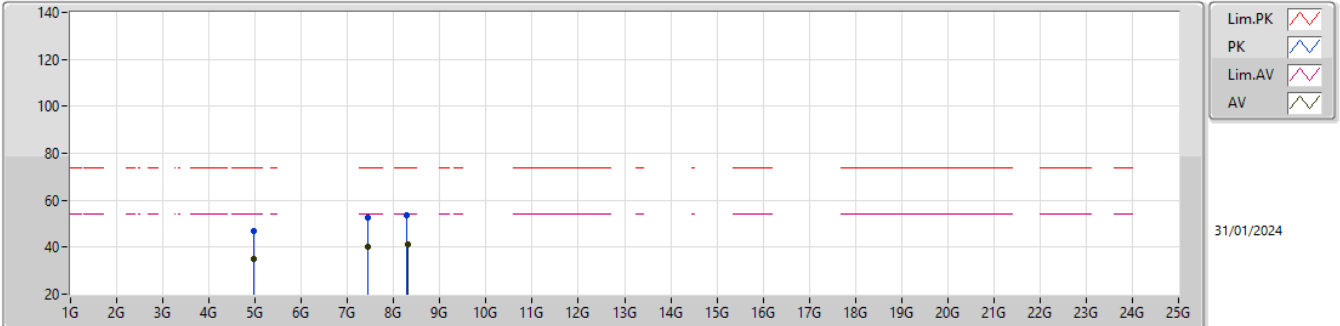

EUT\_Z\_1TX  
Setting 15  
04-P-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.9654G	47.01	74.00	-26.99	41.73	3	Horizontal	341	1.80	-	32.70	5.80	33.22
AV	4.97068G	34.77	54.00	-19.23	29.49	3	Horizontal	341	1.80	-	32.70	5.80	33.22
PK	7.45098G	52.71	74.00	-21.29	42.44	3	Horizontal	269	2.02	-	37.20	7.22	34.15
AV	7.44728G	40.32	54.00	-13.68	30.05	3	Horizontal	269	2.02	-	37.20	7.22	34.15
PK	8.28938G	53.85	74.00	-20.15	43.49	3	Horizontal	358	1.80	-	37.10	7.64	34.38
AV	8.30056G	41.40	54.00	-12.60	31.04	3	Horizontal	358	1.80	-	37.10	7.64	34.38