

A0		24.05.09
A1		24.06.29
A2		

110mm






45mm

R4mm

BLUETTI **MODEL: CHARGER 1** **DC-DC Charger**

DC INPUT: 13.8V/27.6V \equiv 50A Max.
DC OUTPUT: 15V-56V \equiv 10A Max.

Operating Ambient Temperature
Range: -20°C - +60°C / -4°F - +140°F

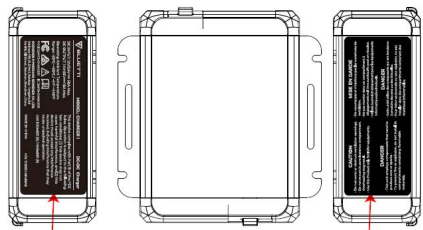






FCC ID: 2AYT3-CHARGER1 IC: 29079-CHARGER1 CAN ICES-003 (B) / NMB-003 (B)

SHENZHEN POWEROAK NEWENER CO., LTD.
Address: F19, BLD No.1, Kaidaer, Tongsha Rd
No.168, Xili Street, Nanshan, Shenzhen, China **MADE IN CHINA** P/N: 17.0301.1401-01A1

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Size: 110*45mm



Label Location