


65

70

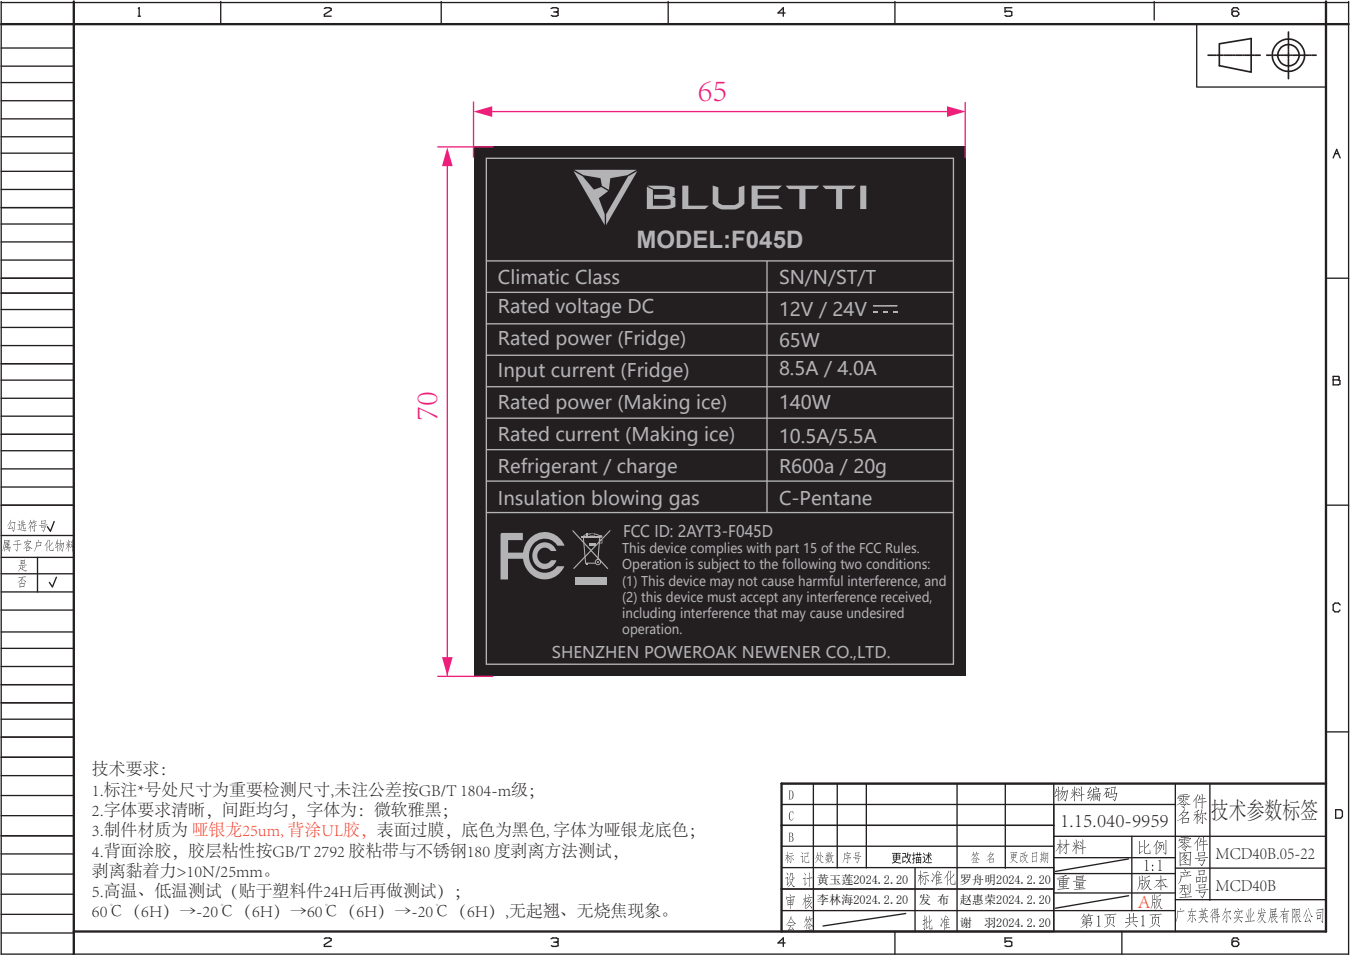

**BLUETTI**  
**MODEL:F045D**

|                            |               |
|----------------------------|---------------|
| Climatic Class             | SN/N/ST/T     |
| Rated voltage DC           | 12V / 24V --- |
| Rated power (Fridge)       | 65W           |
| Input current (Fridge)     | 8.5A / 4.0A   |
| Rated power (Making ice)   | 140W          |
| Rated current (Making ice) | 10.5A/5.5A    |
| Refrigerant / charge       | R600a / 20g   |
| Insulation blowing gas     | C-Pentane     |



FCC ID: 2AYT3-F045D  
This device complies with part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received,  
including interference that may cause undesired  
operation.

SHENZHEN POWEROAK NEWENER CO.,LTD.

技术要求：

- 标注\*号处尺寸为重要检测尺寸,未注公差按GB/T 1804-m级;
- 字体要求清晰,间距均匀,字体为:微软雅黑;
- 制件材质为 **哑银龙25um,背涂UL胶**,表面过膜,底色为黑色,字体为哑银龙底色;
- 背面涂胶,胶层粘性按GB/T 2792 胶粘带与不锈钢180 度剥离方法测试,剥离黏着力>10N/25mm。
- 高温、低温测试 (贴于塑料件24H后再做测试) ;  
60℃ (6H) →-20℃ (6H) →60℃ (6H) →-20℃ (6H) ,无起翘、无烧焦现象。

|   |   |     |             |      |     |               |         |               |
|---|---|-----|-------------|------|-----|---------------|---------|---------------|
| D |   |     |             |      |     | 物料编码          | 零件名称    | 技术参数标签        |
| C |   |     |             |      |     | 1.15.040-9959 |         |               |
| B |   |     |             |      |     | 材料            | 比例      | 零件号           |
| 标 | 记 | 处数  | 序号          | 更改描述 | 签名  | 更改日期          | 1:1     | MCD40B.05-22  |
| 设 | 计 | 黄玉莲 | 2024. 2. 20 | 标准化  | 罗舟明 | 2024. 2. 20   | 重量      | 版本号           |
| 审 | 核 | 李林海 | 2024. 2. 20 | 发布   | 赵惠荣 | 2024. 2. 20   | 版       | MCD40B        |
| 会 | 签 |     |             | 批准   | 谢 羽 | 2024. 2. 20   | A版      | 广东英得尔实业发展有限公司 |
|   |   |     |             |      |     |               | 第1页 共1页 |               |

2

3

4

5

6