

TEST REPORT

Reference No..... : WTX21X11129302W-1
FCC ID : 2AYVL-3145301
Applicant : Dongguan Jiufeng Hardware and Plastics Co. Ltd.
Address : Da Sheng Road#6, Da Mao Ling Industrial Park, Dongping Village , Qishi
Town, Dongguan, China
Product Name : Bunk Shelf with wireless charger
Test Model. : 69808806/3145301
Standards : FCC Part 15.207&15.209
Date of Receipt sample : Nov. 25, 2021
Date of Test..... : Nov. 25, 2021 to Dec. 21, 2021
Date of Issue : Dec. 21, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:

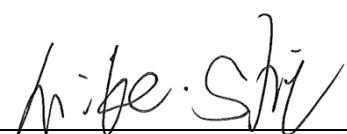

Mike Shi / Project Engineer



Jason Su / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND OPERATION MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
2. SUMMARY OF TEST RESULTS.....	10
3. ANTENNA REQUIREMENT.....	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
4. CONDUCTED EMISSIONS.....	12
4.1 TEST PROCEDURE.....	12
4.2 BASIC TEST SETUP BLOCK DIAGRAM.....	12
4.3 ENVIRONMENTAL CONDITIONS.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
5. RADIATED EMISSION.....	17
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 TEST RECEIVER SETUP.....	19
5.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
5.5 ENVIRONMENTAL CONDITIONS.....	19
5.6 SUMMARY OF TEST RESULTS/PLOTS.....	19
6. OCCUPIED BANDWIDTH.....	26
6.1 STANDARD APPLICABLE.....	26
6.2 TEST SETUP BLOCK DIAGRAM.....	26
6.3 TEST PROCEDURE.....	26
6.3SUMMARY OF TEST RESULTS/PLOTS.....	27
APPENDIX PHOTOGRAPHS.....	29

Report version

Version No.	Date of issue	Description
Rev.00	Dec. 21, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Dongguan Jiufeng Hardware and Plastics Co. Ltd.
 Address of applicant: Da Sheng Road#6, Da Mao Ling Industrial Park, Dongping Village , Qishi Town, Dongguan, China

Manufacturer: Dongguan City GuoHong Lighting Products Co., Ltd.
 Address of manufacturer: Room 116, No. 2 The first road of Liantong Humen Town, Dongguan, Guangdong, PR China

General Description of EUT	
Product Name:	Bunk Shelf with wireless charger
Trade Name:	Squared Away
Model No.:	69808806/3145301
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	112~205KHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Input:	DC9V 1.7A
Wireless output:	10W Max
Power adapter:	MODEL:JML-0901700-18 INPUT:100-240V~ 50/60Hz 0.5A OUTPUT:DC9V,1.7A

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.207: Conducted limits.

FCC Rules Part 15.209: Radiated emission limits; general requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless charging	Wireless output(5W)	DC9V 1.7A
TM2	Wireless charging	Wireless output(10W)	DC9V 1.7A

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC CABLE	2.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.203 Antenna Requirement	Compliant
§15.207 (a) Conducted Emission	Compliant
§15.209 Radiated Emission	Compliant

N/A: not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a Coil antenna, fulfill the requirement of this section.


4. Conducted Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

4.2 Basic Test Setup Block Diagram

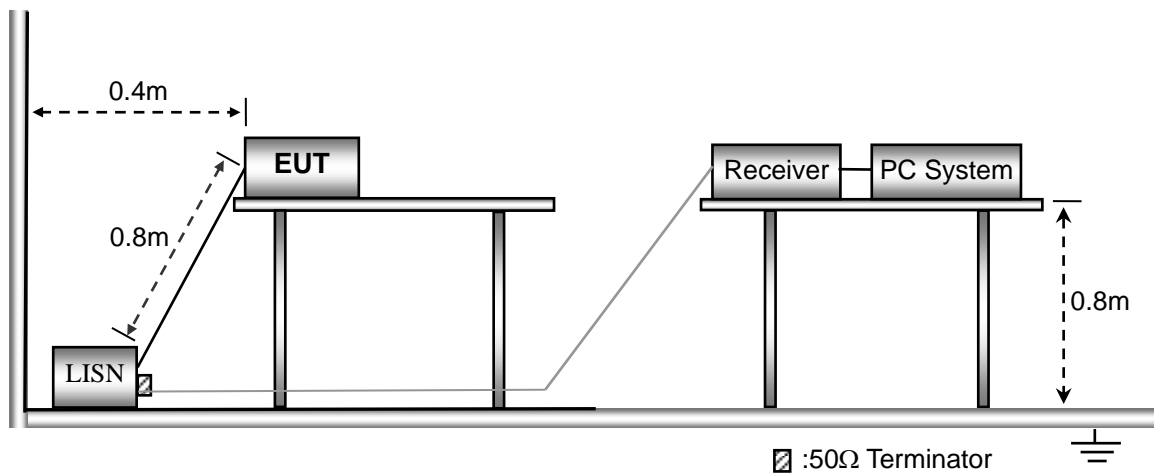


4.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


4.4 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

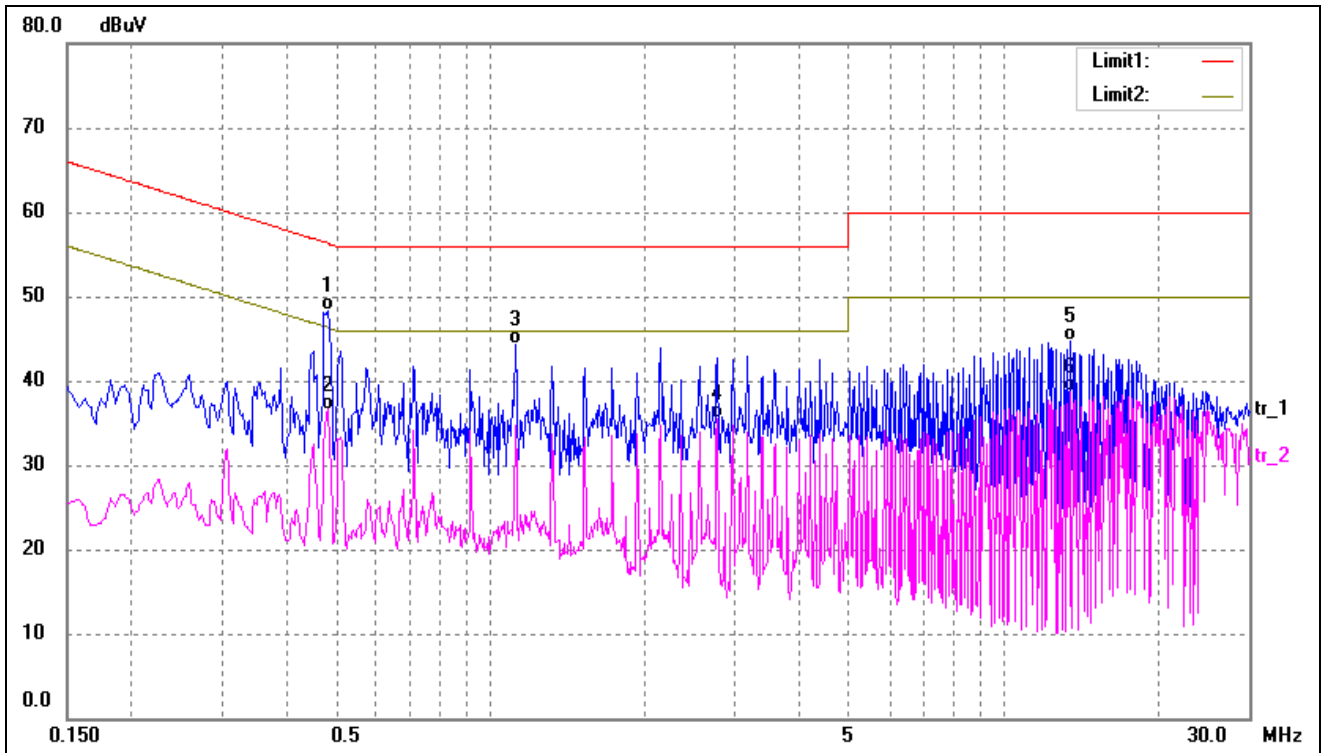


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.4818	38.08	10.27	48.35	56.31	-7.96	QP
2	0.4818	26.33	10.27	36.60	46.31	-9.71	AVG
3	1.1220	33.79	10.51	44.30	56.00	-11.70	QP
4	2.7659	25.44	10.10	35.54	46.00	-10.46	AVG
5	13.4220	34.63	10.06	44.69	60.00	-15.31	QP
6	13.4220	28.67	10.06	38.73	50.00	-11.27	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

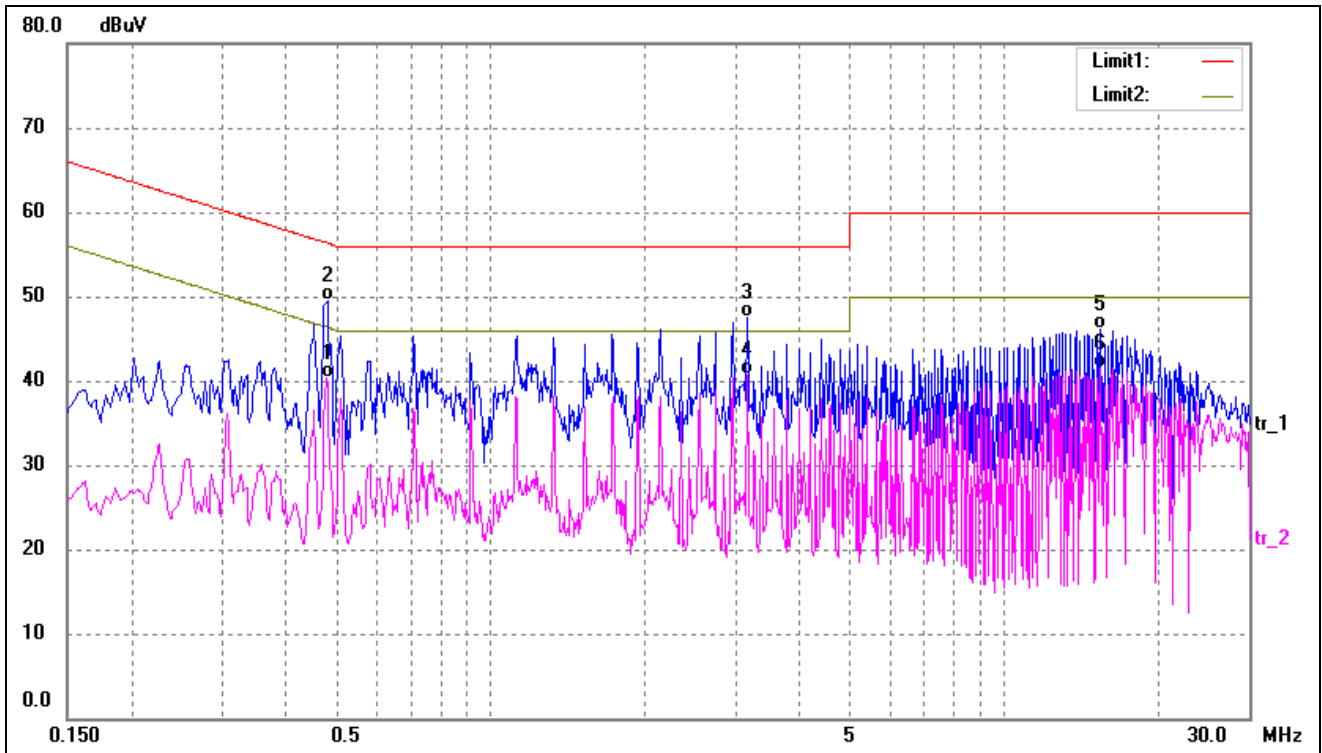


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4780	29.97	10.27	40.24	46.37	-6.13	AVG
2	0.4820	39.17	10.27	49.44	56.30	-6.86	QP
3	3.1659	37.37	10.08	47.45	56.00	-8.55	QP
4*	3.1659	30.68	10.08	40.76	46.00	-5.24	AVG
5	15.3940	36.02	10.16	46.18	60.00	-13.82	QP
6	15.3940	31.26	10.16	41.42	50.00	-8.58	AVG

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

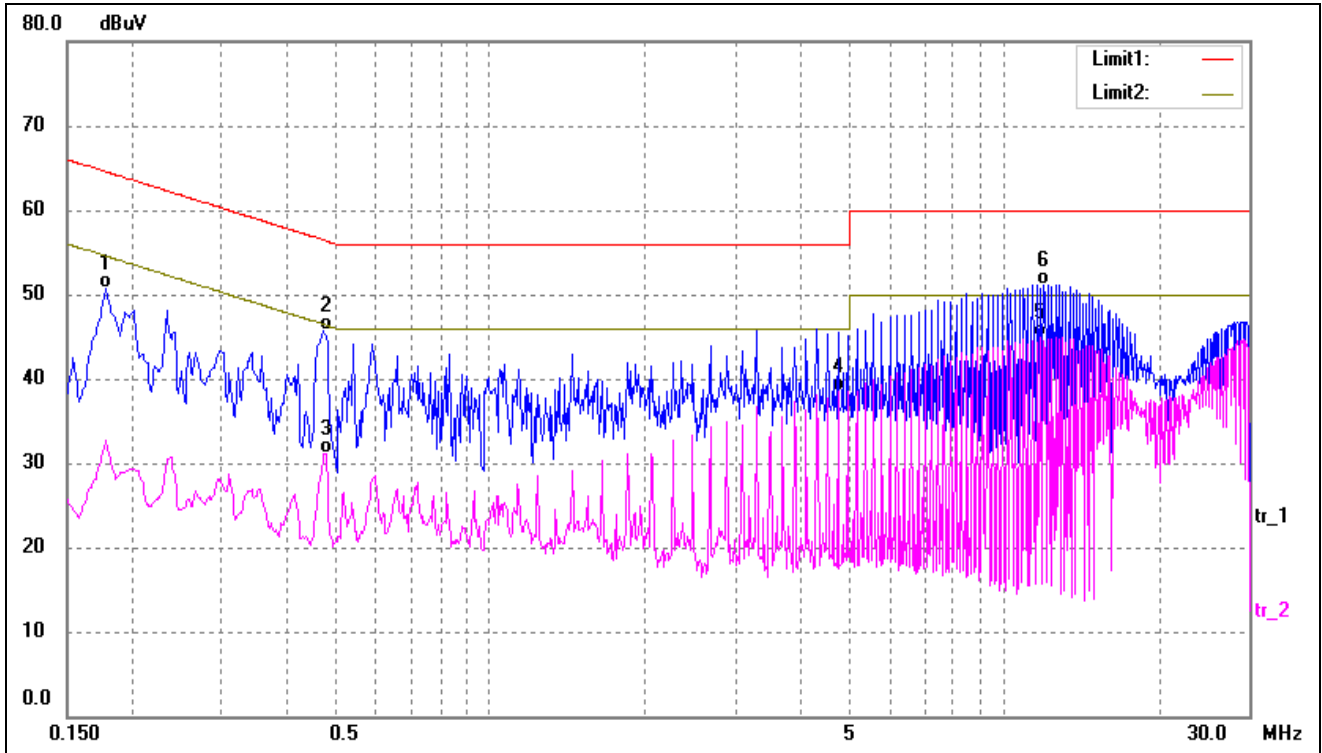

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1779	40.41	10.37	50.78	64.58	-13.80	QP
2	0.4738	35.43	10.27	45.70	56.45	-10.75	QP
3	0.4778	20.77	10.27	31.04	46.38	-15.34	AVG
4	4.7580	28.58	10.01	38.59	46.00	-7.41	AVG
5*	11.7900	34.94	9.97	44.91	50.00	-5.09	AVG
6	11.9940	41.15	9.98	51.13	60.00	-8.87	QP

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

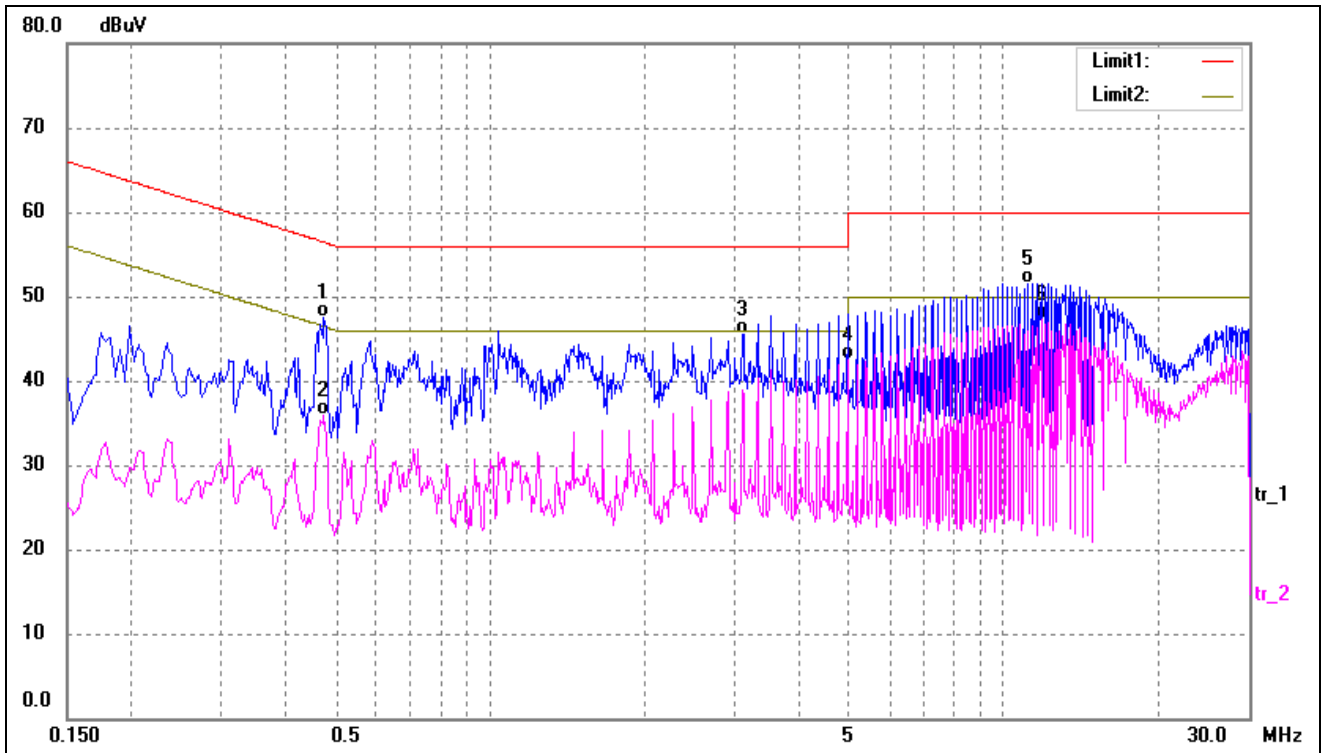

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4737	37.26	10.27	47.53	56.45	-8.92	QP
2	0.4737	25.60	10.27	35.87	46.45	-10.58	AVG
3	3.1059	35.50	10.08	45.58	56.00	-10.42	QP
4	4.9740	32.48	10.00	42.48	46.00	-3.52	AVG
5	11.1859	41.61	9.93	51.54	60.00	-8.46	QP
6*	11.8100	37.36	9.97	47.33	50.00	-2.67	AVG

5. RADIATED EMISSION

5.1 Standard Applicable

According to 15.209(a), radiated emission limits; general requirements.

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$


5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

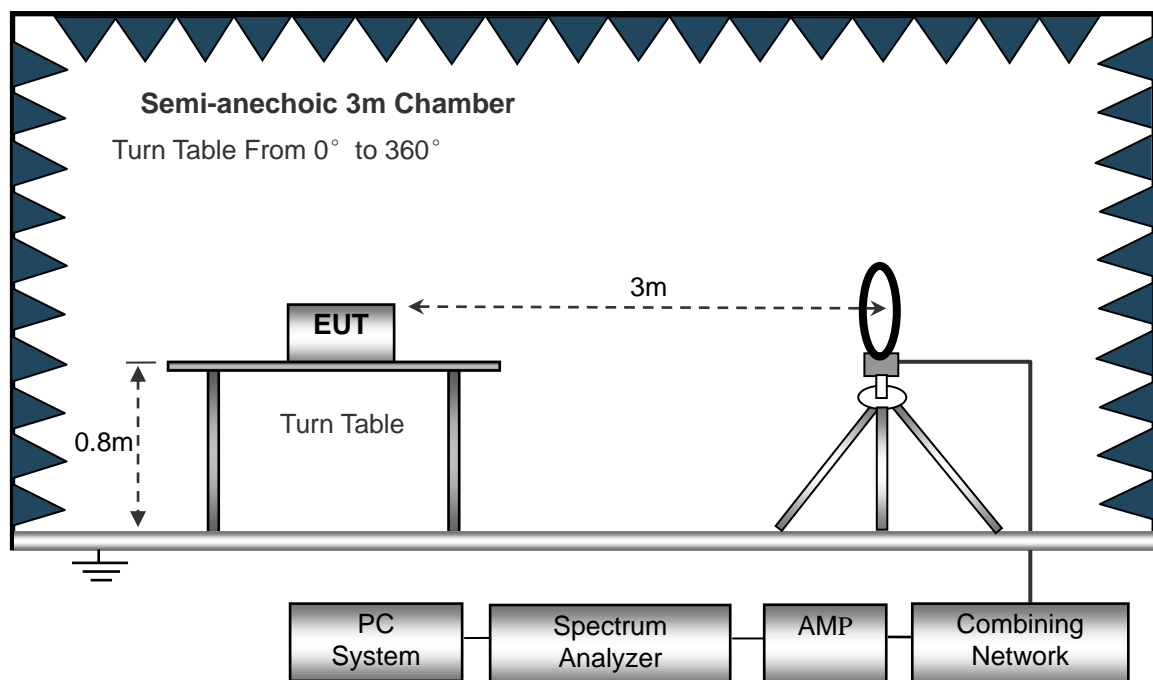

The test setup for emission measurement from 30MHz to 1GHz.

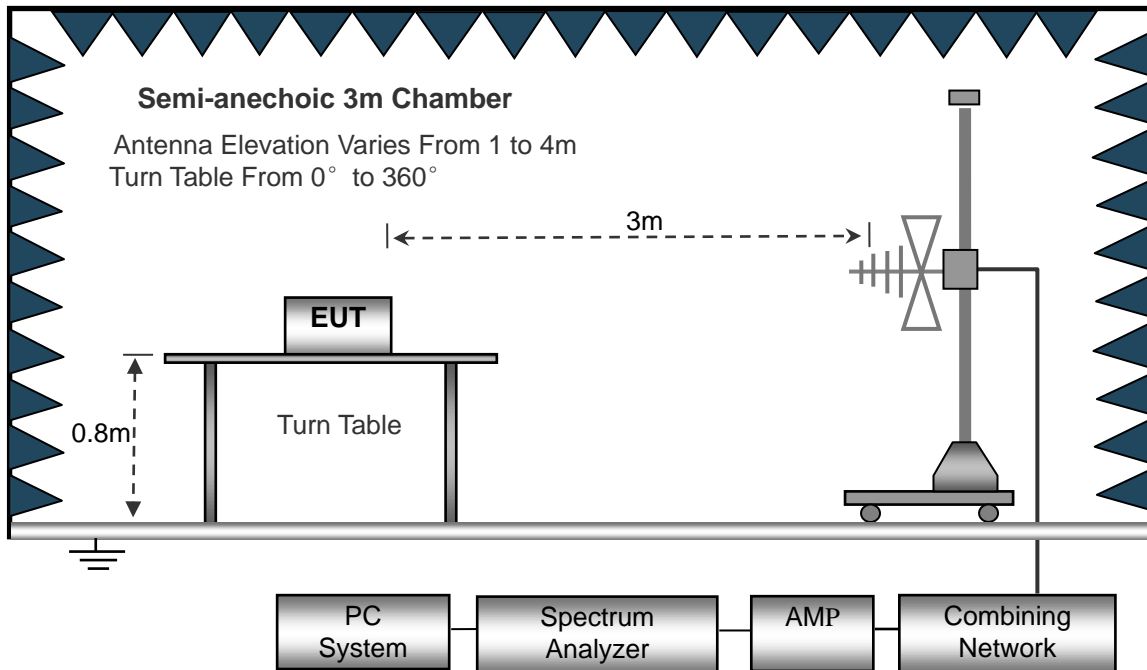

The test setup for emission measurement above 1GHz.

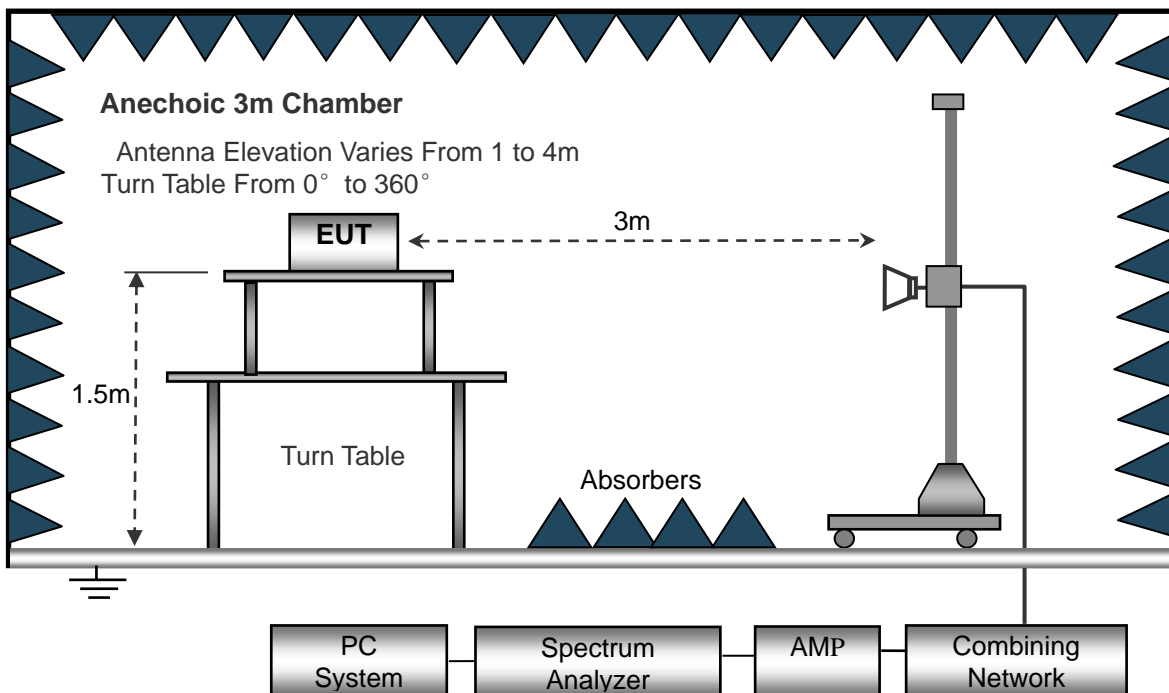

5.3 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10kHz,

VBW =30kHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120kHz,

VBW=300kHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.209(a) Limit}$$

5.5 Environmental Conditions


Temperature:	22.5 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.6 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Below 30MHz

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

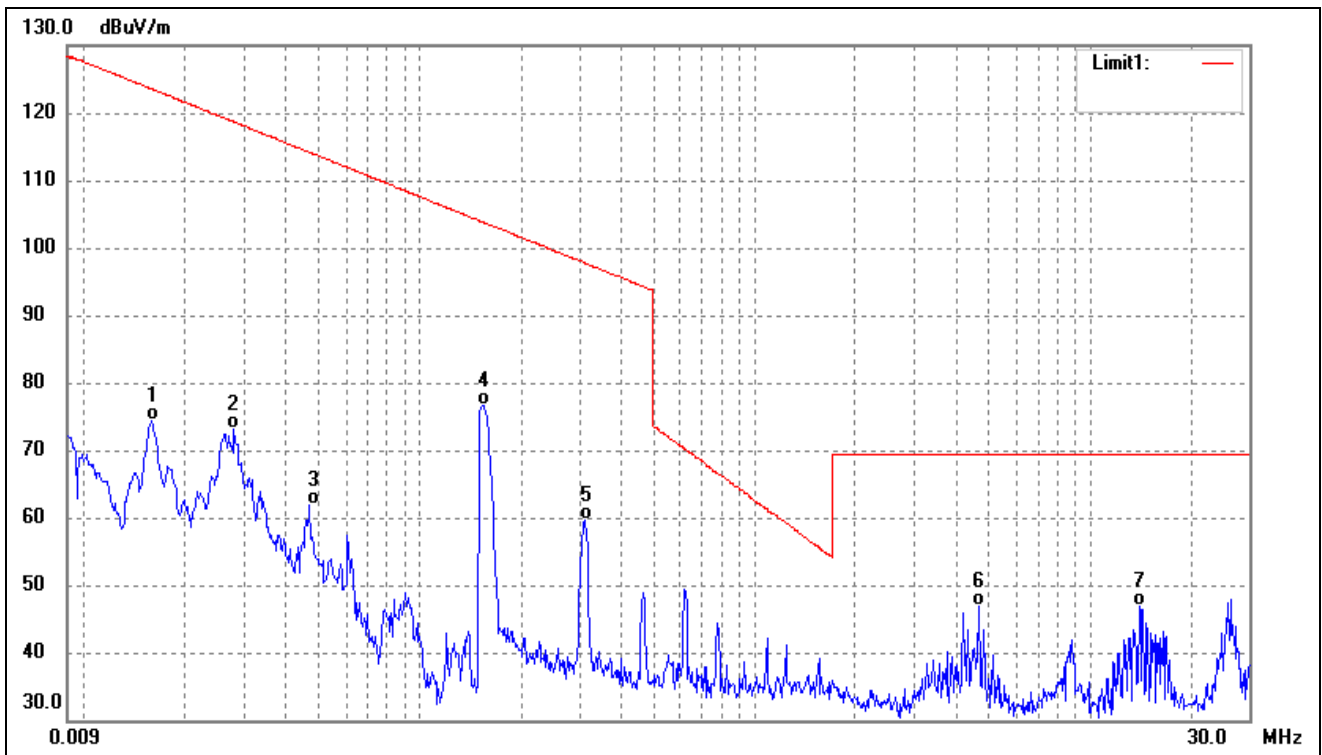

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0158	79.84	-5.58	74.26	123.61	-49.35	-	-	QP
2	0.0280	78.14	-5.11	73.03	118.65	-45.62	-	-	QP
3	0.0468	66.00	-4.01	61.99	114.19	-52.20	-	-	QP
4	0.1548	80.94	-4.22	76.72	103.80	-27.08	-	-	QP
5	0.3100	64.53	-4.88	59.65	97.77	-38.12	-	-	QP
6	4.6469	49.50	-2.64	46.86	69.50	-22.64	-	-	QP
7	13.9886	49.33	-2.54	46.79	69.50	-22.71	-	-	QP


Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

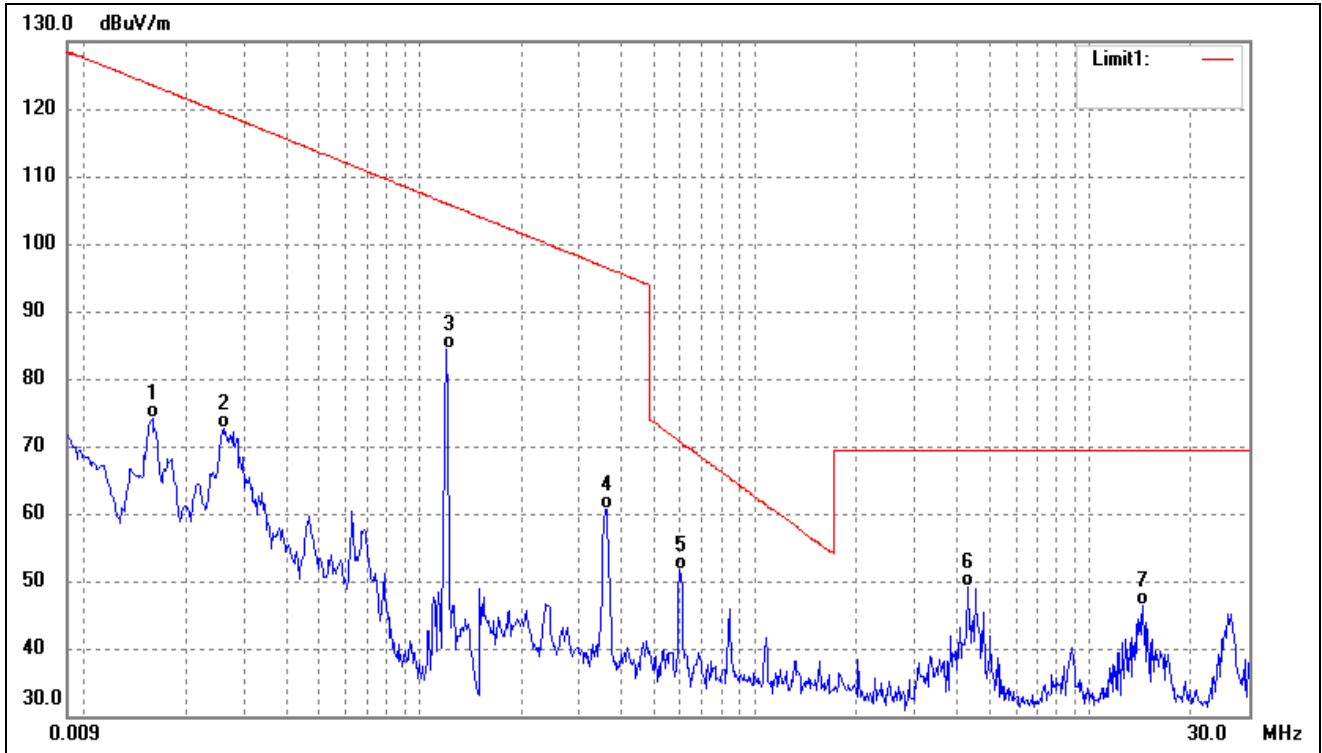

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0160	79.73	-5.58	74.15	123.51	-49.36	-	-	QP
2	0.0260	77.98	-5.23	72.75	119.29	-46.54	-	-	QP
3	0.1198	88.96	-4.51	84.45	106.03	-21.58	-	-	QP
4	0.3577	65.49	-4.78	60.71	96.53	-35.82	-	-	QP
5	0.5979	55.68	-3.96	51.72	70.66	-18.94	-	-	QP
6	4.3146	51.74	-2.69	49.05	69.50	-20.45	-	-	QP
7	14.3641	48.77	-2.47	46.30	69.50	-23.20	-	-	QP


➤ Above 30MHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

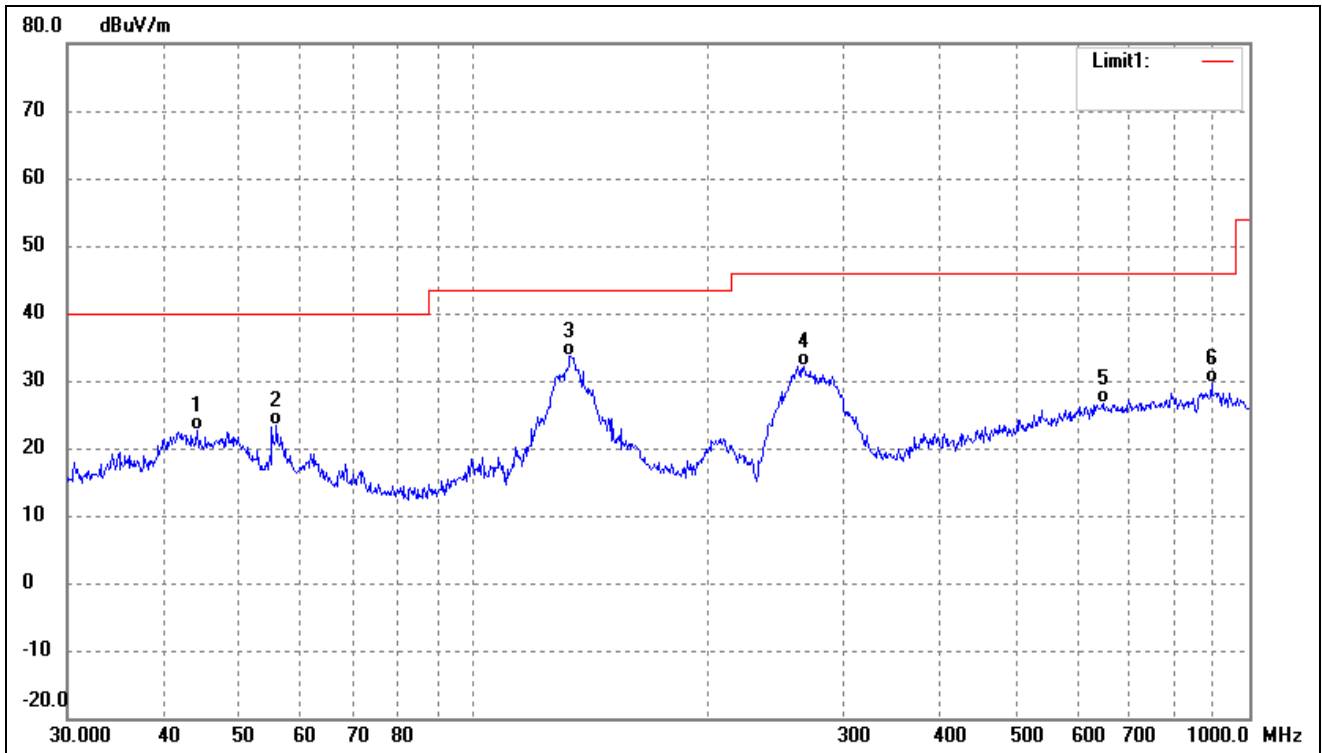


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.1202	29.49	-6.98	22.51	40.00	-17.49	-	-	QP
2	55.8047	31.21	-7.80	23.41	40.00	-16.59	-	-	QP
3	133.1511	45.41	-11.69	33.72	43.50	-9.78	-	-	QP
4	266.6089	40.06	-7.86	32.20	46.00	-13.80	-	-	QP
5	647.3856	25.63	0.89	26.52	46.00	-19.48	-	-	QP
6	893.8567	26.89	2.70	29.59	46.00	-16.41	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

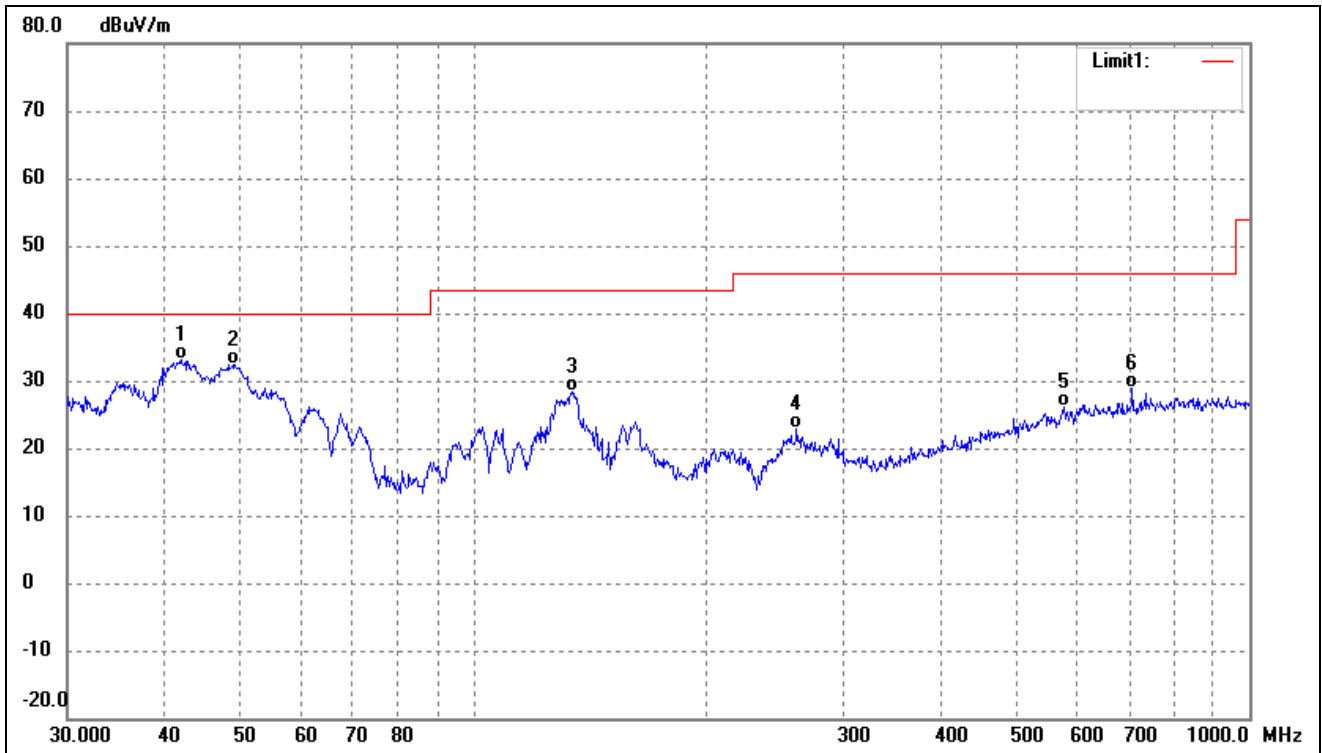


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0066	40.10	-6.99	33.11	40.00	-6.89	-	-	QP
2	49.0145	39.34	-6.96	32.38	40.00	-7.62	-	-	QP
3	134.0882	40.25	-11.78	28.47	43.50	-15.03	-	-	QP
4	261.0583	30.85	-8.00	22.85	46.00	-23.15	-	-	QP
5	576.6443	26.22	-0.03	26.19	46.00	-19.81	-	-	QP
6	706.6999	27.35	1.47	28.82	46.00	-17.18	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

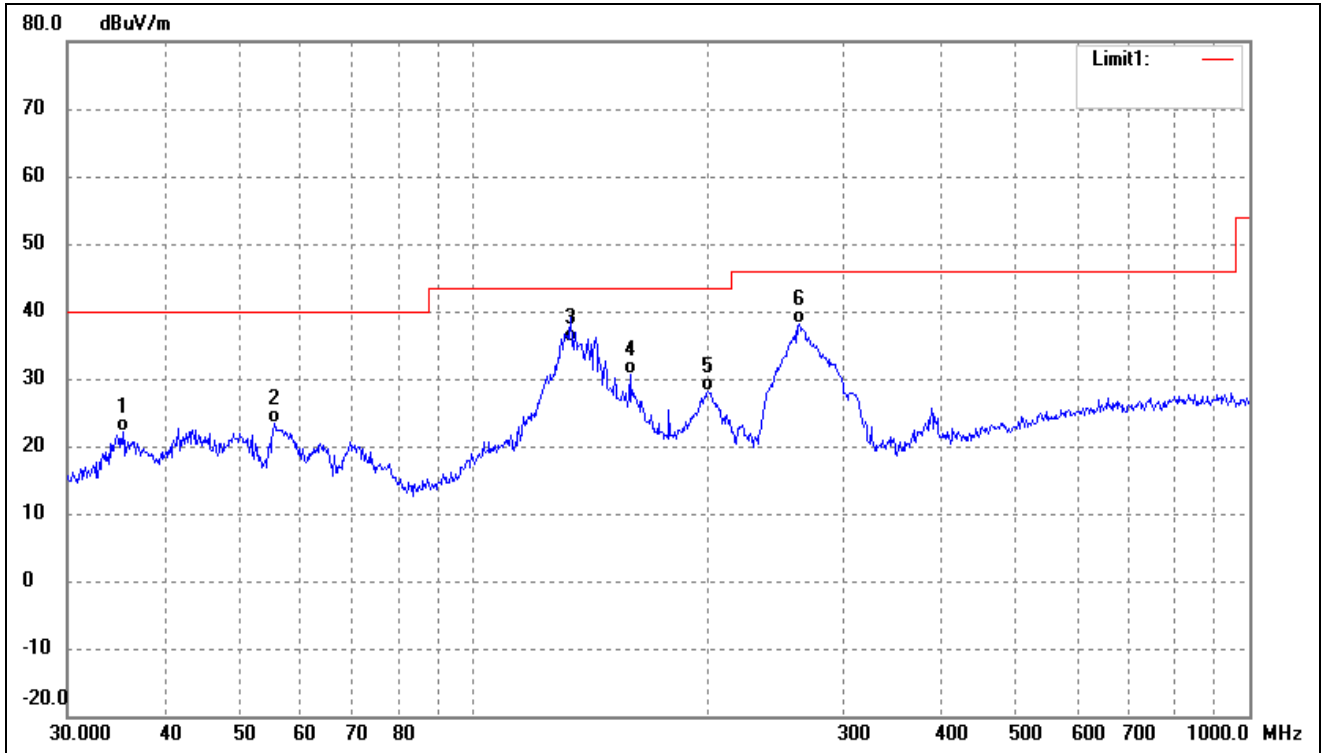

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.3750	30.16	-8.13	22.03	40.00	-17.97	-	-	QP
2	55.4147	31.16	-7.75	23.41	40.00	-16.59	-	-	QP
3	133.6188	47.21	-11.74	35.47	43.50	-8.03	-	-	QP
4	159.2251	42.89	-12.20	30.69	43.50	-12.81	-	-	QP
5	200.6881	37.82	-9.68	28.14	43.50	-15.36	-	-	QP
6	262.8955	46.01	-7.96	38.05	46.00	-7.95	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

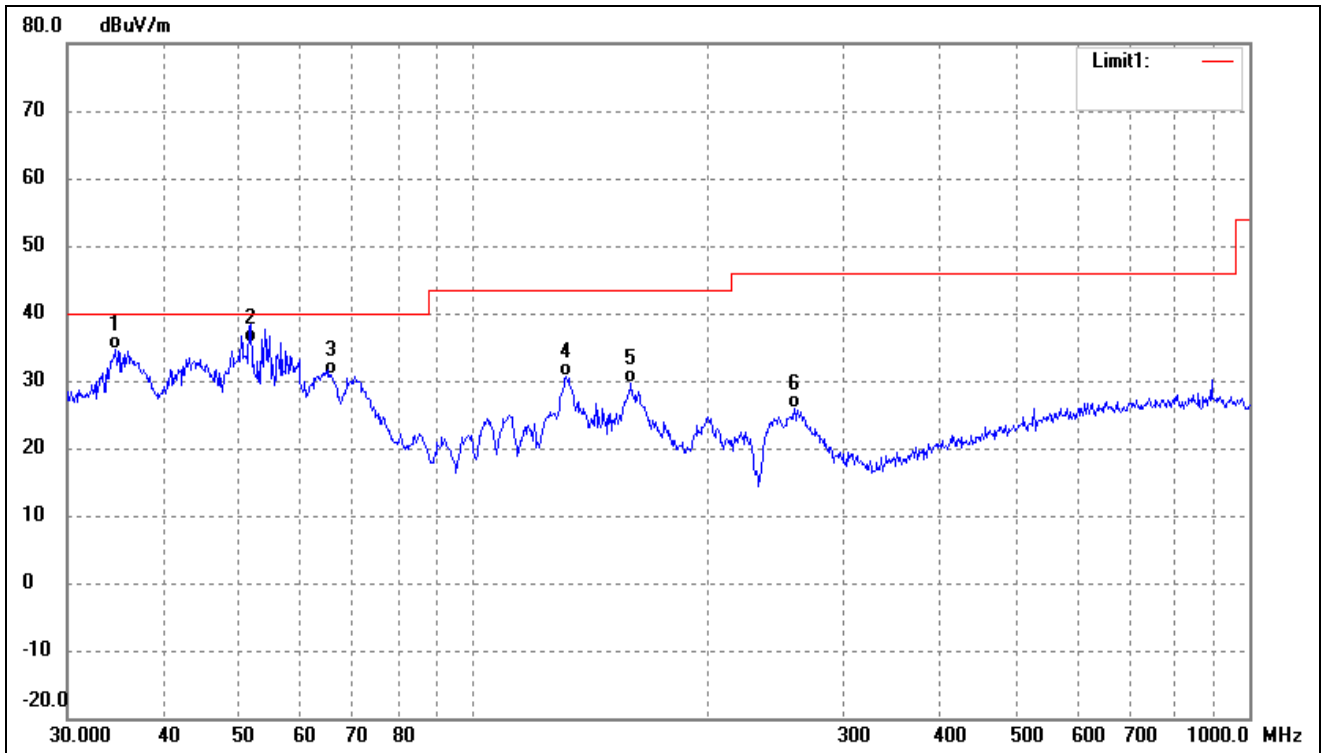

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.6385	42.83	-8.32	34.51	40.00	-5.49	-	-	QP
2	51.6616	42.85	-7.20	35.65	40.00	-4.35	-	-	QP
3	65.5727	40.16	-9.40	30.76	40.00	-9.24	-	-	QP
4	131.7577	42.28	-11.58	30.70	43.50	-12.80	-	-	QP
5	159.7844	41.79	-12.17	29.62	43.50	-13.88	-	-	QP
6	259.2338	34.01	-8.06	25.95	46.00	-20.05	-	-	QP


Remark: '- 'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

6. Occupied Bandwidth

6.1 Standard Applicable

According to 15.215(c), 20dB bandwidth is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Setup Block Diagram

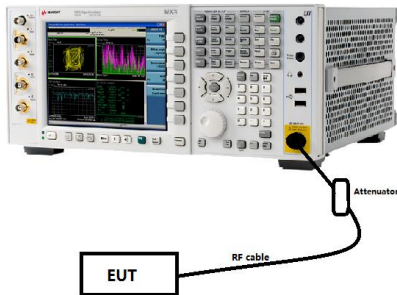

6.3 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 6.9.2, the 20dB bandwidth test method as follows.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize.

Otherwise, the trace from step g) shall be used for step j).


j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.3 Summary of Test Results/Plots

Test mode	Test Channel(kHz)	20dB Bandwidth(kHz)
TM1	129.84	0.53
TM2	114.98	0.52

Please refer to the attached plots.

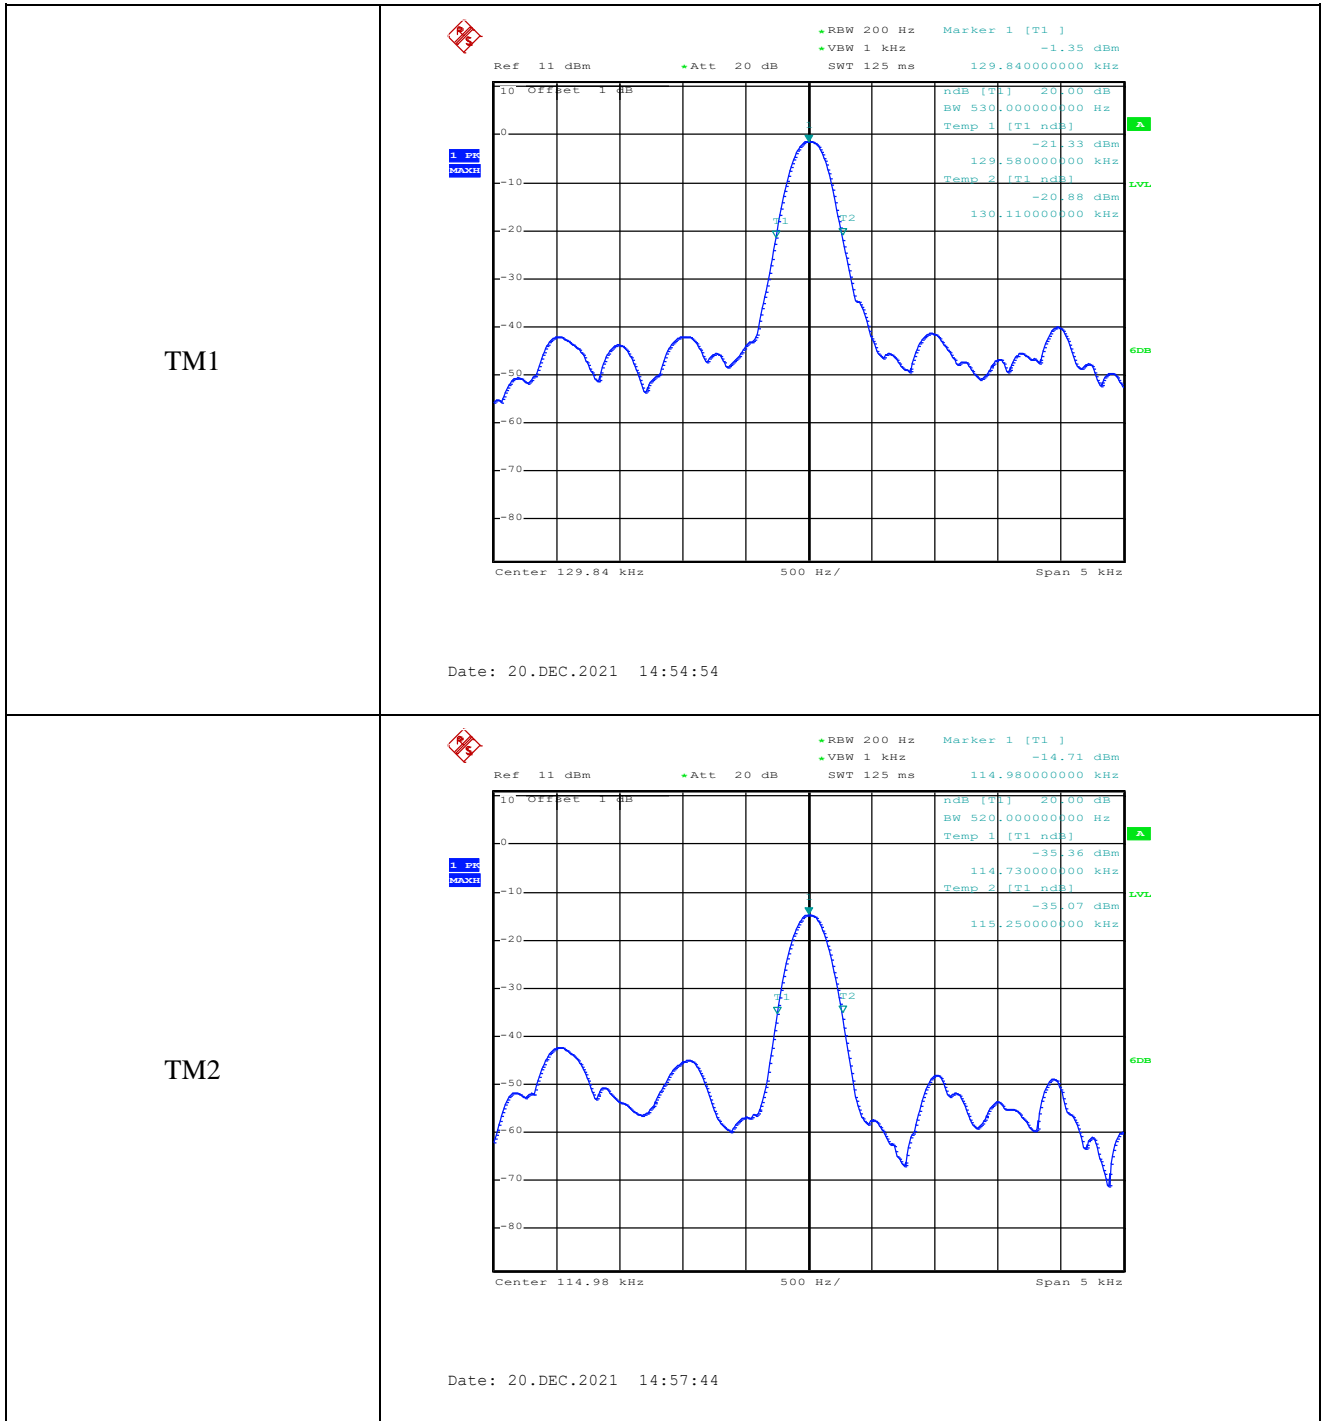

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******