




Prüfbericht-Nr.: <i>Test report No.:</i>	CN219TJX 001	Auftrags-Nr.: <i>Order No.:</i>	170257888	Seite 1 von 22 <i>Page 1 of 22</i>	
Kunden-Referenz-Nr.: <i>Client reference No.:</i>	N/A	Auftragsdatum: <i>Order date.:</i>	07.12.2020		
Auftraggeber: <i>Client:</i>	Wear Future Technologies Co., LTD 23A Floor, Building 3, Zhongke R & D Park, No.009, Gaoxin South 1st Road, High-tech Zone Community, Yuehai Street, Nanshan District, Shenzhen				
Prüfgegenstand: <i>Test item:</i>	Neck Massager				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	K6-EN				
Auftrags-Inhalt: <i>Order content:</i>	FCC approval				
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 FCC KDB Publication 447498 D01 v06				
Wareneingangsdatum: <i>Date of receipt:</i>	18.12.2020				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A002957634				
Prüfzeitraum: <i>Testing period:</i>	Refer to test report				
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Guangdong) Co.,Ltd. EMC Laboratory				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Guangdong) Co., Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:					
 11.03.2021 Storm Shu / Project Manager		 11.03.2021 Amy Wang / Technical Certifier			
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:					
FCC ID: 2AYVT-K6-EN					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

V04

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	5
2.6	LOCATION OF ORIGINAL DATA.....	5
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM.....	11
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	13
5.1.2	<i>Maximum Peak Conducted Output Power.....</i>	14
5.1.3	<i>Conducted Power Spectral Density</i>	15
5.1.4	<i>6dB Bandwidth</i>	16
5.1.5	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....</i>	17
5.1.6	<i>Radiated Spurious Emission.....</i>	18
5.1.7	<i>Radiated Spurious Emission.....</i>	Error! Bookmark not defined.
6	SAFETY HUMAN EXPOSURE	21
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	21
6.1.1	<i>Electromagnetic Fields.....</i>	21
7	PHOTOGRAPHS OF THE TEST SET-UP.....	22
8	LIST OF TABLES.....	22

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test setup and test equipment

Appendix B: Test Results

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

No.102, 1F of Southwest and No.205, 2F of West Warehouse Building, No.767 Tianyuan Road, Tianhe District, Guangzhou, Guangdong, P.R. China

FCC Designation No.: CN1207

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

For the measurement Equipment list, refer to the appendix 1.

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Item		Extended Uncertainty
Conducted Emission		± 2.68 dB
Radiated Emission (9kHz-30MHz)	Field strength (dBµV/m)	U=3.08dB, k=2, σ=95%
Radiated Emission (30-1000MHz)	Field strength (dBµV/m)	U=5.16dB, k=2, σ=95%
Radiated Emission (above 1000MHz)	Field strength (dBµV/m)	U=3.08dB, k=2, σ=95%
Radio Spectrum		± 0.60 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory
No.102, 1F of Southwest and No.205, 2F of West Warehouse Building, No.767 Tianyuan Road, Tianhe District, Guangzhou, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The submitted model K6-EN is a rechargeable neck massager. It supports Bluetooth 5.0 (Single mode) wireless technology.

According to above information, full test were performed on K6-EN

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	Neck Massager
Type Designation	K6-EN
Trade Mark	SKG
FCC ID	2AYVT-K6-EN
Operating Frequency	2402 - 2480 MHz
Operating Temperature Range	5°C to +40°C
Operating Voltage	DC 3.7V or AC 230V (supplied by adaptor)
Testing Voltage	DC 3.7V
Type of Modulation	GFSK
Channel Number	40 channels
Channel Separation	2MHz
Wireless Technology	Bluetooth 5.0 (Single mode)
Antenna Type	PCB Antenna
Antenna Gain	2.0 dBi

Table 3: RF Channel and Frequency of Bluetooth Low Energy

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
00	2402.00	10	2422.00	20	2442.00	30	2462.00
01	2404.00	11	2424.00	21	2444.00	31	2464.00
02	2406.00	12	2426.00	22	2446.00	32	2466.00
03	2408.00	13	2428.00	23	2448.00	33	2468.00
04	2410.00	14	2430.00	24	2450.00	34	2470.00
05	2412.00	15	2432.00	25	2452.00	35	2472.00
06	2414.00	16	2434.00	26	2454.00	36	2474.00
07	2416.00	17	2436.00	27	2456.00	37	2476.00
08	2418.00	18	2438.00	28	2458.00	38	2478.00
09	2420.00	19	2440.00	29	2460.00	39	2480.00

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
 - 1. Bluetooth transmitting mode (Low Energy mode)
 - a) Low Channel
 - b) Middle Channel
 - c) High Channel
- B. On, Bluetooth connecting mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Block Diagram
- FCC/IC Label and Location Info
- Model Difference Letter
- Operation Description
- Photo Document
- Schematics
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014

According to clause 3.1, all tests were performed on model K6-EN in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	IBM	2366(T30)	99-BLMAW 03/03	/

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

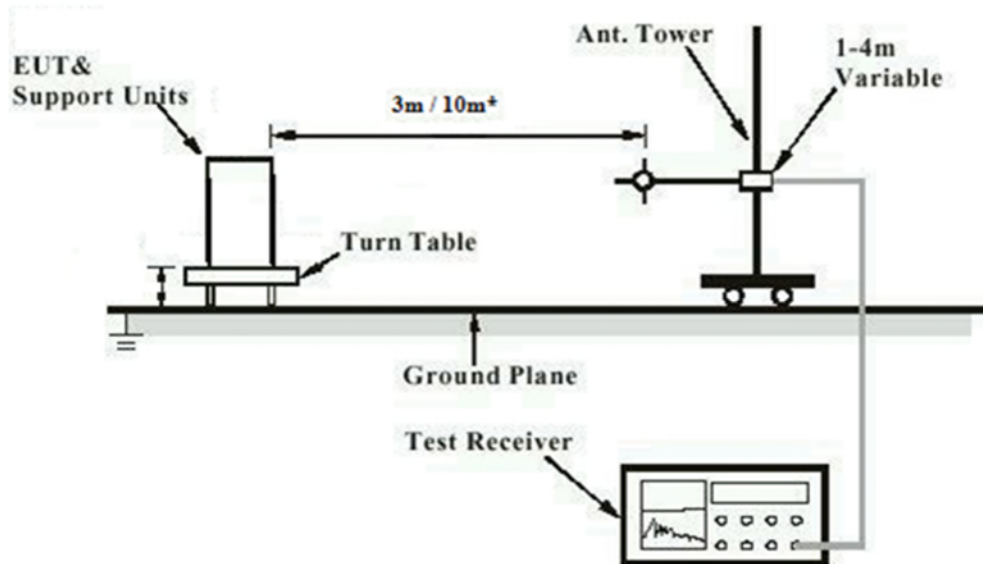


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

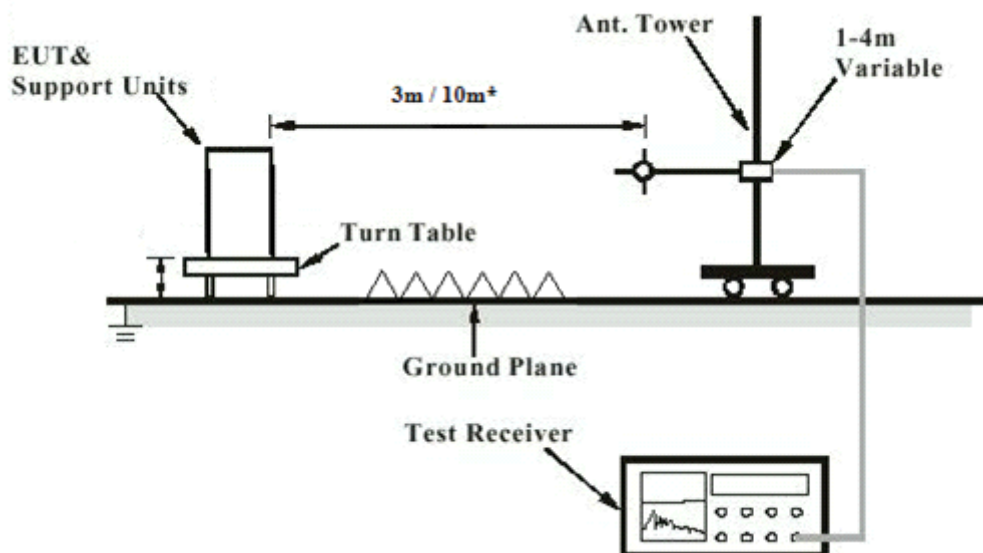


Diagram of Measurement Configuration for Mains Conduction Measurement


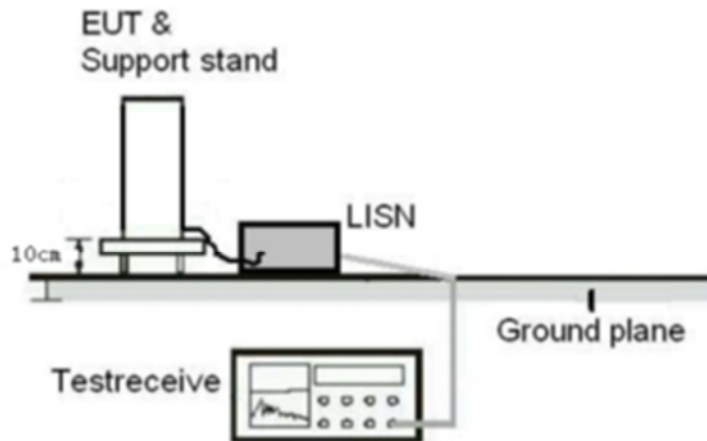


Diagram of Measurement Configuration for Conducted Transmitter Measurement

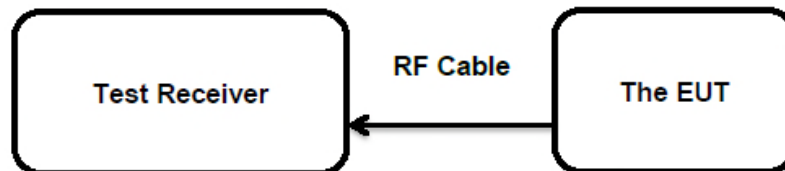

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 2.0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(1)&(3)
 Basic standard : ANSI C63.10: 2013
 Limits : FHSS < 0.125 Watts, DSSS < 1.0 Watts
 Kind of test site : Shielded Room

Test Setup

Date of testing : 07.01.2021
 Input voltage : DC 3.7V
 Operation mode : A.1
 Test channel : Low / Middle / High
 Ambient temperature : 24 °C
 Relative humidity : 50 %
 Atmospheric pressure : 101 kPa

Table 5: Test Result of Maximum Peak Conducted Output Power

Test Mode	Channel Frequency (MHz)	Measured Peak Output Power		Limit (W)
		(dBm)	(W)	
Low Energy	2402	8.03	0.00635	< 1.0
	2440	8.06	0.00639	
	2480	8.03	0.00635	
Maximum Measured Value		8.06	0.00639	/

Note: The cable loss 2.0 dB is taken into account in results.

This testing was carried out on all operation modes, but only the worst case was presented in this report.

5.1.3 Conducted Power Spectral Density

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(e)
 Basic standard : ANSI C63.10: 2013
 Limits : 8 dBm/3kHz
 Kind of test site : Shielded Room

Test Setup

Date of testing : 07.01.2021
 Input voltage : DC 3.7V
 Operation mode : A.1
 Test channel : Low / Middle / High
 Ambient temperature : 25 °C
 Relative humidity : 56 %
 Atmospheric pressure : 101 kPa

Table 6: Test Result of Power Spectral Density, Low Energy

Test Mode	Test Channel (MHz)	Power Spectrum Density(dBm/3kHz)	Limit (dBm/3kHz)
Low Energy	2402	-6.88	< 8.0
	2440	-6.86	
	2480	-8.13	
Maximum Measured Value		-8.13	

Note: The cable loss 2.0 dB is taken into account in results.

5.1.4 6dB Bandwidth

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(a)(2)
 Basic standard : ANSI C63.10: 2013
 Limits : More than 500 KHz
 Kind of test site : Shielded Room

Test Setup

Date of testing : 18.01.2021
 Input voltage : DC 3.7V
 Operation mode : A.1
 Test channel : Low / Middle / High
 Ambient temperature : 24 °C
 Relative humidity : 50 %
 Atmospheric pressure : 101 kPa

Table 7: Test Result of 6dB Bandwidth, Low Energy

Test Mode	Test Channel (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)
Low Energy	2402	756.0	> 500
	2440	1002.0	
	2480	1147.0	
Minimum Measured Value		1147.0	

5.1.5 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT: **Pass****Test Specification**

Test standard : FCC Part 15.247(d)
Basic standard : ANSI C63.10: 2013
Limits : 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power);
In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site : Shielded Room

Test Setup

Date of testing : 07.01.2021
Input voltage : DC 3.7V
Operation mode : A.1
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to following test plot, and compliance is achieved as well.

5.1.6 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 18.01.2021
Input voltage	: DC 3.7V
Operation mode	: A.1
Test channel	: Low / Middle / High
Ambient temperature	: 23 °C
Relative humidity	: 48 %
Atmospheric pressure	: 101 kPa

Remark:

The Radiated Spurious Emission was carried out within frequency range 9kHz – 30MHz and 18GHz - 26.5GHz, and the measurements with active antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

For the measurement records, refer to the appendix 1.

5.1.7 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) & FCC Part 15.107(a)
Basic standard	: ANSI C63.10: 2013 & ANSI C63.4: 2014
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a) & FCC Part 15.107(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 18.01.2021
Input voltage	: AC 120V,60Hz
Operation mode	: C
Earthing	: Connected
Ambient temperature	: 24 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

This testing was carried out on AC 120V and AC 230V input voltage, but only the worst case was presented in this report.
For the measurement records, refer to the appendix B.

5.1.8 Radiated Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.209
Basic standard	: ANSI C63.4: 2014
Frequency range	: 30 MHz – 26GHz
Limits	: FCC part 15.209
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 18.01.2021
Input voltage	: AC 120V,60Hz
Operation mode	: C
Earthing	: Connected
Ambient temperature	: 21 °C
Relative humidity	: 51 %
Atmospheric pressure	: 100 kPa

This testing was carried out on AC 120V and AC 230V input voltage, but only the worst case was presented in this report.
For the measurement records, refer to the appendix B.

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass****Test Specification**

Test standard : CFR47 FCC Part 2.1093
FCC KDB Publication 447498 D01 v06

Measurement Record:

The minimum distance for the EUT is less than 5mm.

Since maximum peak output power of the transmitter is 8.06 dBm \approx 6.39 mW $< \frac{3 \cdot d}{\sqrt{f}} = 9.52$ mW.

Hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01 General RF Exposure Guidance v06.

7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix 1.


8 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: RF Channel and Frequency of Bluetooth Low Energy	8
Table 4: List of Accessories and Auxiliary Equipment.....	10
Table 5: Test Result of Maximum Peak Conducted Output Power.....	14
Table 6: Test Result of Power Spectral Density, Low Energy	15
Table 7: Test Result of 6dB Bandwidth, Low Energy	16


Appendix A.1: Photographs of the Test Set-Up

APPENDIX A.1: PHOTOGRAPHS OF THE TEST SET-UP	1
PHOTOGRAPH 1: SET-UP FOR RADIATED SPURIOUS EMISSION, 30MHz - 1GHz	2
PHOTOGRAPH 2: SET-UP FOR RADIATED SPURIOUS EMISSION, 1GHz - 18GHz	2
PHOTOGRAPH 3: SET-UP FOR RADIATED SPURIOUS EMISSION, 18GHz - 26.5GHz	3
PHOTOGRAPH 4: SET-UP FOR CONDUCTED EMISSION ON AC MAINS	3

Photograph 1: Set-up for Radiated Spurious Emission, 30MHz - 1GHz

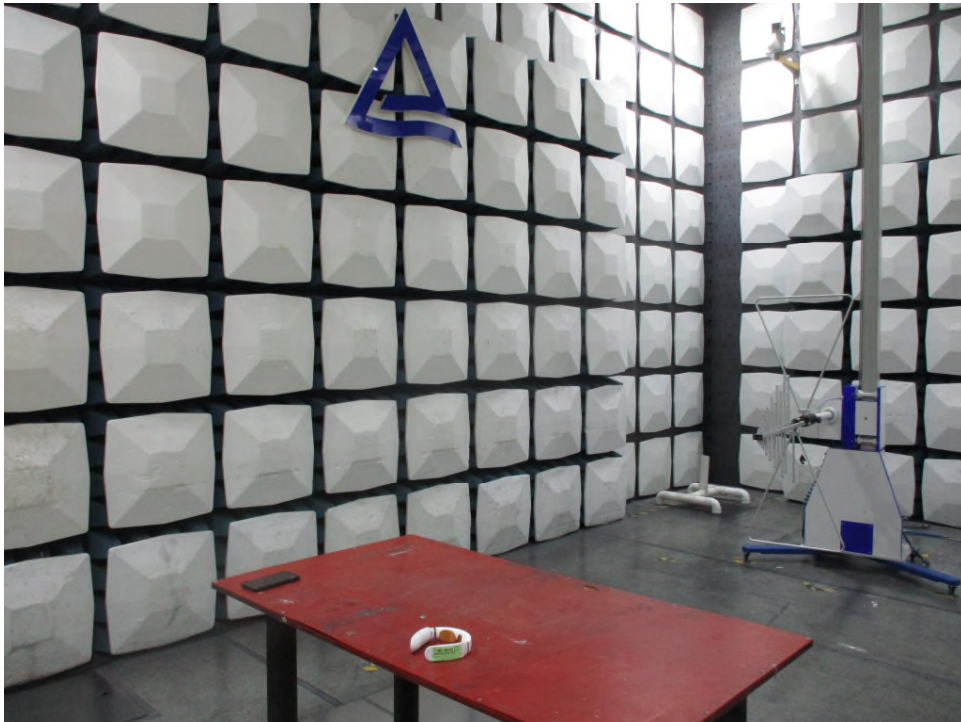

Photograph 2: Set-up for Radiated Spurious Emission, 1GHz - 18GHz

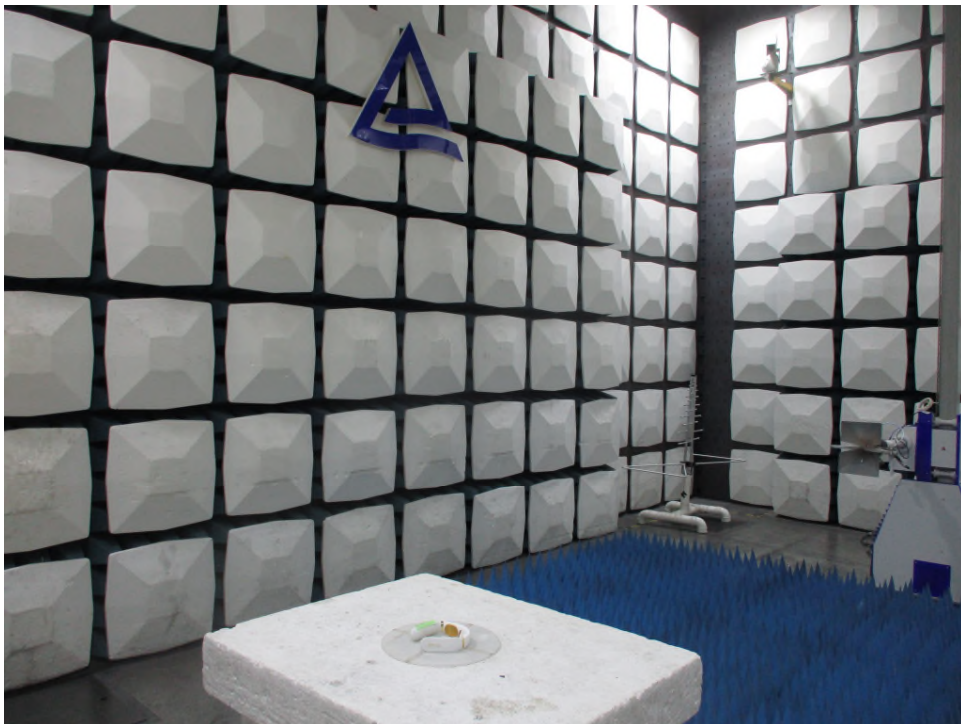

Photograph 3: Set-up for Radiated Spurious Emission, 18GHz - 26.5GHz



Photograph 4: Set-up for Conducted Emission on AC Mains




Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 1 von 49
Page 1 of 49

Conducted Power Spectral Density- BLE-L Channel

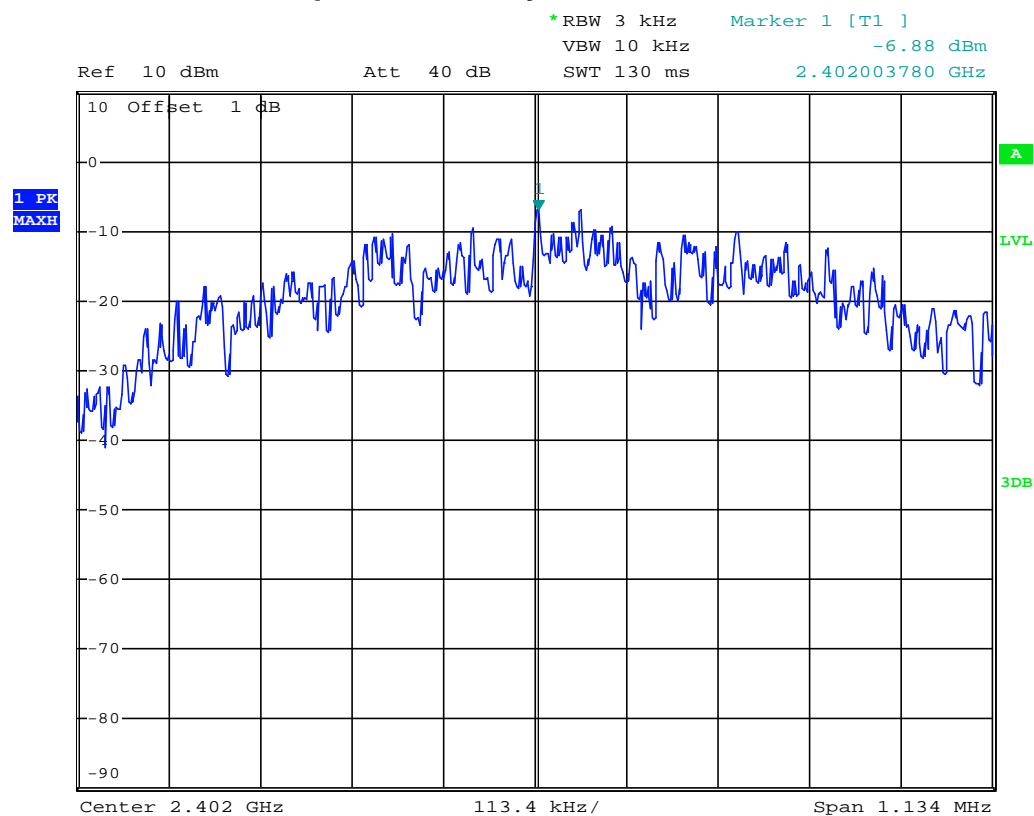


Prüfbericht - Nr.:
Test Report No.


CN219TJX 001

Seite 2 von 49
Page 2 of 49

Conducted Power Spectral Density- BLE-M Channel

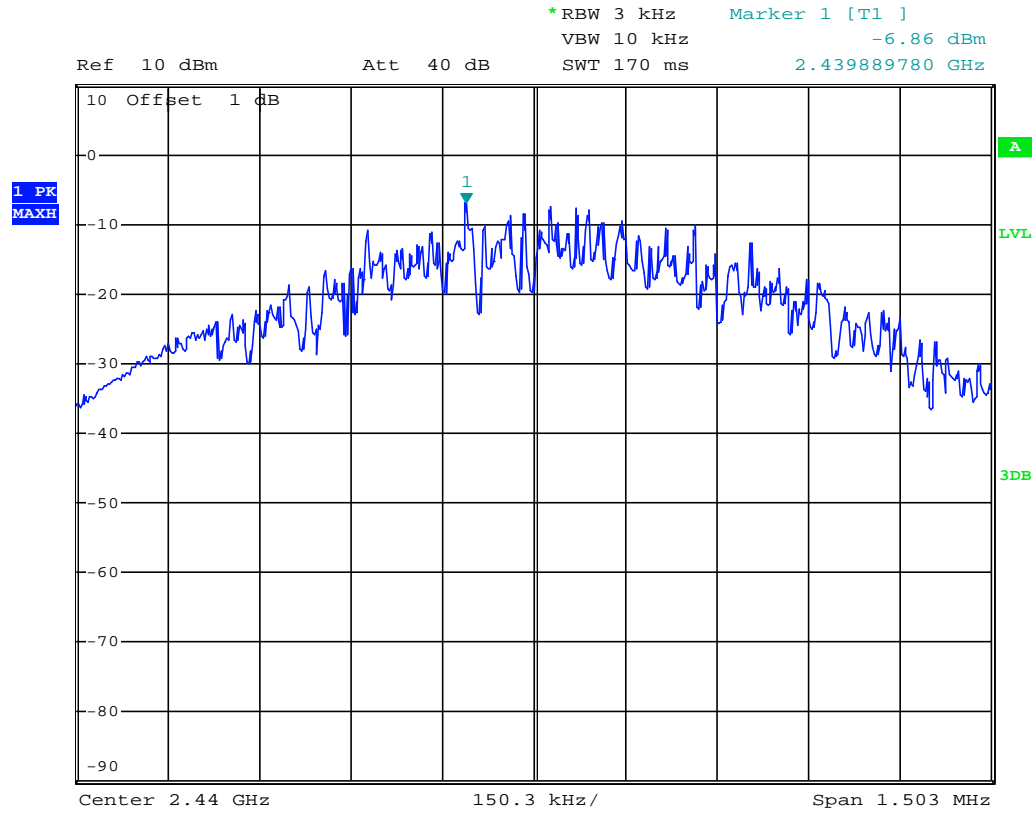

Conducted Power Spectral Density—BLE-H Channel

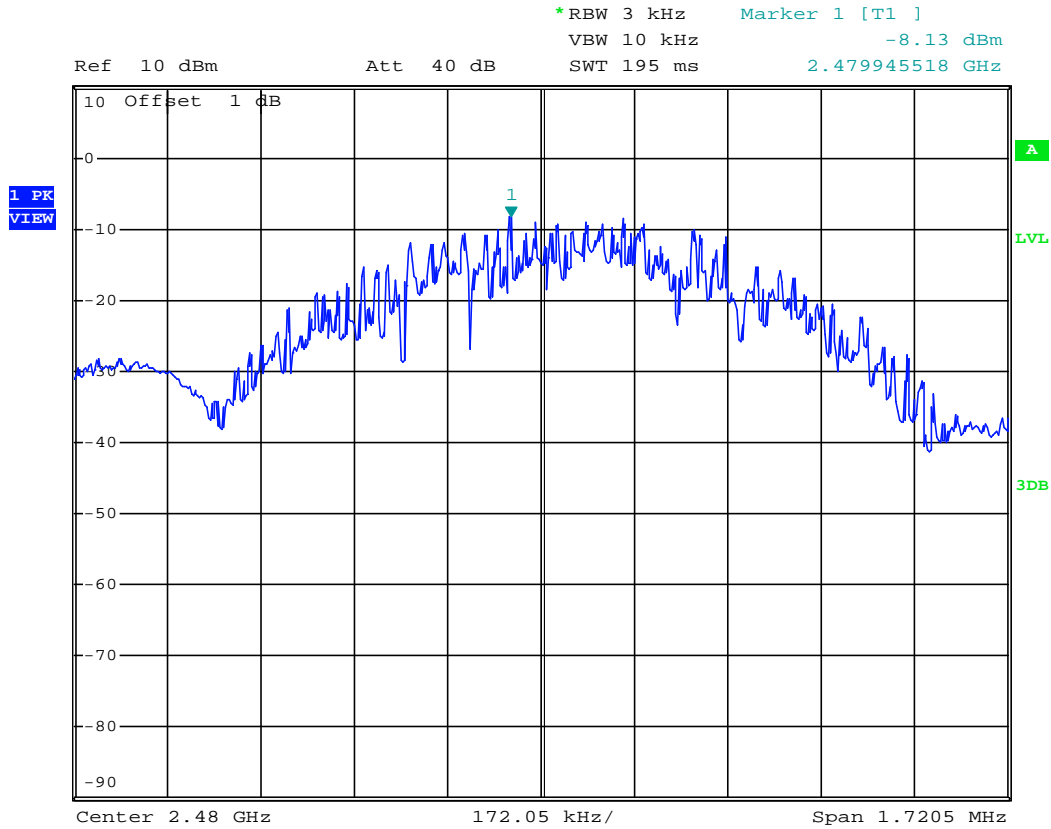


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 4 von 49
Page 4 of 49

6dB Bandwidth-BLE-L Channel

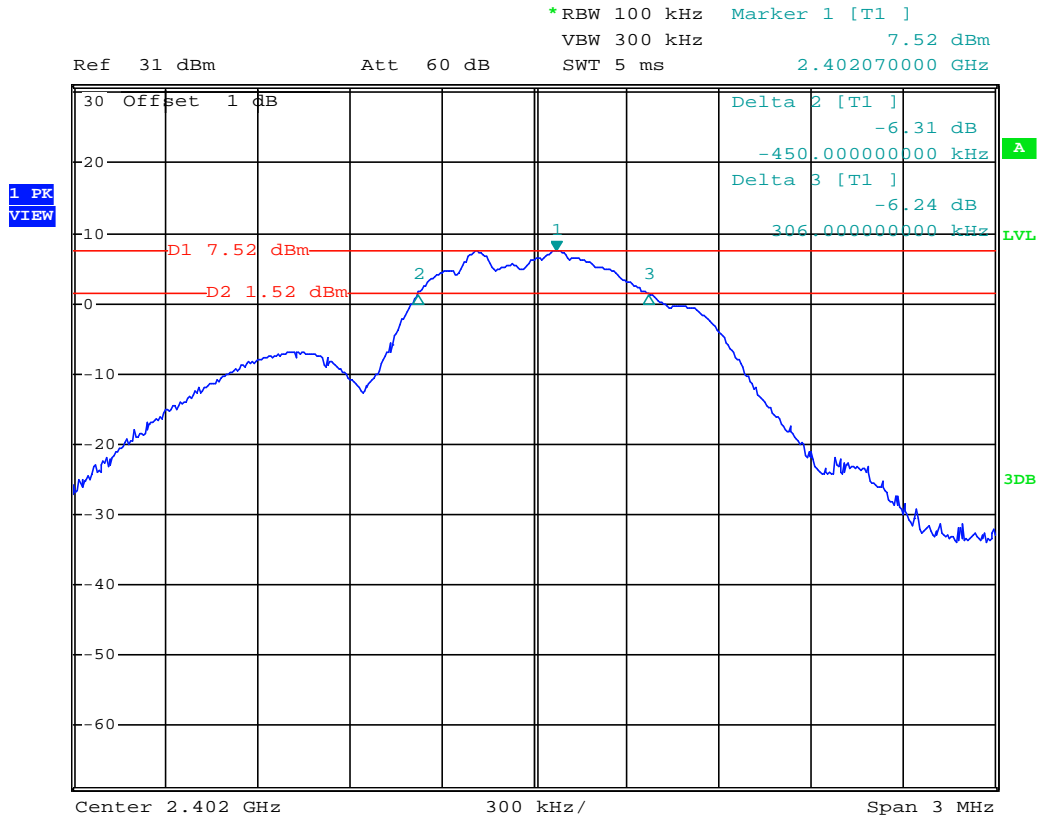


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 5 von 49
Page 5 of 49

6dB Bandwidth-BLE-M Channel

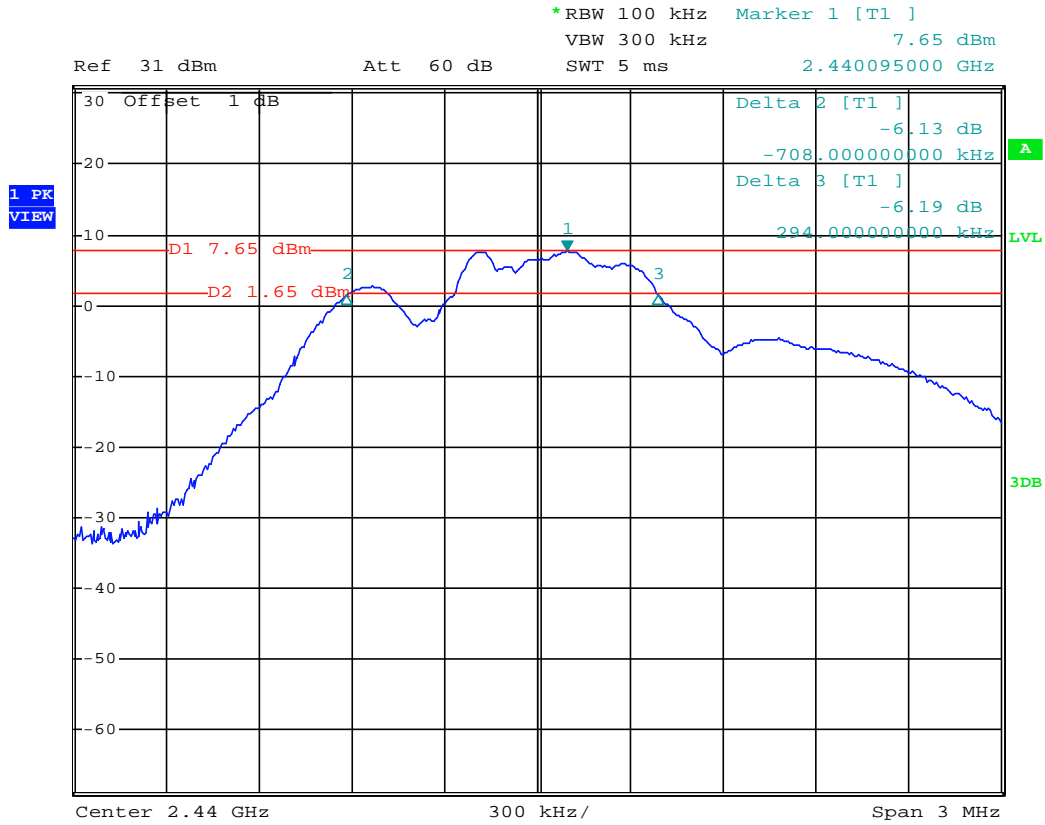


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 6 von 49
Page 6 of 49

6dB Bandwidth-BLE-H Channel

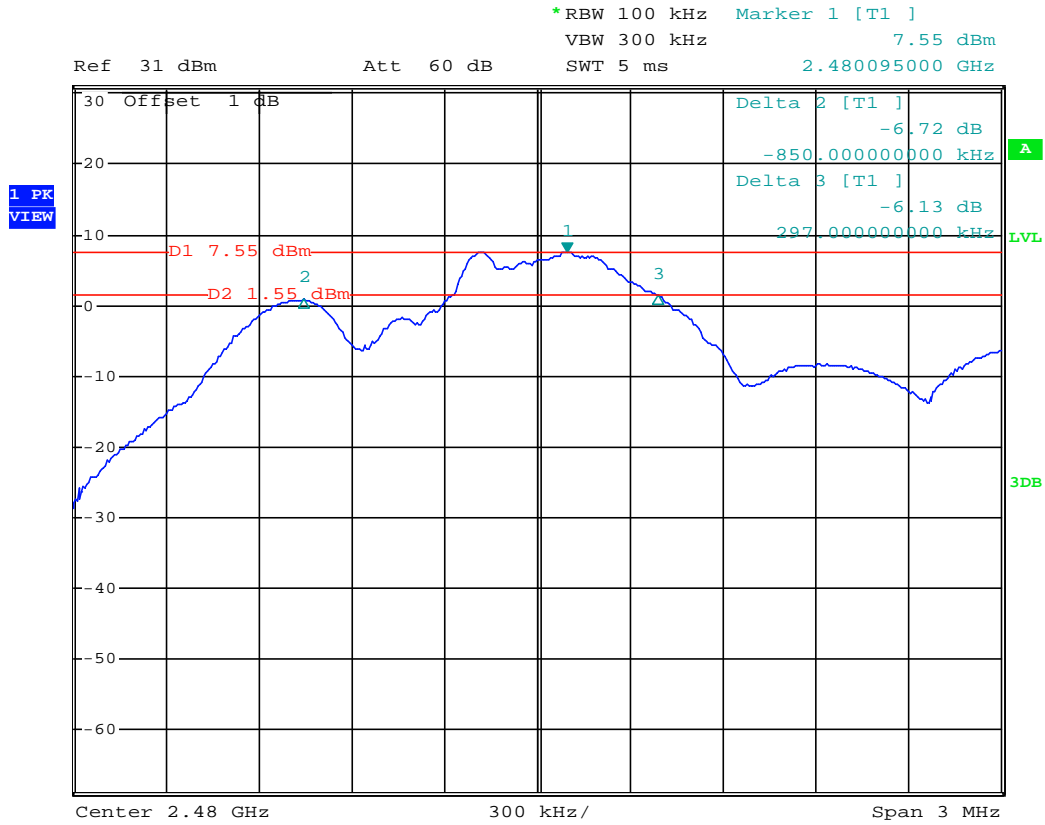


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 7 von 49
Page 7 of 49

Conducted Spurious Emissions –BLE-L Channel

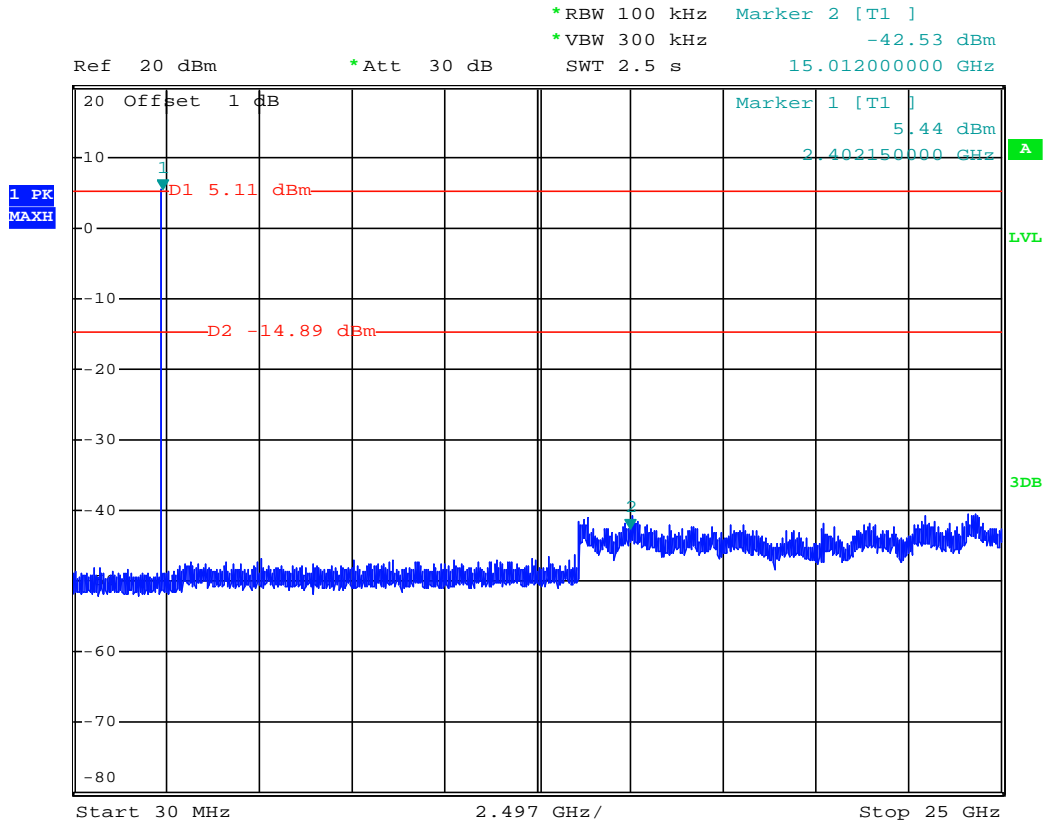


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 8 von 49
Page 8 of 49

Conducted Spurious Emissions –BLE-M Channel

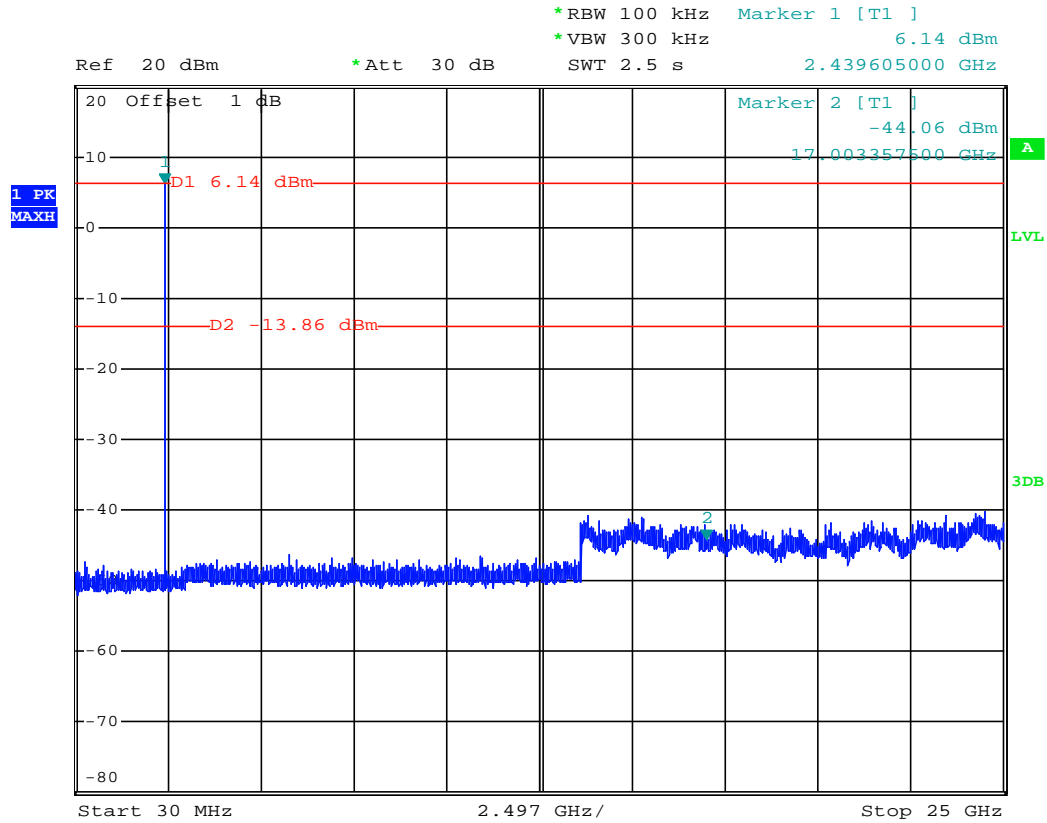


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 9 von 49
Page 9 of 49

Conducted Spurious Emissions –BLE-H Channel

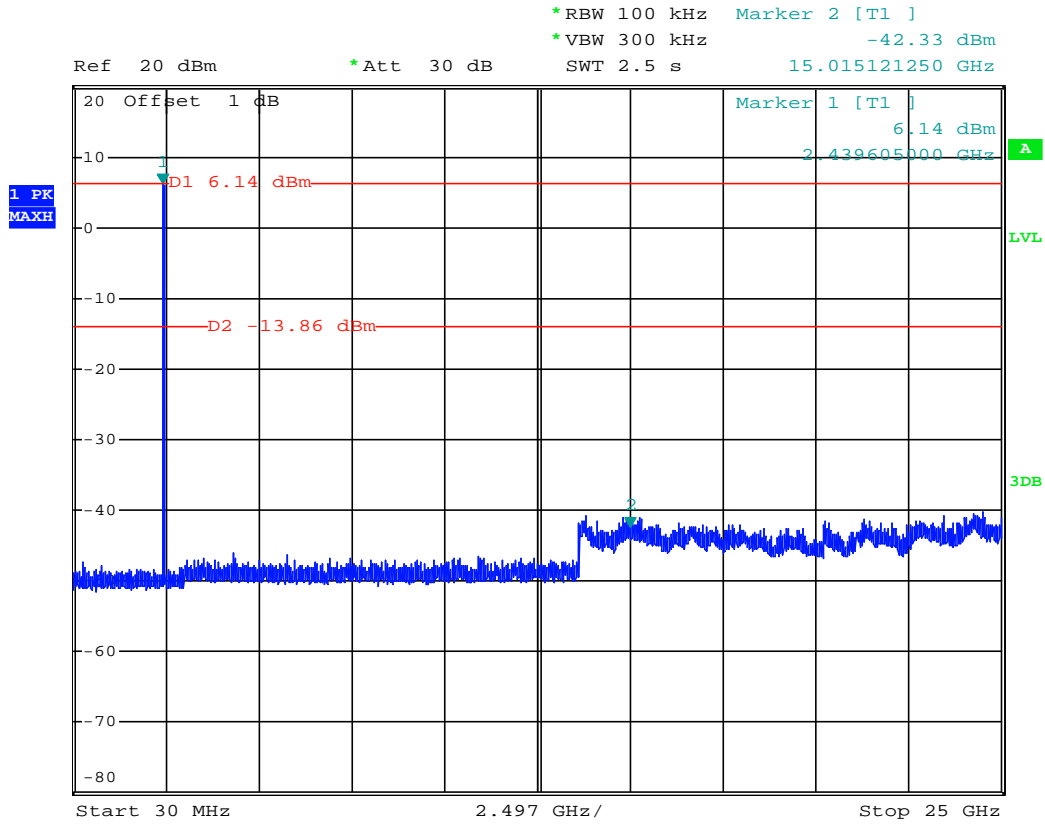


Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 11 von 49
Page 11 of 49

Band Edge-BLE-H CH

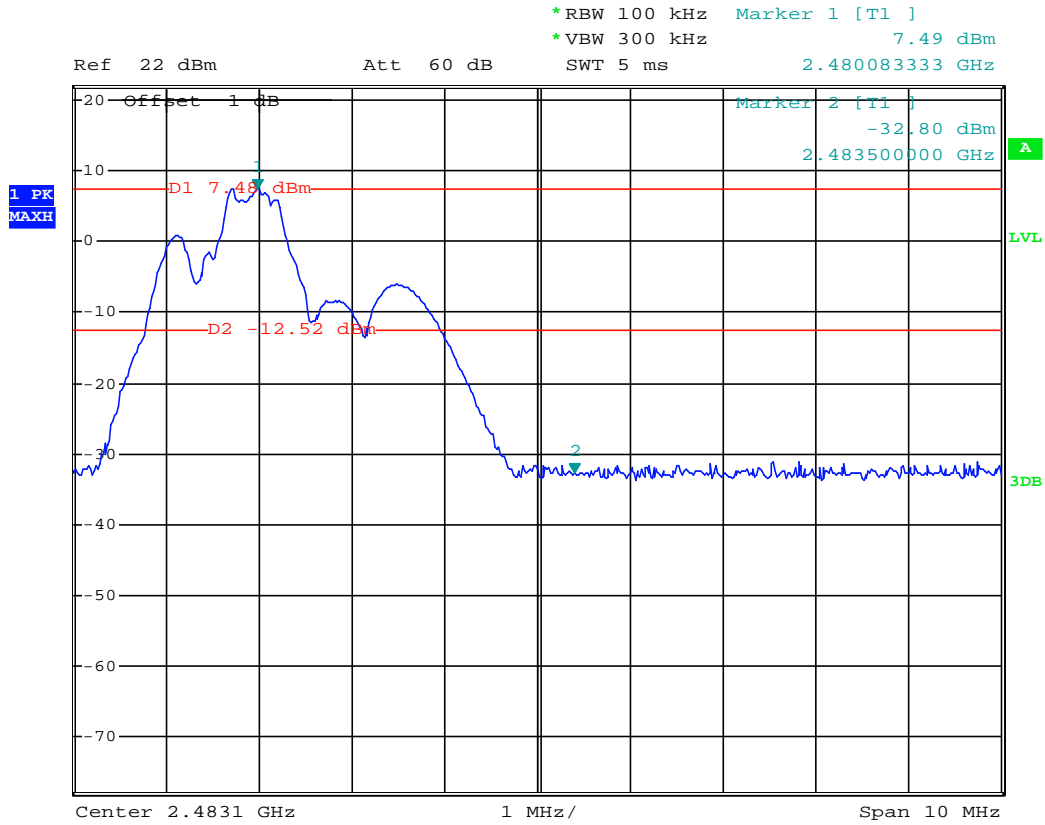

Prüfbericht - Nr.:

CN219TJX 001

Seite 12 von 49

Test Report No.

Page 12 of 49

Radiated Spurious Emissions

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(Middle)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1

Frequency range:	30-1000MHz
Receiver:	ESCI 3
Transducer:	VULB9168

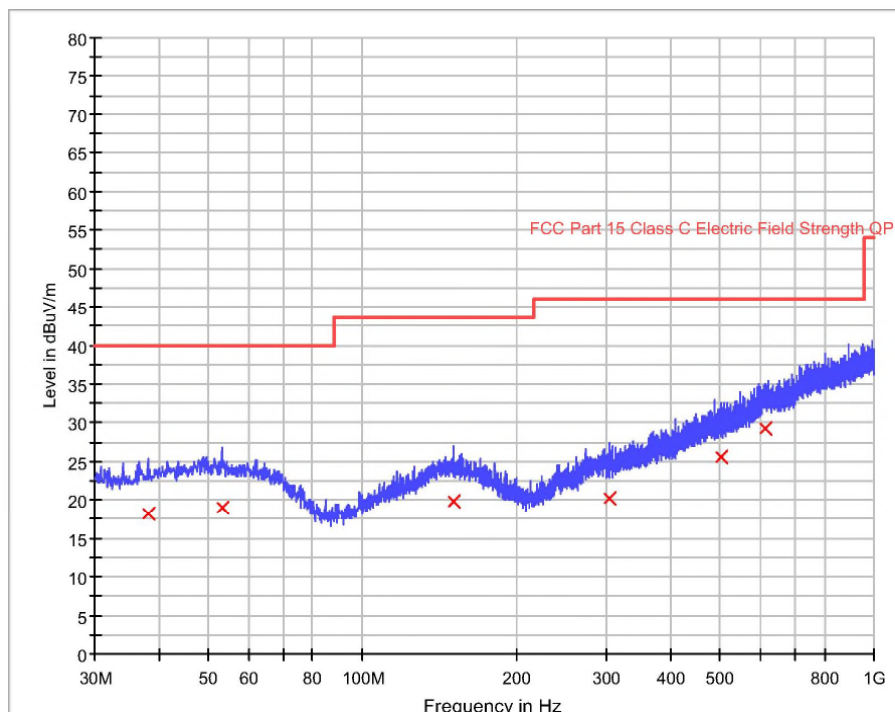

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 13 von 49
Page 13 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)	Comment
38.120000	18.2	1000.0	120.000	H	19.6	21.8	40.0	
53.160000	19.0	1000.0	120.000	H	20.7	21.0	40.0	
151.000000	19.9	1000.0	120.000	H	21.2	23.6	43.5	
304.280000	20.2	1000.0	120.000	H	21.9	25.8	46.0	
503.960000	25.6	1000.0	120.000	H	27.2	20.4	46.0	
611.640000	29.2	1000.0	120.000	H	30.0	16.8	46.0	

Tested by

Chris Liang

20210119

Reviewed by

Jacky Chen

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 14 von 49
Page 14 of 49

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(Middle)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	30-1000MHz
Receiver:	ESC1 3
Transducer:	VULB9168

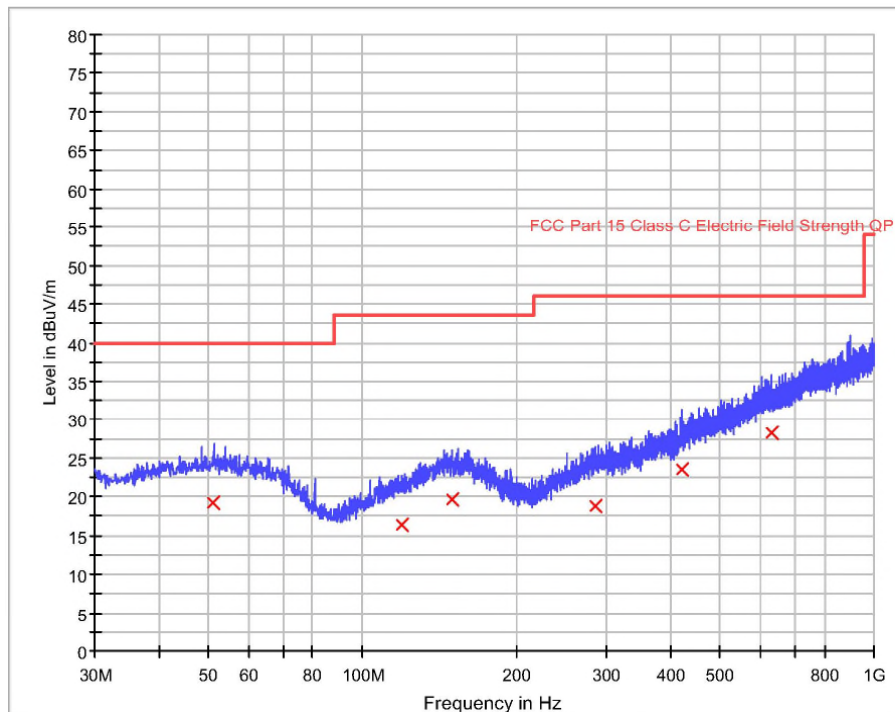

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 15 von 49
Page 15 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)	Comment
51.200000	19.2	1000.0	120.000	V	20.7	20.8	40.0	
119.480000	16.5	1000.0	120.000	V	18.3	27.0	43.5	
149.920000	19.6	1000.0	120.000	V	21.2	23.9	43.5	
284.760000	18.8	1000.0	120.000	V	21.6	27.2	46.0	
421.160000	23.5	1000.0	120.000	V	25.2	22.6	46.0	
628.840000	28.3	1000.0	120.000	V	30.1	17.7	46.0	

Tested by

Chris Liang

20210119

Reviewed by

Jacky Chen

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 16 von 49
Page 16 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(Low)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

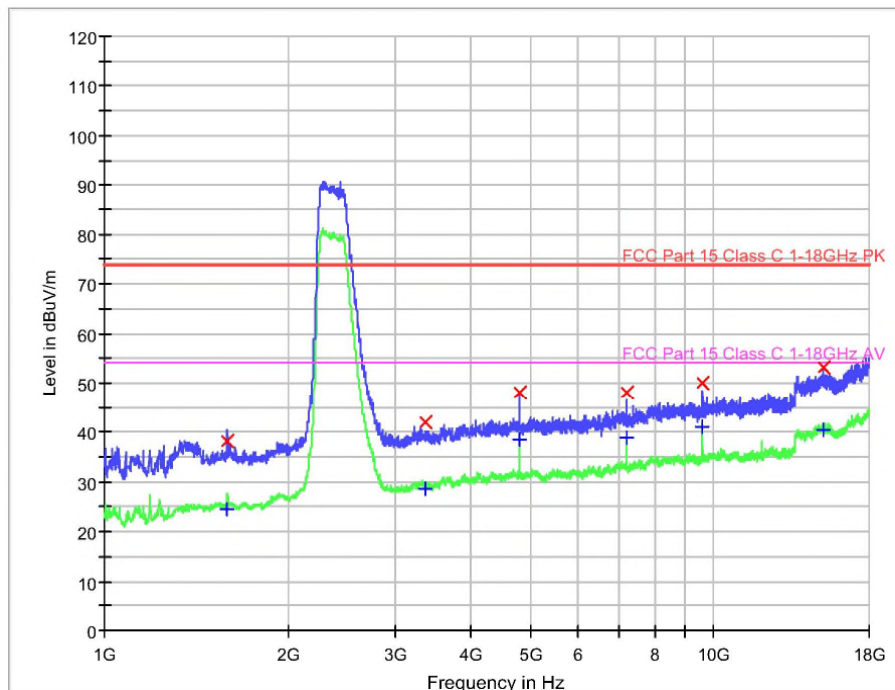

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 17 von 49

Test Report No.

Page 17 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1593.000000	38.1	1000.0	1000.000	H	-15.4	35.9	74.0
3371.000000	41.9	1000.0	1000.000	H	-9.7	32.1	74.0
4804.000000	48.1	1000.0	1000.000	H	-6.7	25.9	74.0
7205.000000	48.0	1000.0	1000.000	H	-3.0	26.0	74.0
9609.000000	50.0	1000.0	1000.000	H	1.4	24.1	74.0
15146.000000	53.2	1000.0	1000.000	H	4.6	20.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1593.000000	24.4	1000.0	1000.000	H	-15.4	29.6	54.0
3371.000000	28.6	1000.0	1000.000	H	-9.7	25.4	54.0
4804.000000	38.6	1000.0	1000.000	H	-6.7	15.4	54.0
7205.000000	38.9	1000.0	1000.000	H	-3.0	15.1	54.0
9609.000000	41.1	1000.0	1000.000	H	1.4	12.9	54.0
15146.000000	40.3	1000.0	1000.000	H	4.6	13.7	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 18 von 49
Page 18 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(Low)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

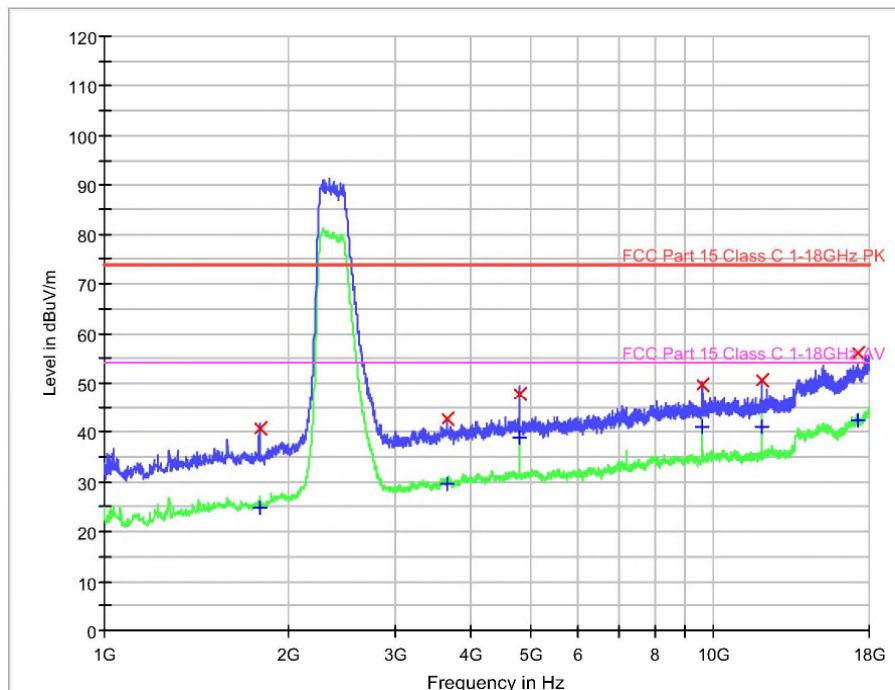

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 19 von 49

Page 19 of 49

Test Report No.

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	PoI	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1797.000000	40.8	1000.0	1000.000	V	-14.1	33.2	74.0
3656.000000	42.8	1000.0	1000.000	V	-9.0	31.2	74.0
4811.000000	47.8	1000.0	1000.000	V	-6.7	26.2	74.0
9608.000000	49.7	1000.0	1000.000	V	1.4	24.3	74.0
12010.000000	50.6	1000.0	1000.000	V	2.6	23.4	74.0
17233.000000	55.9	1000.0	1000.000	V	8.1	18.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	PoI	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1797.000000	24.8	1000.0	1000.000	V	-14.1	29.2	54.0
3656.000000	29.5	1000.0	1000.000	V	-9.0	24.5	54.0
4811.000000	38.9	1000.0	1000.000	V	-6.7	15.1	54.0
9608.000000	40.9	1000.0	1000.000	V	1.4	13.1	54.0
12010.000000	40.9	1000.0	1000.000	V	2.6	13.1	54.0
17233.000000	42.3	1000.0	1000.000	V	8.1	11.8	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 20 von 49
Page 20 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(Middle)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

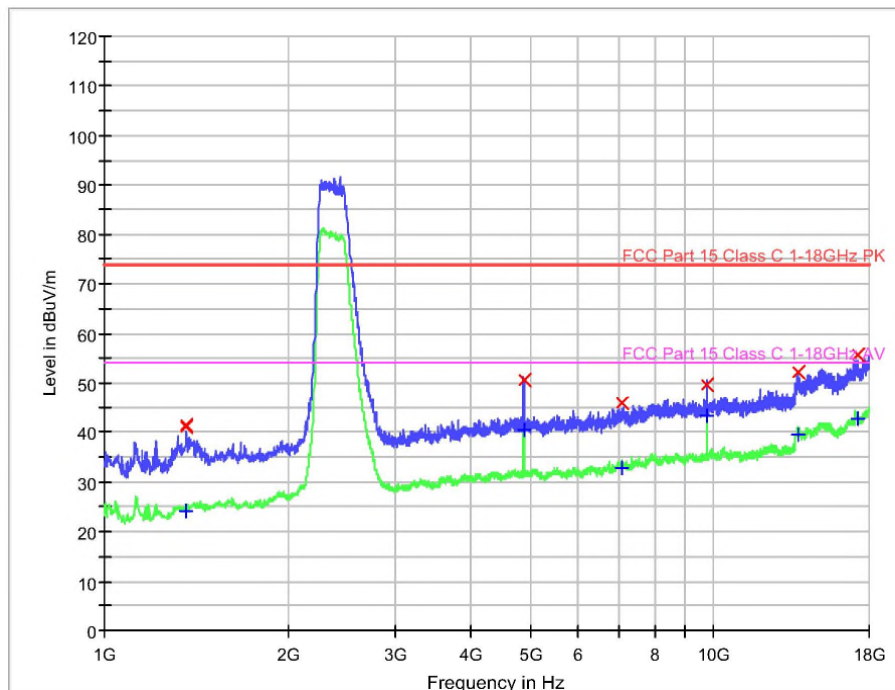

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 21 von 49

Test Report No.

Page 21 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	PoI	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1365.000000	41.2	1000.0	1000.000	H	-16.7	32.8	74.0
1365.000000	41.3	1000.0	1000.000	H	-16.7	32.8	74.0
4880.000000	50.6	1000.0	1000.000	H	-6.5	23.4	74.0
7088.000000	45.9	1000.0	1000.000	H	-3.3	28.1	74.0
9759.000000	49.8	1000.0	1000.000	H	2.0	24.2	74.0
13746.000000	52.4	1000.0	1000.000	H	2.8	21.7	74.0
17226.000000	55.7	1000.0	1000.000	H	8.1	18.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	PoI	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1365.000000	24.3	1000.0	1000.000	H	-16.7	29.7	54.0
1365.000000	24.3	1000.0	1000.000	H	-16.7	29.7	54.0
4880.000000	40.4	1000.0	1000.000	H	-6.5	13.6	54.0
7088.000000	32.8	1000.0	1000.000	H	-3.3	21.2	54.0
9759.000000	43.1	1000.0	1000.000	H	2.0	10.9	54.0
13746.000000	39.3	1000.0	1000.000	H	2.8	14.7	54.0
17226.000000	42.6	1000.0	1000.000	H	8.1	11.4	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 22 von 49
Page 22 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(Middle)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

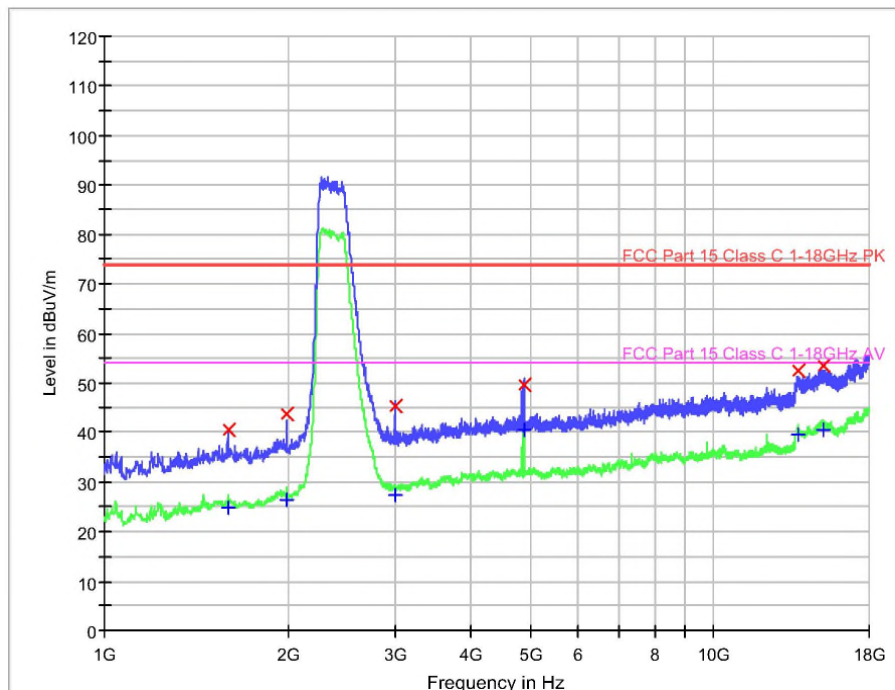

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 23 von 49

Test Report No.

Page 23 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1597.000000	40.3	1000.0	1000.000	V	-15.4	33.7	74.0
1997.000000	43.5	1000.0	1000.000	V	-12.4	30.5	74.0
2997.000000	45.3	1000.0	1000.000	V	-10.4	28.7	74.0
4880.000000	49.7	1000.0	1000.000	V	-6.5	24.3	74.0
13752.000000	52.7	1000.0	1000.000	V	2.8	21.4	74.0
15114.000000	53.5	1000.0	1000.000	V	4.5	20.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1597.000000	24.7	1000.0	1000.000	V	-15.4	29.3	54.0
1997.000000	26.4	1000.0	1000.000	V	-12.4	27.6	54.0
2997.000000	27.5	1000.0	1000.000	V	-10.4	26.5	54.0
4880.000000	40.4	1000.0	1000.000	V	-6.5	13.6	54.0
13752.000000	39.5	1000.0	1000.000	V	2.8	14.5	54.0
15114.000000	40.5	1000.0	1000.000	V	4.5	13.5	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 24 von 49
Page 24 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

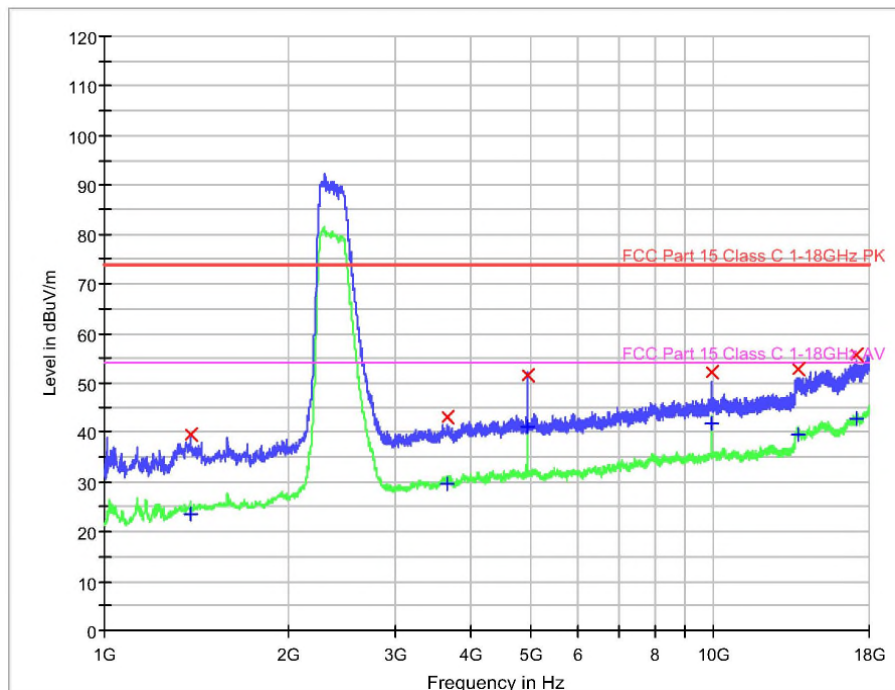

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 25 von 49
Page 25 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1389.000000	39.3	1000.0	1000.000	H	-16.6	34.7	74.0
3652.000000	42.8	1000.0	1000.000	H	-9.0	31.2	74.0
4960.000000	51.7	1000.0	1000.000	H	-6.4	22.4	74.0
9921.000000	52.2	1000.0	1000.000	H	2.2	21.8	74.0
13754.000000	52.9	1000.0	1000.000	H	2.8	21.1	74.0
17199.000000	55.6	1000.0	1000.000	H	8.1	18.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1389.000000	23.6	1000.0	1000.000	H	-16.6	30.4	54.0
3652.000000	29.7	1000.0	1000.000	H	-9.0	24.3	54.0
4960.000000	41.2	1000.0	1000.000	H	-6.4	12.8	54.0
9921.000000	41.6	1000.0	1000.000	H	2.2	12.4	54.0
13754.000000	39.4	1000.0	1000.000	H	2.8	14.6	54.0
17199.000000	42.6	1000.0	1000.000	H	8.1	11.4	54.0

Tested by

Chris Liang

20210119

Reviewed by

Jacky Chen

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 26 von 49
Page 26 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitter(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-07_1GHz-18GHz_With PreAMP EXT& Notch filter

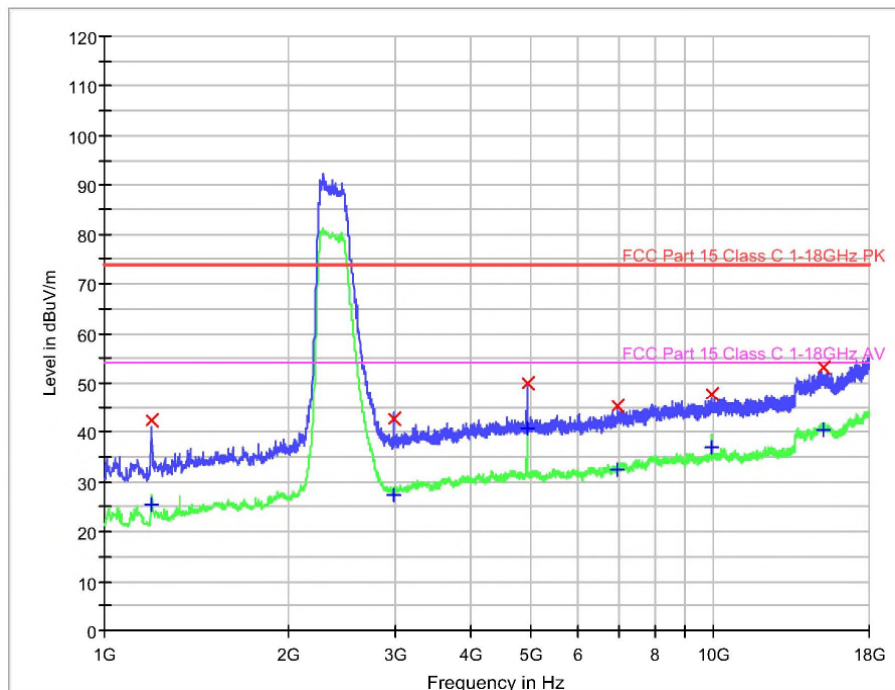

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 27 von 49

Test Report No.

Page 27 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1195.000000	42.4	1000.0	1000.000	V	-17.3	31.6	74.0
2989.000000	42.6	1000.0	1000.000	V	-10.4	31.5	74.0
4960.000000	49.9	1000.0	1000.000	V	-6.4	24.1	74.0
6958.000000	45.2	1000.0	1000.000	V	-3.6	28.8	74.0
9921.000000	47.8	1000.0	1000.000	V	2.2	26.2	74.0
15108.000000	53.3	1000.0	1000.000	V	4.5	20.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1195.000000	25.6	1000.0	1000.000	V	-17.3	28.4	54.0
2989.000000	27.3	1000.0	1000.000	V	-10.4	26.7	54.0
4960.000000	40.8	1000.0	1000.000	V	-6.4	13.2	54.0
6958.000000	32.4	1000.0	1000.000	V	-3.6	21.6	54.0
9921.000000	36.8	1000.0	1000.000	V	2.2	17.2	54.0
15108.000000	40.3	1000.0	1000.000	V	4.5	13.7	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 28 von 49
Page 28 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitting(Low)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

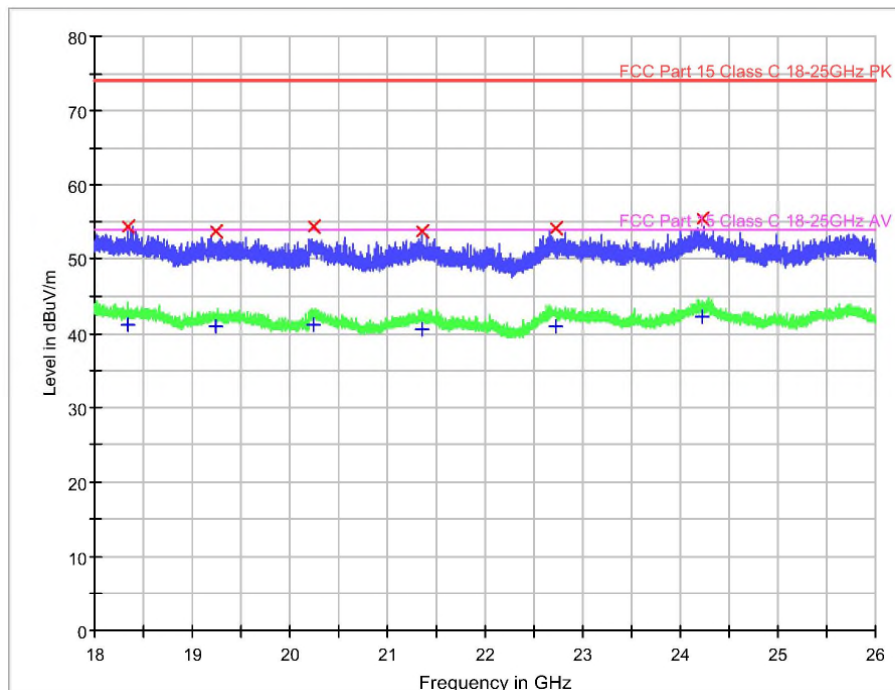

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 29 von 49
Page 29 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
18345.000000	54.2	1000.0	1000.000	H	8.1	19.8	74.0
19235.000000	53.7	1000.0	1000.000	H	7.9	20.3	74.0
20236.000000	54.3	1000.0	1000.000	H	7.7	19.7	74.0
21352.000000	53.7	1000.0	1000.000	H	7.2	20.3	74.0
22724.000000	54.1	1000.0	1000.000	H	7.4	19.9	74.0
24231.000000	55.4	1000.0	1000.000	H	7.7	18.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18345.000000	41.2	1000.0	1000.000	H	8.1	12.8	54.0
19235.000000	40.9	1000.0	1000.000	H	7.9	13.2	54.0
20236.000000	41.2	1000.0	1000.000	H	7.7	12.8	54.0
21352.000000	40.6	1000.0	1000.000	H	7.2	13.5	54.0
22724.000000	41.0	1000.0	1000.000	H	7.4	13.0	54.0
24231.000000	42.2	1000.0	1000.000	H	7.7	11.8	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 30 von 49
Page 30 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitting(Low)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

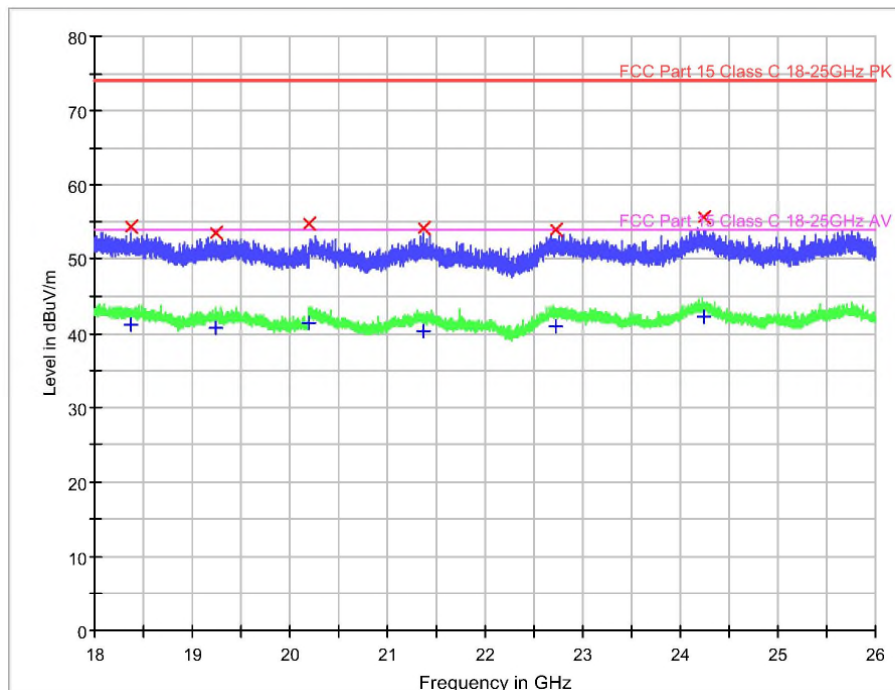

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 31 von 49

Test Report No.

Page 31 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
18372.000000	54.4	1000.0	1000.000	V	8.1	19.6	74.0
19241.000000	53.5	1000.0	1000.000	V	7.9	20.5	74.0
20201.000000	54.7	1000.0	1000.000	V	7.7	19.3	74.0
21371.000000	54.1	1000.0	1000.000	V	7.2	19.9	74.0
22729.000000	53.9	1000.0	1000.000	V	7.4	20.1	74.0
24237.000000	55.6	1000.0	1000.000	V	7.7	18.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18372.000000	41.2	1000.0	1000.000	V	8.1	12.8	54.0
19241.000000	40.8	1000.0	1000.000	V	7.9	13.2	54.0
20201.000000	41.4	1000.0	1000.000	V	7.7	12.6	54.0
21371.000000	40.4	1000.0	1000.000	V	7.2	13.6	54.0
22729.000000	41.0	1000.0	1000.000	V	7.4	13.0	54.0
24237.000000	42.2	1000.0	1000.000	V	7.7	11.8	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 32 von 49
Page 32 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitting(Middle)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

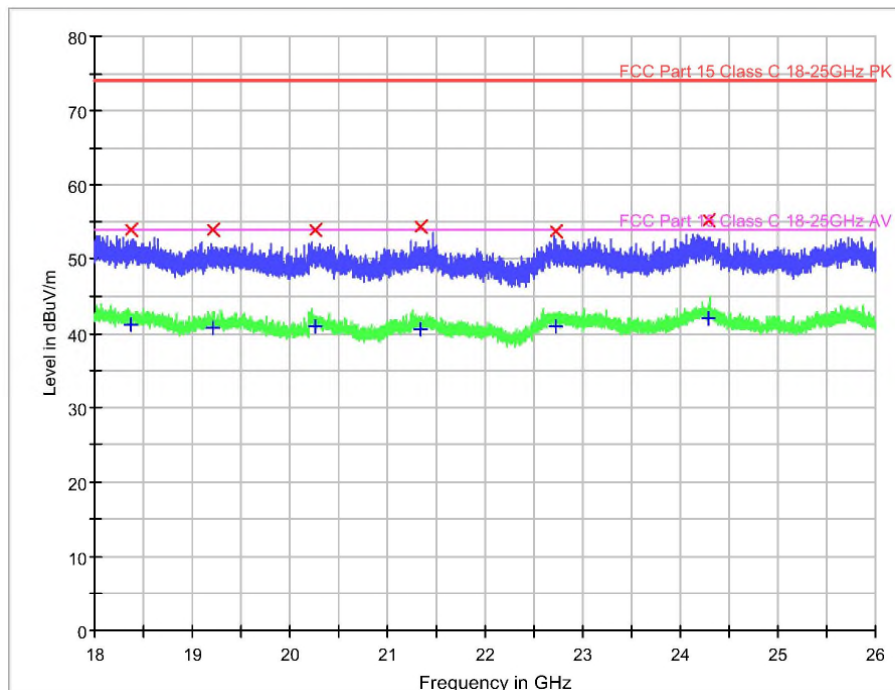

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 33 von 49

Test Report No.

Page 33 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
18366.000000	53.9	1000.0	1000.000	H	8.1	20.1	74.0
19215.000000	53.9	1000.0	1000.000	H	7.9	20.1	74.0
20266.000000	53.8	1000.0	1000.000	H	7.6	20.2	74.0
21335.000000	54.3	1000.0	1000.000	H	7.2	19.7	74.0
22726.000000	53.6	1000.0	1000.000	H	7.4	20.4	74.0
24293.000000	55.3	1000.0	1000.000	H	7.6	18.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18366.000000	41.1	1000.0	1000.000	H	8.1	12.9	54.0
19215.000000	40.7	1000.0	1000.000	H	7.9	13.3	54.0
20266.000000	41.0	1000.0	1000.000	H	7.6	13.0	54.0
21335.000000	40.5	1000.0	1000.000	H	7.2	13.5	54.0
22726.000000	41.0	1000.0	1000.000	H	7.4	13.1	54.0
24293.000000	41.9	1000.0	1000.000	H	7.6	12.1	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 34 von 49
Page 34 of 49

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitting(Middle)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical
Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

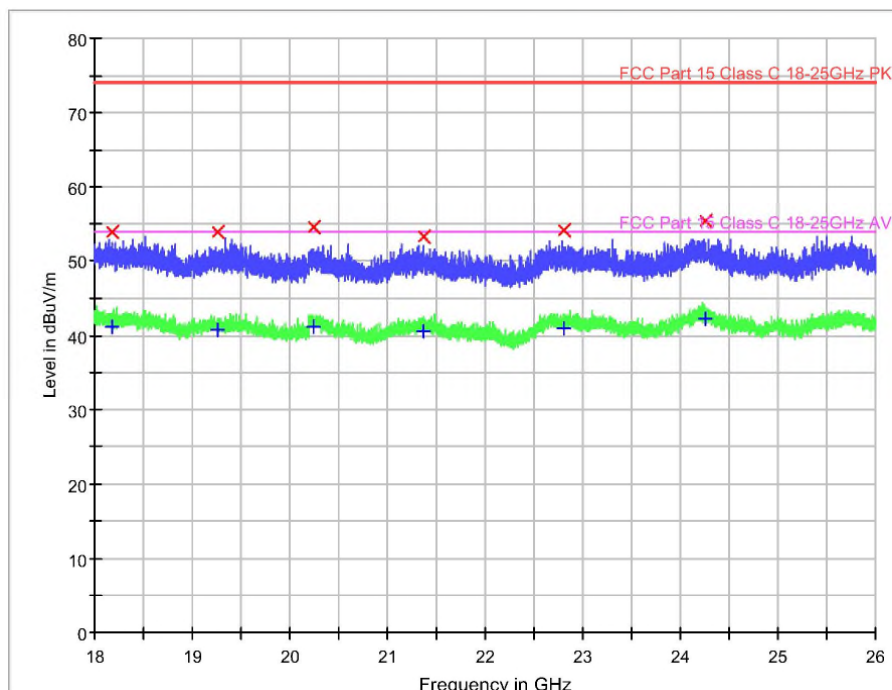

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 35 von 49

Test Report No.

Page 35 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	PoI	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
18178.000000	54.0	1000.0	1000.000	V	8.0	20.1	74.0
19255.000000	53.9	1000.0	1000.000	V	7.9	20.1	74.0
20243.000000	54.6	1000.0	1000.000	V	7.6	19.5	74.0
21379.000000	53.3	1000.0	1000.000	V	7.2	20.7	74.0
22806.000000	54.2	1000.0	1000.000	V	7.4	19.9	74.0
24255.000000	55.5	1000.0	1000.000	V	7.7	18.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	PoI	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18178.000000	41.1	1000.0	1000.000	V	8.0	12.9	54.0
19255.000000	40.7	1000.0	1000.000	V	7.9	13.3	54.0
20243.000000	41.2	1000.0	1000.000	V	7.6	12.8	54.0
21379.000000	40.5	1000.0	1000.000	V	7.2	13.6	54.0
22806.000000	41.0	1000.0	1000.000	V	7.4	13.0	54.0
24255.000000	42.2	1000.0	1000.000	V	7.7	11.8	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 36 von 49
Page 36 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitting(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

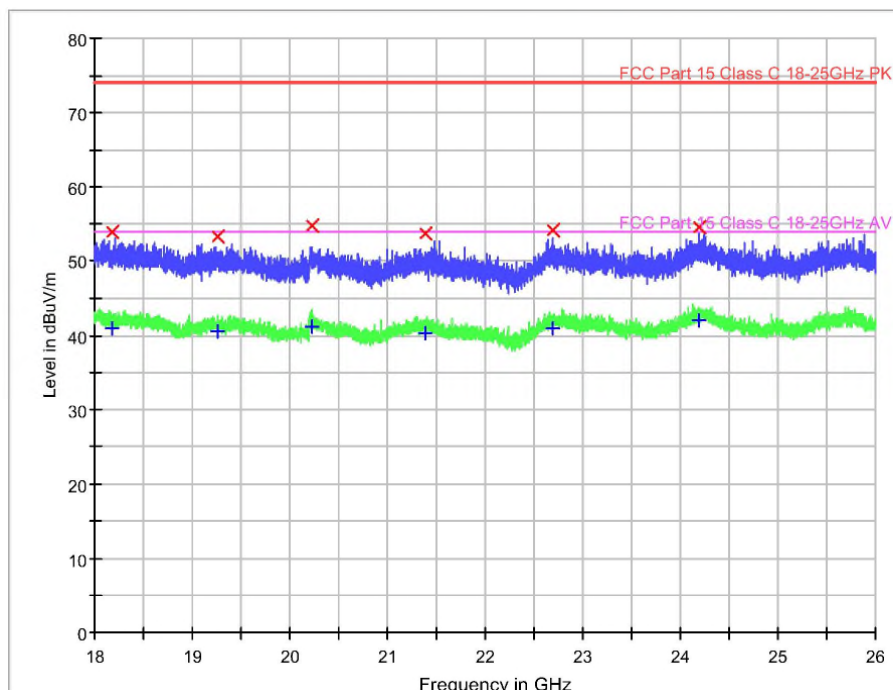

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 37 von 49

Test Report No.

Page 37 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
18181.000000	53.8	1000.0	1000.000	H	8.0	20.2	74.0
19264.000000	53.4	1000.0	1000.000	H	7.9	20.6	74.0
20219.000000	54.8	1000.0	1000.000	H	7.7	19.2	74.0
21391.000000	53.7	1000.0	1000.000	H	7.2	20.3	74.0
22699.000000	54.1	1000.0	1000.000	H	7.4	19.9	74.0
24186.000000	54.6	1000.0	1000.000	H	7.7	19.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18181.000000	41.0	1000.0	1000.000	H	8.0	13.0	54.0
19264.000000	40.5	1000.0	1000.000	H	7.9	13.5	54.0
20219.000000	41.2	1000.0	1000.000	H	7.7	12.8	54.0
21391.000000	40.4	1000.0	1000.000	H	7.2	13.6	54.0
22699.000000	41.0	1000.0	1000.000	H	7.4	13.0	54.0
24186.000000	41.9	1000.0	1000.000	H	7.7	12.1	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 38 von 49
Page 38 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	Transmitting(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

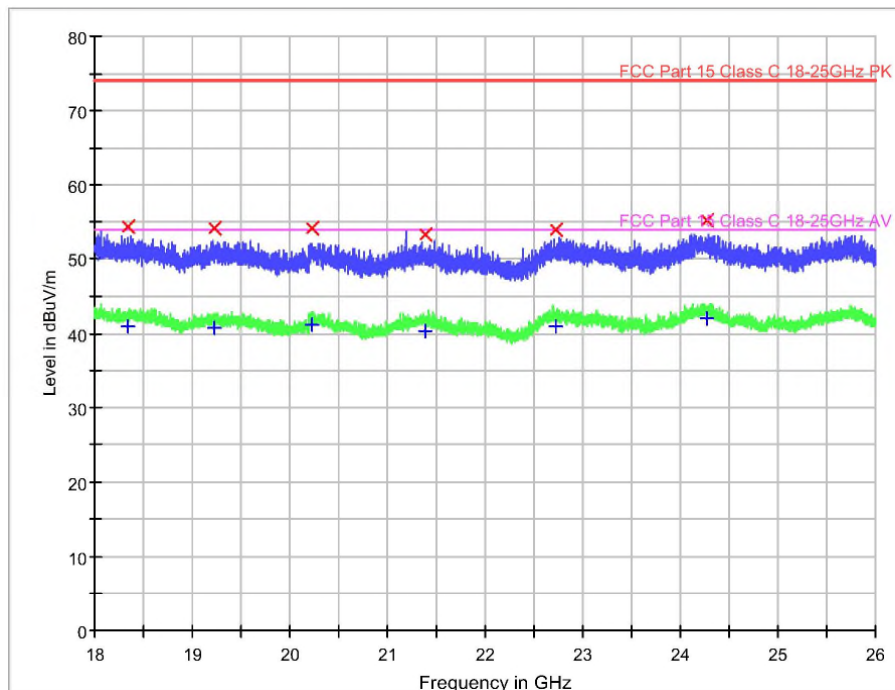

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 39 von 49

Test Report No.

Page 39 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
18331.000000	54.3	1000.0	1000.000	V	8.1	19.7	74.0
19221.000000	54.2	1000.0	1000.000	V	7.9	19.8	74.0
20219.000000	54.1	1000.0	1000.000	V	7.7	19.9	74.0
21391.000000	53.3	1000.0	1000.000	V	7.2	20.8	74.0
22718.000000	53.9	1000.0	1000.000	V	7.4	20.1	74.0
24270.000000	55.1	1000.0	1000.000	V	7.7	18.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Poi	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18331.000000	41.0	1000.0	1000.000	V	8.1	13.0	54.0
19221.000000	40.7	1000.0	1000.000	V	7.9	13.3	54.0
20219.000000	41.2	1000.0	1000.000	V	7.7	12.8	54.0
21391.000000	40.4	1000.0	1000.000	V	7.2	13.6	54.0
22718.000000	40.9	1000.0	1000.000	V	7.4	13.1	54.0
24270.000000	42.0	1000.0	1000.000	V	7.7	12.0	54.0

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 40 von 49
Page 40 of 49

Band Edge- BLE

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Band edge
Operation Mode:	Transmitter(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-05_1GHz-18GHz_With PreAMP EXT

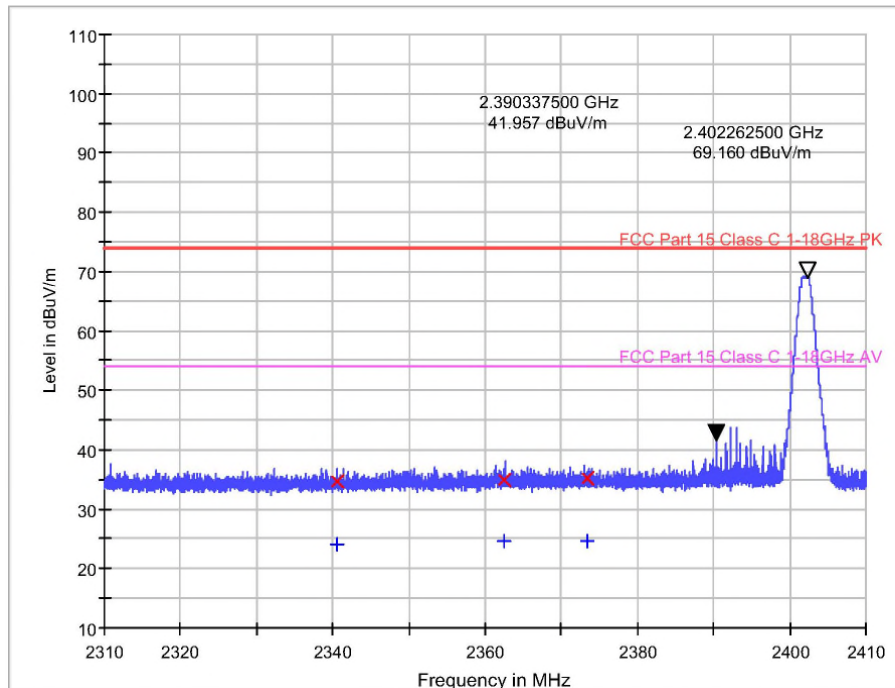

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 41 von 49
Page 41 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2340.500000	34.7	1000.0	1000.000	H	-14.2	39.3	74.0
2362.500000	34.9	1000.0	1000.000	H	-14.2	39.1	74.0
2373.500000	35.1	1000.0	1000.000	H	-14.2	38.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2340.500000	24.1	1000.0	1000.000	H	-14.2	29.9	54.0
2362.500000	24.6	1000.0	1000.000	H	-14.2	29.4	54.0
2373.500000	24.5	1000.0	1000.000	H	-14.2	29.5	54.0

Tested by

Chris Liang

20210119

Reviewed by

Jacky Chen

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 42 von 49
Page 42 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Band edge
Operation Mode:	Transmitter(Low)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-05_1GHz-18GHz_With PreAMP EXT

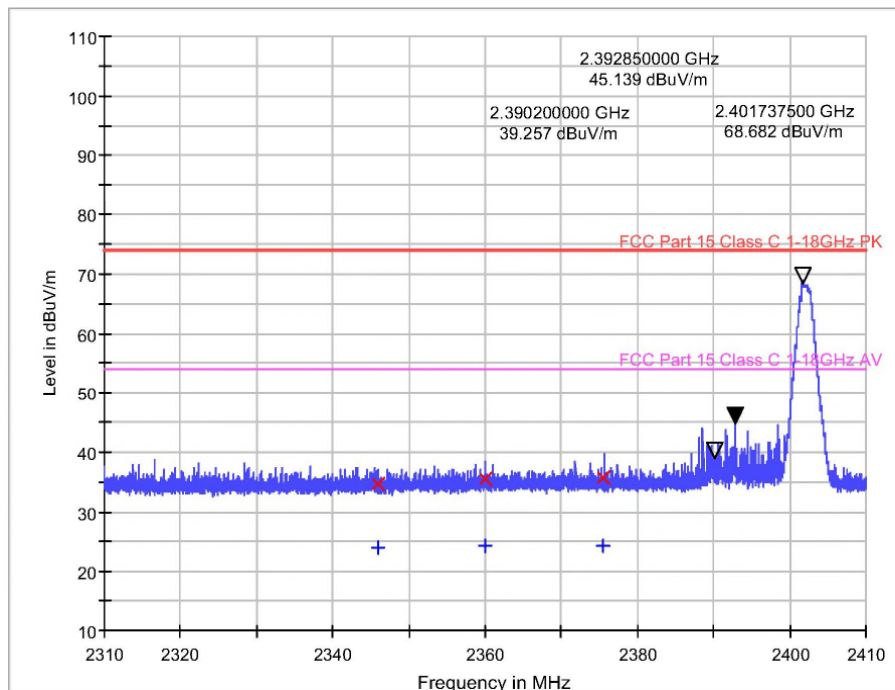

Tested by *Chris Liang*
20210119

Reviewed by

Prüfbericht - Nr.:

CN219TJX 001

Seite 43 von 49

Test Report No.

Page 43 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2346.000000	34.8	1000.0	1000.000	V	-14.2	39.2	74.0
2360.000000	35.5	1000.0	1000.000	V	-14.2	38.5	74.0
2375.500000	35.6	1000.0	1000.000	V	-14.2	38.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2346.000000	24.1	1000.0	1000.000	V	-14.2	29.9	54.0
2360.000000	24.4	1000.0	1000.000	V	-14.2	29.6	54.0
2375.500000	24.5	1000.0	1000.000	V	-14.2	29.6	54.0

Tested by

Chris Liang

Reviewed by

20210119

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 44 von 49
Page 44 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Band edge
Operation Mode:	Transmitter(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-05_1GHz-18GHz_With PreAMP EXT

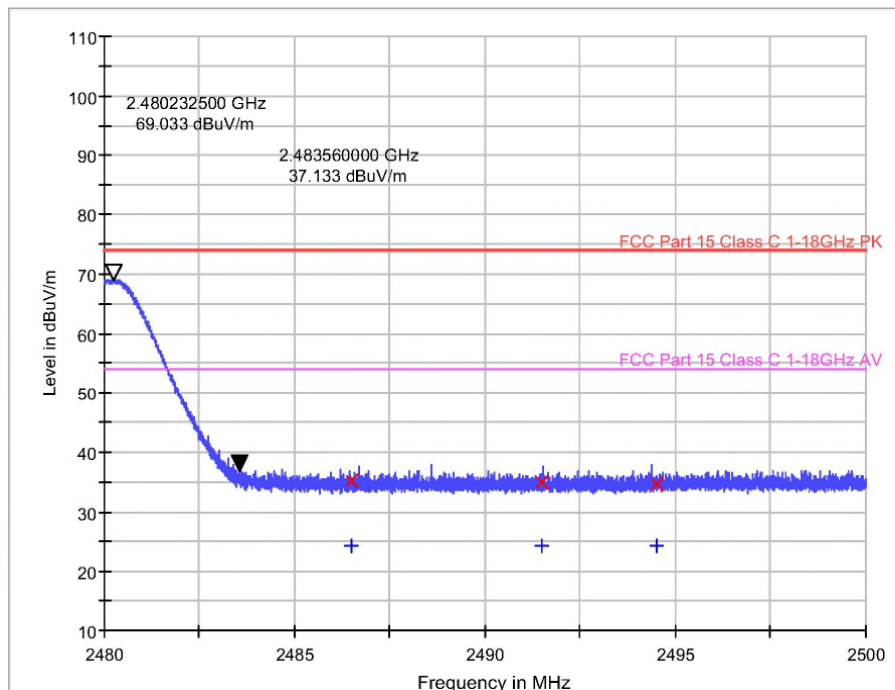

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 45 von 49
Page 45 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2486.500000	35.3	1000.0	1000.000	H	-14.1	38.7	74.0
2491.500000	35.0	1000.0	1000.000	H	-14.1	39.0	74.0
2494.500000	34.7	1000.0	1000.000	H	-14.1	39.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2486.500000	24.4	1000.0	1000.000	H	-14.1	29.6	54.0
2491.500000	24.4	1000.0	1000.000	H	-14.1	29.6	54.0
2494.500000	24.4	1000.0	1000.000	H	-14.1	29.6	54.0

Tested by

Chris Liang

20210119

Reviewed by

Jacky Chen

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 46 von 49
Page 46 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	Innovative
Test Item:	Massager
Identification:	K6-EN
Test Standard:	FCC Part 15C
Test Detail:	Band edge
Operation Mode:	Transmitter(High)
Climate Condition:	20 °C, 50 %, 100 k Pa
Test Voltage/ Freq:	DC 5V
Receipt No:	170257888
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907

EMCTT_EREFO11-A02-05_1GHz-18GHz_With PreAMP EXT

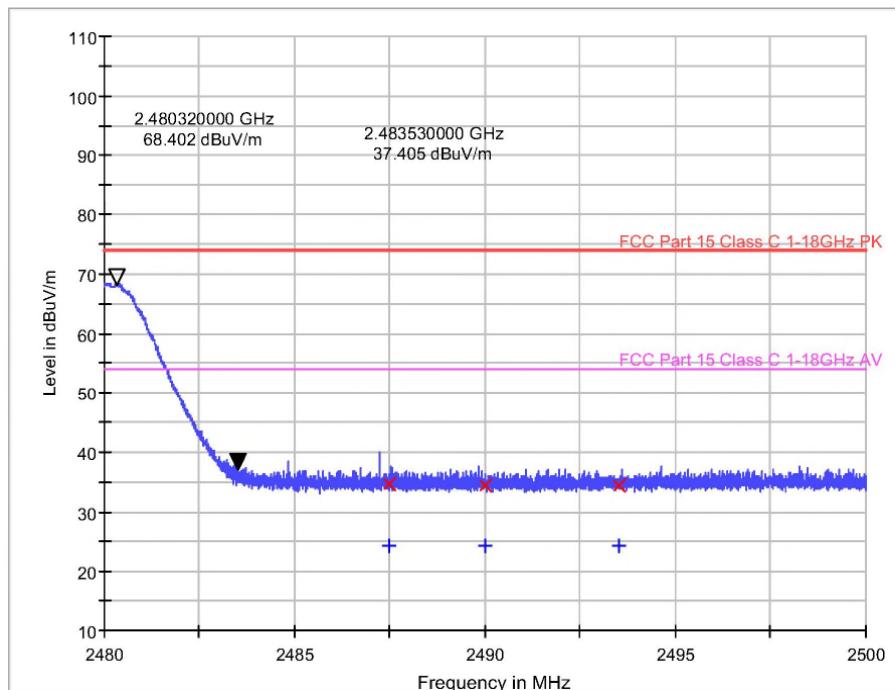

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 47 von 49
Page 47 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2487.500000	34.6	1000.0	1000.000	V	-14.1	39.4	74.0
2490.000000	34.5	1000.0	1000.000	V	-14.1	39.5	74.0
2493.500000	34.5	1000.0	1000.000	V	-14.1	39.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2487.500000	24.3	1000.0	1000.000	V	-14.1	29.7	54.0
2490.000000	24.4	1000.0	1000.000	V	-14.1	29.6	54.0
2493.500000	24.4	1000.0	1000.000	V	-14.1	29.6	54.0

Tested by

Chris Liang

20210119

Reviewed by

Jacky Chen

20210121

Prüfbericht - Nr.:
Test Report No.

CN219TJX 001

Seite 48 von 49
Page 48 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Common Information

Manufacturer: Innovative
Test Item: Massager
Identification: K6-EN
Test Standard: FCC Part 15B
Test Detail: Conducted Emission
Operation Mode: A
Climate Condition: 23 °C, 50 %, 100 k Pa
Test Voltage/ Freq.: AC 120V/60Hz
Port / Line: AC mains
Receipt No.: 170257888
Report No.: /
Result: Pass
Comment: /

Hardware Setup: 1phase LISN ENV216 to ESCI 3
Level Unit: dBµV

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak; Average	9kHz	4.5kHz	10ms	ESCI 3

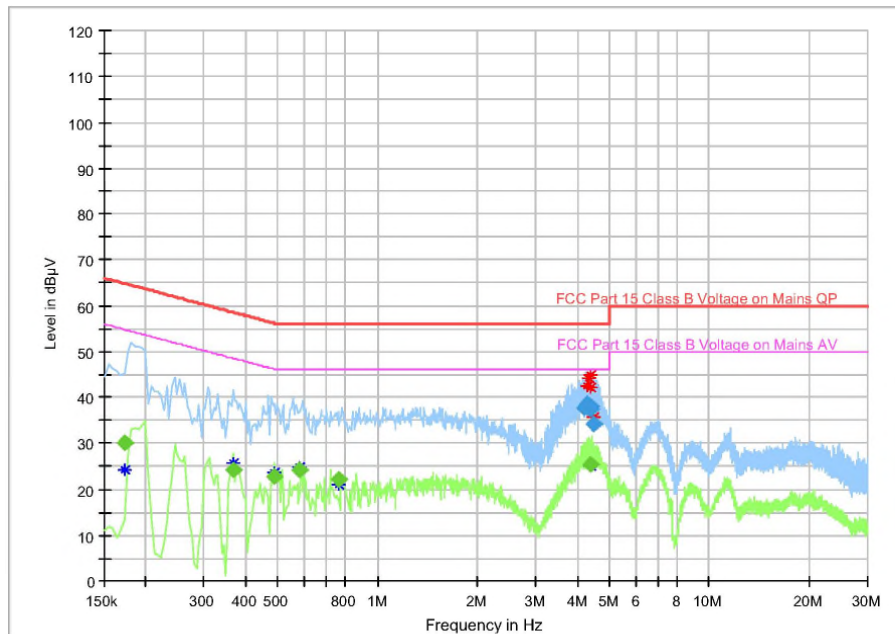

Tested by *Chris Liang*
20210119

Reviewed by *Jacky Chen*
20210121

Prüfbericht - Nr.:

CN219TJX 001

Seite 49 von 49

Test Report No.

Page 49 of 49

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.172500	---	30.20	54.84	24.64	1000.0	9.000	N	9.6
0.366000	---	24.34	48.59	24.26	1000.0	9.000	L1	9.6
0.487500	---	22.86	46.21	23.35	1000.0	9.000	L1	9.7
0.582000	---	24.31	46.00	21.69	1000.0	9.000	L1	9.7
0.762000	---	22.14	46.00	23.86	1000.0	9.000	L1	9.7
4.218000	37.72	---	56.00	18.28	1000.0	9.000	N	9.8
4.281000	38.41	---	56.00	17.59	1000.0	9.000	N	9.8
4.353000	37.52	---	56.00	18.48	1000.0	9.000	N	9.8
4.375500	---	25.39	46.00	20.61	1000.0	9.000	L1	9.8
4.384500	38.01	---	56.00	17.99	1000.0	9.000	N	9.8
4.393500	37.26	---	56.00	18.74	1000.0	9.000	N	9.8
4.492500	34.10	---	56.00	21.90	1000.0	9.000	L1	9.8

Tested by

Chris Liang

Reviewed by

Jacky Chen

20210119

20210121