



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiaxitang Community, Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No.....: GRCTR240402038-03

FCC ID.....: 2AYVYFMWRJ04A3

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: May. 15, 2024

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiaxitang Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: Shenzhen FIMI Robot Technology Co.,Ltd.

Address.....: 2nd Floor, East Block, Tianliao Building, 1133 Xueyuan Avenue, Taoyuan Street, Nanshan District, Shenzhen City, Guangdong Province

Test specification.....:

Standard.....: FCC Part 15 Subpart E 15.407

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: FIMI MINI 3 Drone

Trade Mark.....: /

Manufacturer.....: Shenzhen FIMI Robot Technology Co.,Ltd.

Model/Type reference.....: FMWRJ04A3

Listed Models: /

Firmware Version.....: V1.0

Hardware Version.....: V1.0

Modulation: OFDM

Frequency.....: From 5745MHz-5825MHz

Ratings.....: 5.0V---2.0A(charged by DC 5V Power Adapter) or 7.7V---2200mAh (By Li-ion rechargeable battery)

Result.....: **PASS**

TEST REPORT

Equipment under Test : FIMI MINI 3 Drone

Model /Type : FMWRJ04A3

Listed Models : /

Applicant : **Shenzhen FIMI Robot Technology Co.,Ltd.**

Address : 2nd Floor,East Block,Tianliao Builbing,1133 Xueyuan Avenue, Taoyuan Street, Nanshan District,Shenzhen City, Guangdong Province

Manufacturer : **Shenzhen FIMI Robot Technology Co.,Ltd.**

Address : 2nd Floor,East Block,Tianliao Builbing,1133 Xueyuan Avenue, Taoyuan Street, Nanshan District,Shenzhen City, Guangdong Province

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Equipment Under Test	5
2.4 Short description of the Equipment under Test (EUT)	5
2.5 EUT configuration	6
2.6 EUT operation mode	6
2.7 Block Diagram of Test Setup	6
2.8 Related Submittal(s) / Grant (s)	6
2.9 Modifications	6
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory	7
3.2 Test Facility	7
3.3 Environmental conditions	7
3.4 Test Description	7
3.5 Statement of the measurement uncertainty	8
3.6 Equipments Used during the Test	9
4 TEST CONDITIONS AND RESULTS	10
4.1 AC Power Conducted Emission	10
4.2 Radiated Emissions	13
4.3 Maximum Conducted Average Output Power	19
4.4 Power Spectral Density	21
4.5 Emission Bandwidth (26dB Bandwidth)	28
4.6 Minimum Emission Bandwidth (6dB Bandwidth)	29
4.7 Frequency Stability	35
4.8 Automatically Discontinue Transmission	37
4.9 Band edge for RF Conducted Emissions	38
5 TEST SETUP PHOTOS OF THE EUT	44
6 PHOTOS OF THE EUT	45

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL

INFORAMTION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Apr. 28, 2024
Testing commenced on	:	Apr. 28, 2024
Testing concluded on	:	May. 15, 2024

2.2 Product Description

Product Name:	FIMI MINI 3 Drone			
Model/Type reference:	FMWRJ04A3			
Listed Models:	/			
Power supply:	5.0V---2.0A(charged by DC 5V Power Adapter) or 7.7V---2200mAh (By Li-ion rechargeable battery)			
Adapter information (Auxiliary test supplied by test Lab):	Model:JYR9-05 Input:AC100-240V 50/60Hz, 0.3A Output:DC 5V,2A			
Testing sample ID:	GRCTR240402038-1# (Engineer sample), GRCTR240402038-2# (Normal sample)			

WIFI

	20MHz system	40MHz system	80MHz system	160MHz system
Supported type:	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5745MHz-5825MHz	5755MHz-5795MHz	5775MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Channel number:	5	2	1	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Antenna type:	Internal antenna			
Antenna gain:	1.01 dBi			
Remark: *When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.				

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 5V from Adapter

2.4 Short description of the Equipment under Test (EUT)

This is a FIMI MINI 3 Drone.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/> /		M/N: /
		Manufacturer: /

2.6 EUT operation mode


The Applicant provides communication tools software(SecureCRT) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) for testing meet KDB558074 test requirement.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz			
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775		
	153	5765						
	157	5785	159	5795				
	161	5805						
	165	5825	--	--	--	--		

Note: The line display in gray is those Channels/Frequencies select to test in this report for each operation mode.

2.7 Block Diagram of Test Setup

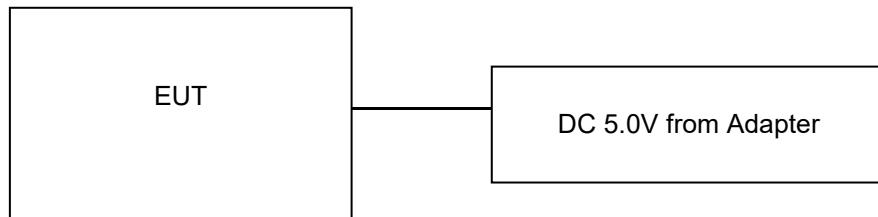

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiaxitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	N/A _{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS _{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS

FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A <small>Note 3</small>
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS
FCC Part 15.407(c)	Automatically Discontinue Transmission	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: N/A means "not applicable".

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
	11a/OFDM	6 Mbps
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth)	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2023/09/27	2024/09/26
LISN	R&S	ENV216	GRCTEE010	2023/09/27	2024/09/26
EMI Test Receiver	R&S	ESPI	GRCTEE017	2023/09/28	2024/09/27
EMI Test Receiver	R&S	ESCI	GRCTEE008	2023/09/27	2024/09/26
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2023/09/27	2024/09/26
Spectrum Analyzer	R&S	FSP	GRCTEE003	2023/09/28	2024/09/27
Vector Signal generator	Agilent	N5181A	GRCTEE007	2023/09/27	2024/09/26
Analog Signal Generator	R&S	SML03	GRCTEE006	2023/09/27	2024/09/26
Climate Chamber	QIYA	LCD-9530	GRCTES016	2023/09/27	2024/09/26
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2023/09/28	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2023/09/27	2024/09/26
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2023/09/28	2024/09/27
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2023/09/27	2024/09/26
Directional coupler	NARDA	4226-10	GRCTEE004	2023/09/27	2024/09/26
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2023/09/27	2024/09/26
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2023/09/27	2024/09/26
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2023/09/27	2024/09/26
Power Sensor	Agilent	U2021XA	GRCTEE070	2023/09/27	2024/09/26
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

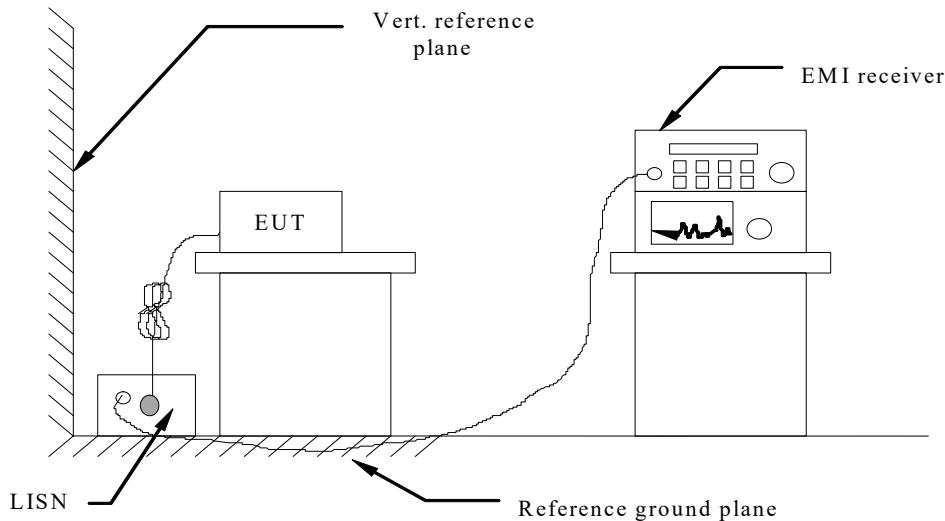

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. All modes of 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) were tested at Low, Middle, and High channel; only the worst result of 802.11n (HT20) CH149 was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

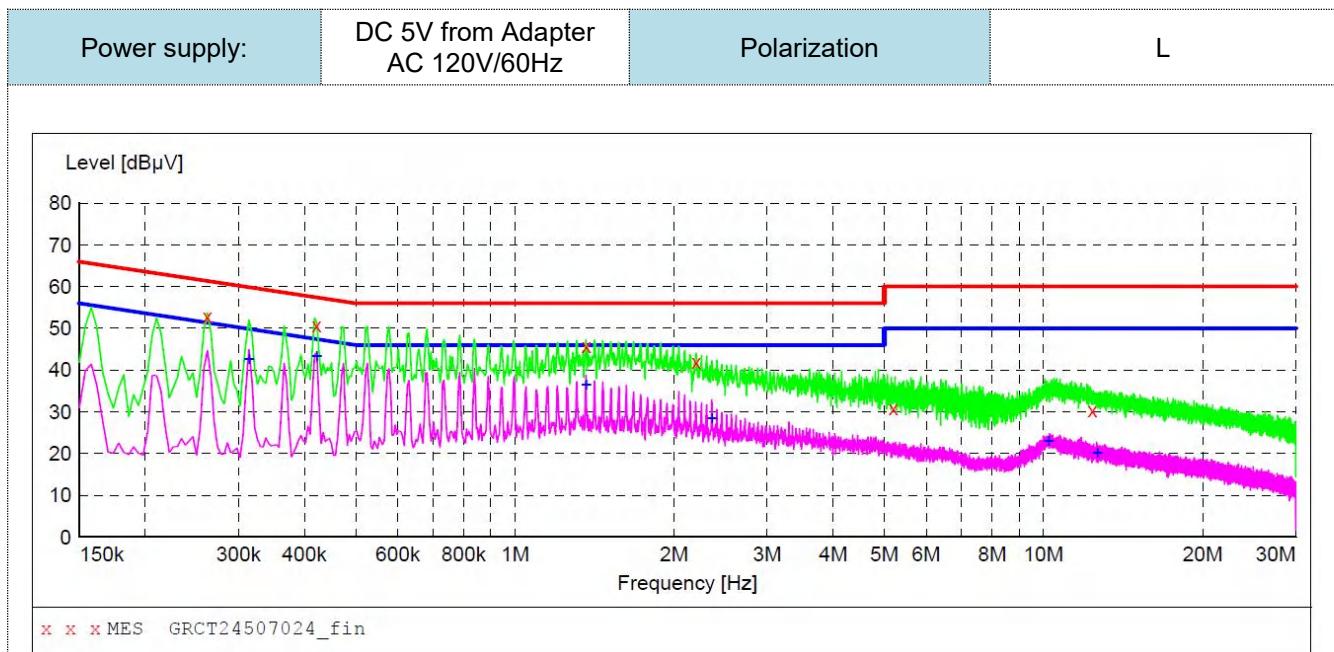**MEASUREMENT RESULT: "GRCT24507024_fin"**

5/7/2024 2:47PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.262000	52.90	9.6	61	8.5	QP	L1	GND
0.422000	50.80	9.8	57	6.6	QP	L1	GND
1.366000	45.90	10.0	56	10.1	QP	L1	GND
2.206000	42.10	10.0	56	13.9	QP	L1	GND
5.202000	30.90	10.0	60	29.1	QP	L1	GND
12.390000	30.30	10.0	60	29.7	QP	L1	GND

MEASUREMENT RESULT: "GRCT24507024_fin2"


5/7/2024 2:47PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.314000	42.70	9.5	50	7.2	AV	L1	GND
0.422000	43.50	9.8	47	3.9	AV	L1	GND
1.366000	36.50	10.0	46	9.5	AV	L1	GND
2.358000	28.50	10.0	46	17.5	AV	L1	GND
10.230000	23.10	10.0	50	26.9	AV	L1	GND
12.634000	20.20	10.0	50	29.8	AV	L1	GND

Note:1).Level (dB μ V)= Reading (dB μ V)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dB μ V) - Level (dB μ V)

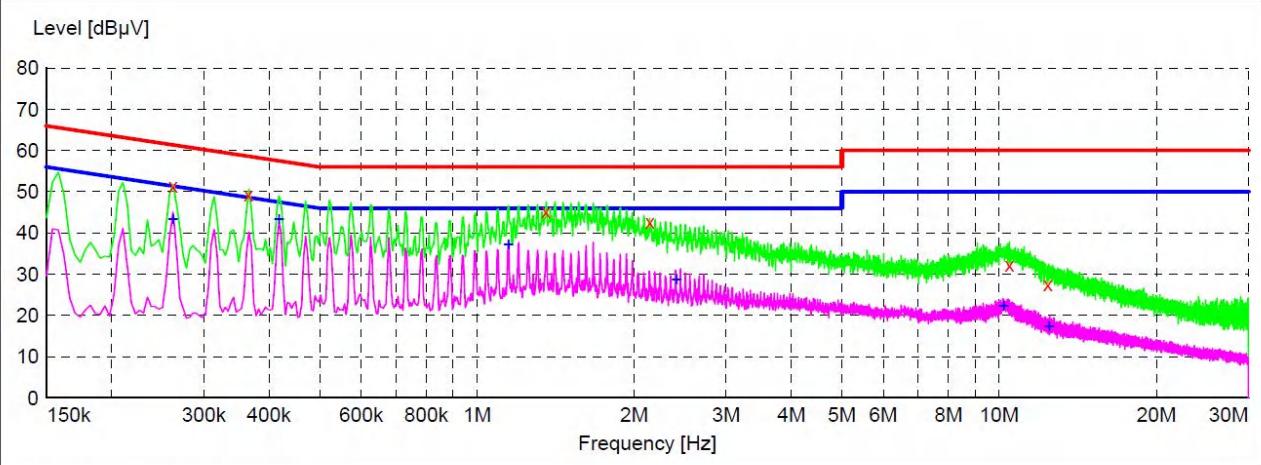Power supply:	DC 5V from Adapter AC 120V/60Hz	Polarization	N																																																								
 <p>Level [dBμV]</p> <p>Frequency [Hz]</p> <p>Legend: MES GRCT24507023_fin</p>																																																											
<p>MEASUREMENT RESULT: "GRCT24507023_fin"</p> <p>5/7/2024 2:44PM</p> <table> <thead> <tr> <th>Frequency MHz</th> <th>Level dBμV</th> <th>Transd dB</th> <th>Limit dBμV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.262000</td> <td>51.50</td> <td>9.6</td> <td>61</td> <td>9.9</td> <td>QP</td> <td>N</td> <td>GND</td> </tr> <tr> <td>0.366000</td> <td>49.40</td> <td>9.6</td> <td>59</td> <td>9.2</td> <td>QP</td> <td>N</td> <td>GND</td> </tr> <tr> <td>1.358000</td> <td>45.20</td> <td>10.0</td> <td>56</td> <td>10.8</td> <td>QP</td> <td>N</td> <td>GND</td> </tr> <tr> <td>2.146000</td> <td>42.60</td> <td>10.0</td> <td>56</td> <td>13.4</td> <td>QP</td> <td>N</td> <td>GND</td> </tr> <tr> <td>10.478000</td> <td>32.20</td> <td>10.0</td> <td>60</td> <td>27.8</td> <td>QP</td> <td>N</td> <td>GND</td> </tr> <tr> <td>12.406000</td> <td>27.50</td> <td>10.0</td> <td>60</td> <td>32.5</td> <td>QP</td> <td>N</td> <td>GND</td> </tr> </tbody> </table>				Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE	0.262000	51.50	9.6	61	9.9	QP	N	GND	0.366000	49.40	9.6	59	9.2	QP	N	GND	1.358000	45.20	10.0	56	10.8	QP	N	GND	2.146000	42.60	10.0	56	13.4	QP	N	GND	10.478000	32.20	10.0	60	27.8	QP	N	GND	12.406000	27.50	10.0	60	32.5	QP	N	GND
Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE																																																				
0.262000	51.50	9.6	61	9.9	QP	N	GND																																																				
0.366000	49.40	9.6	59	9.2	QP	N	GND																																																				
1.358000	45.20	10.0	56	10.8	QP	N	GND																																																				
2.146000	42.60	10.0	56	13.4	QP	N	GND																																																				
10.478000	32.20	10.0	60	27.8	QP	N	GND																																																				
12.406000	27.50	10.0	60	32.5	QP	N	GND																																																				
<p>MEASUREMENT RESULT: "GRCT24507023_fin2"</p> <p>5/7/2024 2:44PM</p> <table> <thead> <tr> <th>Frequency MHz</th> <th>Level dBμV</th> <th>Transd dB</th> <th>Limit dBμV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.262000</td> <td>43.40</td> <td>9.6</td> <td>51</td> <td>8.0</td> <td>AV</td> <td>N</td> <td>GND</td> </tr> <tr> <td>0.418000</td> <td>43.40</td> <td>9.8</td> <td>48</td> <td>4.1</td> <td>AV</td> <td>N</td> <td>GND</td> </tr> <tr> <td>1.150000</td> <td>37.20</td> <td>10.0</td> <td>46</td> <td>8.8</td> <td>AV</td> <td>N</td> <td>GND</td> </tr> <tr> <td>2.410000</td> <td>28.80</td> <td>10.0</td> <td>46</td> <td>17.2</td> <td>AV</td> <td>N</td> <td>GND</td> </tr> <tr> <td>10.194000</td> <td>22.40</td> <td>10.0</td> <td>50</td> <td>27.6</td> <td>AV</td> <td>N</td> <td>GND</td> </tr> <tr> <td>12.470000</td> <td>17.30</td> <td>10.0</td> <td>50</td> <td>32.7</td> <td>AV</td> <td>N</td> <td>GND</td> </tr> </tbody> </table>				Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE	0.262000	43.40	9.6	51	8.0	AV	N	GND	0.418000	43.40	9.8	48	4.1	AV	N	GND	1.150000	37.20	10.0	46	8.8	AV	N	GND	2.410000	28.80	10.0	46	17.2	AV	N	GND	10.194000	22.40	10.0	50	27.6	AV	N	GND	12.470000	17.30	10.0	50	32.7	AV	N	GND
Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE																																																				
0.262000	43.40	9.6	51	8.0	AV	N	GND																																																				
0.418000	43.40	9.8	48	4.1	AV	N	GND																																																				
1.150000	37.20	10.0	46	8.8	AV	N	GND																																																				
2.410000	28.80	10.0	46	17.2	AV	N	GND																																																				
10.194000	22.40	10.0	50	27.6	AV	N	GND																																																				
12.470000	17.30	10.0	50	32.7	AV	N	GND																																																				
<p>Note: 1) Level (dBμV) = Reading (dBμV) + Transducer (dB) 2) Transducer (dB) = insertion loss of LISN (dB) + Cable loss (dB) 3) Margin(dB) = Limit (dBμV) - Level (dBμV)</p>																																																											

4.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) <small>Note1</small>
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dB μ V/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

(5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209


(6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

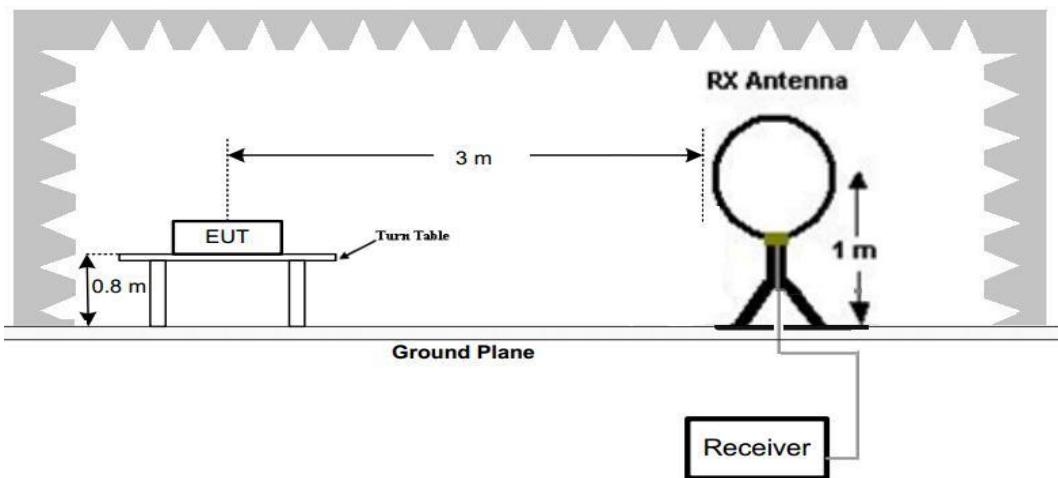

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

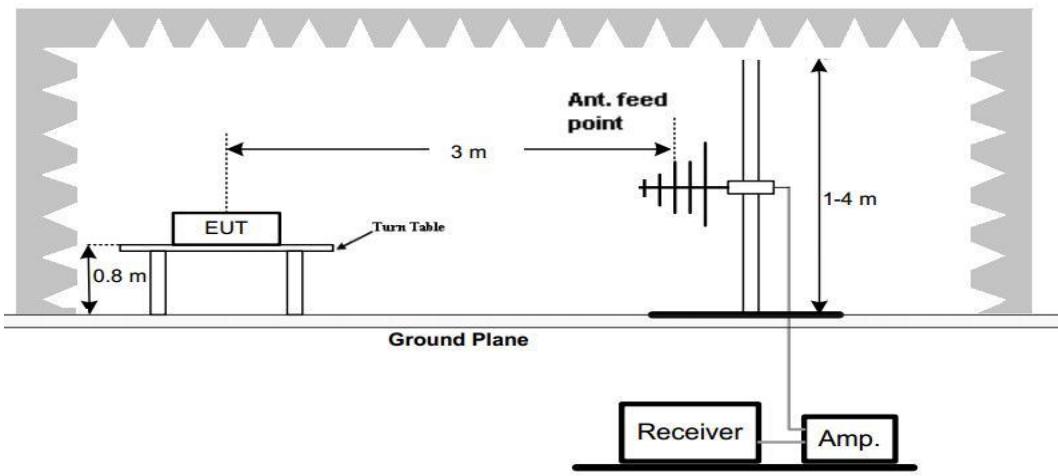

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

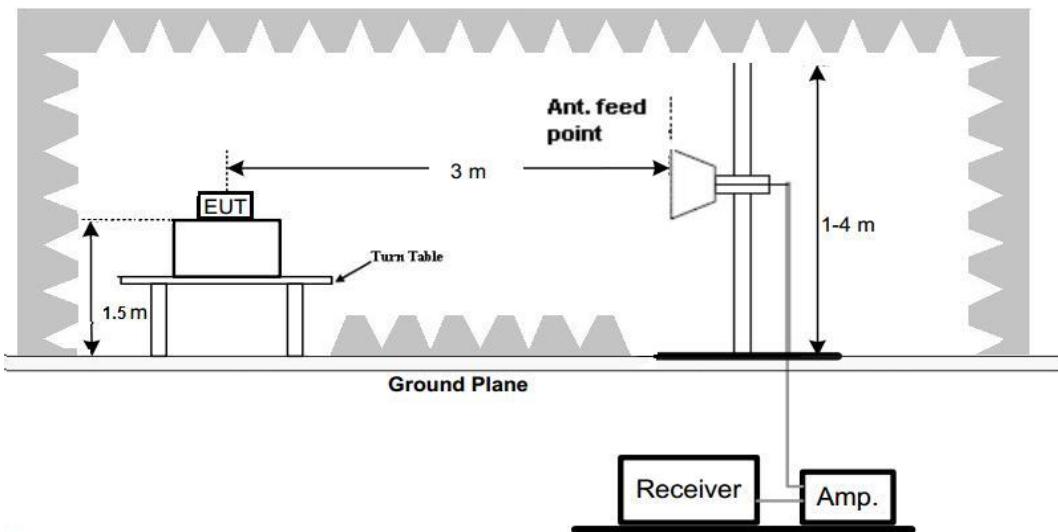

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:


Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested for below 1GHz test, only the worst case 802.11n (HT20) low channel of U-NII 3 band was recorded.
3. All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

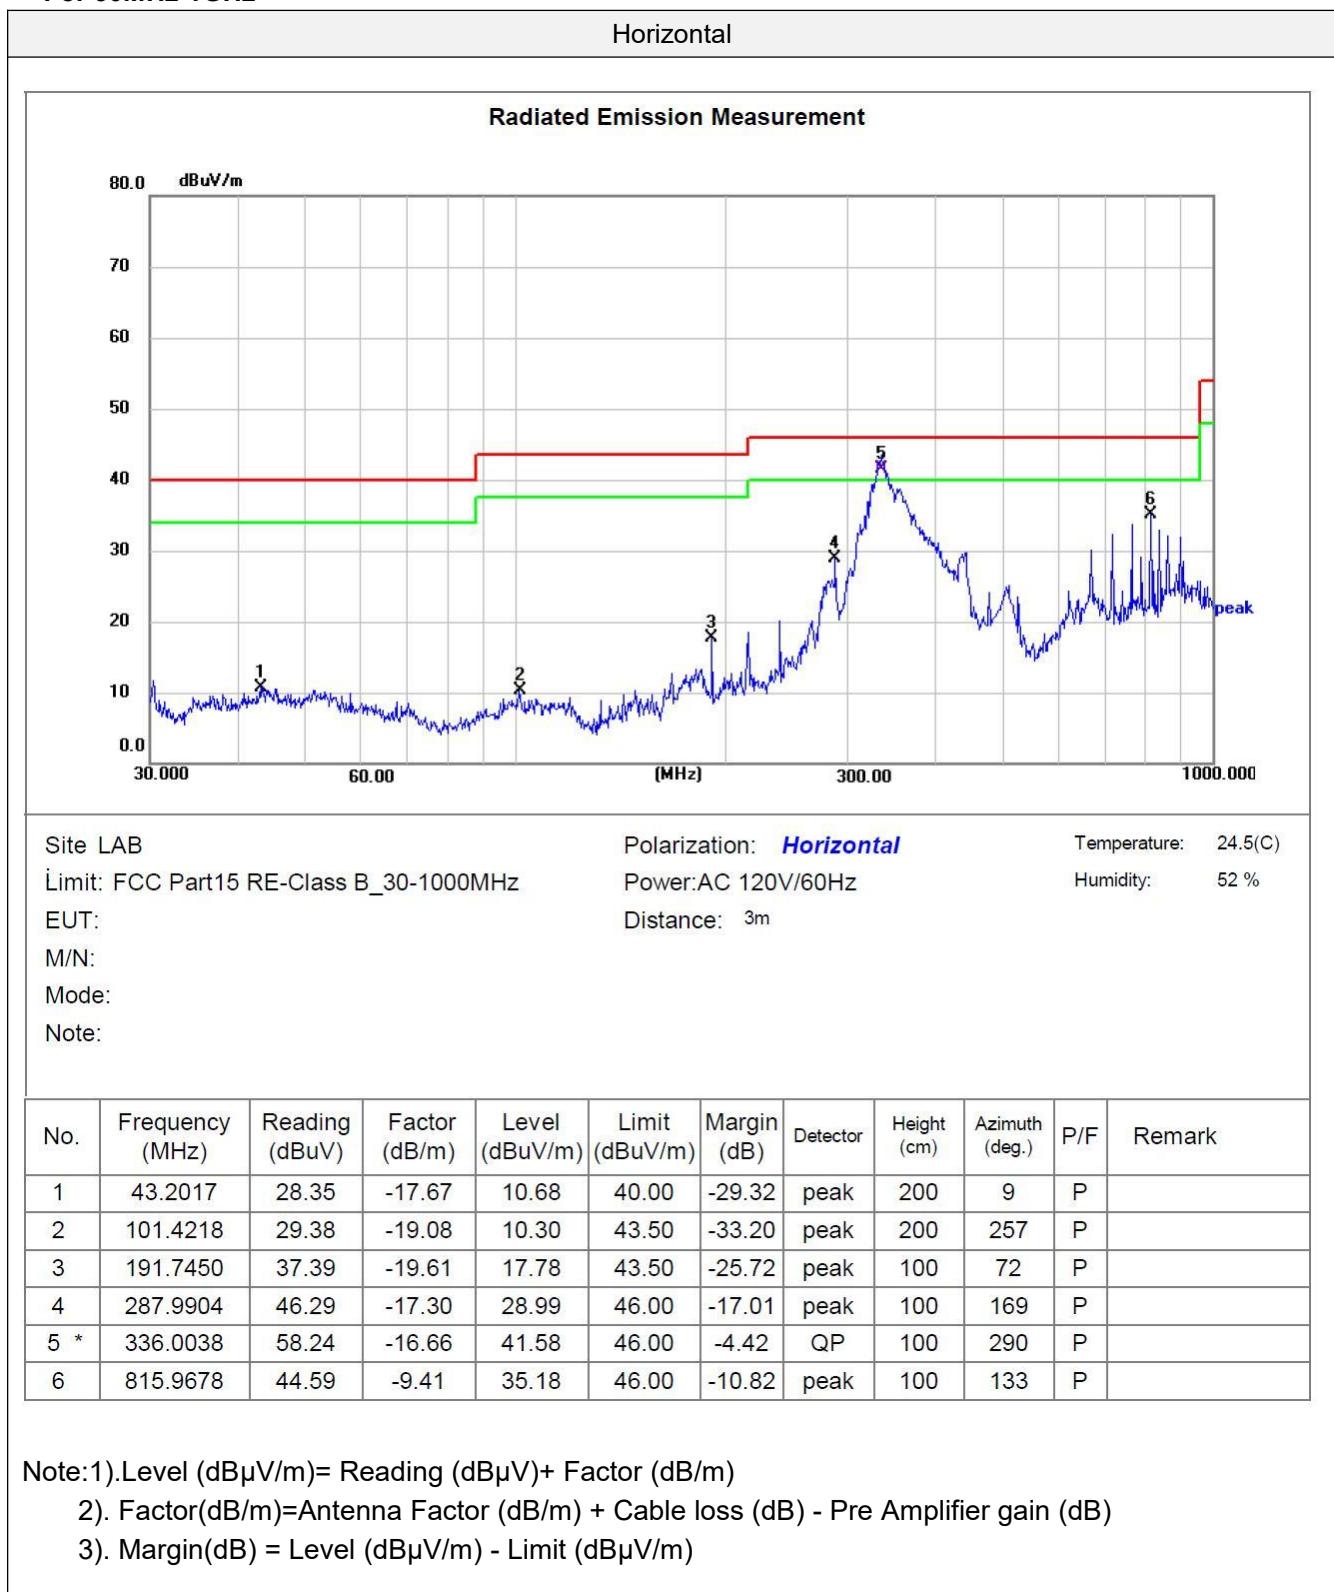

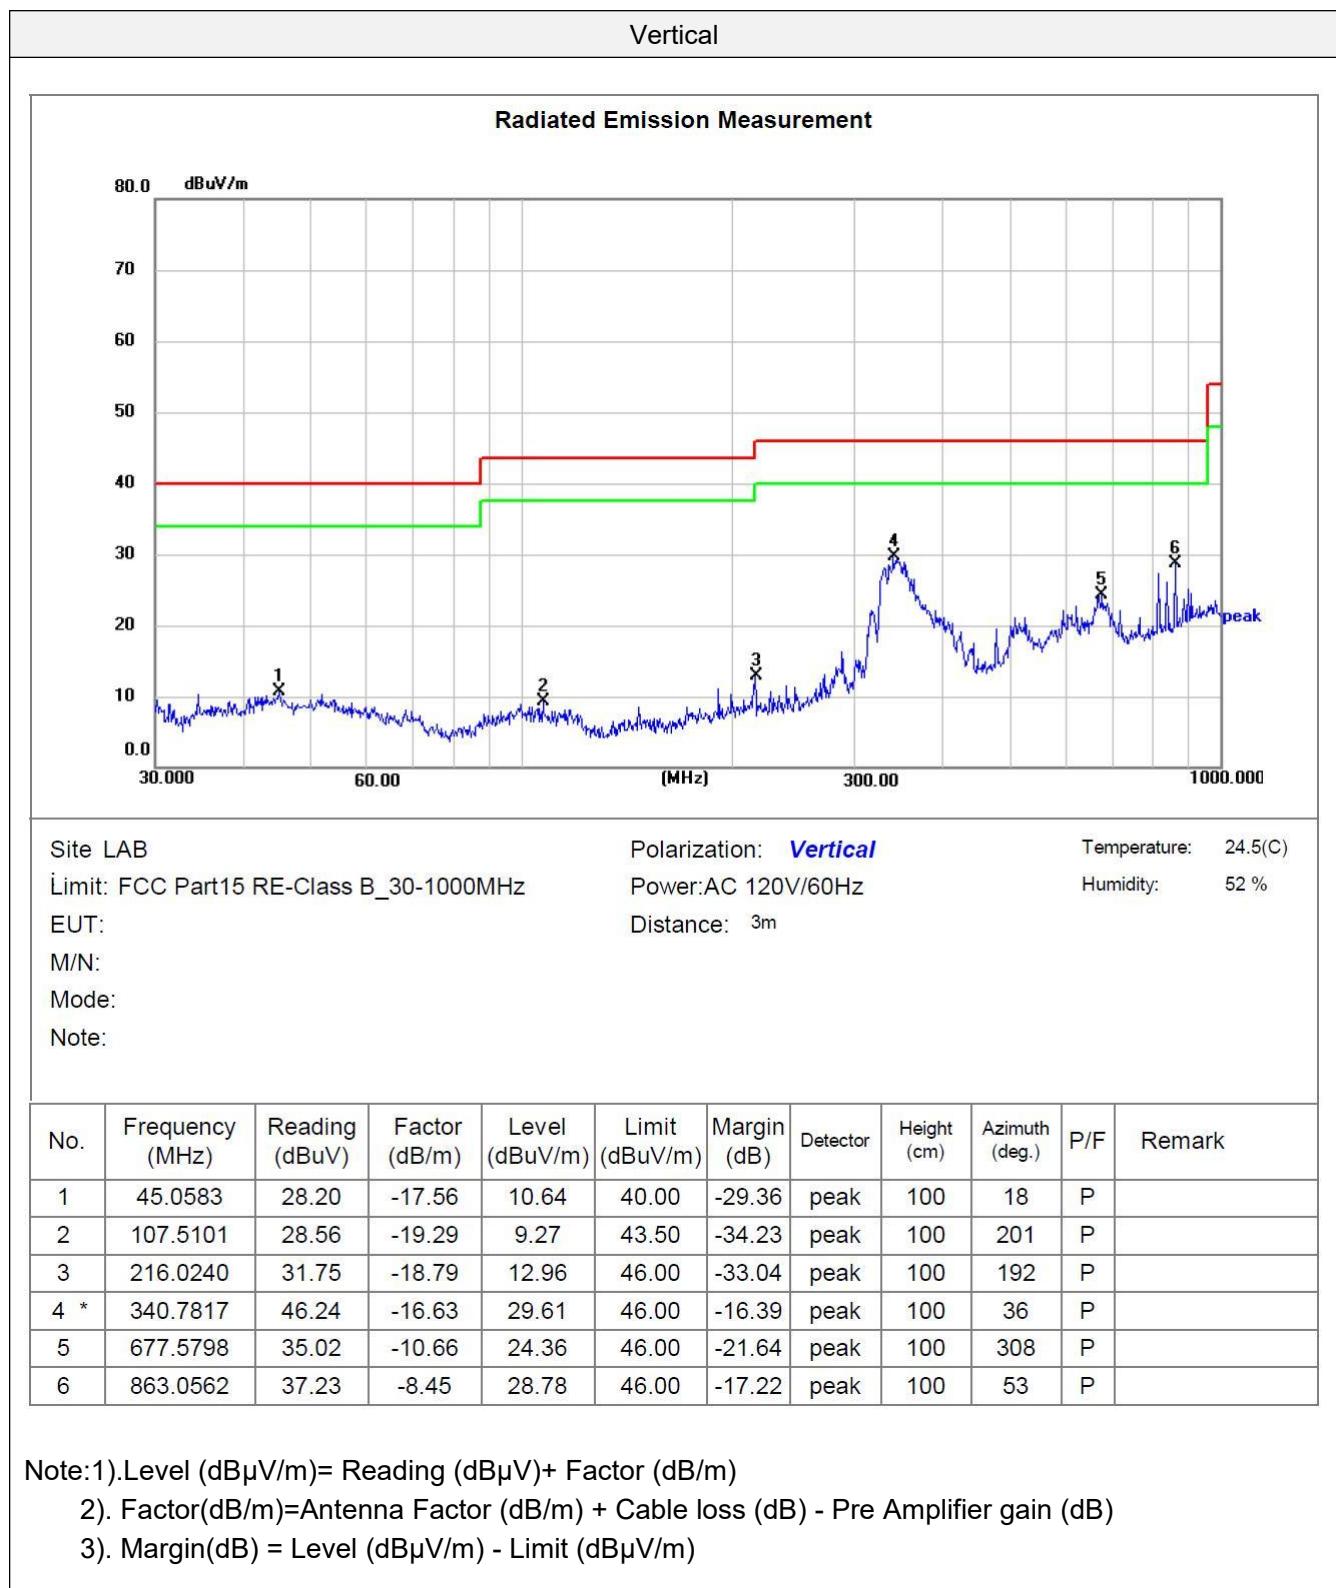

For 1GHz to 40GHz**U-NII 3 & 802.11n (HT20) Mode (above 1GHz)**

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	50.42	PK	H	68.30	17.88	68.78	30.54	5.74	54.64	-18.36
	5700.00	54.67	PK	H	105.30	50.63	72.89	30.61	5.83	54.66	-18.22
149.00	5720.00	55.22	PK	H	110.90	55.68	73.09	30.82	6.02	54.71	-17.87
	5725.00	55.34	PK	H	122.30	66.96	73.19	30.83	6.05	54.73	-17.85
(5745MHz)	11490.00	51.15	PK	H	68.20	17.05	55.9	39.23	10.83	54.81	-4.75
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	51.47	PK	H	68.20	16.73	55.92	39.34	10.96	54.75	-4.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
	5850.00	55.78	PK	H	122.30	66.52	73.50	30.85	6.08	54.65	-17.72
165.00	5855.00	55.34	PK	H	110.90	55.56	73.05	30.87	6.10	54.68	-17.71
	5875.00	54.97	PK	H	105.30	50.33	72.66	30.90	6.13	54.72	-17.69
	5925.00	51.46	PK	H	68.30	16.84	69.00	30.94	6.15	54.63	-17.54
(5825MHz)	11650.00	51.38	PK	H	68.20	16.82	55.09	39.42	11.15	54.28	-3.71
	--	--	--	--	--	--	--	--	--	--	--

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	50.56	PK	V	68.30	17.74	68.92	30.54	5.74	54.64	-18.36
	5700.00	51.48	PK	V	105.30	53.82	69.70	30.61	5.83	54.66	-18.22
149.00	5720.00	54.46	PK	V	110.90	56.44	72.33	30.82	6.02	54.71	-17.87
	5725.00	55.79	PK	V	122.30	66.51	73.64	30.83	6.05	54.73	-17.85
(5745MHz)	11490.00	50.47	PK	V	68.20	17.73	55.22	39.23	10.83	54.81	-4.75
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	50.89	PK	V	68.20	17.31	55.34	39.34	10.96	54.75	-4.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
	5850.00	54.75	PK	V	122.30	67.55	72.47	30.85	6.08	54.65	-17.72
165.00	5855.00	55.28	PK	V	110.90	55.62	72.99	30.87	6.10	54.68	-17.71
	5875.00	51.45	PK	V	105.30	53.85	69.14	30.90	6.13	54.72	-17.69
	5925.00	50.72	PK	V	68.20	17.48	68.26	30.94	6.15	54.63	-17.54
(5825MHz)	11650.00	50.83	PK	V	68.20	17.37	54.54	39.42	11.15	54.28	-3.71
	--	--	--	--	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a, MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ac VHT40, IEEE 802.11ac VHT80.

4.3 Maximum Conducted Average Output Power

Limit

For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration

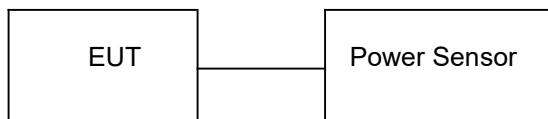

Test Results**U-NII 3**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	149	13.52	30.00	Pass
	157	12.57		
	165	12.69		
802.11n(HT20)	149	13.53	30.00	Pass
	157	12.56		
	165	12.63		
802.11n(HT40)	151	13.99	30.00	Pass
	159	12.86		
802.11ac(VHT20)	149	12.10	30.00	Pass
	157	12.54		
	165	11.12		
802.11ac(VHT40)	151	11.27	30.00	Pass
	159	12.93		
802.11ac(VHT80)	155	12.02	30.00	Pass

4.4 Power Spectral Density

Limit

(1) For the band 5.15 - 5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 300KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration





Test Results


Type	Bands	Channel	Power Spectral Density (dBm/300KHz)	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	U-NII 3	149	2.62	4.838	30	Pass
		157	1.65	3.868		
		165	1.59	3.808		
802.11n (HT20)	U-NII 3	149	0.71	2.928	30	Pass
		157	-1.56	0.658		
		165	-1.33	0.888		
802.11n (HT40)	U-NII 3	151	3.18	5.398	30	Pass
		159	-1.12	1.098		
802.11ac (VHT20)	U-NII 3	149	-0.92	1.298	30	Pass
		157	-1.37	0.848		
		165	-5.72	-3.502		
802.11ac (VHT40)	U-NII 3	151	-5.60	-3.382	30	Pass
		159	-1.08	1.138		
802.11ac (VHT80)	U-NII 3	155	-1.85	0.368		


Remark: P.S.D(dBm/500KHz)= P.S.D(dBm/300KHz)+10 log (500 kHz/300kHz).


Test plot as follows

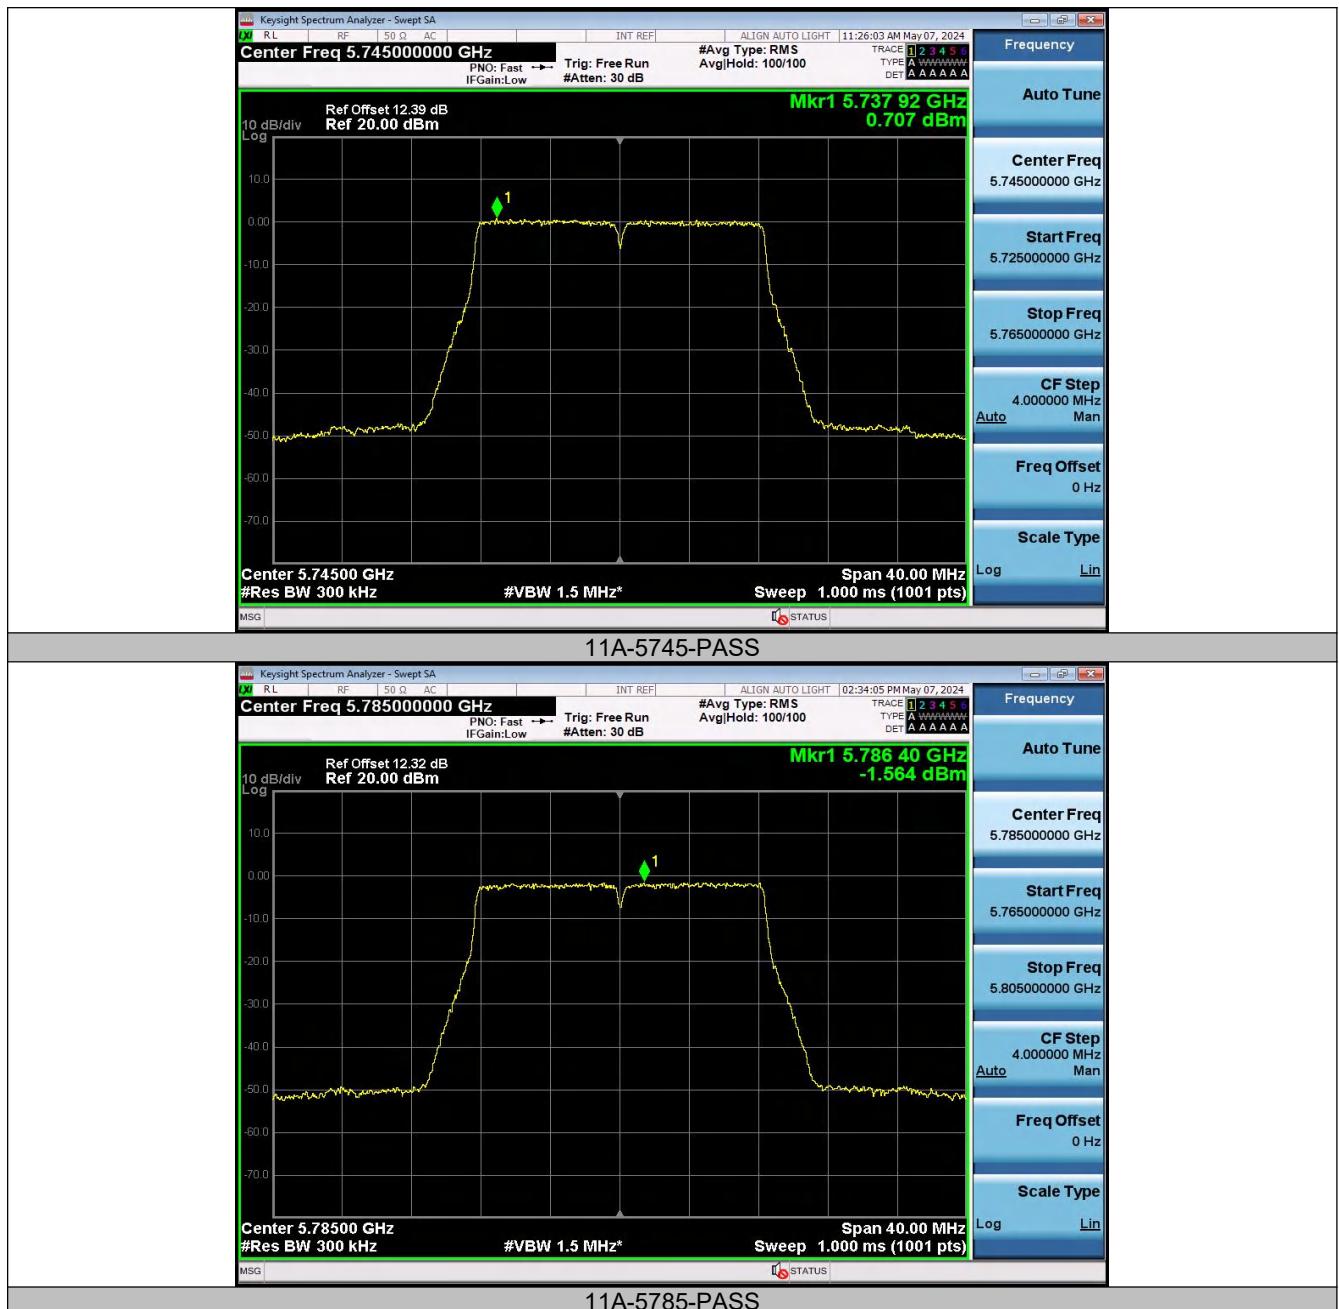

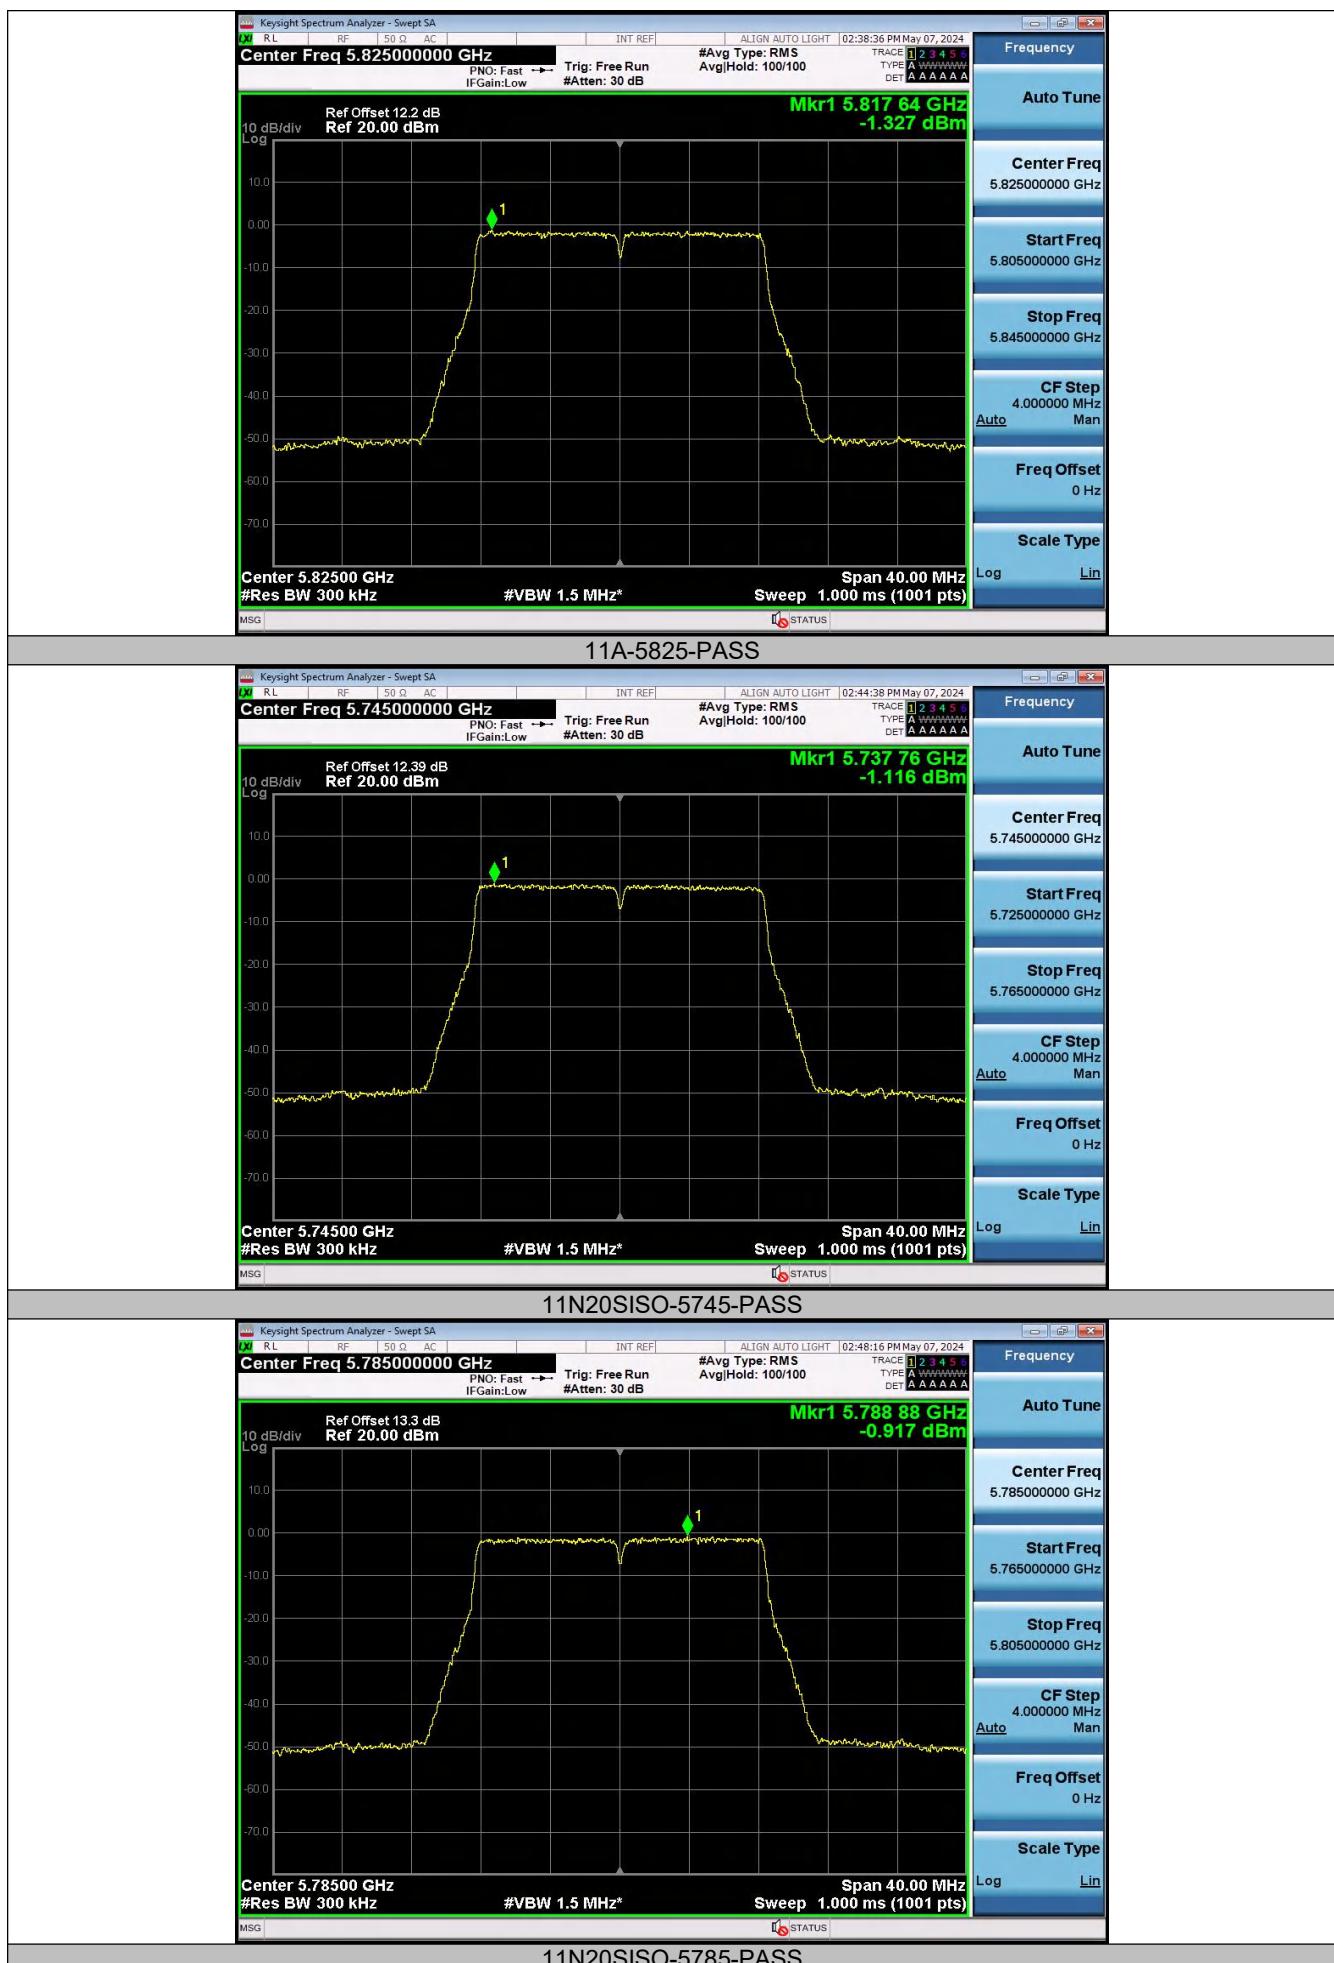

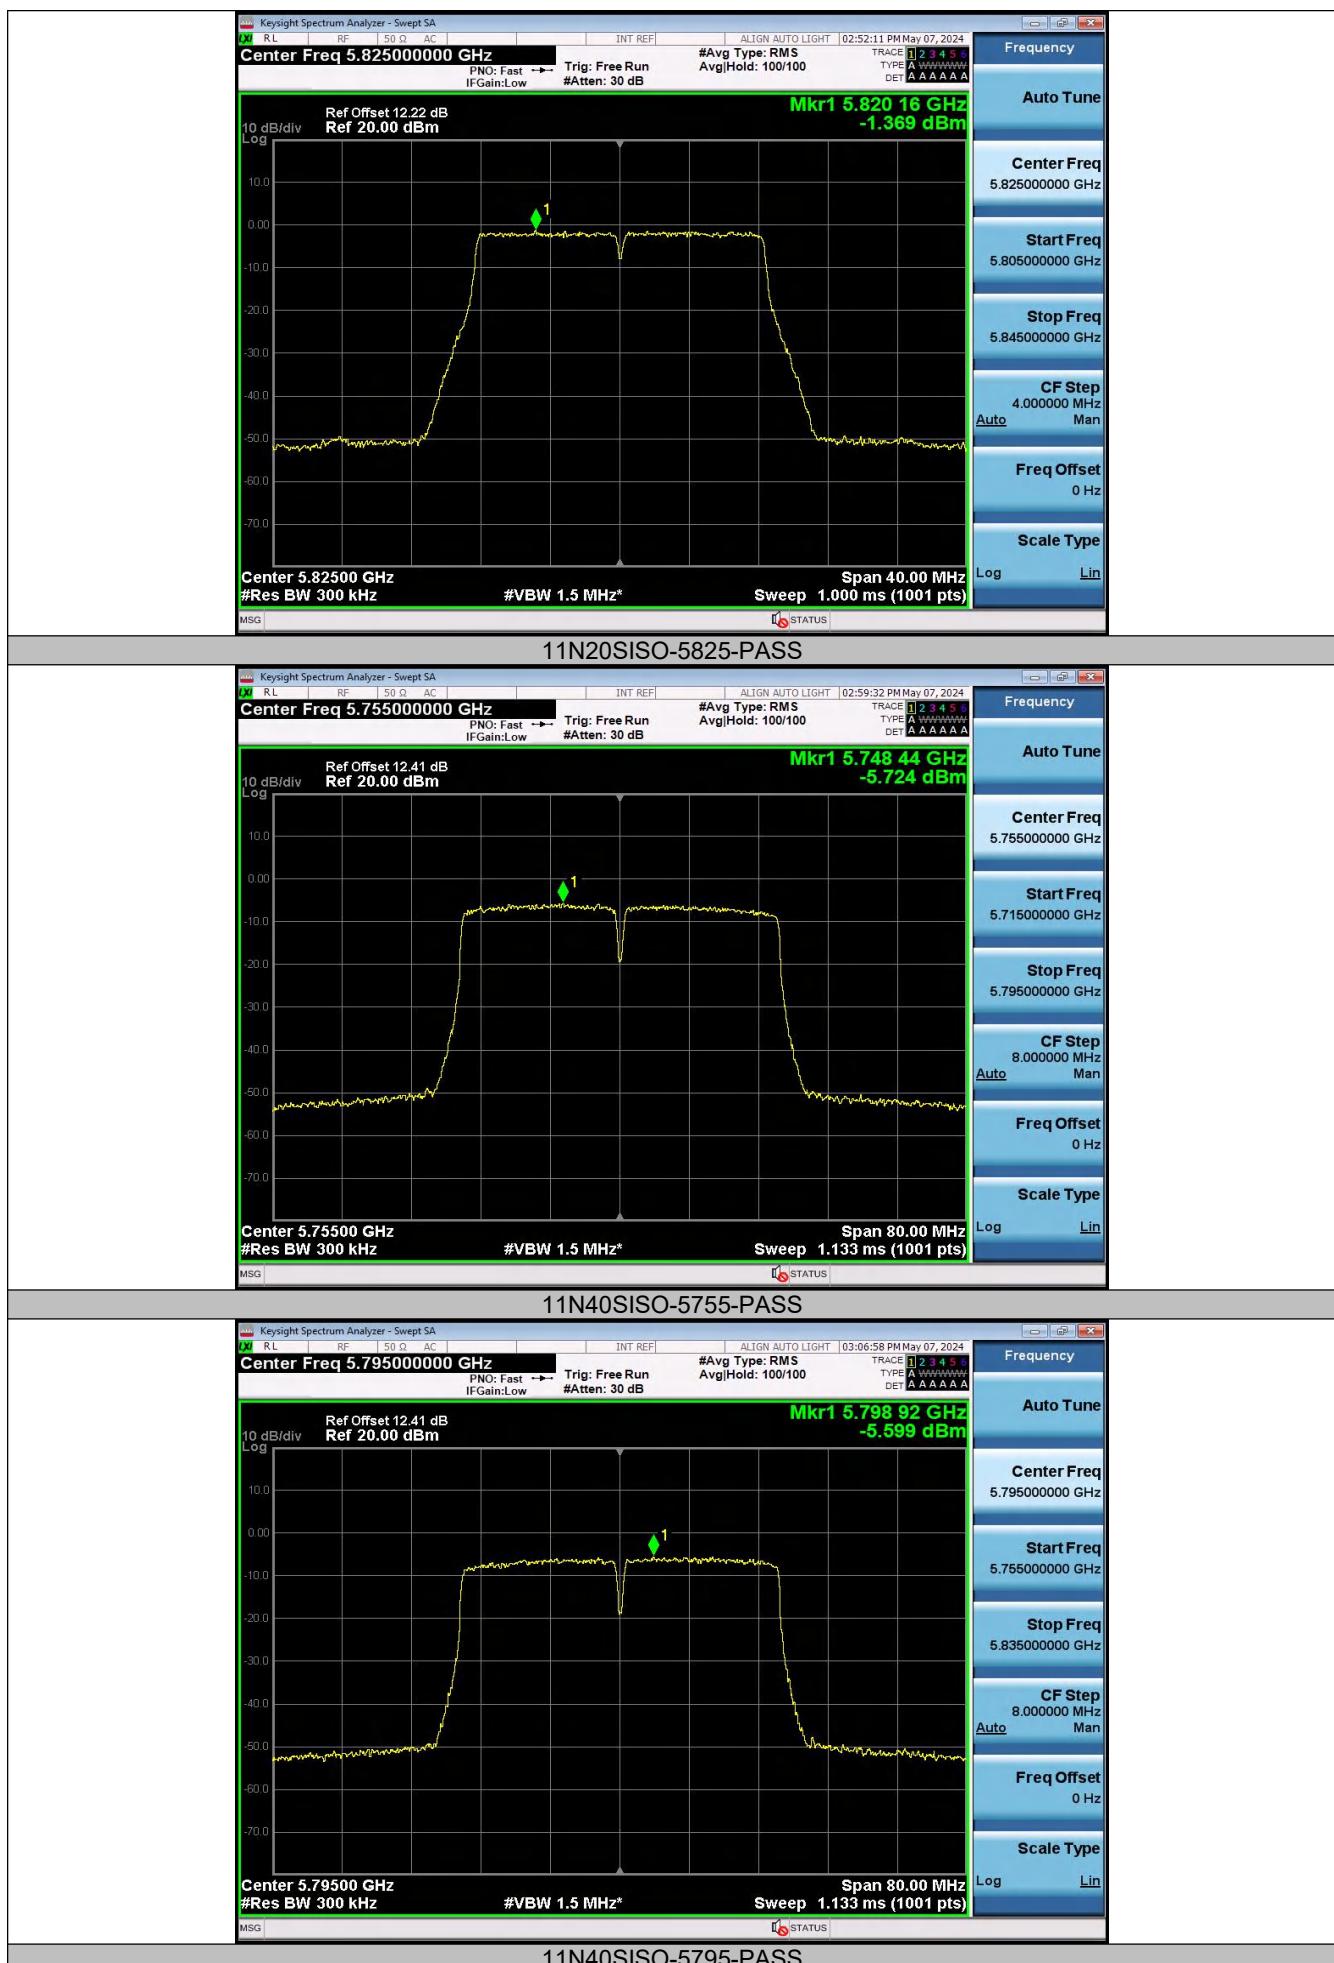

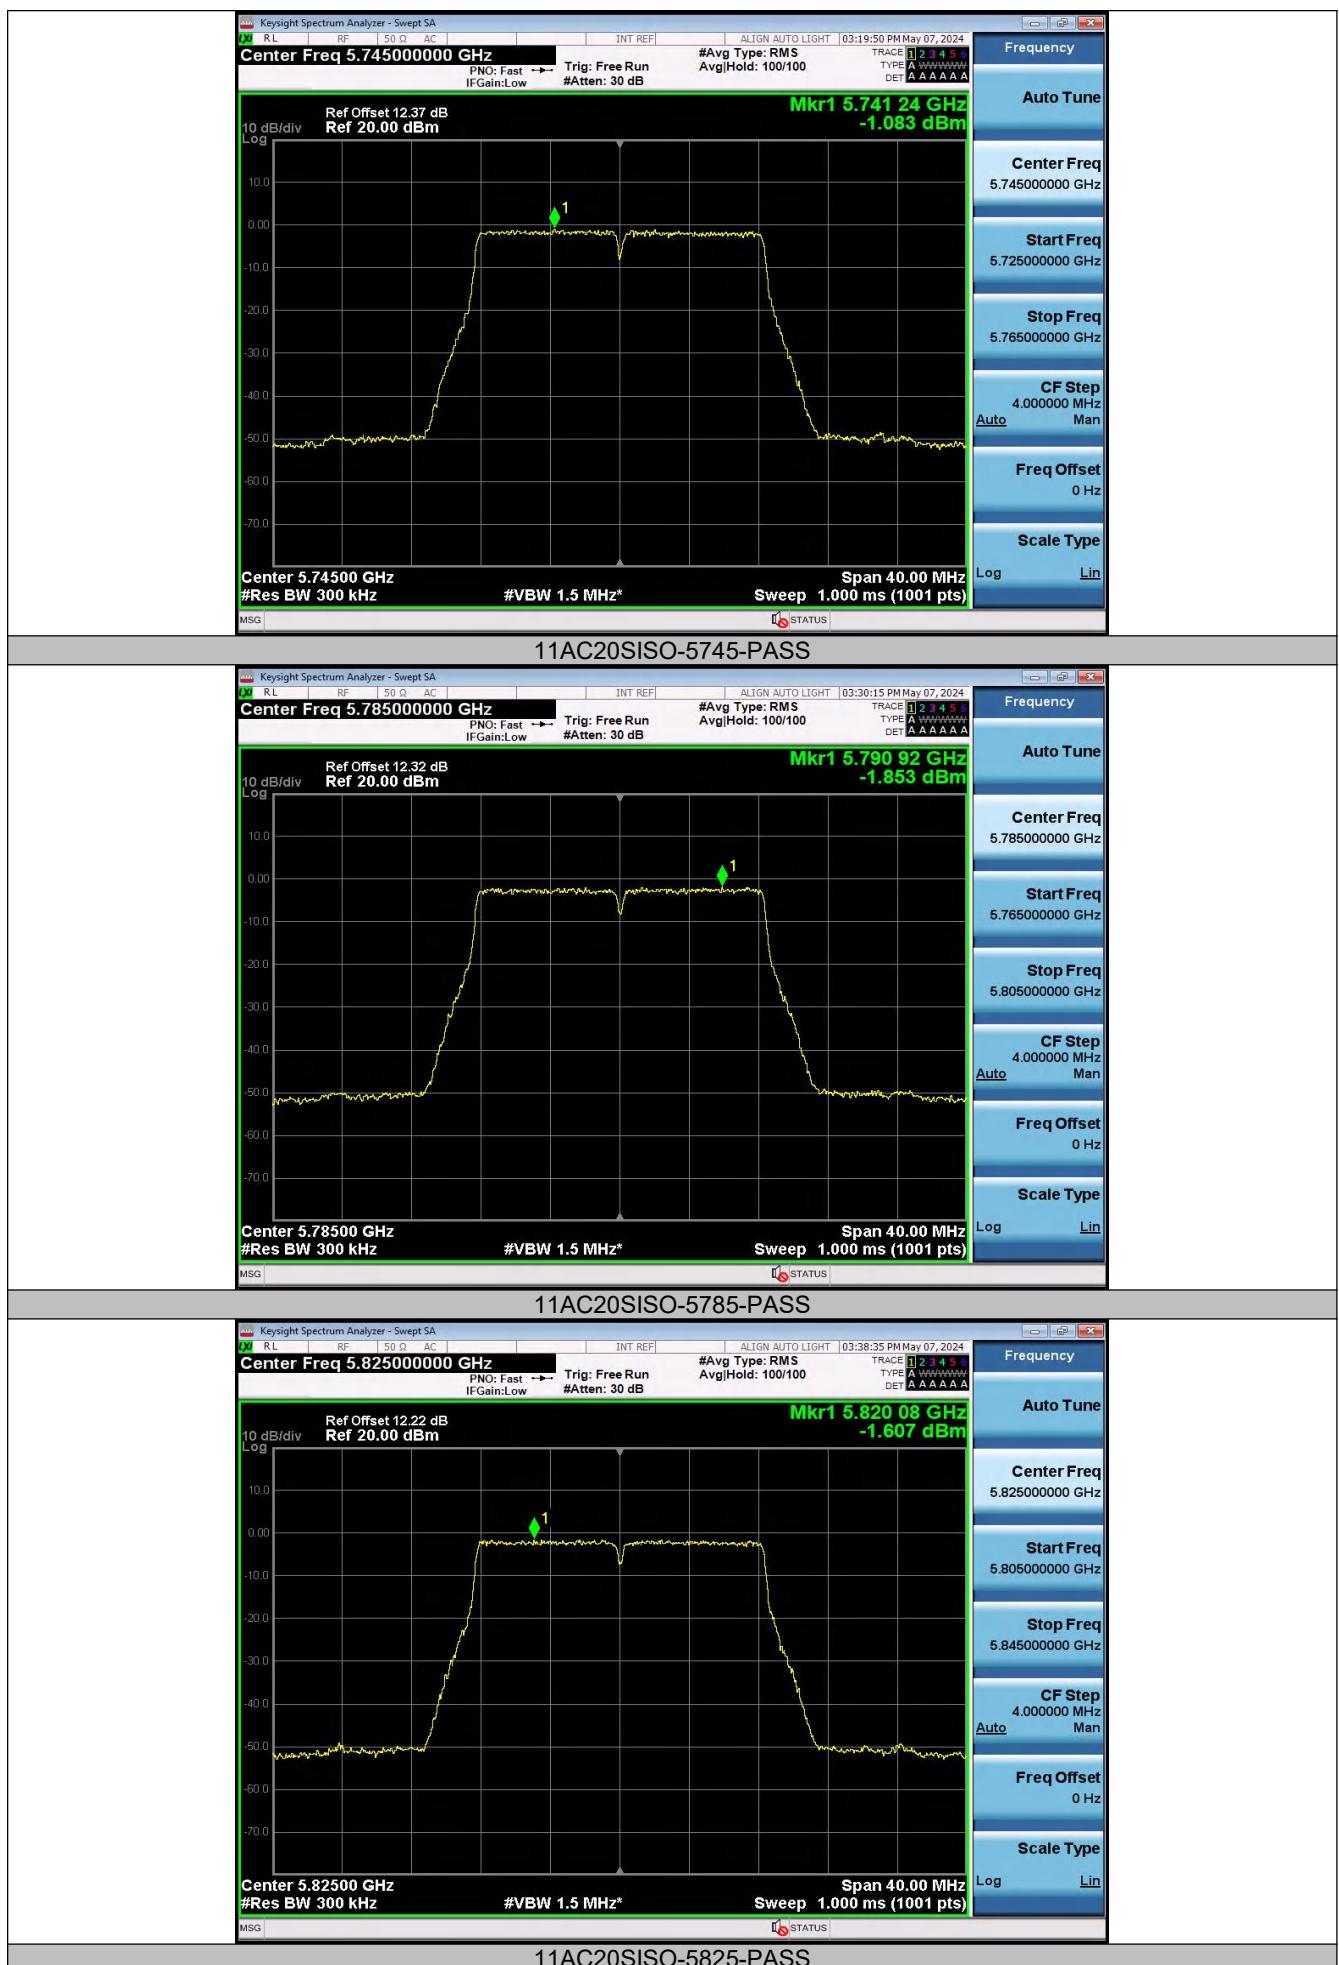

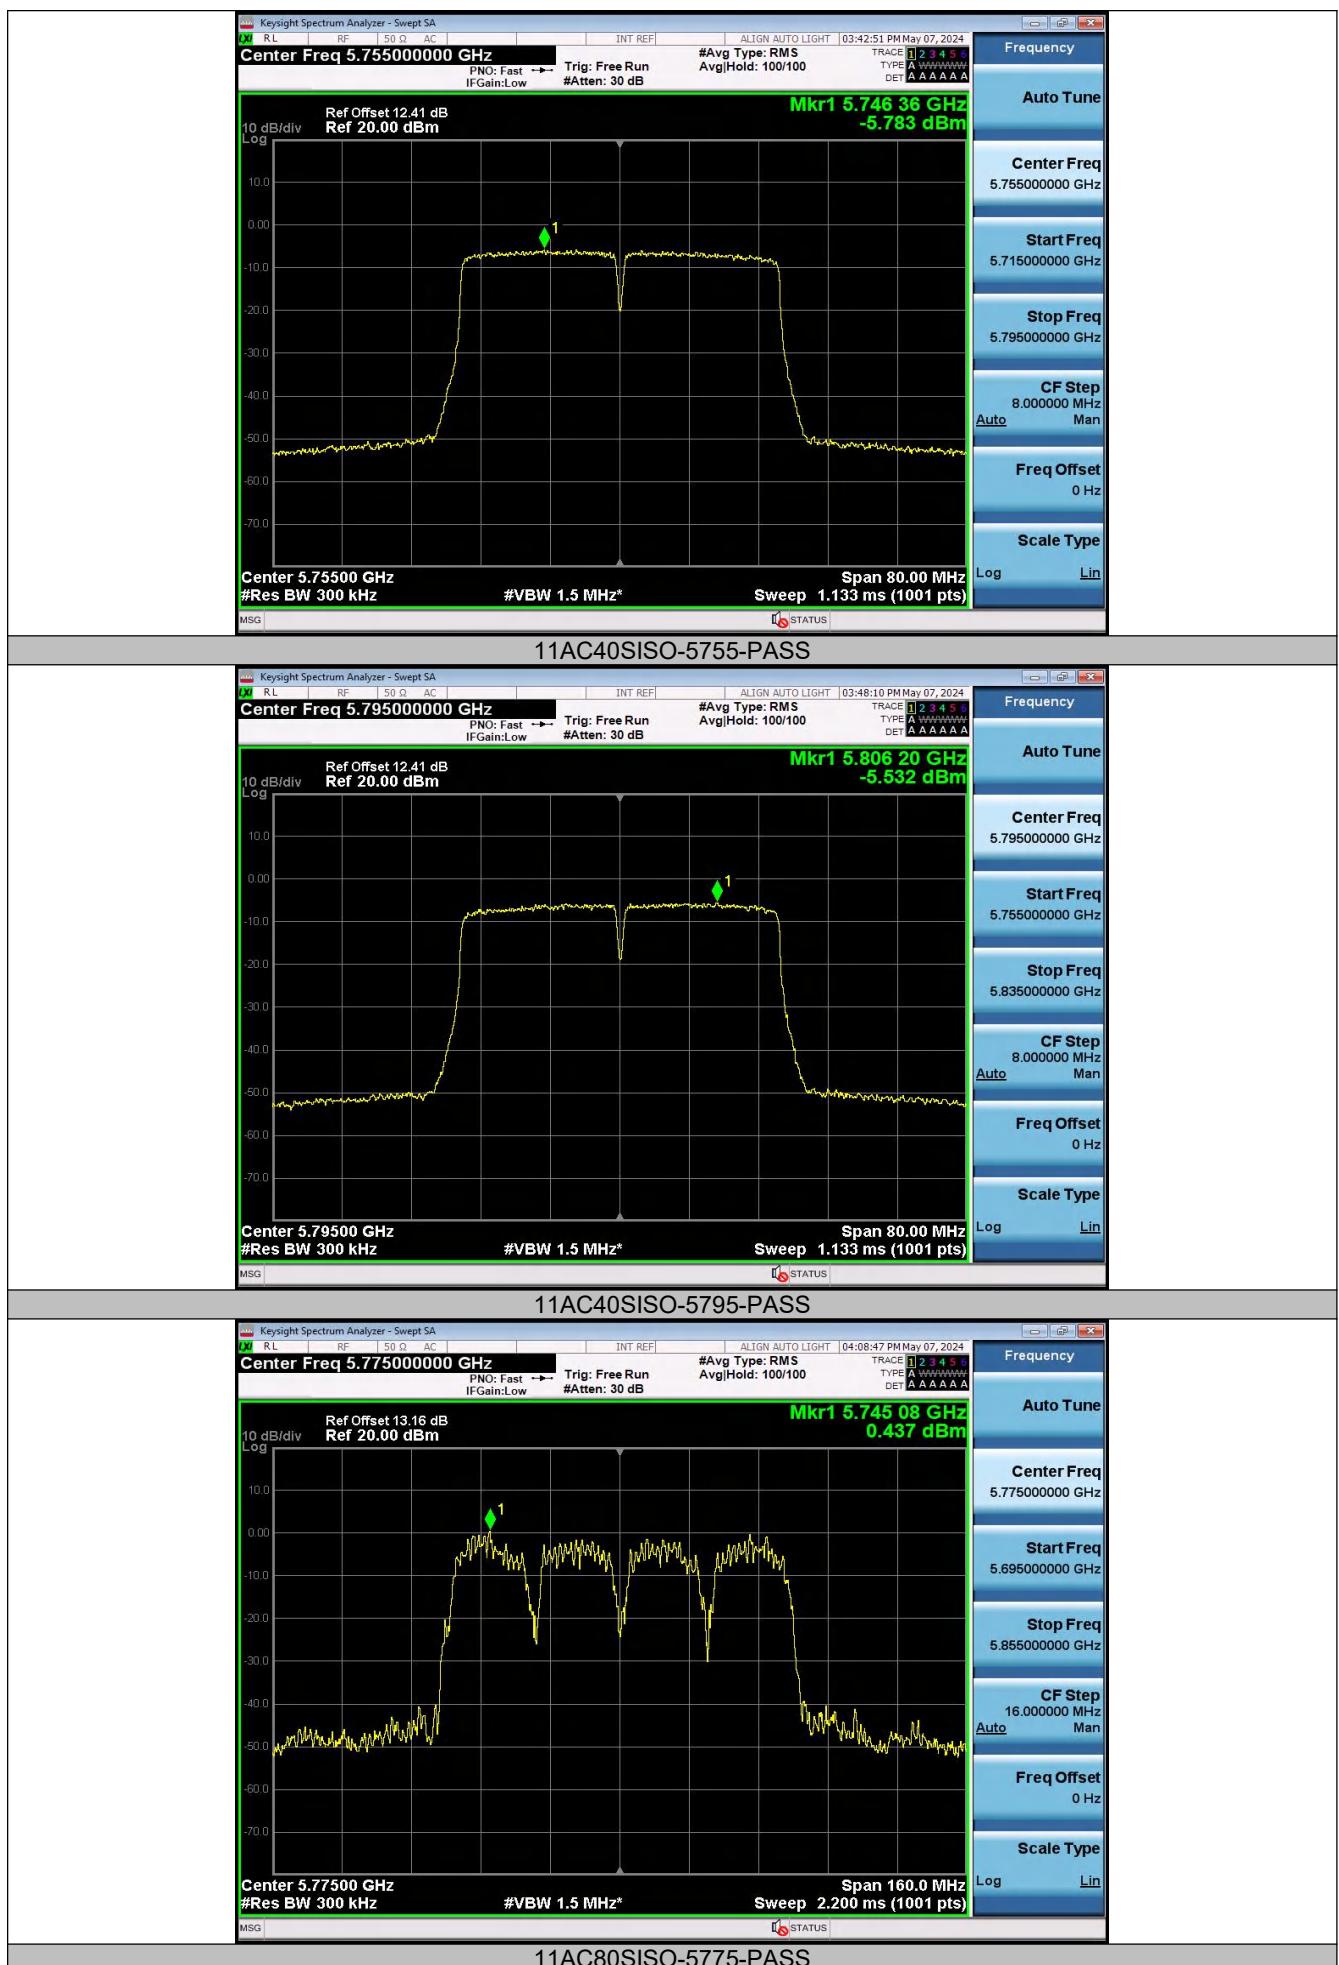

4.5 Emission Bandwidth (26dB Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

This test item is not applicable for the EUT.

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration





Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.360	≥500KHz	Pass
		157	16.360		
		165	16.320		
802.11n(HT20)	U-NII 3	149	16.320		
		157	16.360		
		165	16.360		
802.11n(HT40)	U-NII 3	151	35.120	≥500KHz	Pass
		159	33.920		
802.11ac(VHT20)	U-NII 3	149	16.360		
		157	16.360		
		165	16.360		
802.11ac(VHT40)	U-NII 3	151	35.440		
		159	35.120		
802.11ac(VHT80)	U-NII 3	155	55.040		

Test plot as follows:



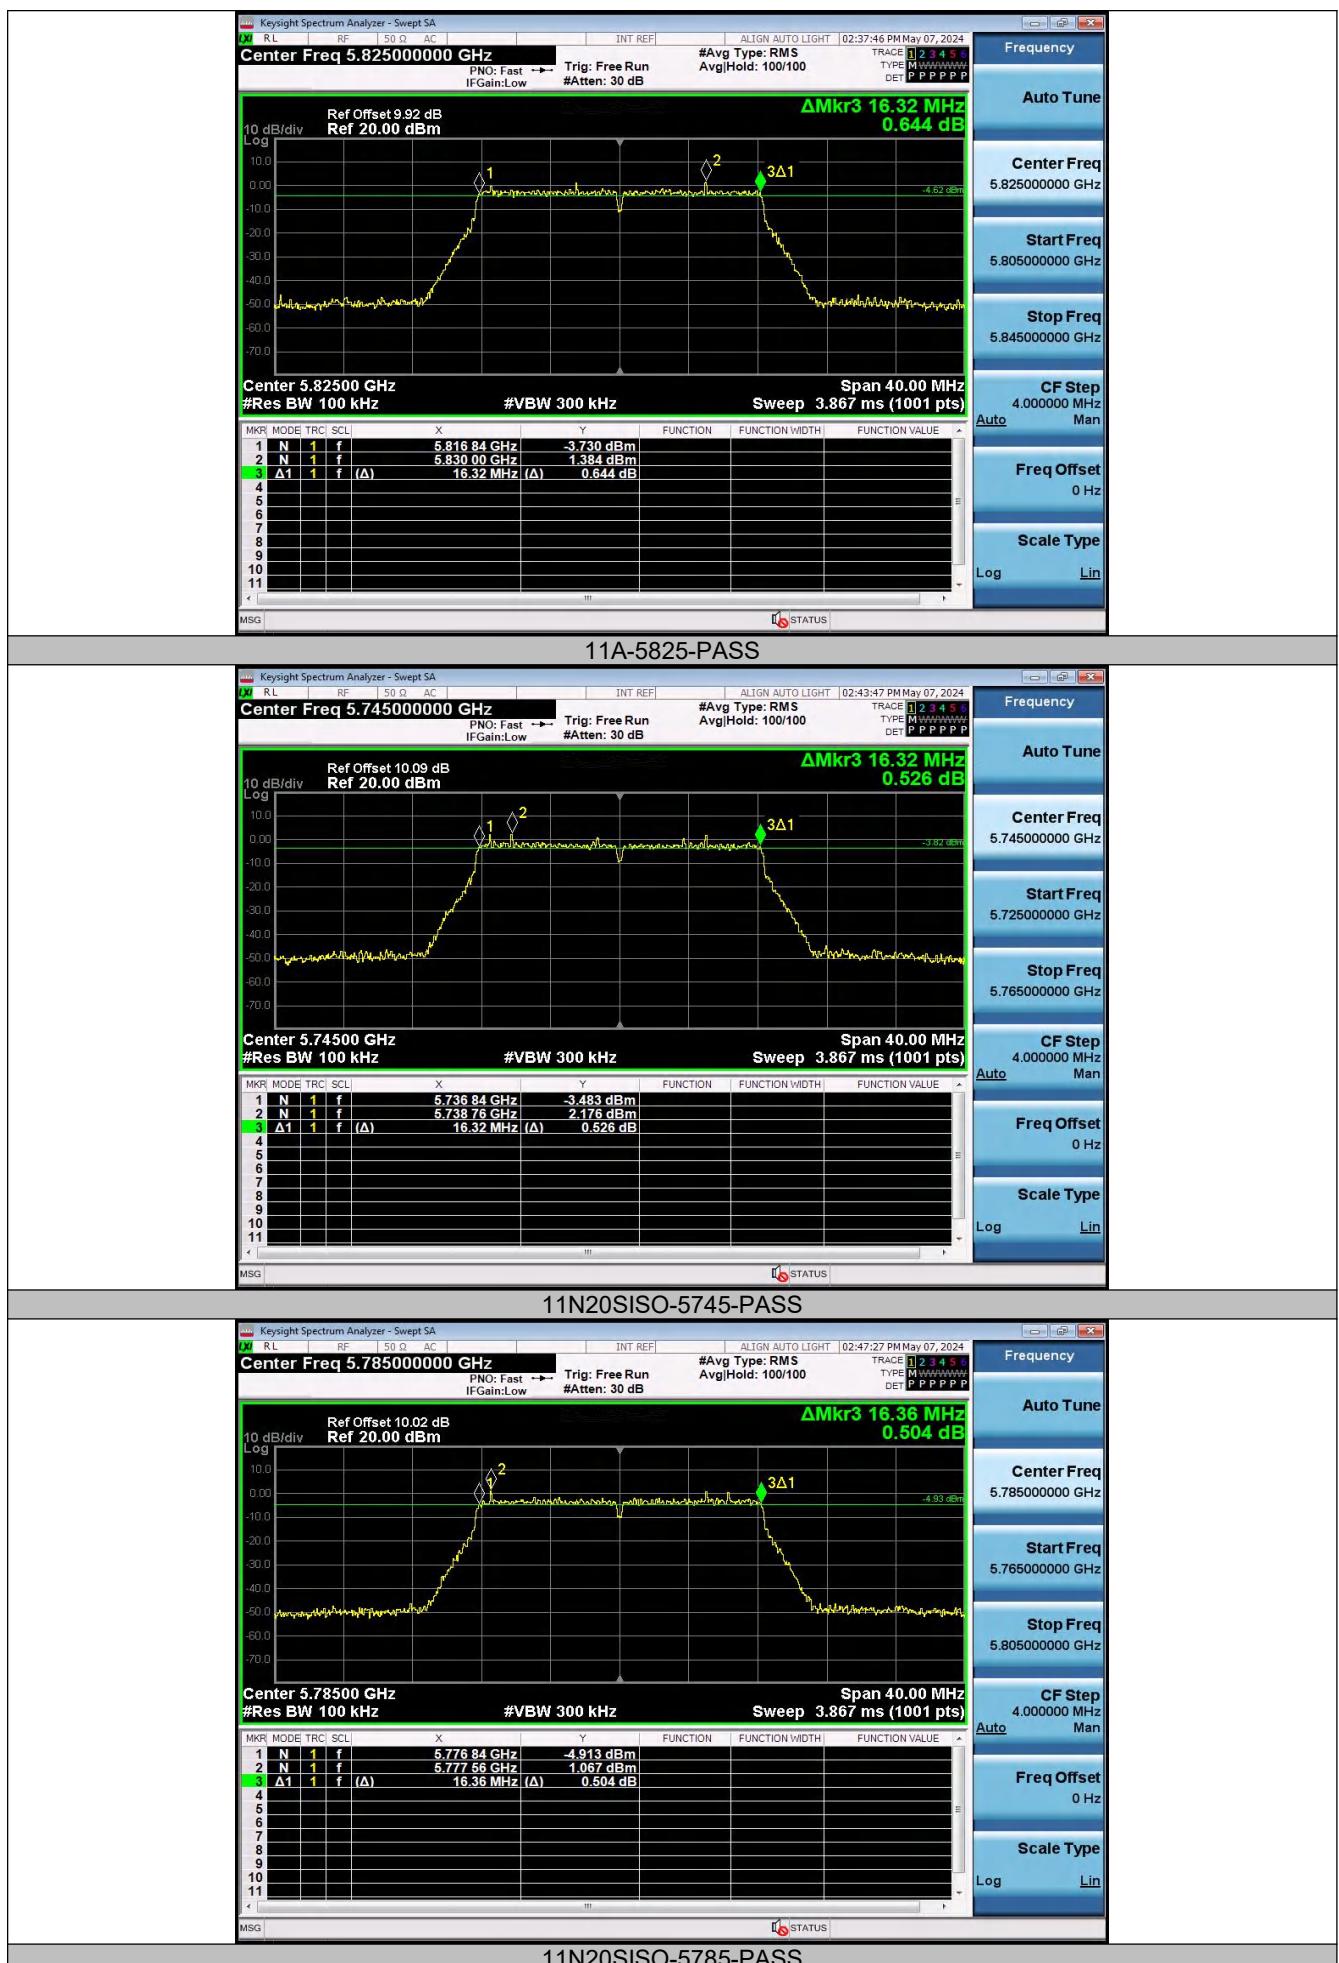

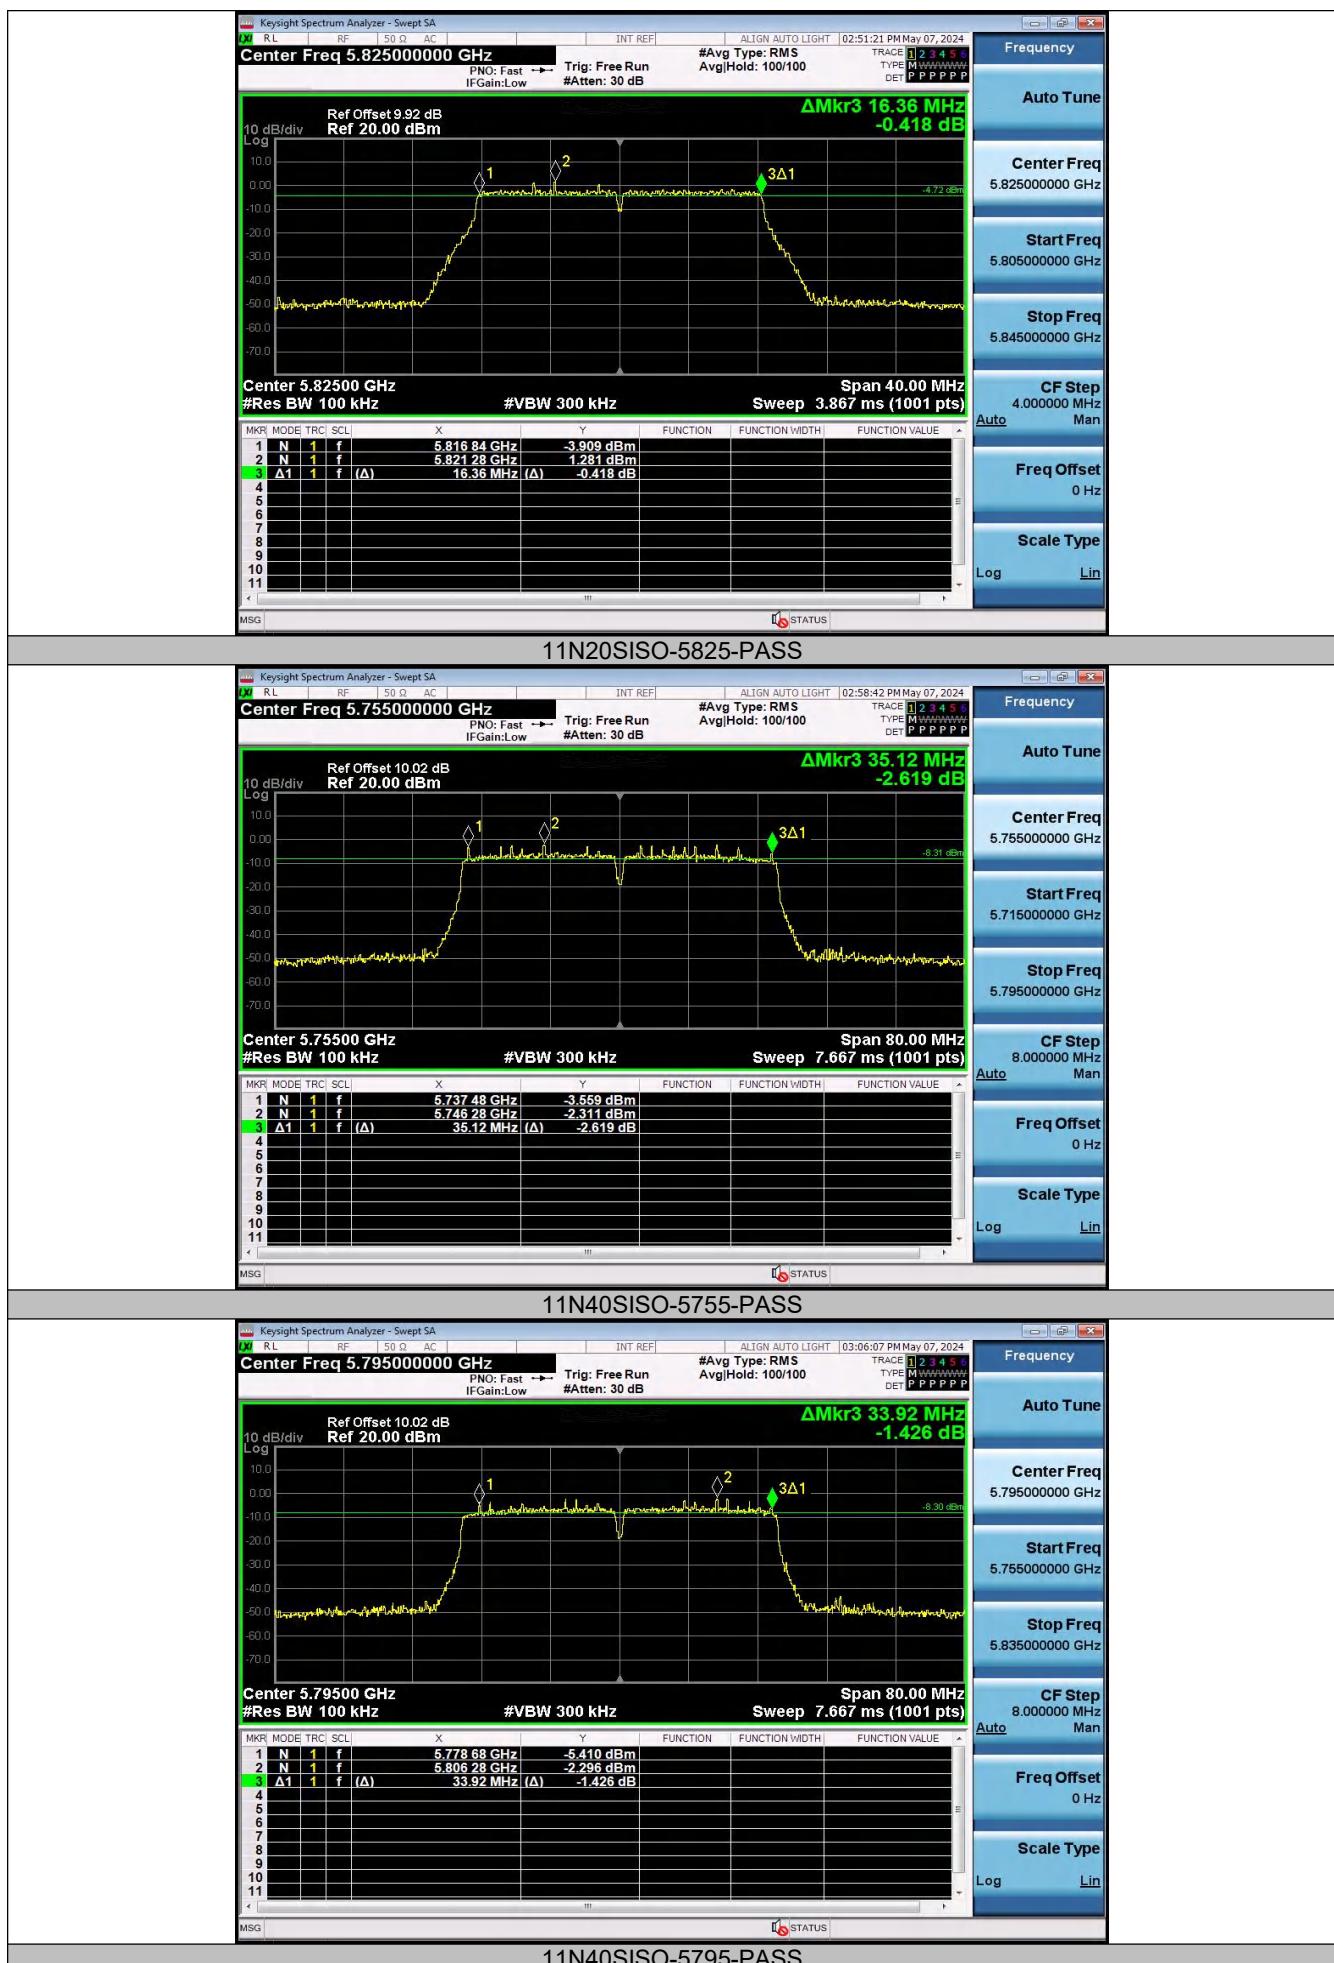


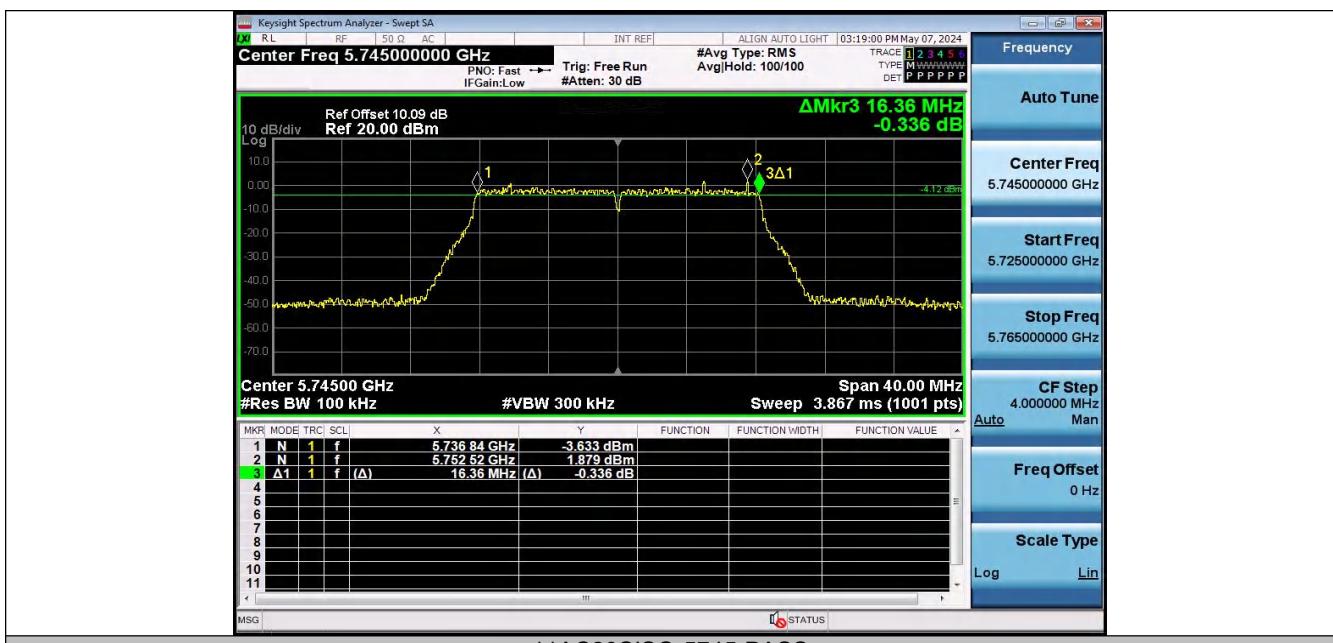


11AC20SISO-5745-PASS



11AC20SISO-5785-PASS

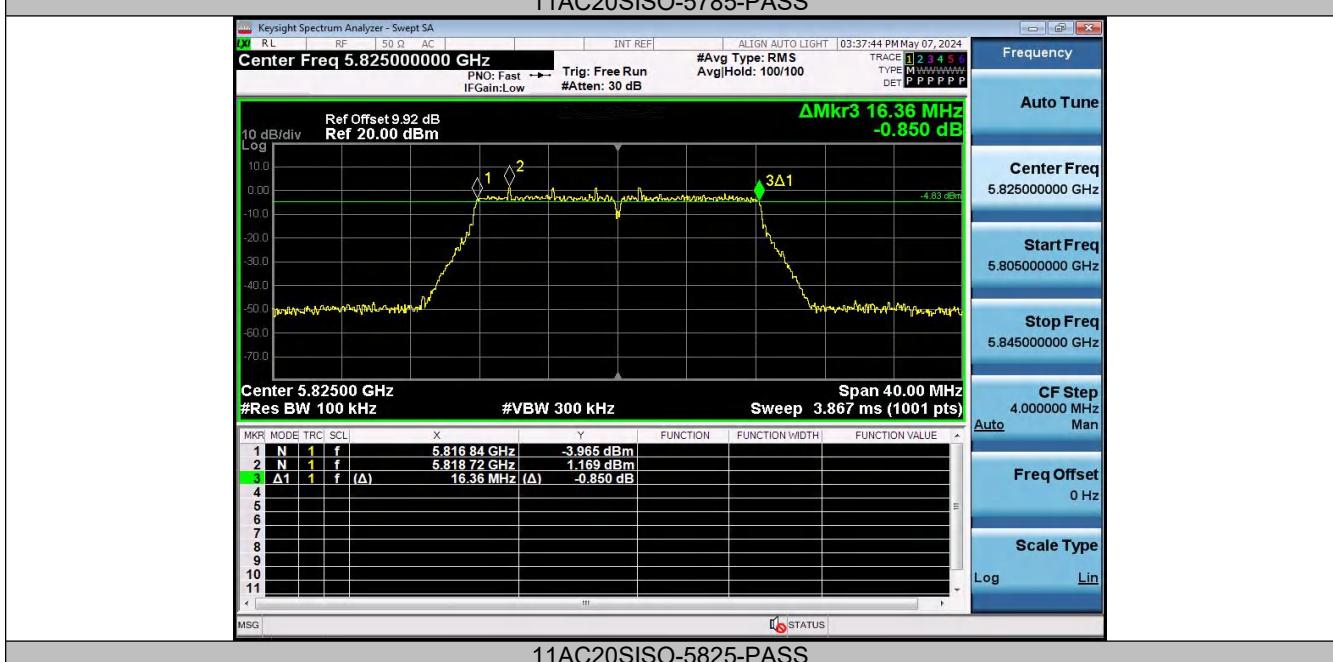

11AC20SISO-5825-PASS

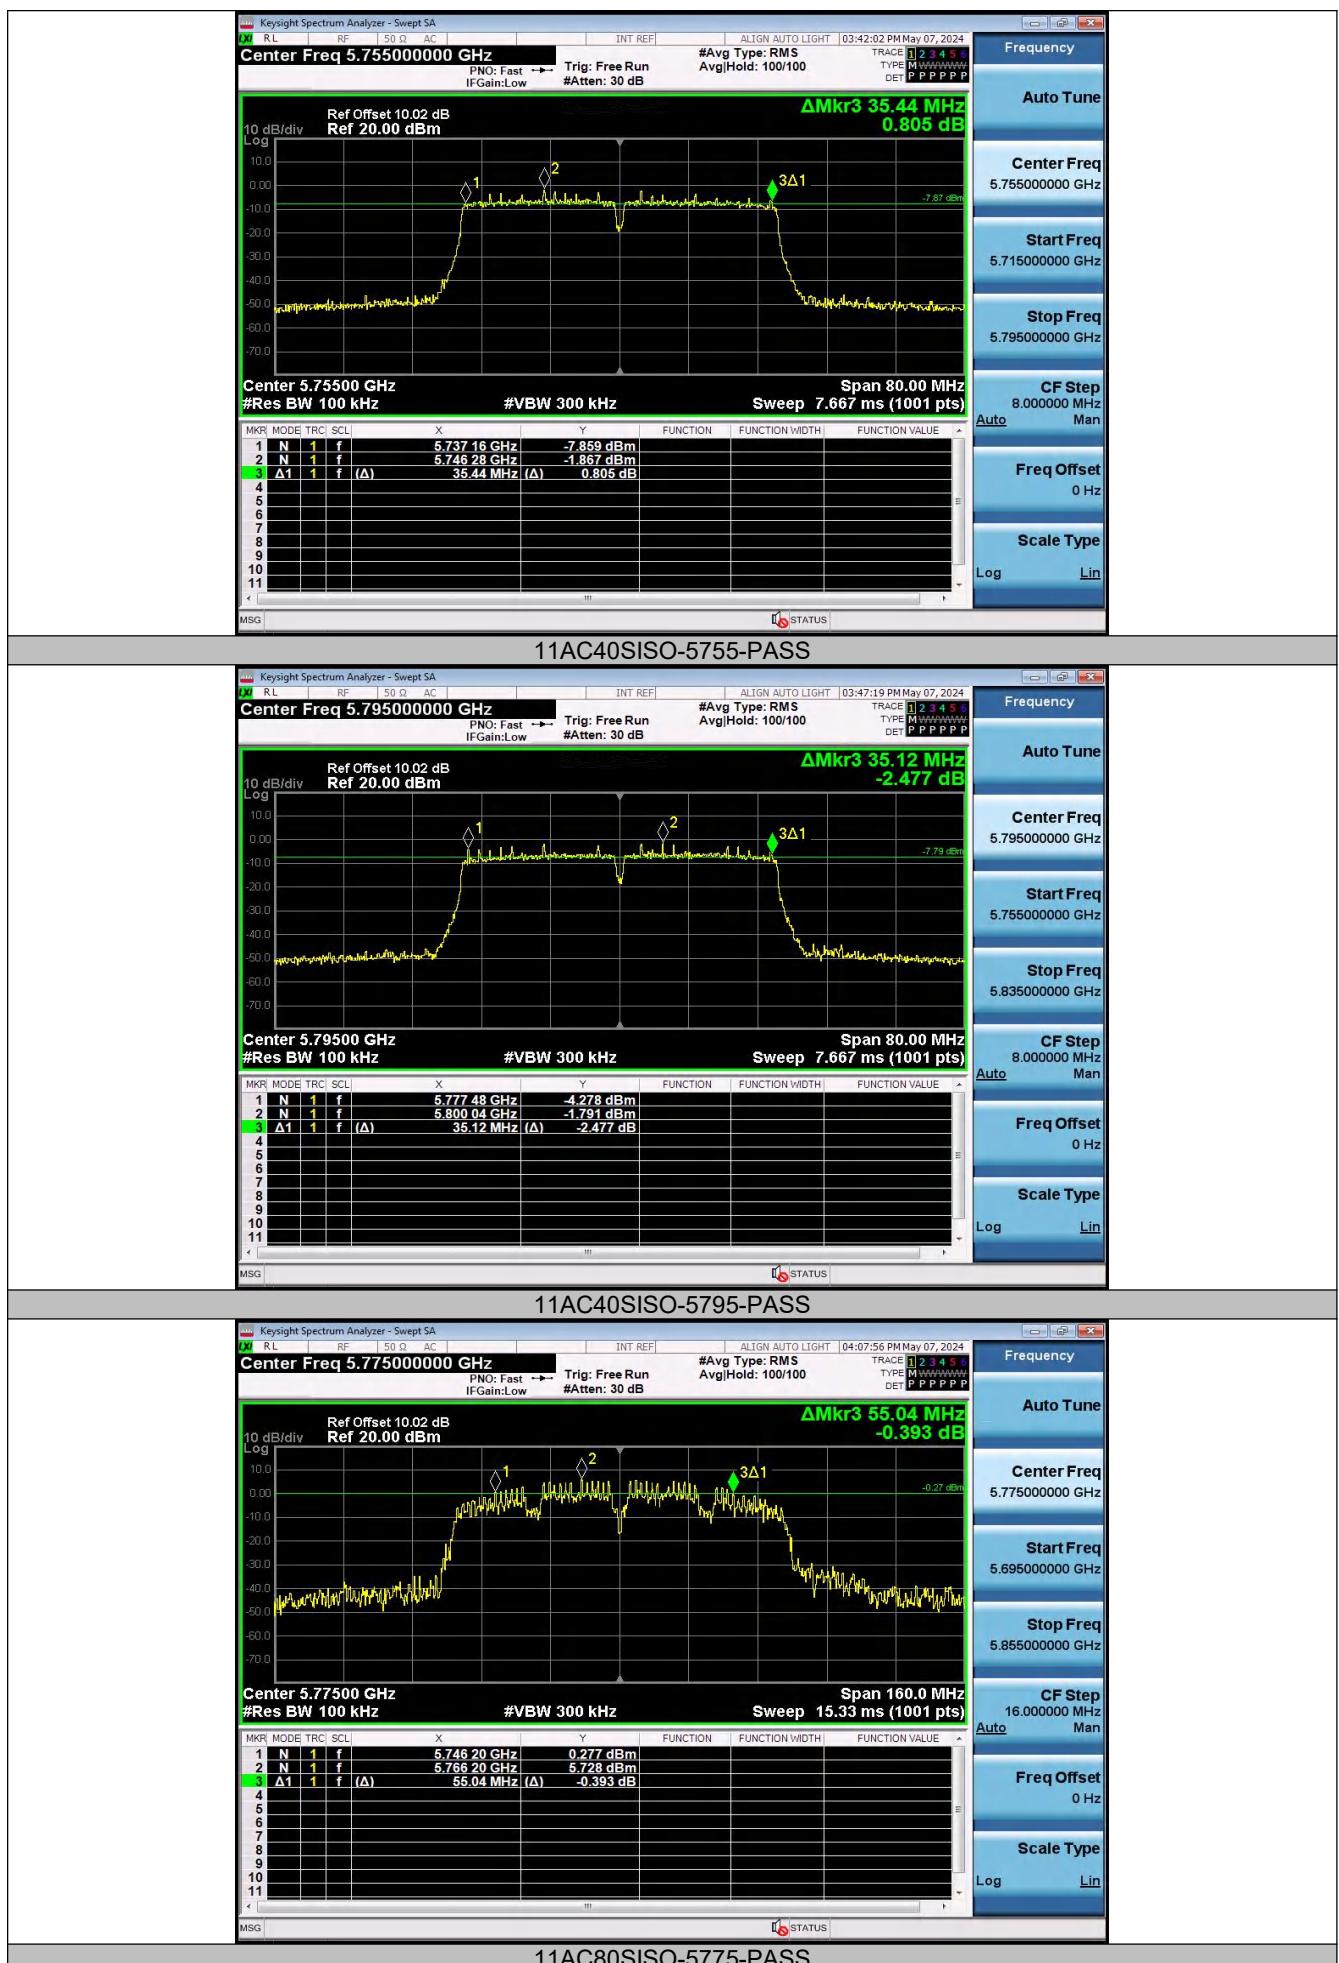


4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

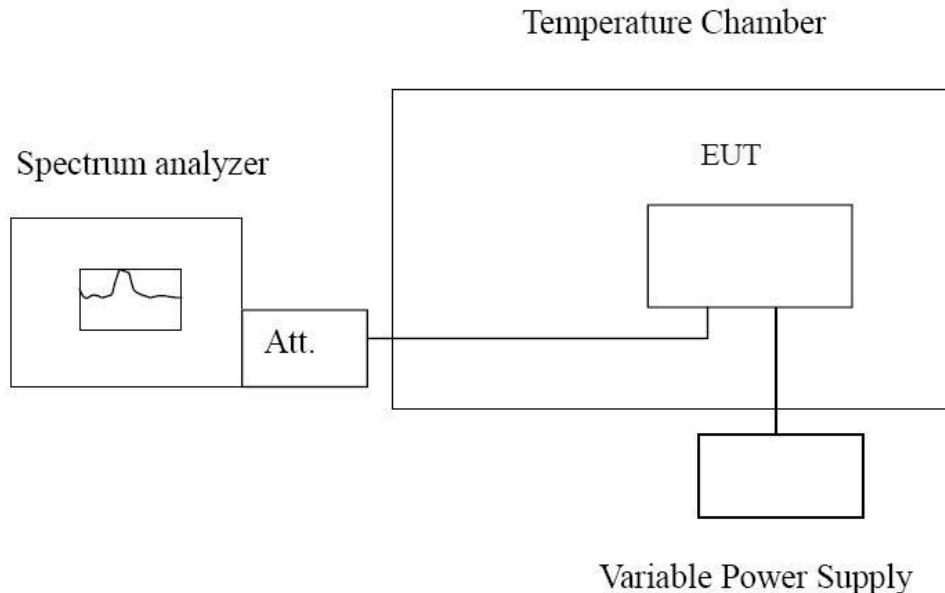

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
13.20	-30	129.43	0.02253	Within the band of operation	Pass
	-20	136.82	0.02382		
	-10	131.24	0.02284		
	0	130.93	0.02279		
	10	126.36	0.02199		
	20	128.54	0.02237		
	30	133.97	0.02332		
	40	134.58	0.02343		
	50	128.71	0.02240		
	14.52	130.55	0.02272		
11.88	20	136.49	0.02376		

4.8 Automatically Discontinue Transmission

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.407(c):

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Test Result:

Declared by applicants that the device will automatically discontinue transmission in case of either absence of information to transmit or operational failure.

4.9 Band edge for RF Conducted Emissions

Limit

1) For transmitters operating in the 5.15 – 5.25 GHz band: All emissions outside of the 5.15 – 5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

2) For transmitters operating solely in the 5.725 – 5.850 GHz band.

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure


Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold.


Test Configuration



Test Results


Test plot as follows:

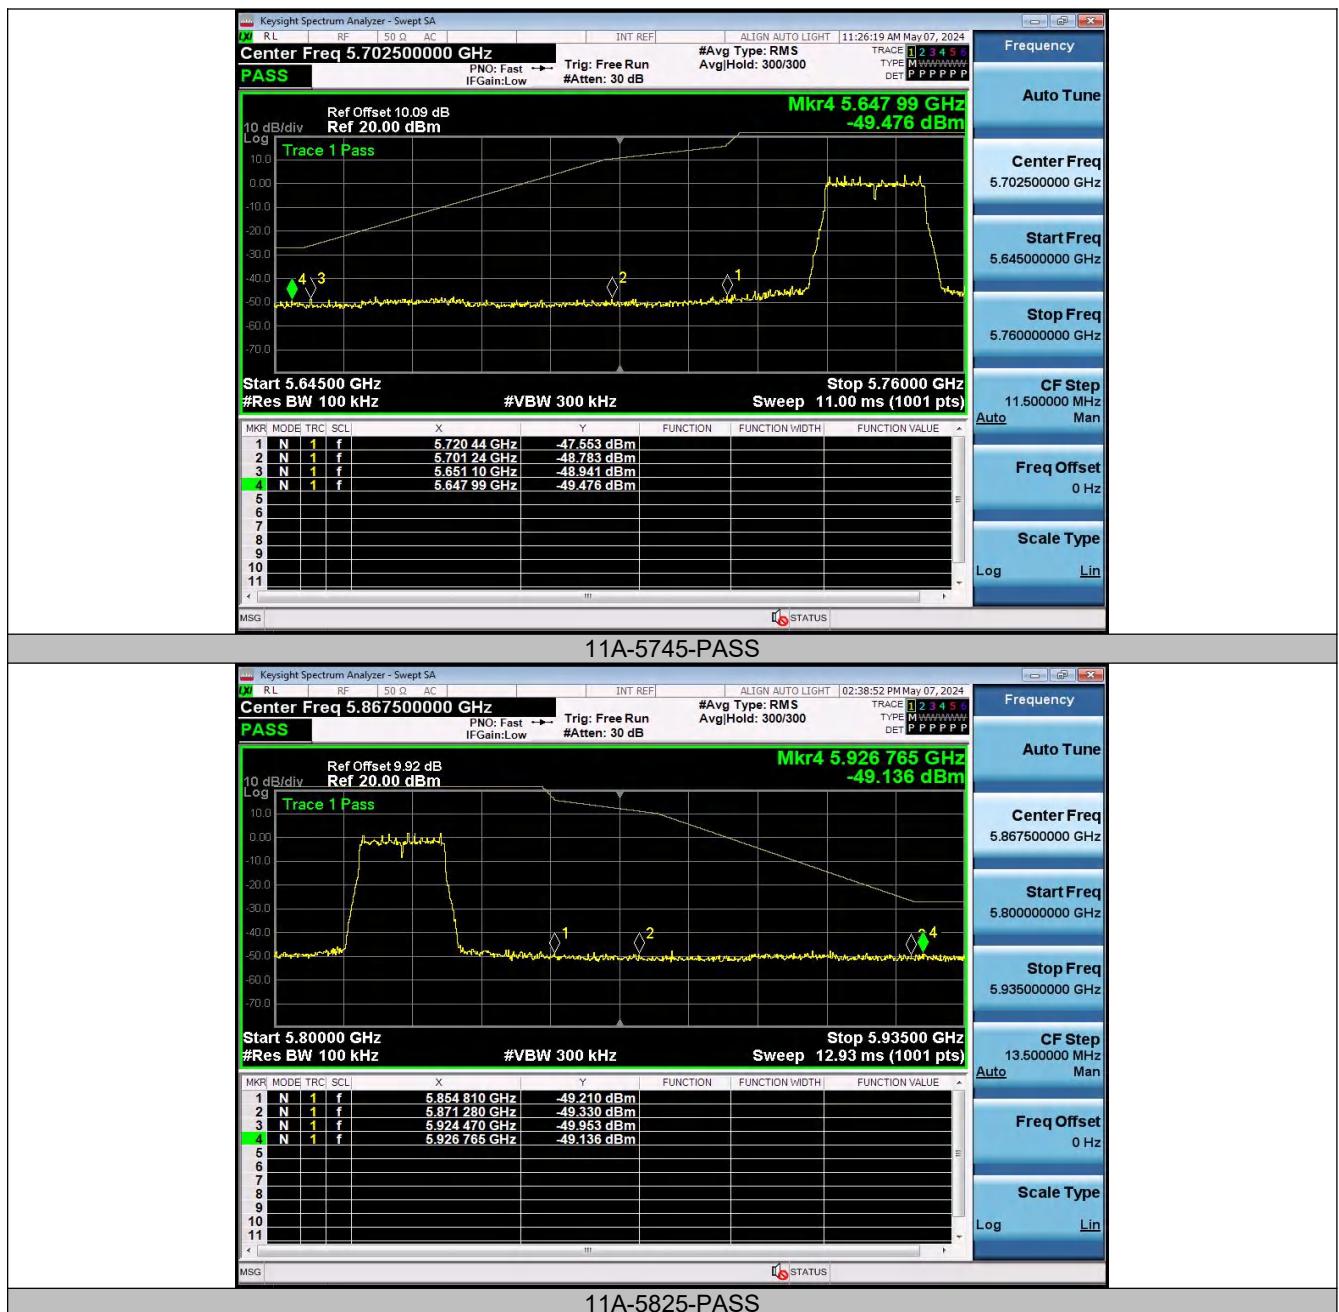

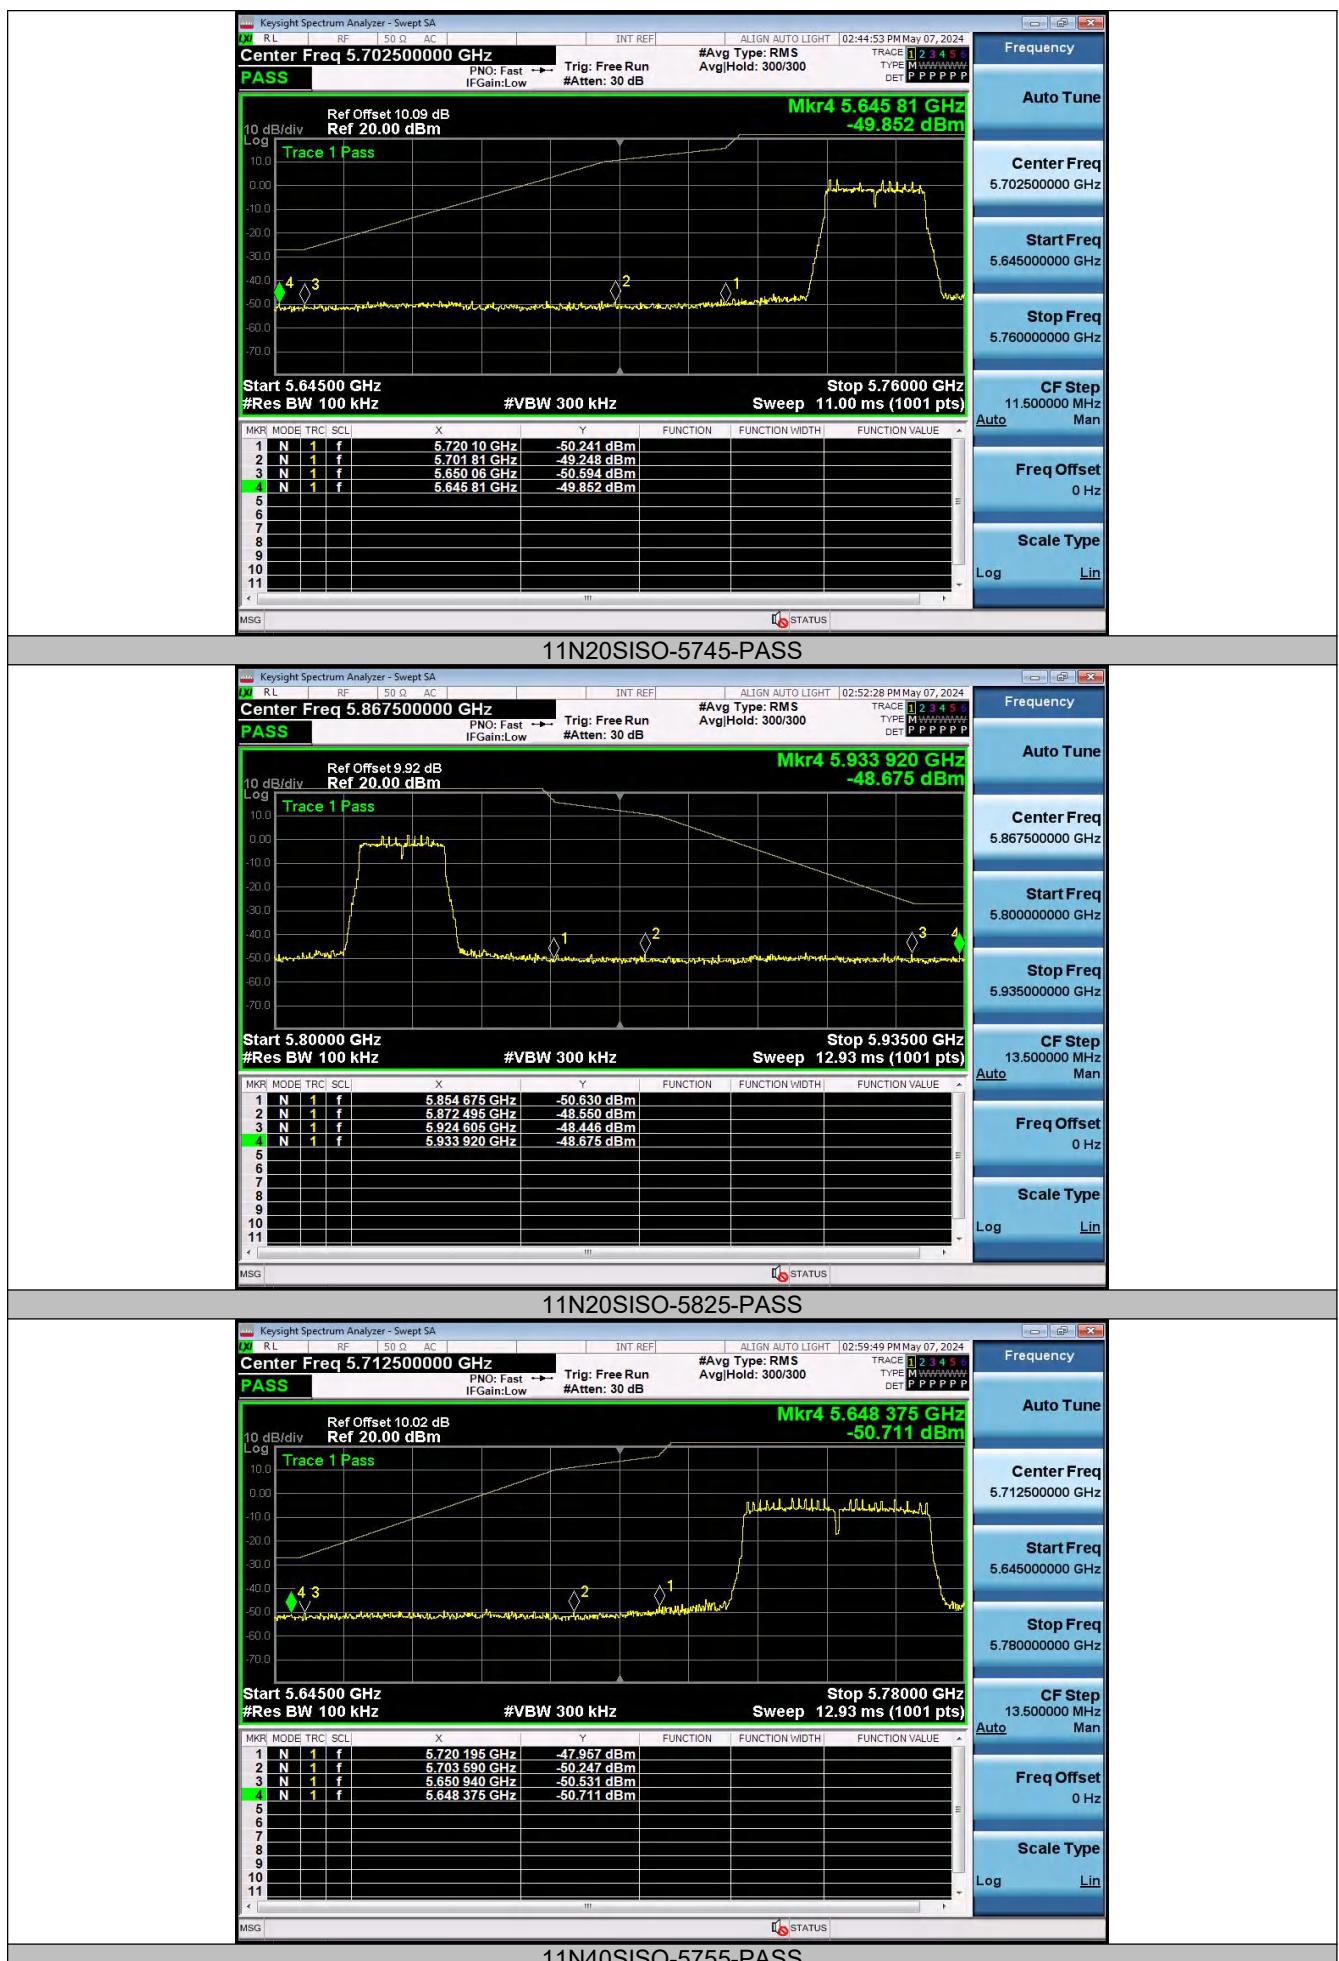





11N40SISO-5795-PASS

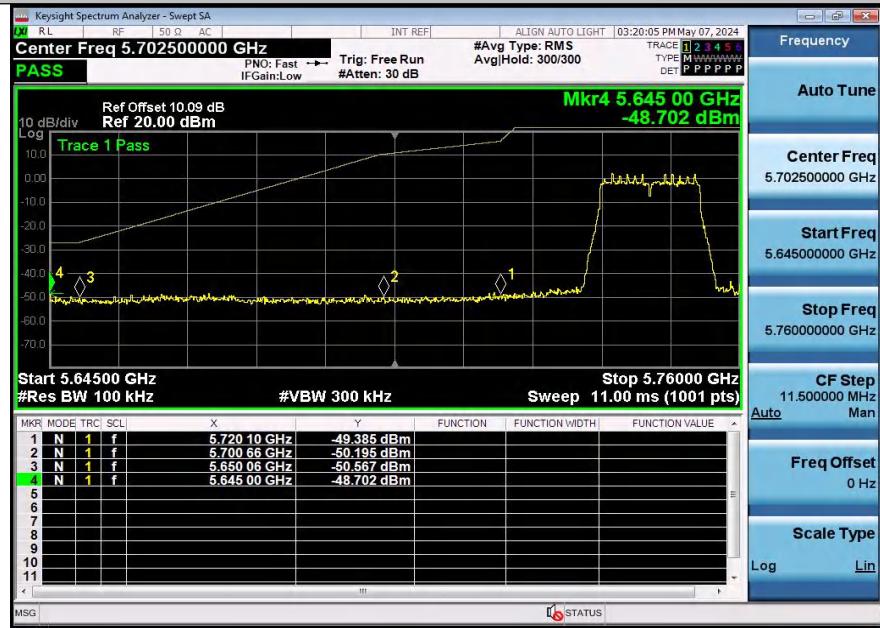

11AC20SISO-5745-PASS


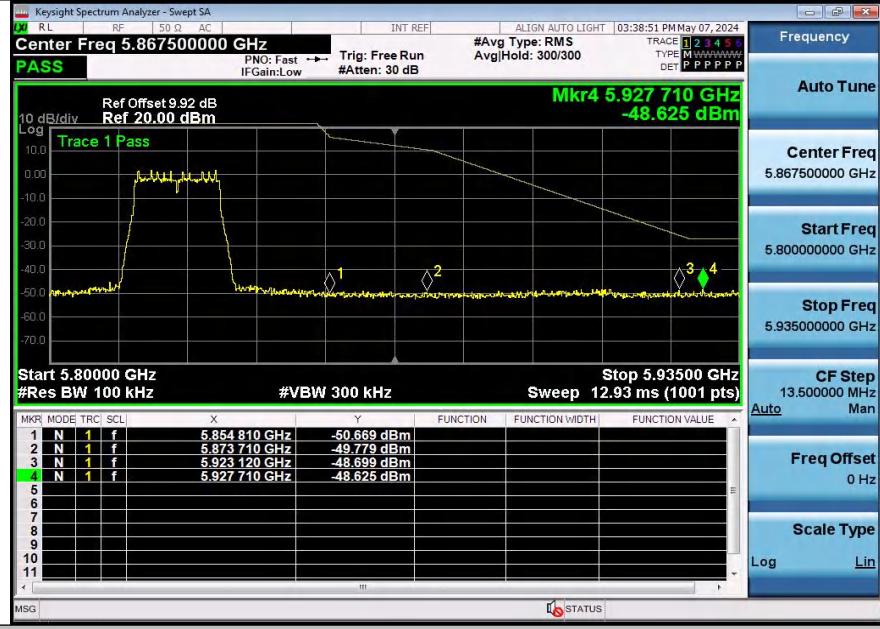


11AC20SISO-5825-PASS

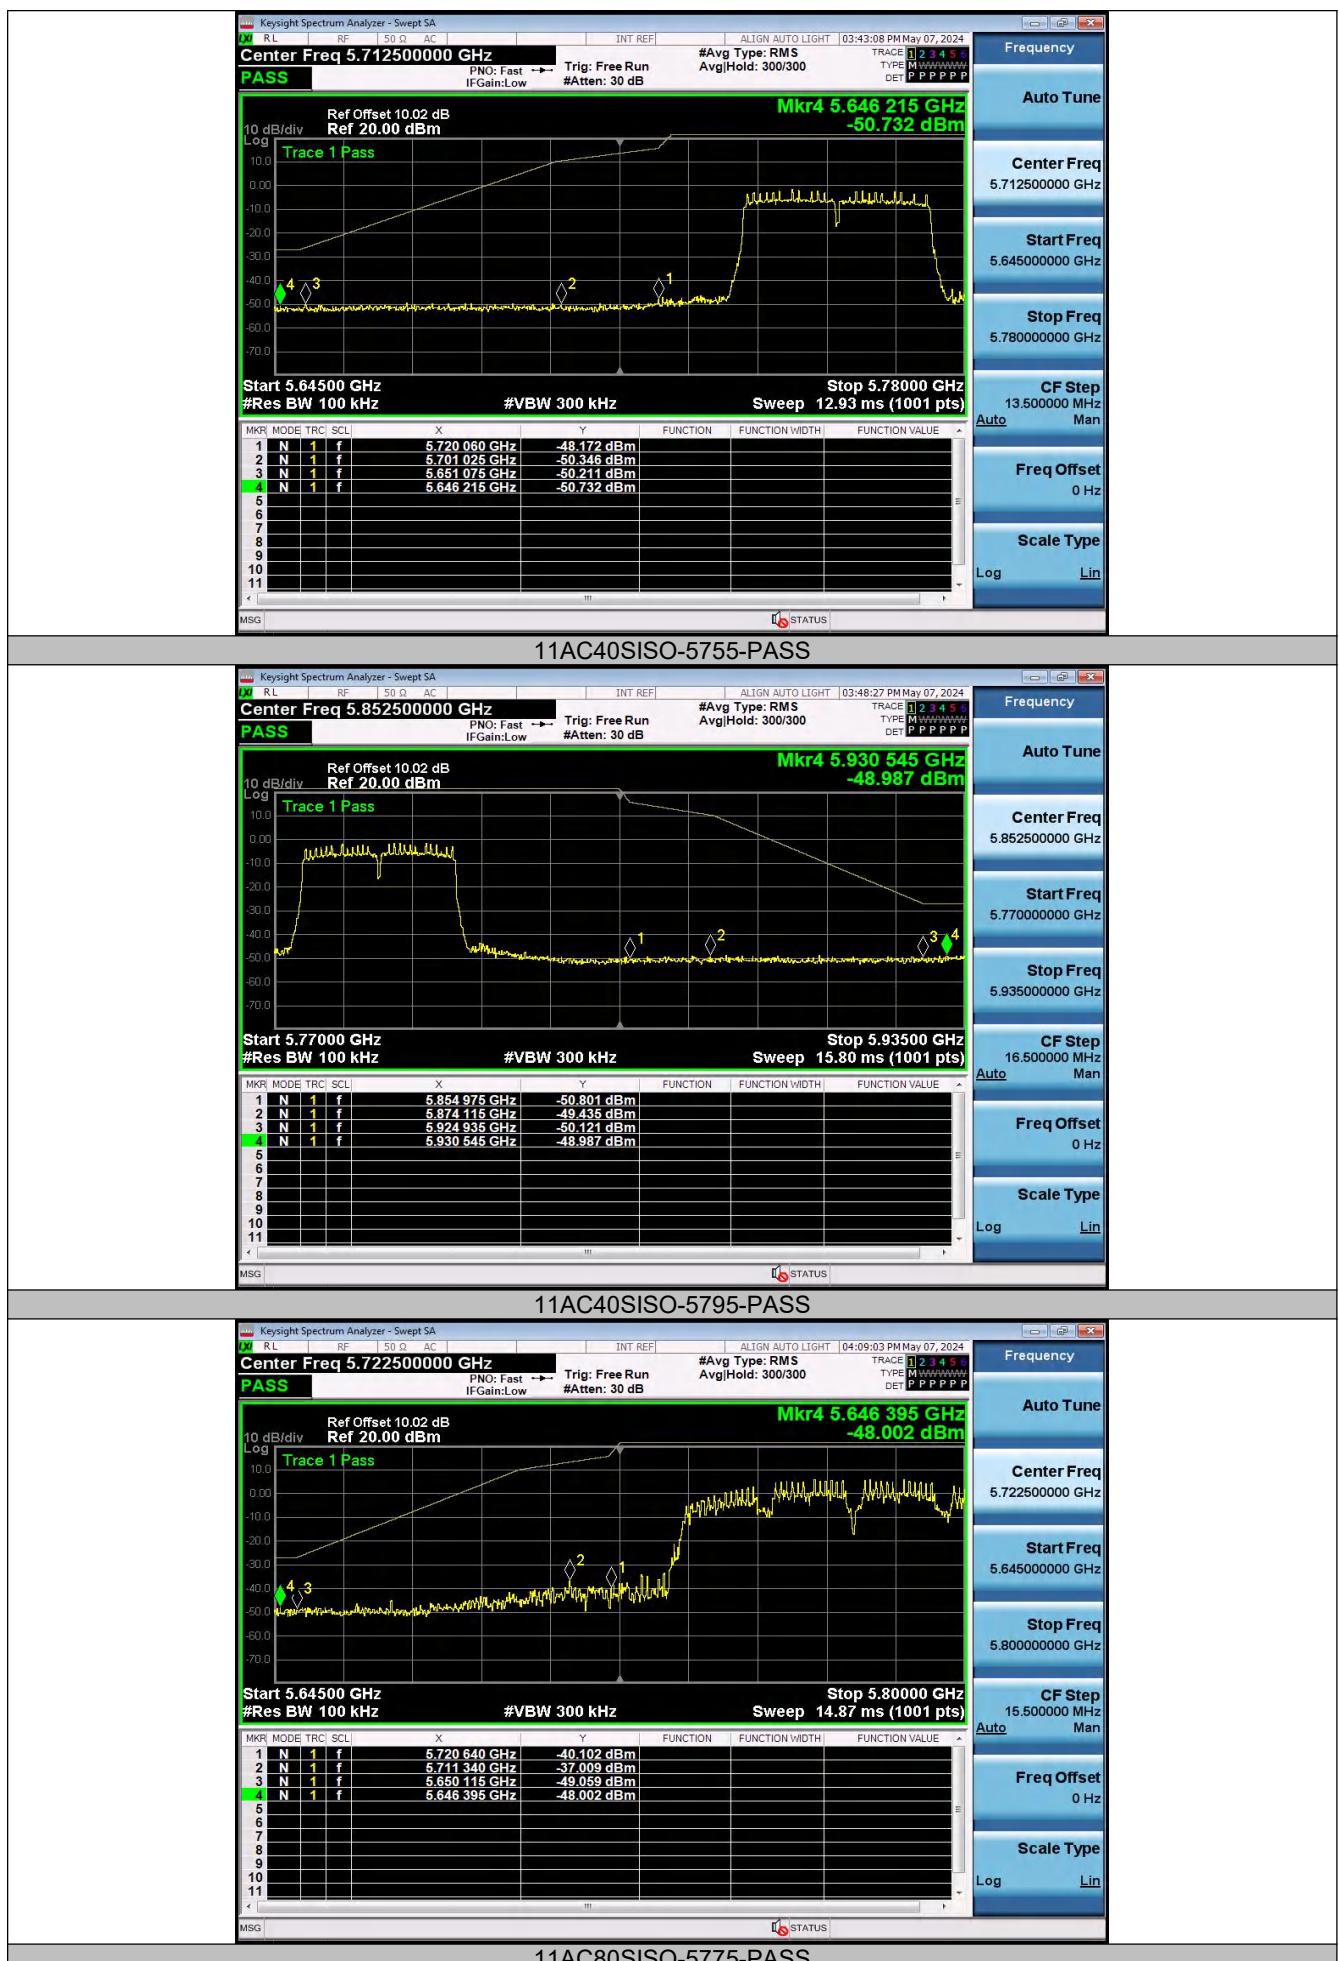



5 Test Setup Photos of the EUT

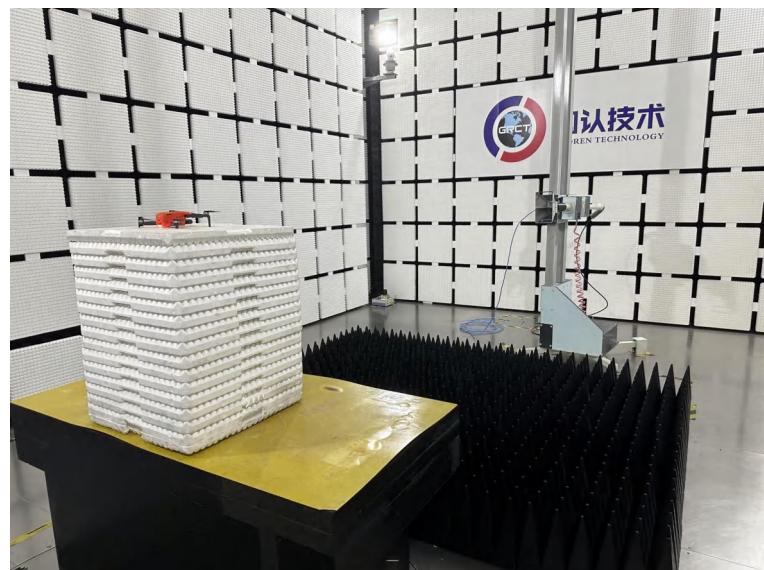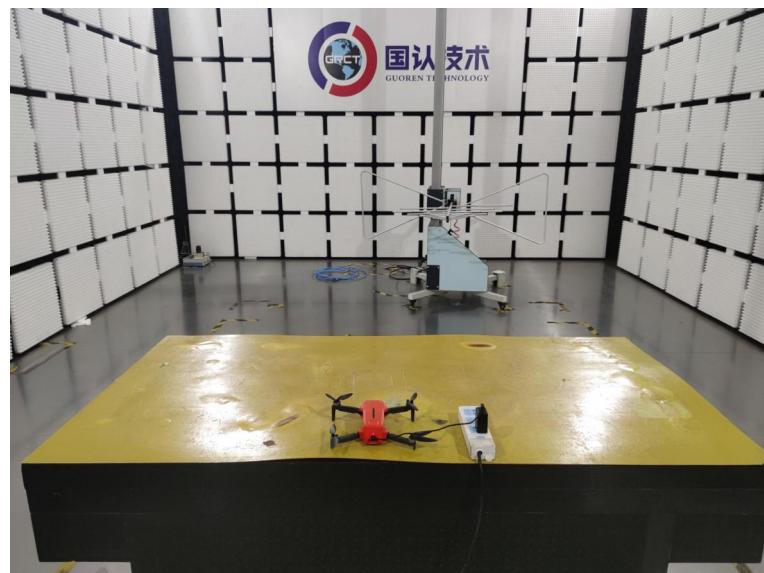

6 Photos of the EUT

Reference to the test report No. **GRCTR240402038-01**.

***** **End of Report** *****