



www.insize.com




7315
WIRELESS TRANSMITTER
OPERATION MANUAL






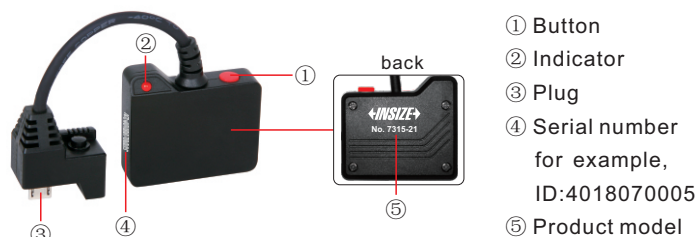


Introduction






7315-21(7315-22, 7315-30...): transmitters, is connected to our measuring tool and used with the receiver 7315-2 or 7315-3 to send the measuring value to the computer. A unique serial number is printed on the side of each transmitter.

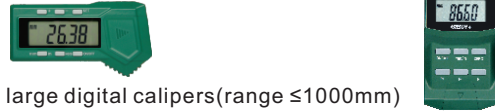

Instructions for use

- ① Button: Press the button to trigger data collection, and send one data each time.
- ② Indicator: For each successful data transmission, the red light flashes once.
- ③ Plug: Inserted into the data interface of the gage. The applicable gages for each type of transmitter are shown in the table below.

Code	Plug	Applicable gages
7315-21	 采集按键	 digital calipers and digital depth gauges
7315-22		 large digital calipers(range $\leq 1000\text{mm}$) and digital height gauges
7315-30		 digital micrometers

Code	Plug	Applicable gages
7315-50		
7315-50M		digital indicators, digital thickness gages and digital internal/external caliper gages
7315-60		 high precision digital indicators


④ Battery installation:

As shown in the figure, remove the four screws from the cover and load the CR2032 battery with the positive side facing out.



⑤ Connection with gages:


There is a velcro sticker being attached to the battery cover of the transmitter, and another velcro sticker can be attached to the appropriate position of the gage. Then, the transmitter can be fixed on the gage with velcro stickers (as shown in the figure below) to avoid inconvenience in the measurement process.

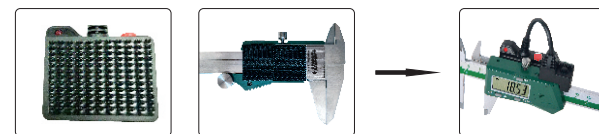


For the fixed position of the transmitter, the following ways are available for reference:

(You can also choose other suitable ways.)

① 7315-21:
digital calipers



② 7315-22:
large digital calipers



digital height gauges



③ 7315-30:
digital micrometers



④ 7315-50M:
digital indicators



digital thickness gages



⑤ 7315-60:
high precision digital indicators



FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.