

Test Mode:802. 11ac VHT20

Carrier frequency (MHz)	Correction Factor(dB)	Chain	Power Density (dBm)
5745	0.05	Chain0	-1.01
5785		Chain0	-0.878
5825		Chain0	-0.771

Test Mode:802. 11ac VHT20 Chain0



Test Mode:802. 11ac VHT20 Chain0



Test Mode:802. 11ac VHT20 Chain0




Test Mode:802. 11ac VHT20

Carrier frequency (MHz)	Correction Factor(dB)	Chain	Power Density (dBm/500kHz)
5720	0	Chain0	-8.007

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result.

Test Mode:802. 11ac VHT20 Chain0

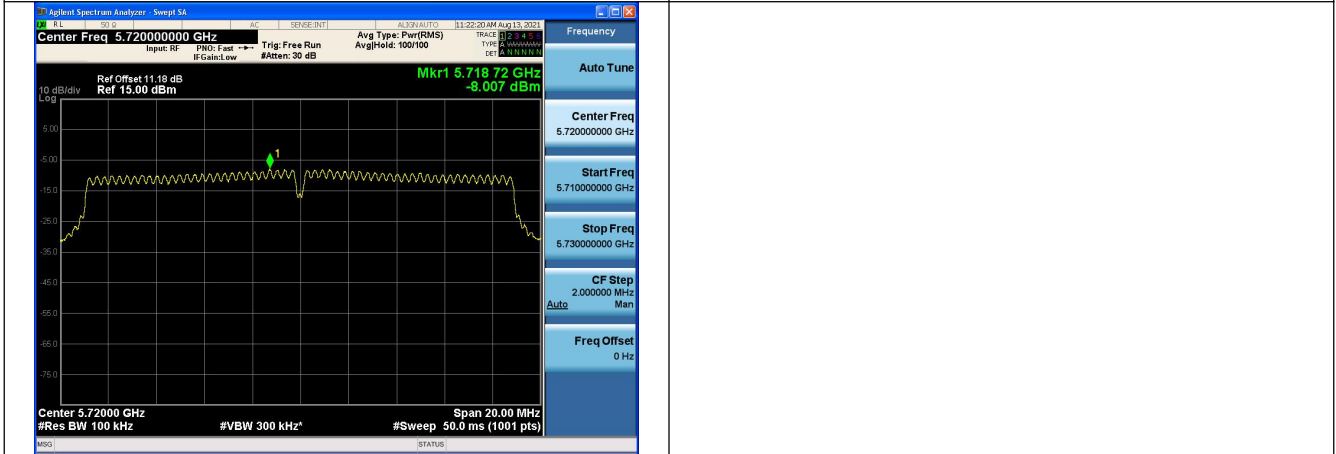


Test Mode:802. 11ac VHT40

Carrier frequency (MHz)	Correction Factor(dB)	Chain	Power Density (dBm)
5755	0.10	Chain0	-3.704
5795		Chain0	-3.59

Test Mode:802. 11ac VHT40 Chain0



Test Mode:802. 11ac VHT40 Chain0

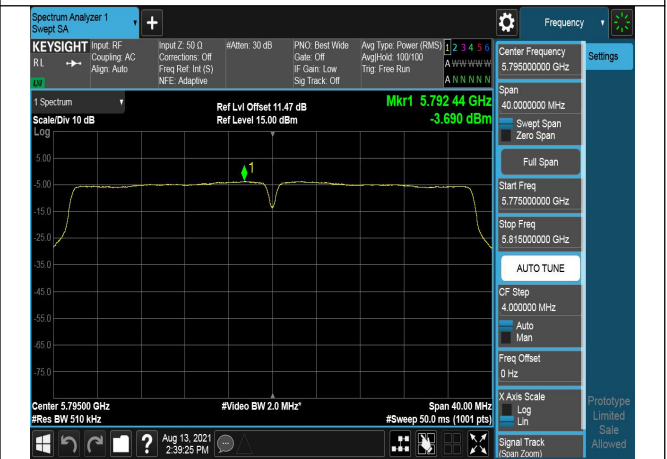


Test Mode:802. 11ac VHT40

Carrier frequency (MHz)	Correction Factor(dB)	Chain	Power Density (dBm/500kHz)
5710	0	Chain0	-11.019

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result.


Test Mode:802. 11ac VHT40 Chain0

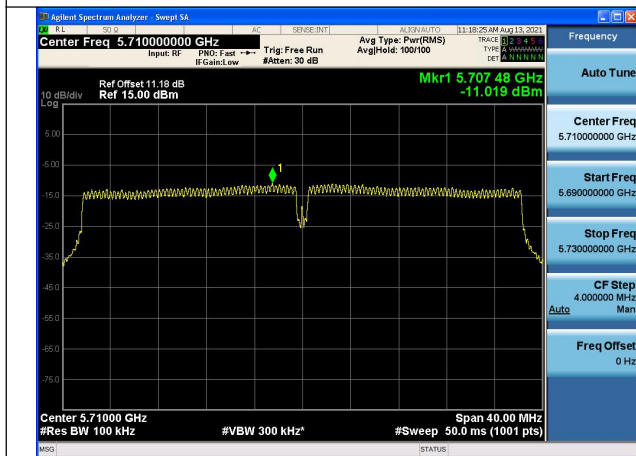

Test Mode:802. 11ac VHT80

Carrier frequency (MHz)	Correction Factor(dB)	Chain	Power Density (dBm)
5775	0.19	Chain0	-6.861

Test Mode:802. 11ac VHT80 Chain0

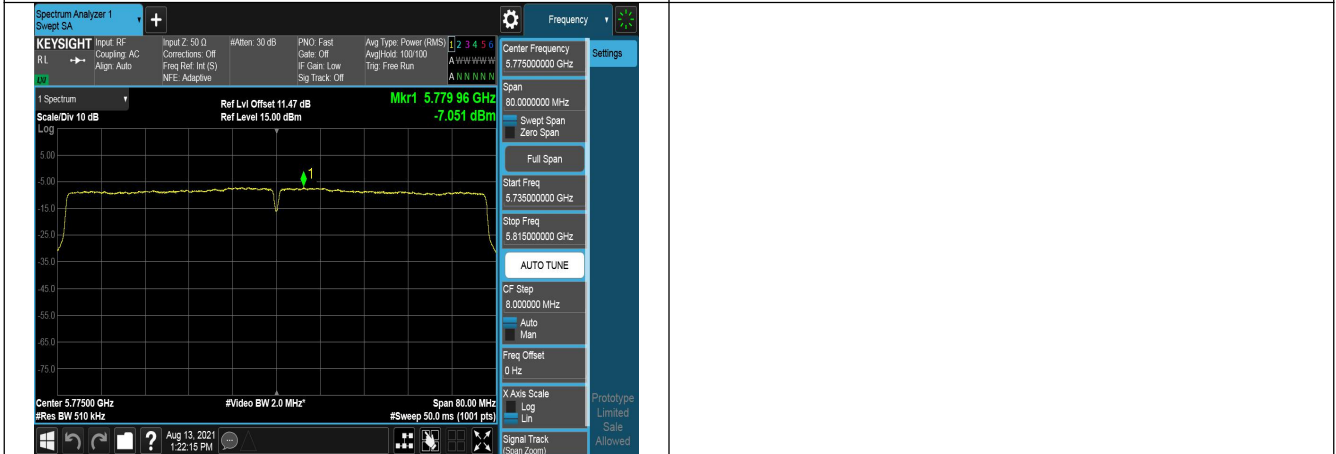

Test Mode:802. 11ac VHT80

Carrier frequency (MHz)	Correction Factor(dB)	Chain	Power Density (dBm/500kHz)
5690	0.10	Chain0	-13.652

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result.

Test Mode:802. 11ac VHT80 Chain0

