



Certificate Number: 5055.02

---

# TEST REPORT FOR BLUETOOTH TESTING

---

Report No.: SRTC2021-9004(F)-21063004(D)

Product Name: Smart Phone

Product Model: FCG01

Applicant: FCNT LIMITED

Manufacturer: FCNT LIMITED

Specification: FCC Part 15 Subpart C (2020)

FCC ID: 2AYY9FMP186

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388



## CONTENTS

### **1. GENERAL INFORMATION**

1.1 Notes of the test report.....	2
1.2 Information about the testing laboratory.....	2
1.3 Applicant's details.....	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3

### **2 DESCRIPTION OF THE DEVICE UNDER TEST..... 4**

2.1 Final Equipment Build Status.....	4
2.2 Description of Test Modes.....	5
2.2.1 Test Mode Applicability and Tested Channel Detail.....	5
2.3 Duty Cycle of Test Signal.....	7
2.4 EUT operating conditions.....	7
2.5 Support Equipment.....	7

### **3 REFERENCE SPECIFICATION..... 8**

### **4 KEY TO NOTES AND RESULT CODES..... 8**

### **5 RESULT SUMMARY..... 9**

### **6 TEST RESULT..... 10**

6.1 20dB Bandwidth.....	10
6.2 Channel Separation.....	11
6.3 Peak Transmitter Output Power.....	12
6.4 Dwell Time.....	13
6.5 Number of Hopping Frequencies.....	14
6.6 Conducted out of band emission measurement.....	15
6.7 Band-edge measurement.....	16
6.8 Spurious Radiated Emissions.....	17
6.9 AC Power line Conducted Emission.....	22

### **7 MEASUREMENT UNCERTAINTIES..... 23**

### **8 TEST EQUIPMENTS..... 24**

### **APPENDIX A – TEST DATA OF CONDUCTED EMISSION..... 25**

### **APPENDIX B – TEST DATA OF RADIATED EMISSION..... 41**

## 1. GENERAL INFORMATION

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### 1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

### 1.3 Applicant's details

Company:	FCNT LIMITED
Address:	Churinkan 7-10-1 Yamato, Kanagawa 2420007, Japan
City:	Yamato
Country or Region:	Japan
Contacted person:	Masahiro Kurosawa
Tel:	+81-50-3358-3533
Email:	kurosawa_masa@fcnt.com

### 1.4 Manufacturer's details

Company:	FCNT LIMITED
Address:	Churinkan 7-10-1 Yamato, Kanagawa 2420007, Japan
City:	Yamato
Country or Region:	Japan
Contacted person:	Masahiro Kurosawa
Tel:	+81-50-3358-3533
Email:	kurosawa_masa@fcnt.com



### 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-06-24
Testing Start Date:	2021-07-02
Testing End Date:	2021-09-27

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	32

Normal Supply Voltage (V d.c.):	3.9
---------------------------------	-----

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Frequency Range:	2.402GHz~2.480GHz
Number of Channel:	79
Modulation Type:	GFSK, $\pi$ /4DQPSK, 8DPSK
Duplex Mode:	TDD
Channel Spacing:	1MHz
Data Rate:	1Mbps, 2 Mbps, 3 Mbps
Power Supply:	Charger
Software Revision:	V03RK26A-UD
Hardware Revision:	V1.2.0
IMEI:	359326120007212 359326120007980 359326120007790
Antenna type:	Refer to Note1
Antenna connector:	Refer to Note1

#### Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note1: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connector Type
N/A	N/A	1.2dBi	2.402GHz~2.480GHz	PIFA Antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.



## 2.2 Description of Test Modes

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	16	2418	32	2434	48	2450	64	2466
1	2403	17	2419	33	2435	49	2451	65	2467
2	2404	18	2420	34	2436	50	2452	66	2468
3	2405	19	2421	35	2437	51	2453	67	2469
4	2406	20	2422	36	2438	52	2454	68	2470
5	2407	21	2423	37	2439	53	2455	69	2471
6	2408	22	2424	38	2440	54	2456	70	2472
7	2409	23	2425	39	2441	55	2457	71	2473
8	2410	24	2426	40	2442	56	2458	72	2474
9	2411	25	2427	41	2443	57	2459	73	2475
10	2412	26	2428	42	2444	58	2460	74	2476
11	2413	27	2429	43	2445	59	2461	75	2477
12	2414	28	2430	44	2446	60	2462	76	2478
13	2415	29	2431	45	2447	61	2463	77	2479
14	2416	30	2432	46	2448	62	2464	78	2480
15	2417	31	2433	47	2449	63	2465		

### 2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	
GFSK, π/4DQPSK, 8DPSK	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, π/4DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps



**Radiated Emission Test (Below 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

**Power Line Conducted Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

**Antenna Port Conducted Measurement:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	0, 39, 78	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps



### 2.3 Duty Cycle of Test Signal

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK(DH5)	79.00%	1.02
$\pi/4$ DQPSK(DH5)	79.00%	1.02
8DPSK(DH5)	79.10%	1.02

### 2.4 EUT operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:  
N/A





### **3 REFERENCE SPECIFICATION**

Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules




### **4 KEY TO NOTES AND RESULT CODES**

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

## 5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	20dB Bandwidth	15.247(a)(1)(iii)	Pass
2	Channel Separation	15.247(a)(1)	Pass
3	Peak Transmitter Output Power	15.247(b)(1)	Pass
4	Dwell Time	15.247(a)(1)(iii)	Pass
5	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
6	Conducted out of band emission measurement	15.247(d)	Pass
7	Band-edge	15.247(d)	Pass
8	Spurious Radiated Emissions	15.205/15.209	Pass
9	AC Power line Conducted Emission	15.207	Pass
10	Antenna requirement	15.203	Pass(refer to section 2.1)

Note: The device is designed according to specifications of SIG, So it has a full support to Medium access protocol and fully compliant with the KDB558074 standard. The device is compliant Pseudorandom hopping, Equal hopping frequency, receiver bandwidth synchronize and have same bandwidth with transmitted signal. And the ability to have adaptive hopping when encountering other signals.

This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested by: Mr. Liu Ce 	Approved date:  20210927

## **6 TEST RESULT**

### **6.1 20dB Bandwidth**

#### **6.1.1 Test limit**

FCC Part15.247 (a.1.iii)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.


#### **6.1.2 Test Procedure Used**

ANSI C63.10-2013 – Section 6.9.2

#### **6.1.3 Test settings**

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 20$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2.  $RBW = 1 - 5\% OBW$
3.  $VBW \geq 3 \times RBW$
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

#### **6.1.4 Test Setup**

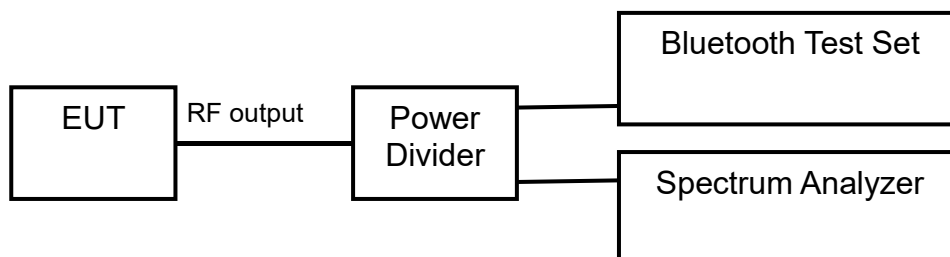

#### **6.1.5 Test result**

The test results are shown in Appendix A.

## 6.2 Channel Separation

### 6.2.1 Test limit

FCC Part15.247 (a) (1)

Measurement is made with EUT operating in hopping mode. The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


### 6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

### 6.2.3 Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

### 6.2.4 Test Setup

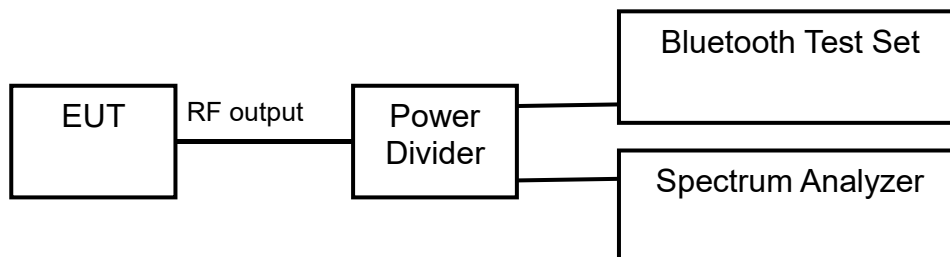

### 6.2.5 Test result

The test results are shown in Appendix A.

### 6.3 Peak Transmitter Output Power

#### 6.3.1 Test limit

FCC Part 15.247(b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band:1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30.0dBm	30.0dBm	30.0dBm

For all other frequency hopping systems in the 2400-2483.5 MHz band:0.125 watts.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	21.0dBm	21.0dBm	21.0dBm

#### 6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

#### 6.3.3 Test Settings


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### 6.3.4 Test Setup

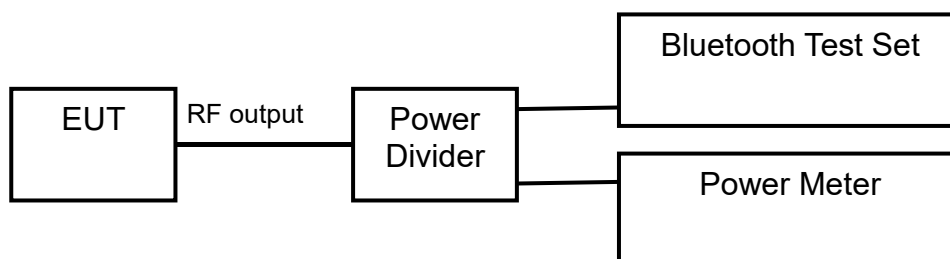

#### 6.3.5 Test result

The test results are shown in Appendix A.

## 6.4 Dwell Time

### 6.4.1 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length \* hop rate \* 31.6/ number of hopping channels with:

- hop rate=1600/2 \* 1/s for DH1 packets =800
- hop rate=1600/4 \* 1/s for DH3 packets =400
- hop rate=1600/6 \* 1/s for DH5 packets =266.67
- Number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s \* 79

### 6.4.2 Test limit

FCC Part 15.247(a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 6.4.3 Test Settings

ANSI C63.10-2013 Section 7.8.4

1. Span = zero span, centered on a hopping channel
2. RBW  $\leq$  channel spacing and  $\gg 1/T$ , where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

### 6.4.4 Test Setup

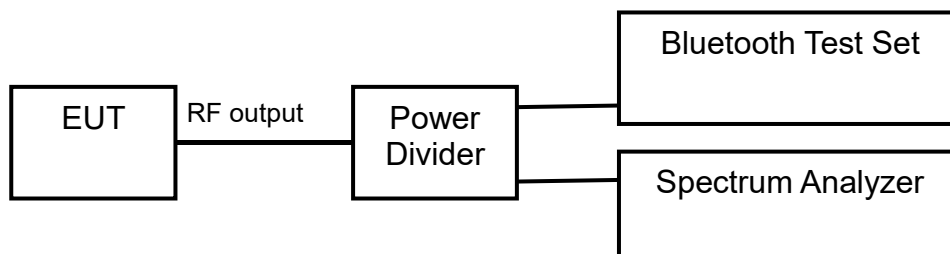

### 6.4.5 Test result

The test results are shown in Appendix A.

## 6.5 Number of Hopping Frequencies

### 6.5.1 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

### 6.5.2 Test limit

FCC Part15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 6.5.3 Test Settings

ANSI C63.10-2013 Section 7.8.3

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.5.4 Test Setup

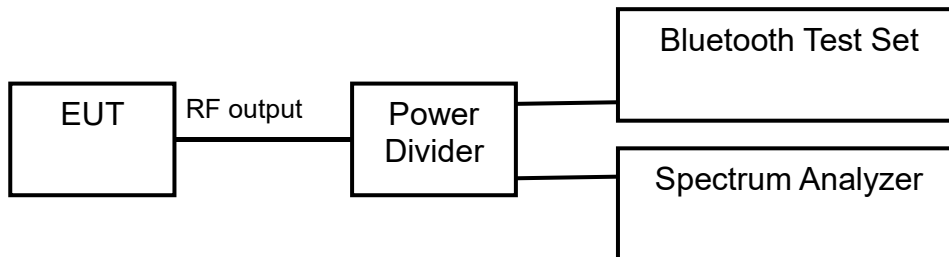

### 6.5.5 Test result

The test results are shown in Appendix A.

## 6.6 Conducted out of band emission measurement

### 6.6.1 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


### 6.6.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

### 6.6.3 Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 26GHz
2. RBW = 1MHz\* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### 6.6.4 Test Setup

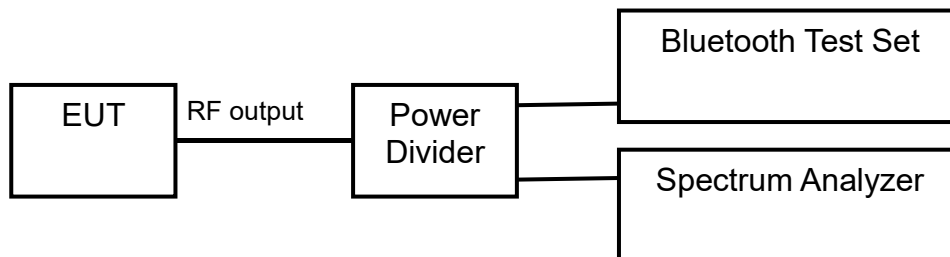

### 6.6.5 Test result

The test results are shown in Appendix A .

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.



## 6.7 Band-edge measurement

### 6.7.1 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


### 6.7.2 Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

### 6.7.3 Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100 kHz
4. VBW = 300 kHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### 6.7.4 Test Setup

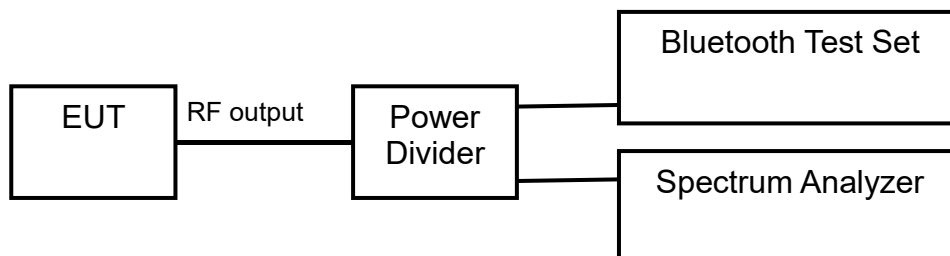

### 6.7.6 Test result

The test results are shown in Appendix A.

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

## 6.8 Spurious Radiated Emissions

### 6.8.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

### 6.8.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device.

Frequency [MHz]	Field strength [ $\mu\text{V/m}$ ]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**Radiated Limits**

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

**Used conversion factor: Limit (dB $\mu\text{V/m}$ ) = 20 log (Limit ( $\mu\text{V/m}$ )/1 $\mu\text{V/m}$ )**

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$ )
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

**Conversion Radiated limits**

### 6.8.3 Test Procedure Used

KDB 558074 D01 v05r02 – Section 12.2.7

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**For the radiated emission test above 1GHz:**

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

**6.8.4 Test Settings****Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**

Frequency	Detector
< 1000MHz	Quasi-peak
>1000MHz	Peak and average

**Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.8.5 Test Setup


#### For Radiated emission below 30MHz

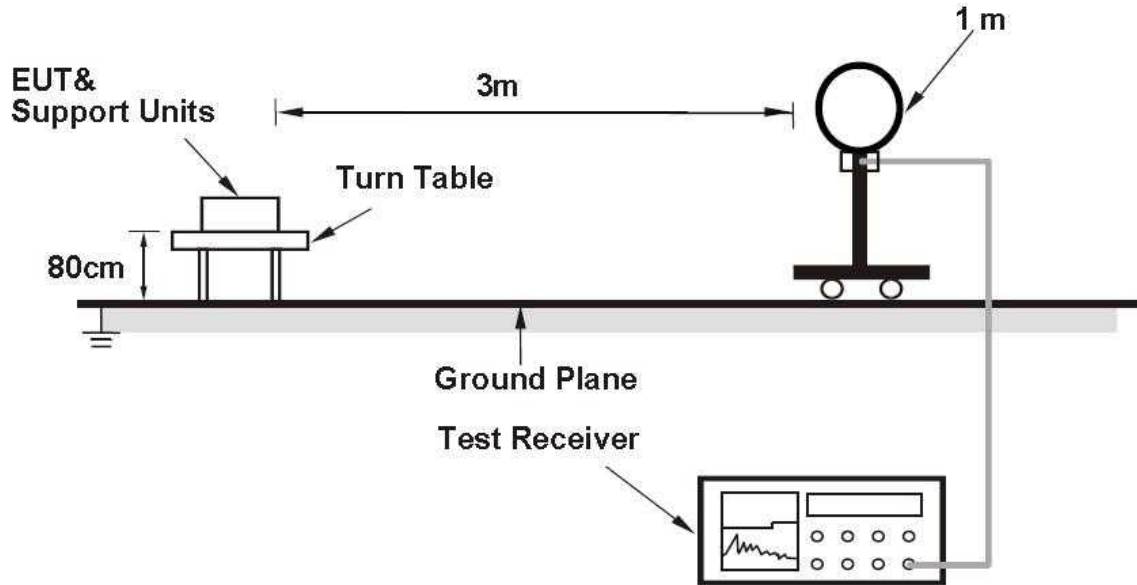

#### For Radiated emission 30MHz to 1GHz

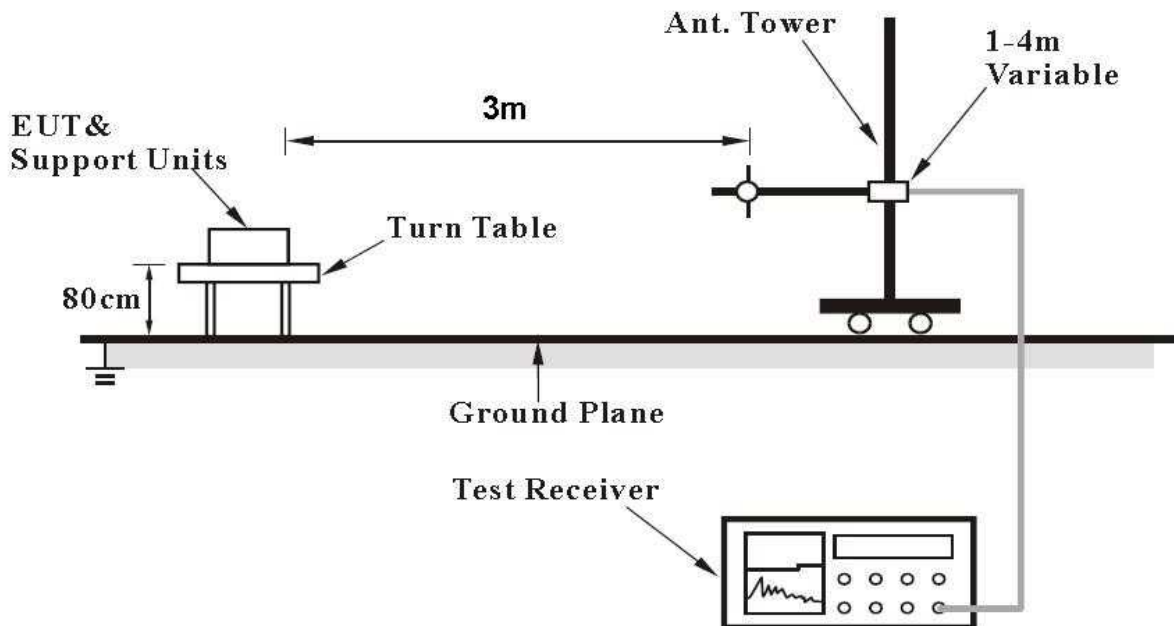

### For Radiated emission above 1GHz

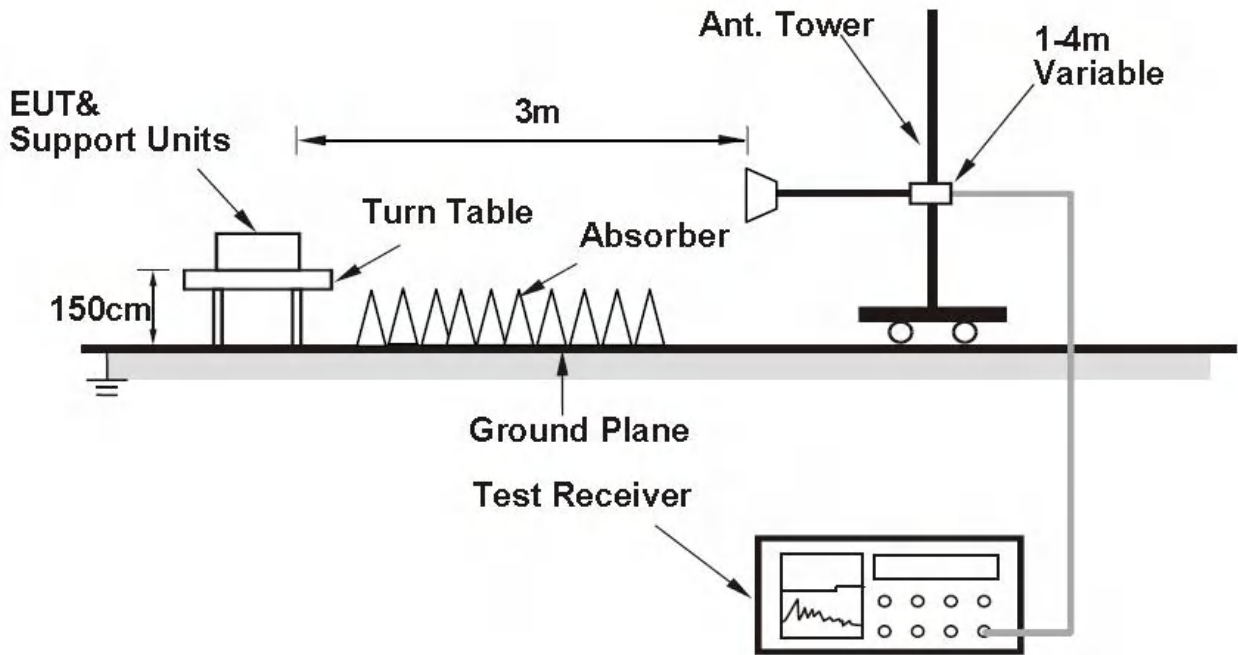

### 6.8.6 Test result

The test results are shown in Appendix B.

## 6.9 AC Power line Conducted Emission

### 6.9.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013


### 6.9.2 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

### 6.9.3 Test Setup

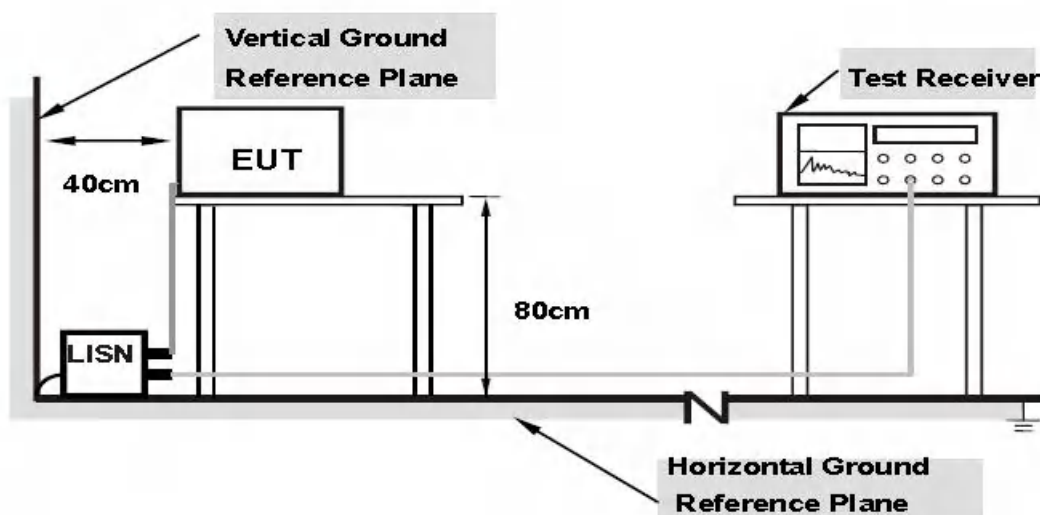

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.9.4 Test result

The test results are shown in Appendix B.



## **7 MEASUREMENT UNCERTAINTIES**

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	





## 8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2021.06.21	2022.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2021.05.18	2022.05.17
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2021.06.21	2022.06.20
4.	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
5.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
6.	Power Sensor E9323A	Agilent	MY52150008	2021.04.13	2022.04.12
7.	Signal Generator / SMBV100A	R&S	260910	2021.06.21	2022.06.20
8.	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
18.	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
20.	EMI test receiver	R&S	101574	2021.06.21	2022.06.20
21.	ESR3 EMI test receiver	R&S	102361	2021.04.12	2022.04.11
22.	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
23.	ENV216 AMN	R&S	101881	2021.06.21	2022.06.20
24.	WLAN AP WIA3300-20 (FCC ID: 2AHKT-WIA3300-20)	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---
26.	Horn antenna / SAS-574	A.H.SYSTEMS	2581	2021.04.22	2023.04.21
27.	Loop antenna / HFH2-Z2	R&S	100340	2021.08.21	2022.08.20
28.	VULB 9163 Ultra log test antenna	schwarzbeck	867	2021.05.29	2023.05.28



## **APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

Offset 11.2dB = Attenuator 10dB+Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

**BT**

### **1 Duty Cycle and Antenna Gain**

Modulation Type	Frequency (MHz)	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK(DH5)	2402	79.00%	1.02	1.20
$\pi/4$ DQPSK(2DH5)	2402	79.00%	1.02	1.20
8DPSK(3DH5)	2402	79.10%	1.02	1.20

### **2 Conducted Power**

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK	11.61	11.42	10.45
$\pi/4$ DQPSK	11.10	10.74	9.74
8DPSK	11.42	11.10	10.10

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK	10.04	9.87	8.84
$\pi/4$ DQPSK	7.67	7.05	6.09
8DPSK	7.72	7.06	6.10

**3 Occupied Bandwidth**  
**20dB Bandwidth**  
Modulation type:GFSK

Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	889.9
2441	926.6
2480	892.8



Modulation: GFSK 2402MHz



Modulation: GFSK 2441MHz



Modulation: GFSK 2480MHz

Modulation type:  $\pi/4$ DQPSK

Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	1345.0
2441	1346.7
2480	1350.2



Modulation:  $\pi/4$ DQPSK 2402MHz



Modulation:  $\pi/4$ DQPSK 2441MHz



Modulation:  $\pi/4$ DQPSK 2480MHz

Modulation type: 8DPSK

Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	1355.6
2441	1351.3
2480	1353.2




Modulation: 8DPSK 2402MHz




Modulation: 8DPSK 2441MHz




Modulation: 8DPSK 2480MHz




**4 Hopping Frequency Separation**  
Modulation type:GFSK  
**Channel separation**

Op-mode	Channel separation (MHz)
Hopping mode	1
	


**Number of Hopping Frequencies**

Op-mode	Result
Hopping mode	79
	


Modulation type:  $\pi/4$ DQPSK  
**Channel separation**

Op-mode	Channel separation (MHz)
Hopping mode	1
	


**Number of Hopping Frequencies**

Op-mode	Result
Hopping mode	79
	

Modulation type: 8DPSK  
**Channel separation**

Op-mode	Channel separation (MHz)
Hopping mode	1
	


**Number of Hopping Frequencies**

Op-mode	Result
Hopping mode	79
	



**5 Dwell Time**  
 Modulation type:GFSK

Packet type	Time slot length(μs)	Dwell time	Dwell time(ms)
DH1	378	Time slot length *31.6*16000/2/79	121.0
DH3	1600	Time slot length *31.6*16000/4/79	256.0
DH5	2850	Time slot length *31.6*16000/6/79	304.0

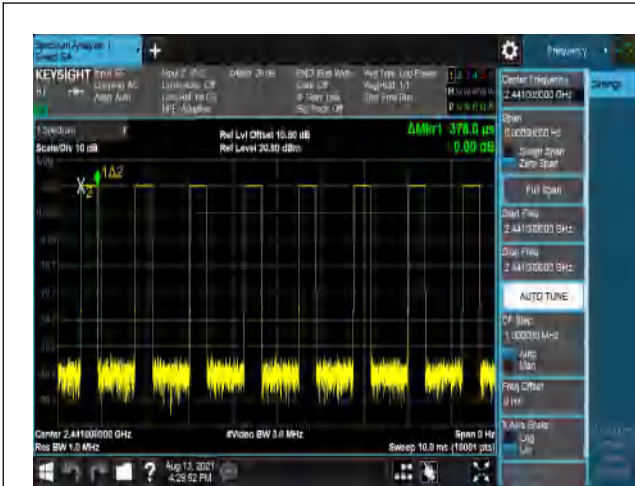

Modulation: GFSK DH1 2441MHz



Modulation: GFSK DH3 2441MHz



Modulation: GFSK DH5 2441MHz

Modulation type:  $\pi/4$ DQPSK

Packet type	Time slot length( $\mu$ s)	Dwell time	Dwell time(ms)
2DH1	383	Time slot length $*31.6*16000/2/79$	122.6
2DH3	1600	Time slot length $*31.6*16000/4/79$	256.0
2DH5	2850	Time slot length $*31.6*16000/6/79$	304.0



Modulation:  $\pi/4$ DQPSK 2DH1 2441MHz




Modulation:  $\pi/4$ DQPSK 2DH3 2441MHz



Modulation:  $\pi/4$ DQPSK 2DH5 2441MHz

Modulation type: 8DPSK

Packet type	Time slot length(μs)	Dwell time	Dwell time(ms)
3DH1	350	Time slot length $*31.6*16000/2/79$	112.0
3DH3	1600	Time slot length $*31.6*16000/4/79$	256.0
3DH5	2850	Time slot length $*31.6*16000/6/79$	304.0

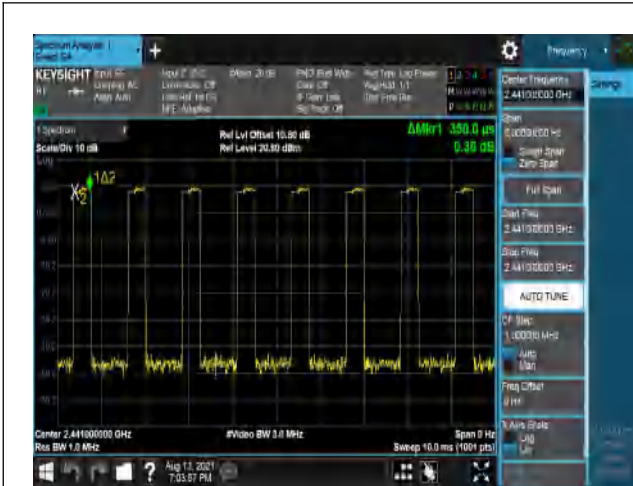

Modulation: 8DPSK 3DH1 2441MHz




Modulation: 8DPSK 3DH3 2441MHz




Modulation: 8DPSK 3DH5 2441MHz


**6 Conducted Out of band emission measurement**  
 Modulation type:GFSK

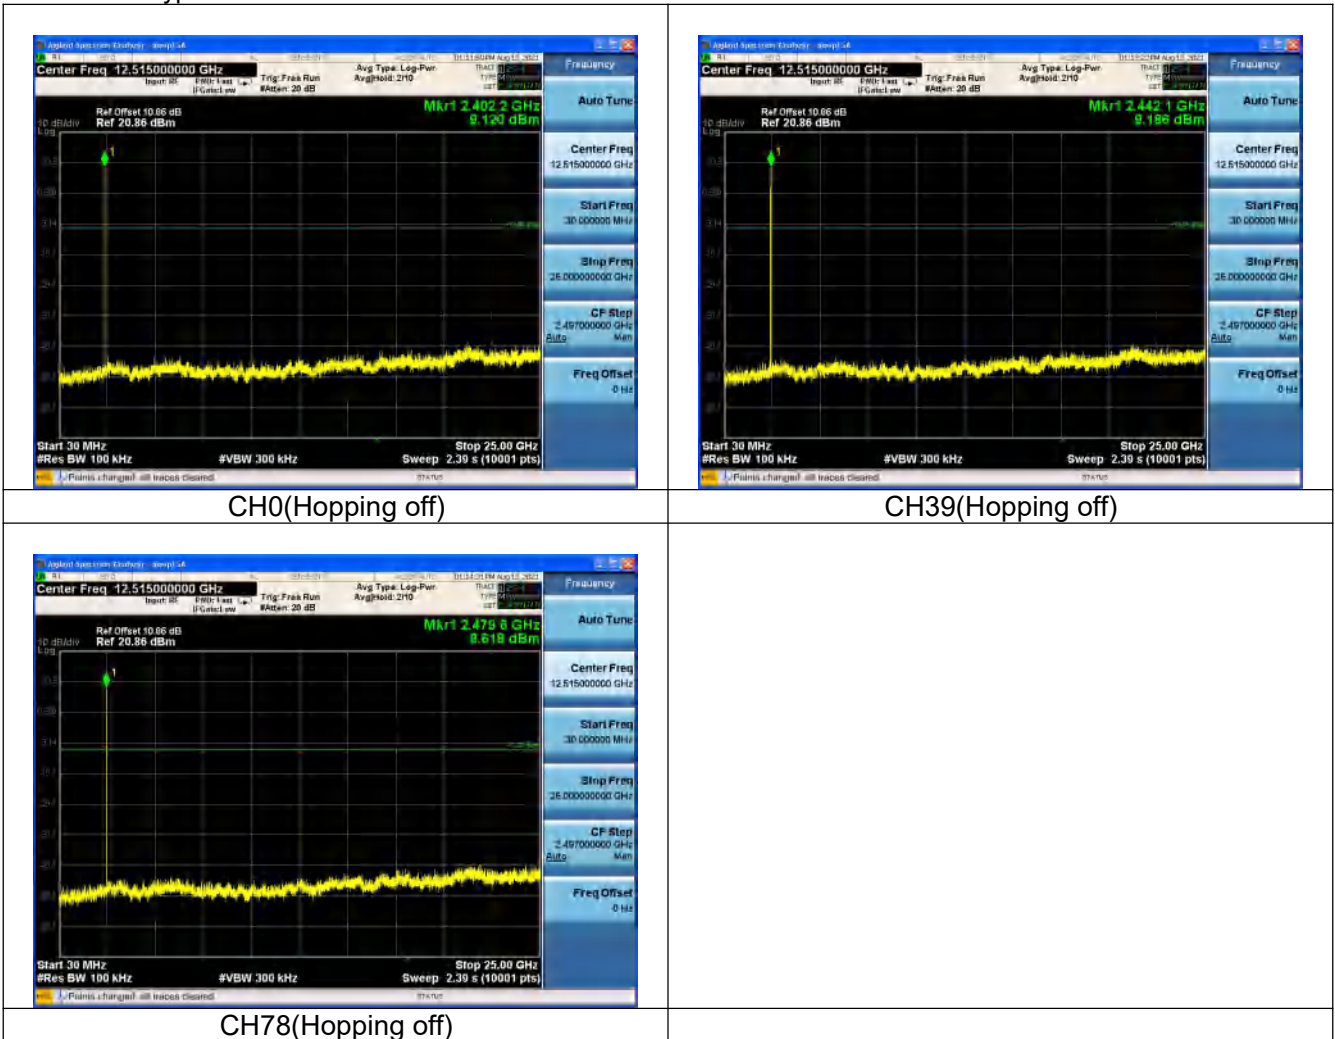

Modulation type:  $\pi/4$ DQPSK

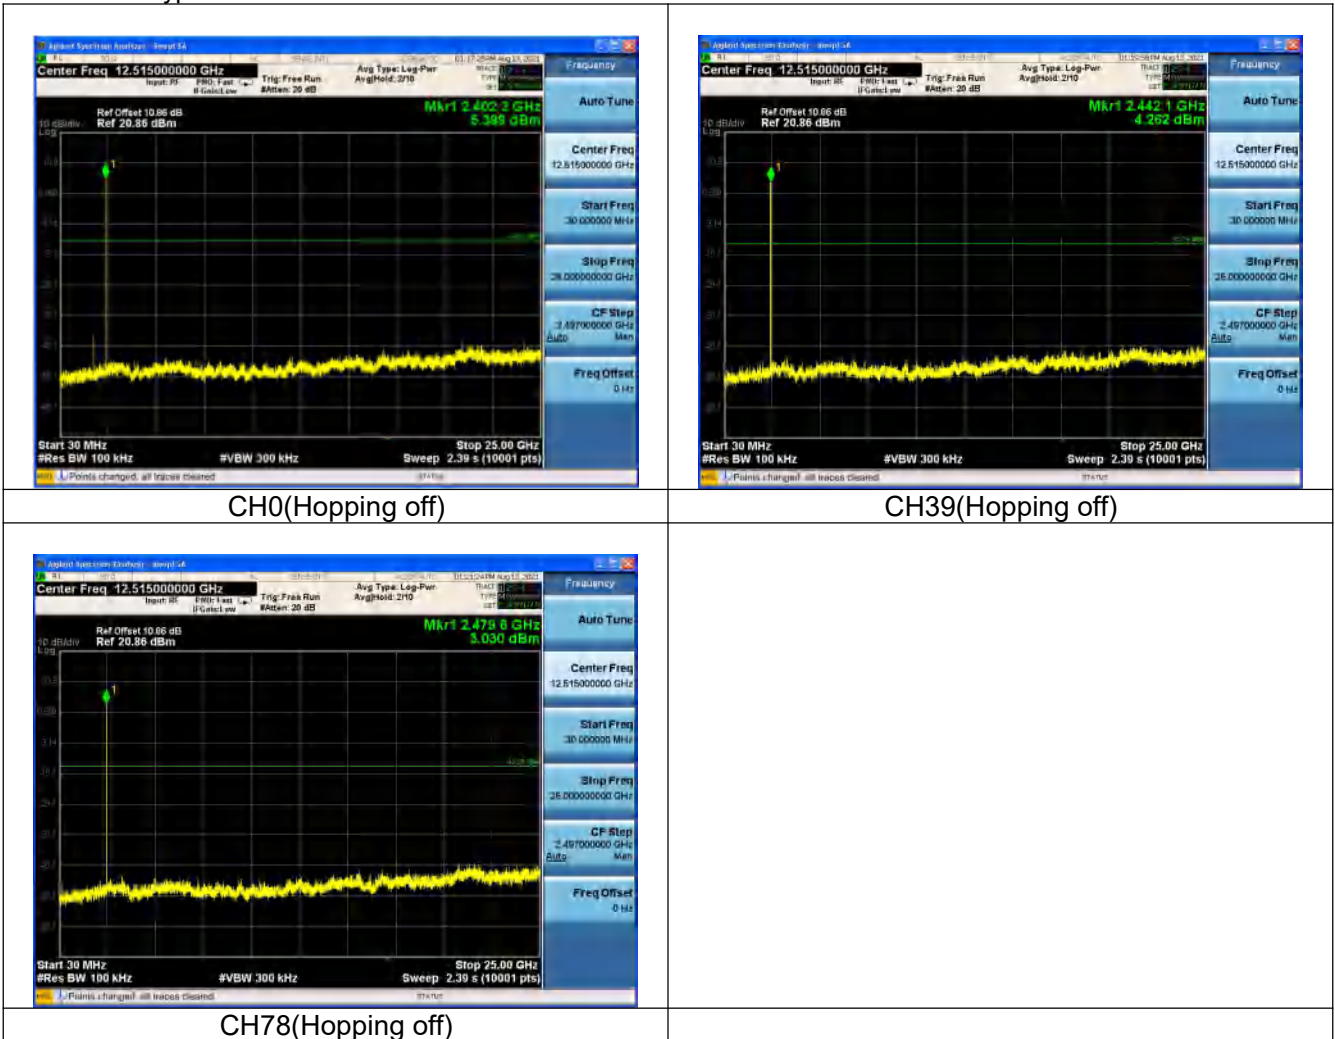

Modulation type: 8DPSK

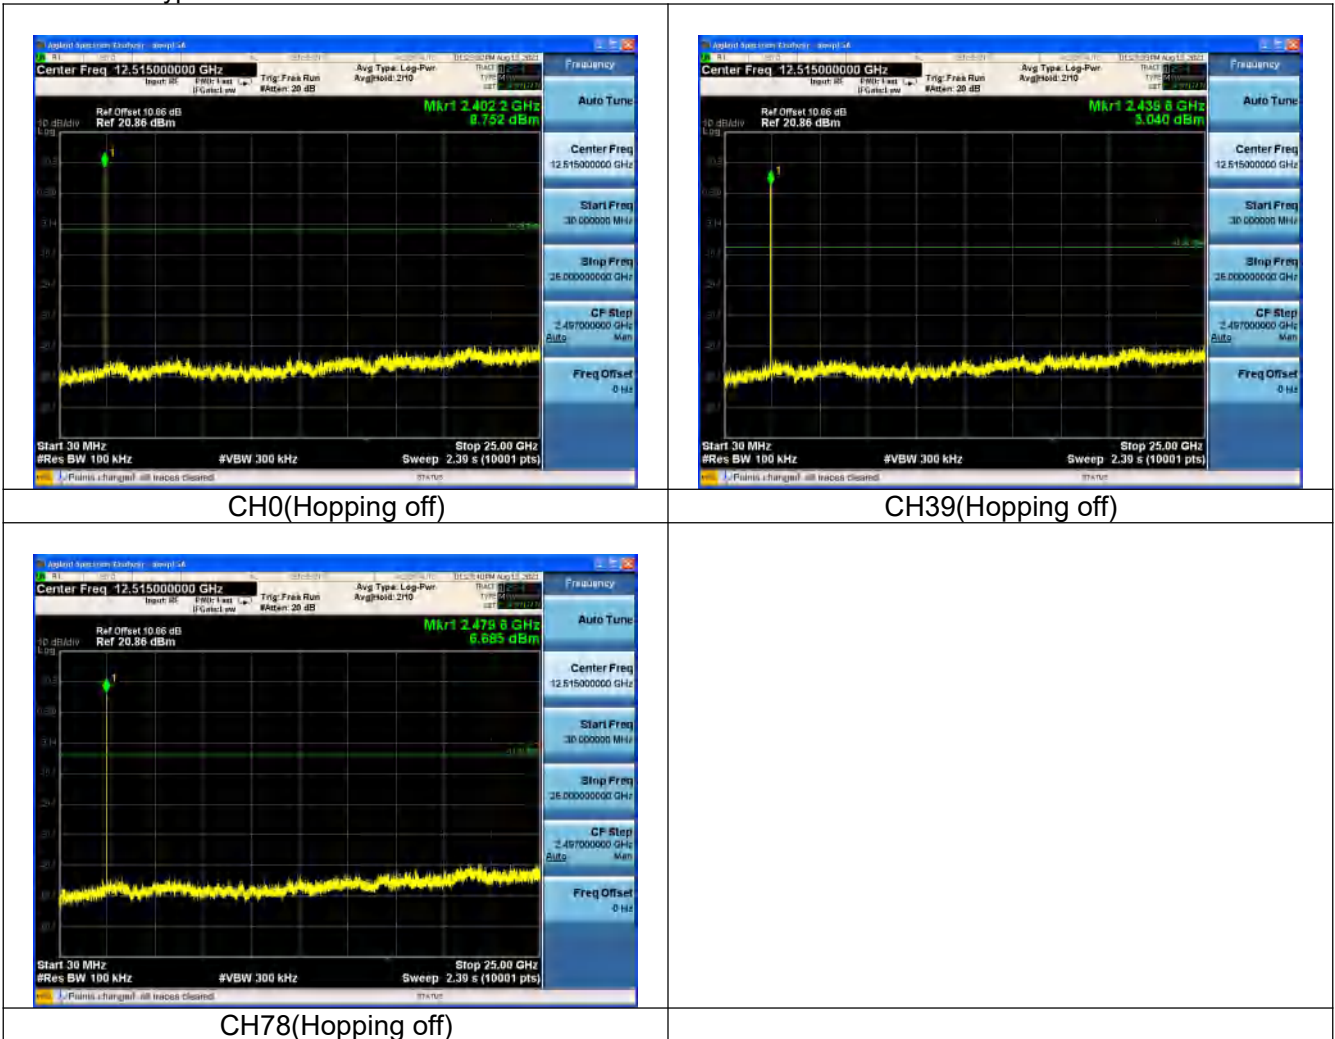

## 7 Band Edge measurement

Modulation type:GFSK



Modulation type:  $\pi/4$ DQPSK





Modulation type: 8DPSK





## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Radiated Emission Band Edge**

The worst case attitude: The mobile lay down.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (70.54 dBuV/m) = (36.54 dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2402MHz.

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	70.54	36.54	N/A	N/A	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	96.03	62.03	N/A	N/A	8.90	25.10
2	2390	24.28	-9.72	-49.72	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	93.05	59.05	N/A	N/A	8.90	25.10
2	2390	24.42	-9.58	-49.58	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	92.85	58.85	N/A	N/A	8.90	25.10
2	2390	14.96	-19.04	-39.04	54.00	8.90	25.10



Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode: GFSK  
 Polarity: Horizontal  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	90.48	56.48	N/A	N/A	8.90	25.10
2	2390	14.71	-19.29	-39.29	54.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: GFSK  
 Polarity: Vertical  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.34	61.34	N/A	N/A	8.90	25.10
2	2483.5	25.90	-8.10	-48.10	74.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: GFSK  
 Polarity: Horizontal  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.34	58.34	N/A	N/A	8.90	25.10
2	2483.5	25.48	-8.52	-48.52	74.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: GFSK  
 Polarity: Vertical  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	93.77	59.77	N/A	N/A	8.90	25.10
2	2483.5	15.73	-18.27	-38.27	54.00	8.90	25.10



Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: GFSK  
 Polarity: Horizontal  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	90.89	56.89	N/A	N/A	8.90	25.10
2	2483.5	15.40	-18.60	-38.60	54.00	8.90	25.10

Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Vertical  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	96.20	62.20	N/A	N/A	8.90	25.10
2	2390	25.32	-8.68	-48.68	74.00	8.90	25.10

Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Horizontal  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	94.10	60.10	N/A	N/A	8.90	25.10
2	2390	24.47	-9.53	-49.53	74.00	8.90	25.10

Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Vertical  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	92.99	58.99	N/A	N/A	8.90	25.10
2	2390	14.52	-19.48	-39.48	54.00	8.90	25.10



Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Horizontal  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	90.20	56.20	N/A	N/A	8.90	25.10
2	2390	13.85	-20.15	-40.15	54.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Vertical  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.74	61.74	N/A	N/A	8.90	25.10
2	2483.5	24.80	-9.20	-49.20	74.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Horizontal  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	93.13	59.13	N/A	N/A	8.90	25.10
2	2483.5	24.35	-9.65	-49.65	74.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Vertical  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	93.52	59.52	N/A	N/A	8.90	25.10
2	2483.5	15.62	-18.38	-38.38	54.00	8.90	25.10



Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode:  $\pi/4$ DQPSK  
 Polarity: Horizontal  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.21	57.21	N/A	N/A	8.90	25.10
2	2483.5	15.60	-18.40	-38.40	54.00	8.90	25.10

Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode: 8DPSK  
 Polarity: Vertical  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	95.99	61.99	N/A	N/A	8.90	25.10
2	2390	25.26	-8.74	-48.74	74.00	8.90	25.10

Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode: 8DPSK  
 Polarity: Horizontal  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	93.74	59.74	N/A	N/A	8.90	25.10
2	2390	25.44	-8.56	-48.56	74.00	8.90	25.10

Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode: 8DPSK  
 Polarity: Vertical  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	93.98	59.98	N/A	N/A	8.90	25.10
2	2390	15.49	-18.51	-38.51	54.00	8.90	25.10



Carrier frequency (MHz): 2402  
 Channel No.:0  
 Test Mode: 8DPSK  
 Polarity: Horizontal  
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.87	57.87	N/A	N/A	8.90	25.10
2	2390	15.03	-18.97	-38.97	54.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: 8DPSK  
 Polarity: Vertical  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	96.10	62.10	N/A	N/A	8.90	25.10
2	2483.5	24.01	-9.99	-49.99	74.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: 8DPSK  
 Polarity: Horizontal  
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.08	60.08	N/A	N/A	8.90	25.10
2	2483.5	23.91	-10.09	-50.09	74.00	8.90	25.10

Carrier frequency (MHz): 2480  
 Channel No.:78  
 Test Mode: 8DPSK  
 Polarity: Vertical  
 Detector: Average


No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.12	60.12	N/A	N/A	8.90	25.10
2	2483.5	15.64	-18.36	-38.36	54.00	8.90	25.10



Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode: 8DPSK  
Polarity: Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.96	57.96	N/A	N/A	8.90	25.10
2	2483.5	16.49	-17.51	-37.51	54.00	8.90	25.10

Copy of Copy of 002C\_FCC

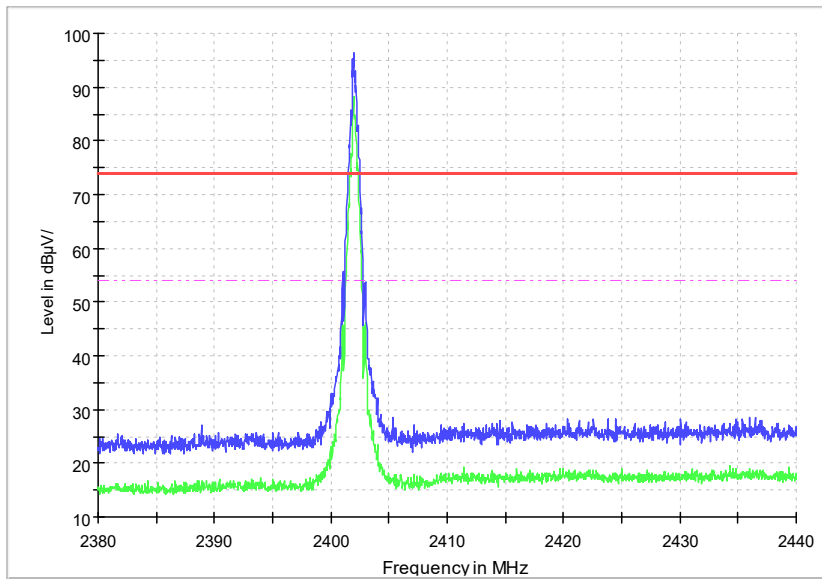





### Sample Calculations

#### Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation:  $(23.97 \text{ dB}\mu\text{V/m}) = (44.97 \text{ dB}\mu\text{V}) + (-21 \text{ dB/m})$ , the corresponding frequency is 30.97MHz.

For GFSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.97	23.97	-21	44.97	Vertical	40
87.521	16.26	-22.1	38.36	Vertical	40
161.5805	24.83	-22	46.83	Vertical	43.5
176.858	19.27	-21.2	40.47	Vertical	43.5
514.7575	12.68	-10.5	23.18	Vertical	46
928.4625	18.99	-2.9	21.89	Vertical	46

For  $\pi/4$ DQPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097	24.73	-21.2	45.93	Vertical	40
86.939	15.11	-22.3	37.41	Vertical	40
162.1625	25.25	-22	47.25	Vertical	43.5
178.5555	19.09	-21.1	40.19	Vertical	43.5
541.6265	13.11	-9.9	23.01	Vertical	46
942.188	19.19	-2.8	21.99	Vertical	46

For 8DPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.4065	25.06	-20.9	45.96	Vertical	40
87.715	16.4	-22	38.4	Vertical	40
165.121	22.84	-21.9	44.74	Vertical	43.5
177.3915	19.5	-21.2	40.7	Vertical	43.5
534.2545	13.1	-10	23.1	Vertical	46
952.2275	19.03	-2.7	21.73	Vertical	46



For GFSK  
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.2425	25.37	-21.2	46.57	Vertical	40
92.3225	18.42	-20.8	39.22	Vertical	43.5
163.2295	25.19	-21.9	47.09	Vertical	43.5
177.7795	19.41	-21.2	40.61	Vertical	43.5
508.792	12.45	-10.6	23.05	Vertical	46
927.735	19.07	-2.9	21.97	Vertical	46

For  $\pi/4$ DQPSK  
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.4365	25.29	-21.1	46.39	Vertical	40
93.2925	17.52	-20.6	38.12	Vertical	43.5
162.7445	25.14	-21.9	47.04	Vertical	43.5
178.701	19.08	-21.1	40.18	Vertical	43.5
528.386	12.98	-10.2	23.18	Vertical	46
934.525	19.14	-2.8	21.94	Vertical	46

For 8DPSK  
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.388	25.48	-21.1	46.58	Vertical	40
92.565	18.55	-20.7	39.25	Vertical	43.5
159.1555	21.11	-22.1	43.21	Vertical	43.5
177.44	19.52	-21.2	40.72	Vertical	43.5
519.656	12.9	-10.4	23.3	Vertical	46
957.7565	19.24	-2.6	21.84	Vertical	46

For GFSK  
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.3395	24.55	-21.2	45.75	Vertical	40
87.9575	16.66	-21.9	38.56	Vertical	40
162.114	24.97	-22	46.97	Vertical	43.5
175.112	17.77	-21.3	39.07	Vertical	43.5
553.412	13.09	-9.6	22.69	Vertical	46
935.9315	19.18	-2.8	21.98	Vertical	46




For  $\pi/4$ DQPSK  
 Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.843	23.25	-20.8	44.05	Vertical	40
87.2785	15.95	-22.1	38.05	Vertical	40
163.1325	25.09	-21.9	46.99	Vertical	43.5
175.888	18.71	-21.3	40.01	Vertical	43.5
548.7075	13.15	-9.7	22.85	Vertical	46
897.083	18.18	-3.3	21.48	Vertical	46

For 8DPSK  
 Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194	25.06	-21.2	46.26	Vertical	40
87.327	15.94	-22.1	38.04	Vertical	40
162.1625	25.04	-22	47.04	Vertical	43.5
177.828	19.43	-21.2	40.63	Vertical	43.5
554.2365	13.16	-9.6	22.76	Vertical	46
914.058	18.73	-3.1	21.83	Vertical	46


Full Spectrum

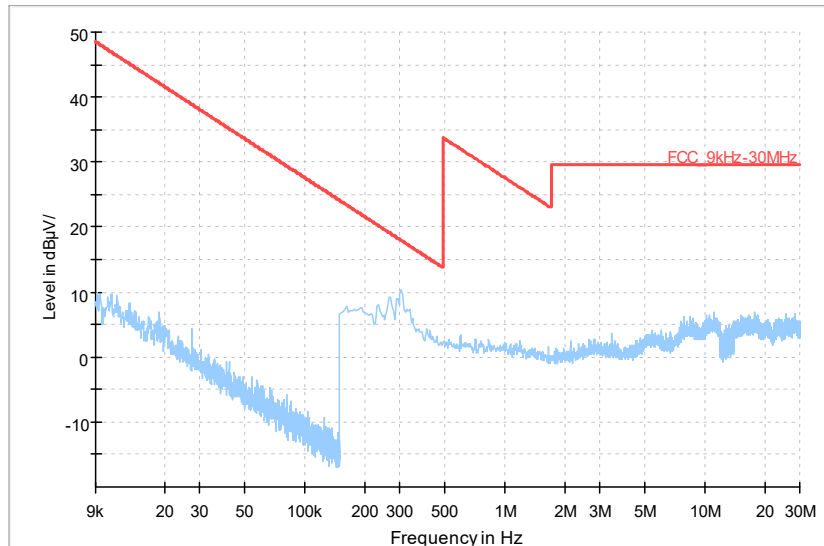


Preview Result 1-PK+      FCC\_9kHz-30MHz

Frequency Range: 9kHz-30MHz

Carrier frequency (MHz): 2402  
 Channel No.:0

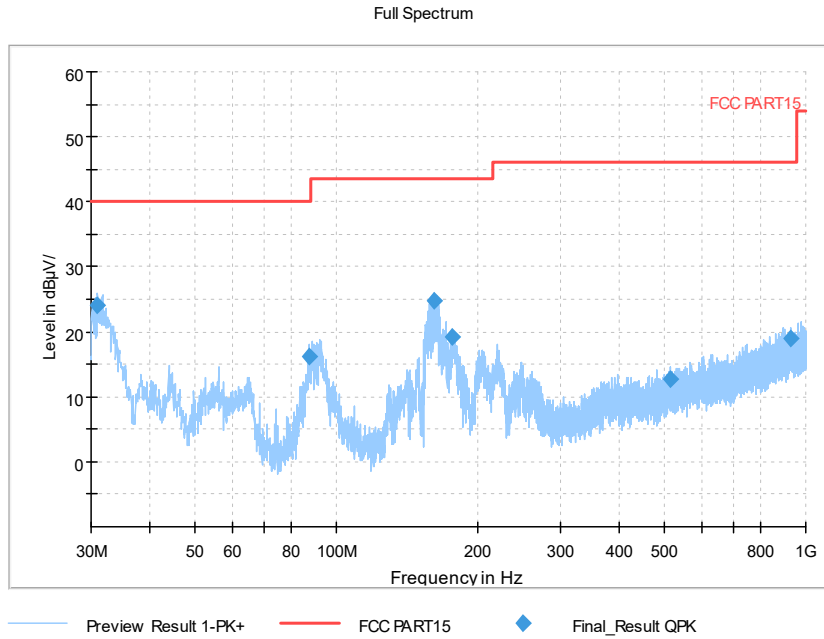


**Frequency Range: 30MHz-1000MHz**  
**Detector: QP mode**  
**Modulation type: GFSK**

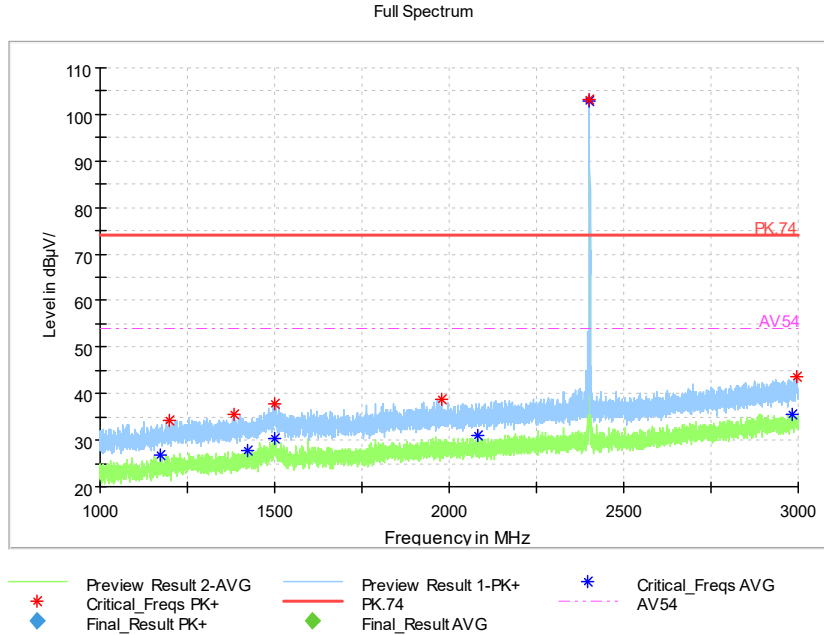

**Frequency Range: 1GHz-3GHz**  
**Detector: Av mode and PK mode**  
**Modulation type: GFSK**


Full Spectrum

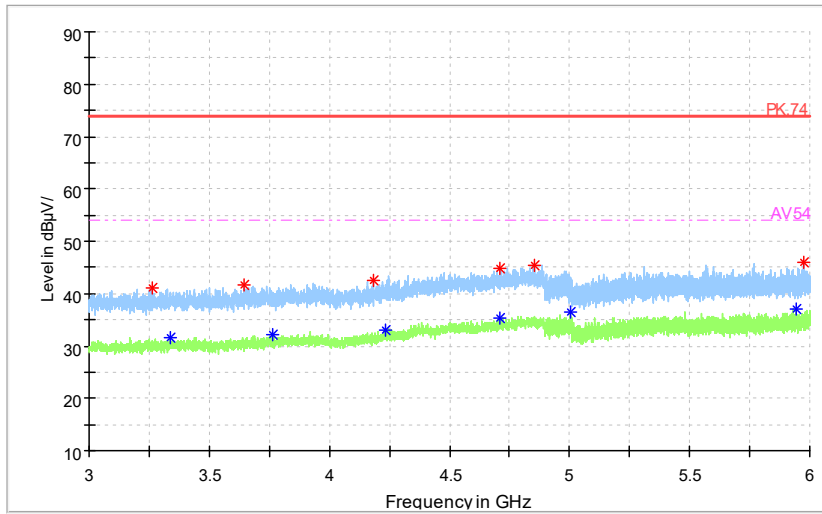

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

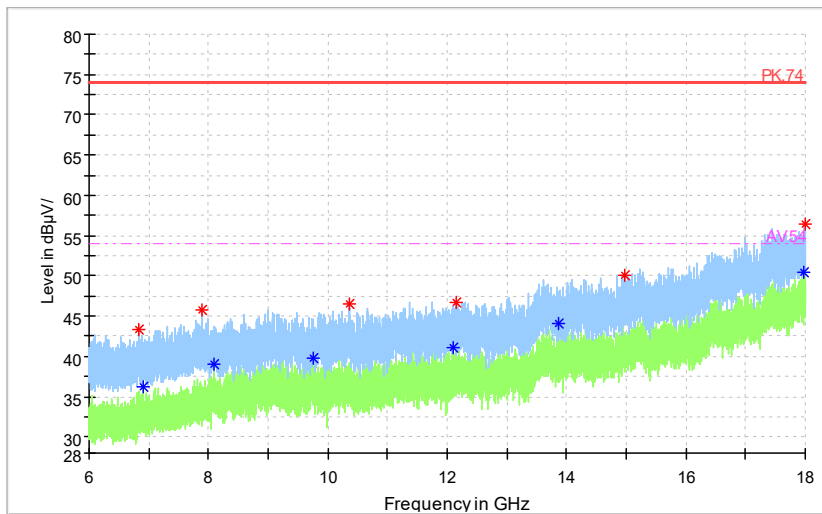

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 6GHz- 18GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

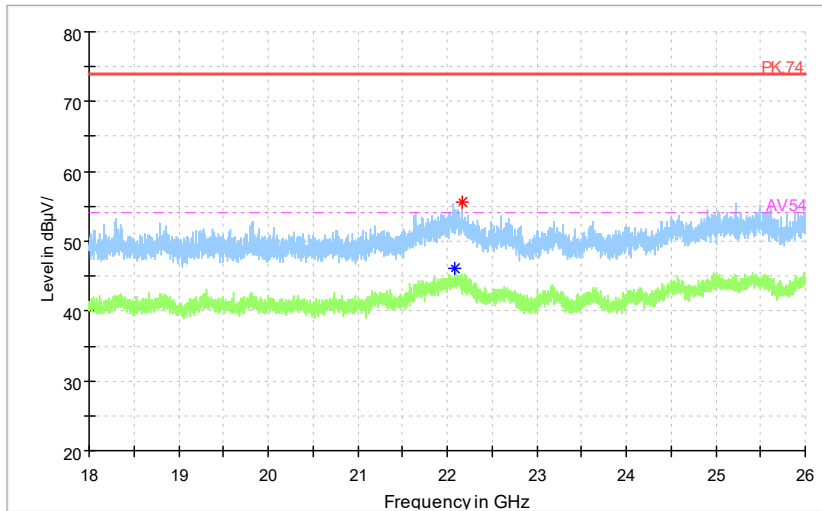

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

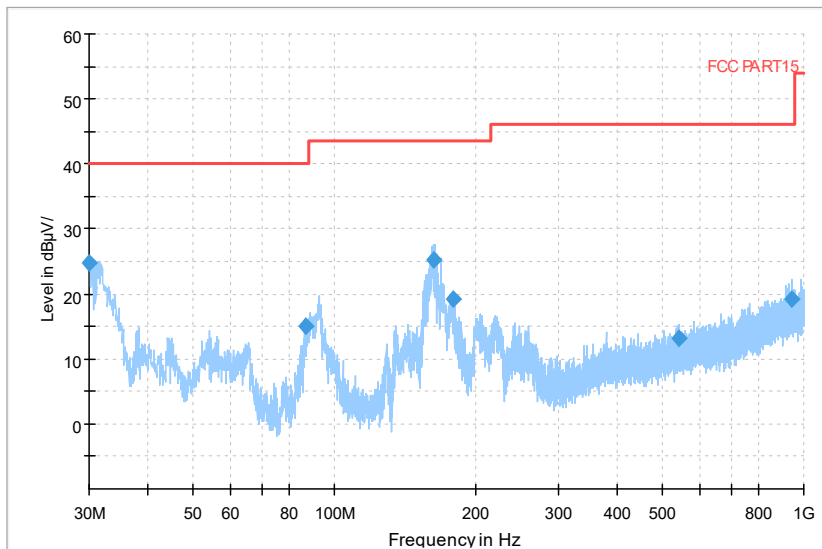

— Preview Result 1-PK+     — FCC PART15     ◆ Final\_Result QPK

Frequency Range: 30MHz-1000 MHz  
 Detector: QP mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

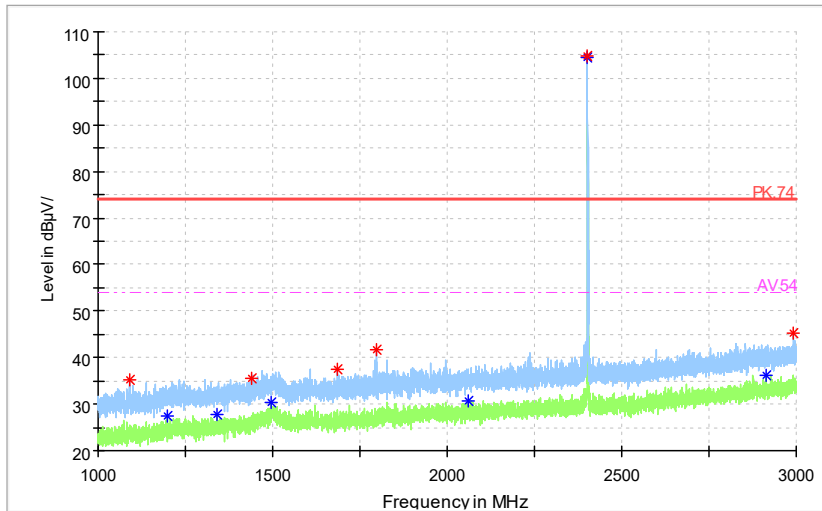

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

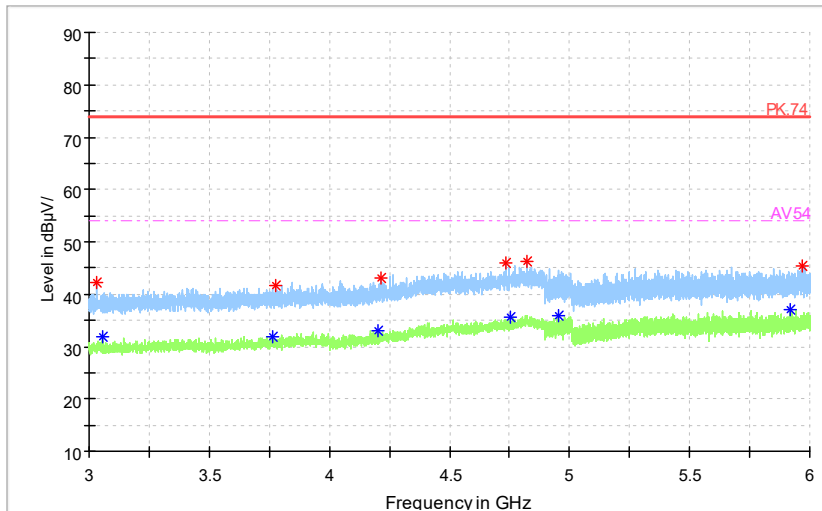

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

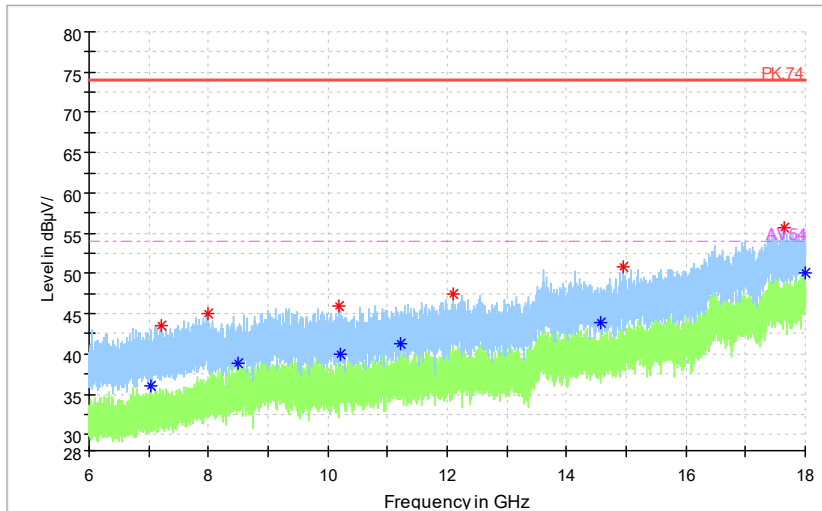

◆ Preview Result 2-AVG     ◆ Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     ◆ Final\_Result PK+     ◆ Final\_Result AVG     - - - AV54

Frequency Range: 6GHz-18GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK

Full Spectrum

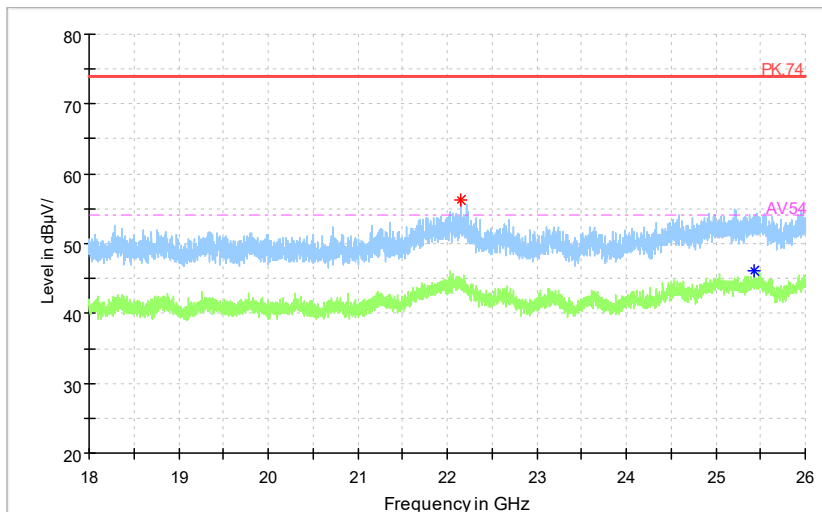


◆ Preview Result 2-AVG     ◆ Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     ◆ Final\_Result PK+     ◆ Final\_Result AVG     - - - AV54

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK




Full Spectrum

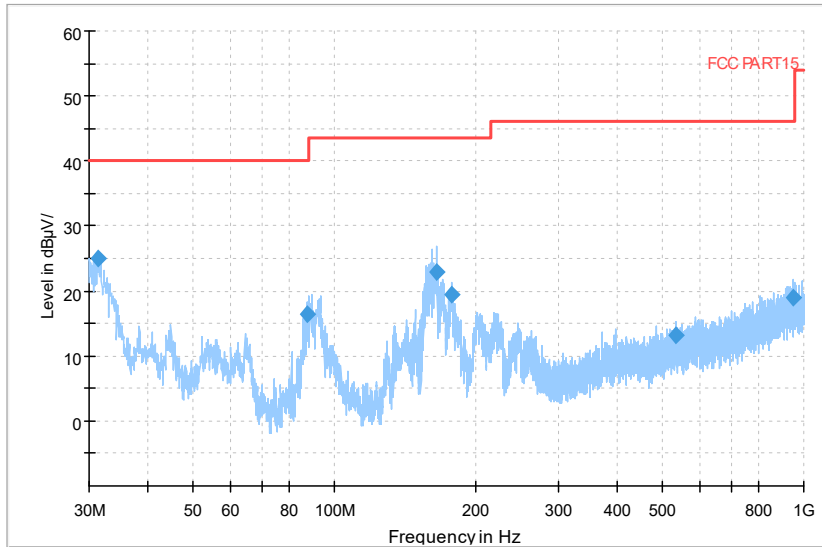


Frequency Range: 30MHz-1000 MHz  
 Detector: QP mode  
 Modulation type: 8DPSK

Full Spectrum

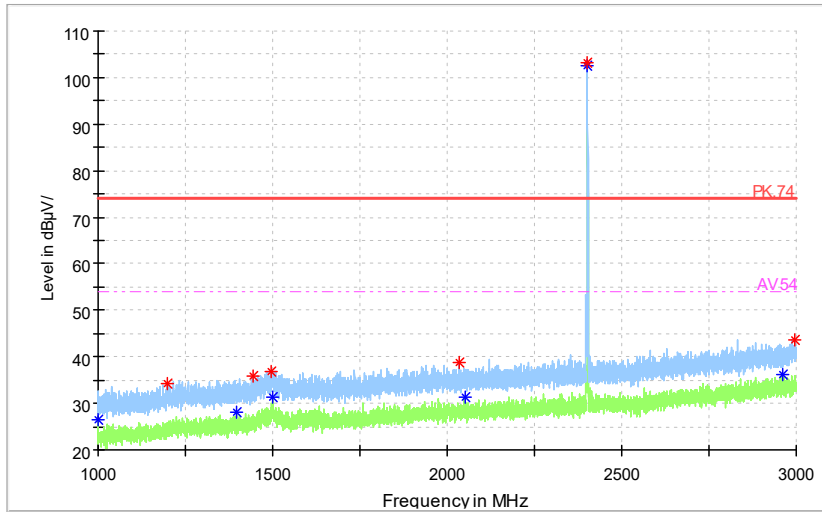

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK


Full Spectrum

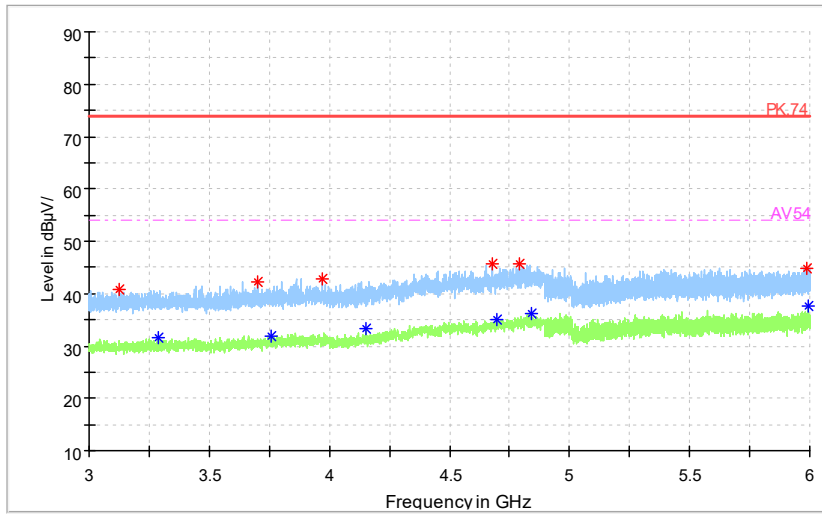

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK


Full Spectrum

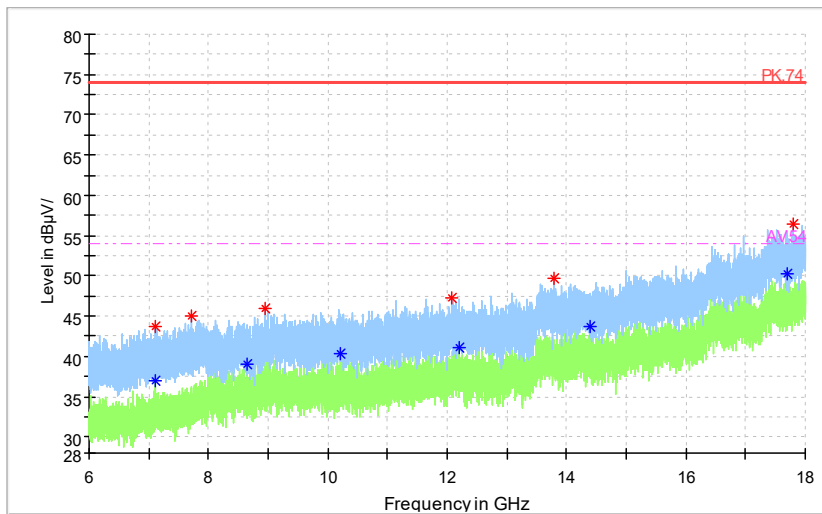

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 6GHz-18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK


Full Spectrum

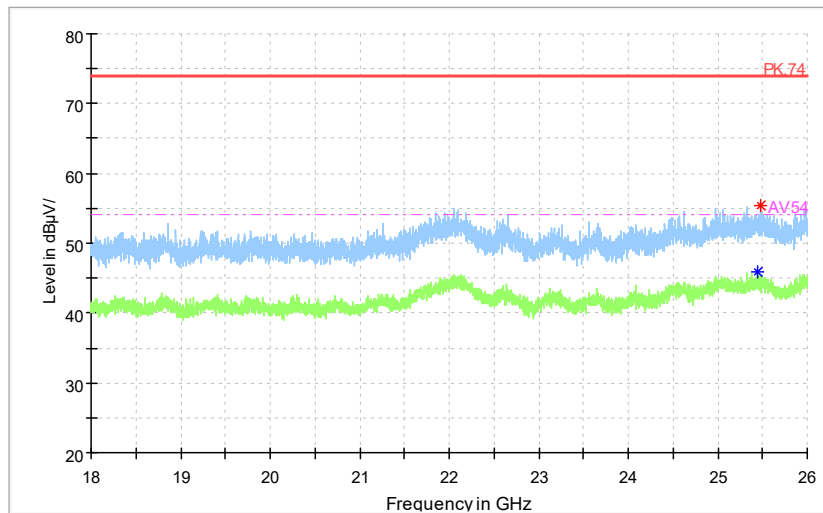


Preview Result 2-AVG      Preview Result 1-PK+      \* Critical\_Freqs AVG  
Critical\_Freqs PK+      PK.74      AV54  
Final\_Result PK+      Final\_Result AVG

Frequency Range: 18GHz-26GHz  
Detector: Av mode and PK mode  
Modulation type: 8DPSK

Carrier frequency (MHz): 2441  
 Channel No.:39

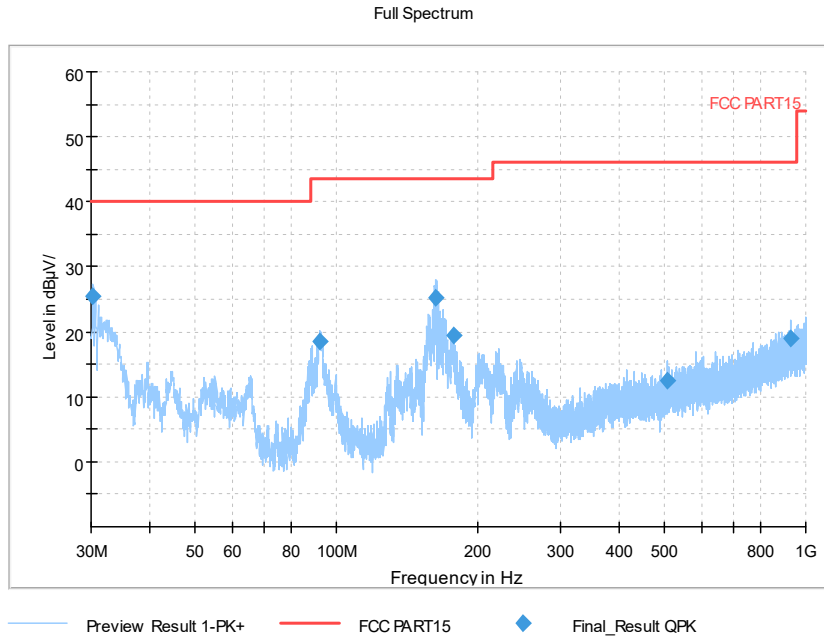


**Frequency Range: 30MHz-1000MHz**  
**Detector: QP mode**  
**Modulation type: GFSK**

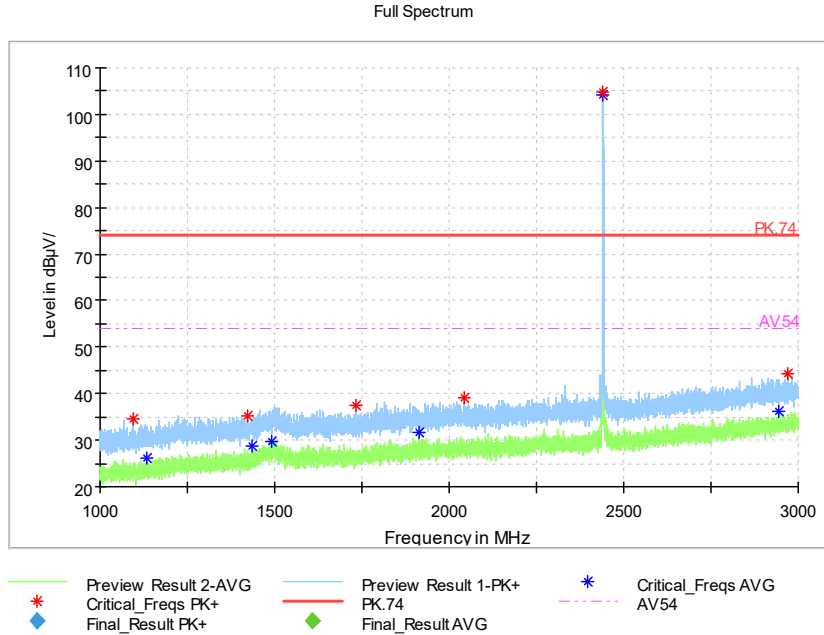

**Frequency Range: 1GHz-3GHz**  
**Detector: Av mode and PK mode**  
**Modulation type: GFSK**


Full Spectrum

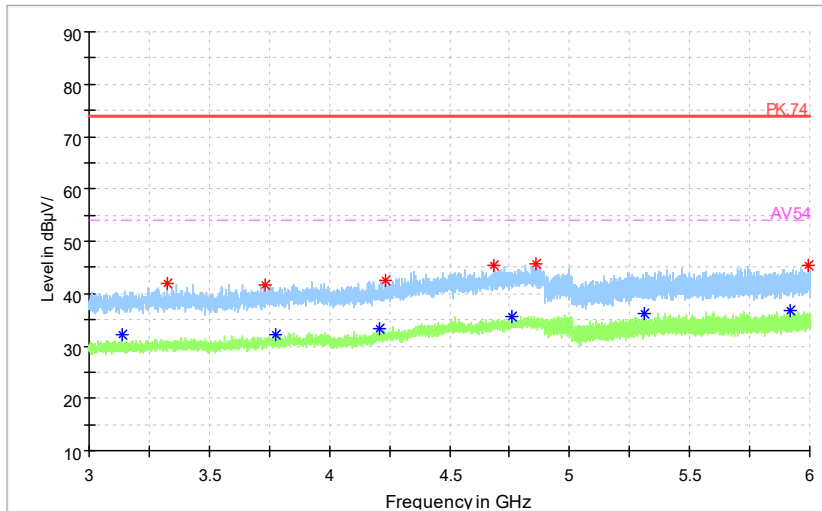

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

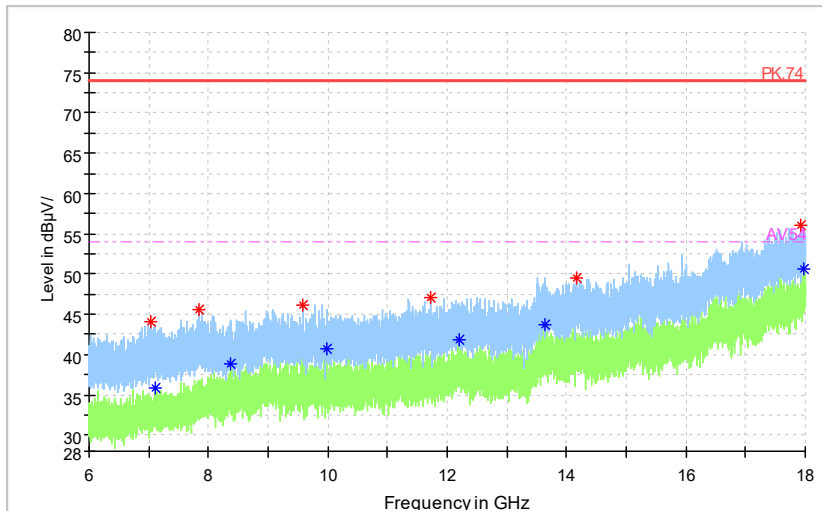

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG


Frequency Range: 6GHz- 18GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK

Full Spectrum

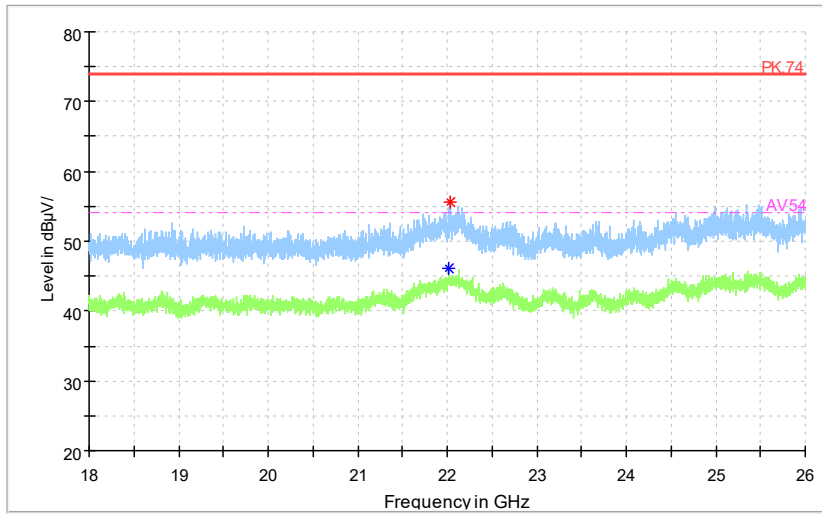


Preview Result 2-AVG      Preview Result 1-PK+      Critical\_Freqs AVG  
Critical\_Freqs PK+      PK.74      AV54  
Final\_Result PK+      Final\_Result AVG

Frequency Range: 18GHz-26GHz  
Detector: Av mode and PK mode  
Modulation type: GFSK

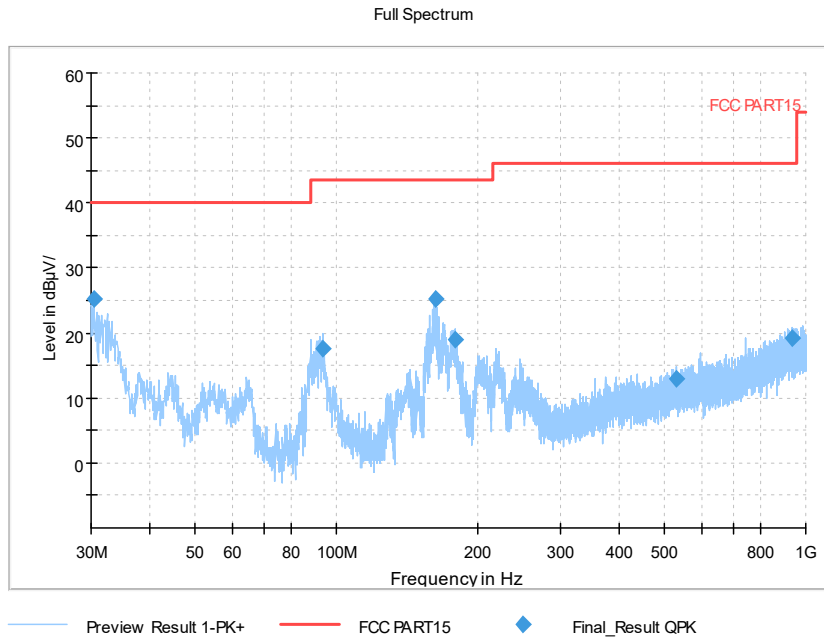


Frequency Range: 30MHz-1000 MHz  
 Detector: QP mode  
 Modulation type:  $\pi/4$ DQPSK

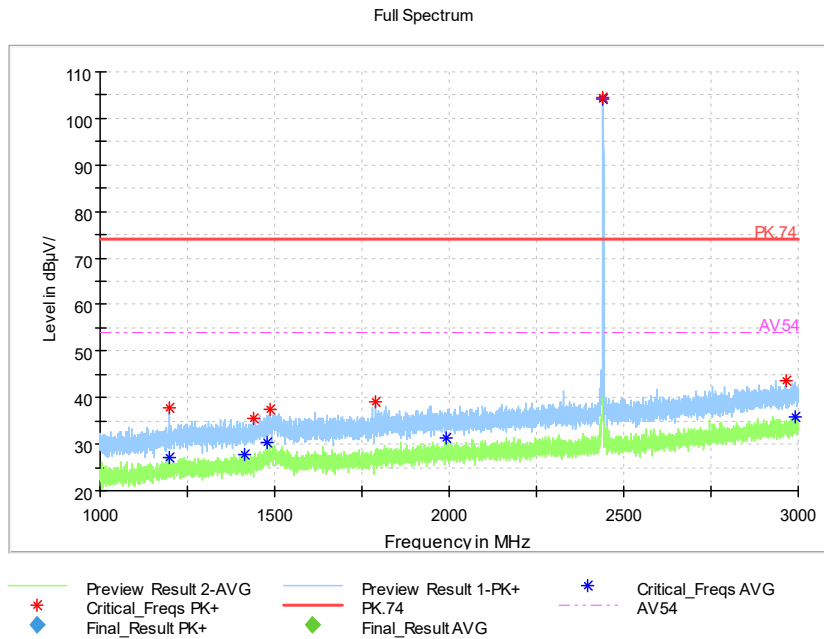

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

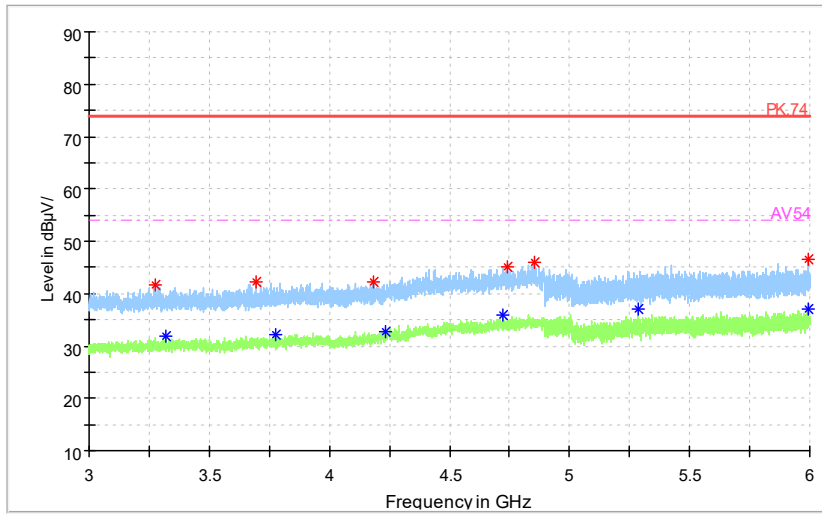

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK

Full Spectrum

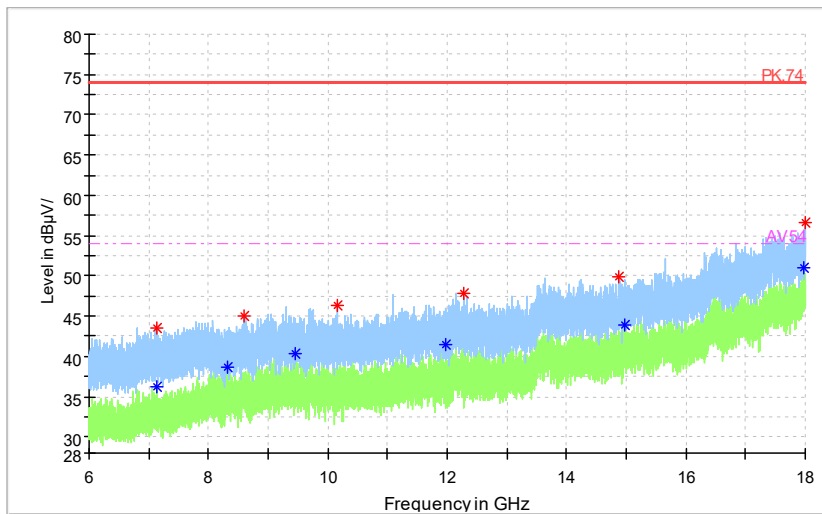


— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 6GHz-18GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK




Full Spectrum

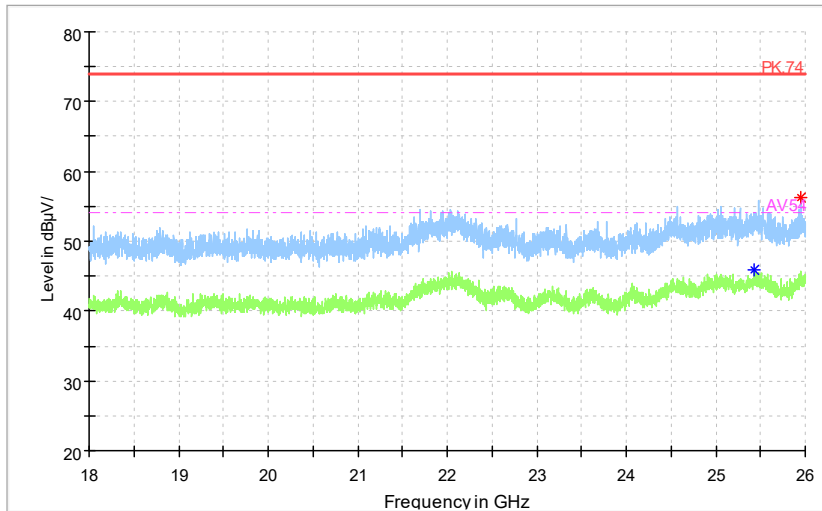

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

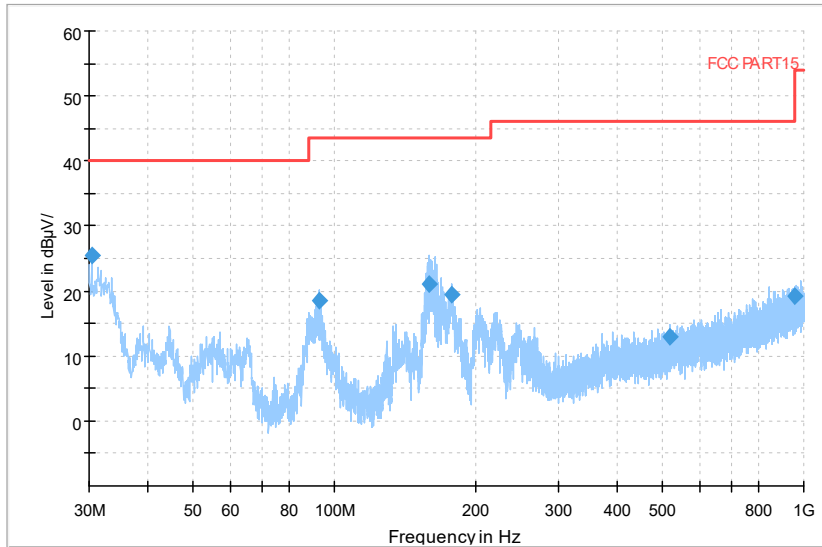

Preview Result 1-PK+    FCC PART15    Final\_Result QPK

Frequency Range: 30MHz-1000 MHz  
 Detector: QP mode  
 Modulation type: 8DPSK


Full Spectrum

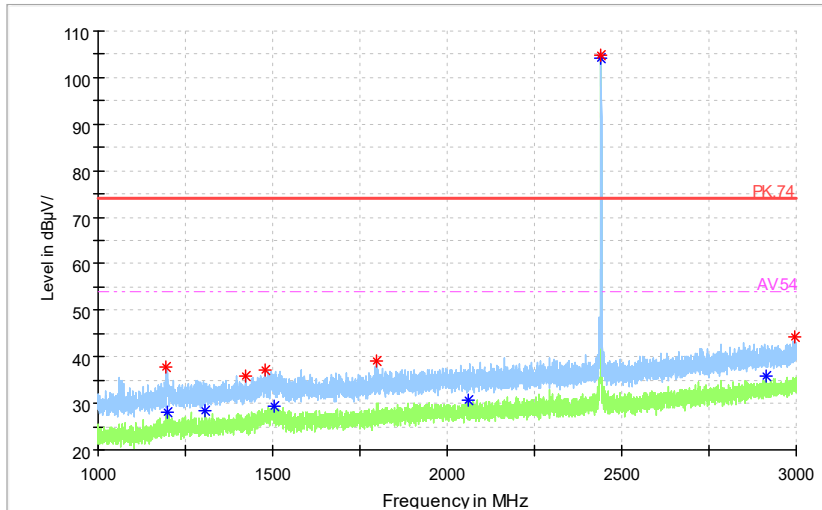

Preview Result 2-AVG    Preview Result 1-PK+    Critical\_Freqs AVG  
 Critical\_Freqs PK+    PK.74    AV.54  
 Final\_Result PK+    Final\_Result AVG

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK


Full Spectrum

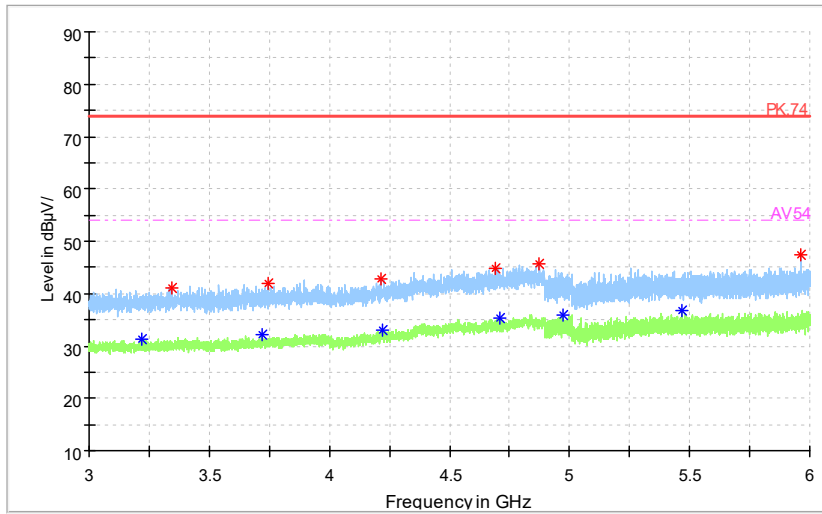

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

**Frequency Range: 3GHz-6GHz**  
**Detector: Av mode and PK mode**  
**Modulation type: 8DPSK**


Full Spectrum

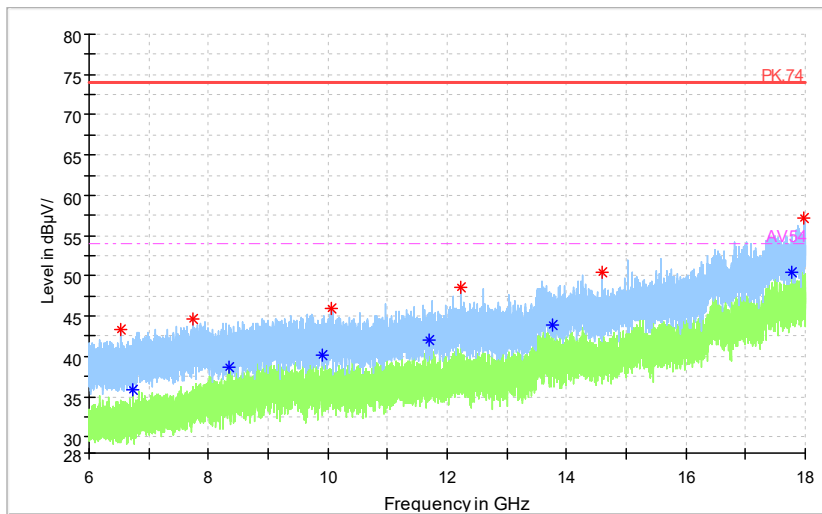







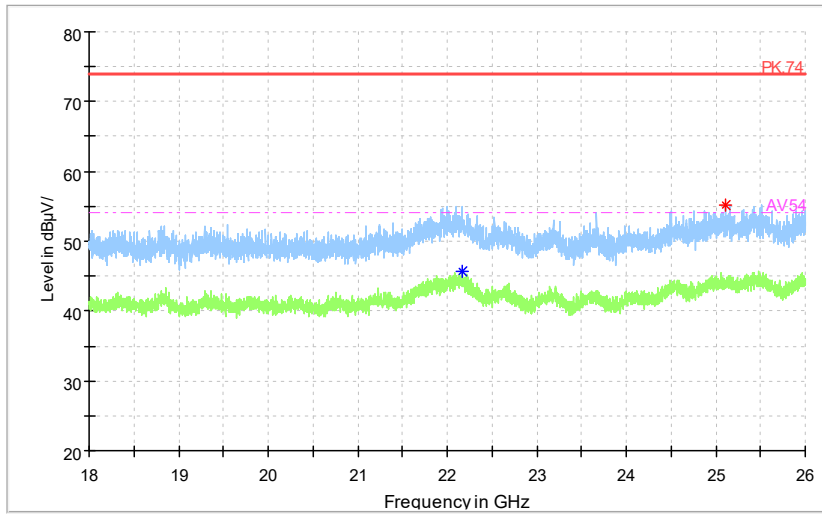

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

**Frequency Range: 6GHz-18GHz**  
**Detector: Av mode and PK mode**  
**Modulation type: 8DPSK**


Full Spectrum




 Preview Result 2-AVG	 Preview Result 1-PK+	 Critical_Freqs AVG
 Critical_Freqs PK+	 PK.74	 AV54
 Final_Result PK+	 Final_Result AVG	

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK

Carrier frequency (MHz): 2480  
 Channel No.:78

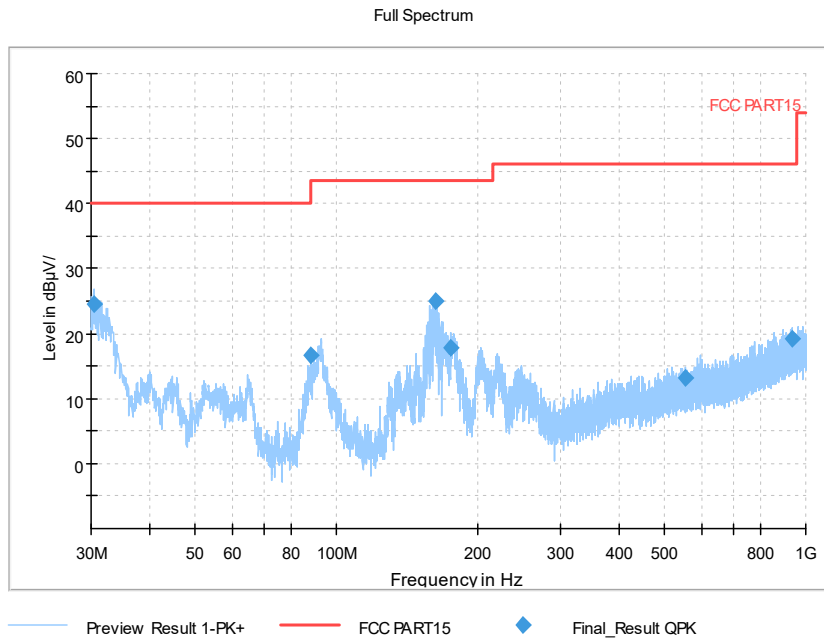


Frequency Range: 30MHz-1000MHz  
 Detector: QP mode  
 Modulation type: GFSK

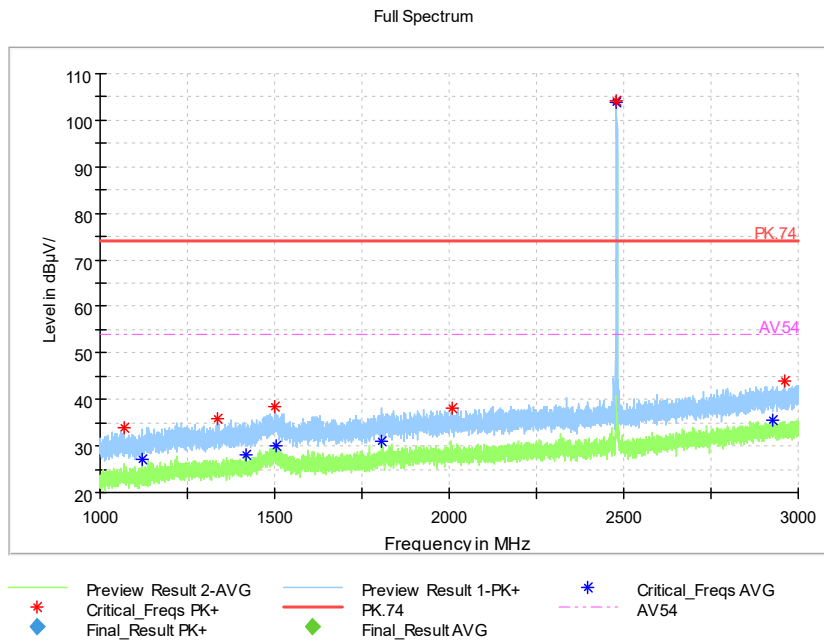

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

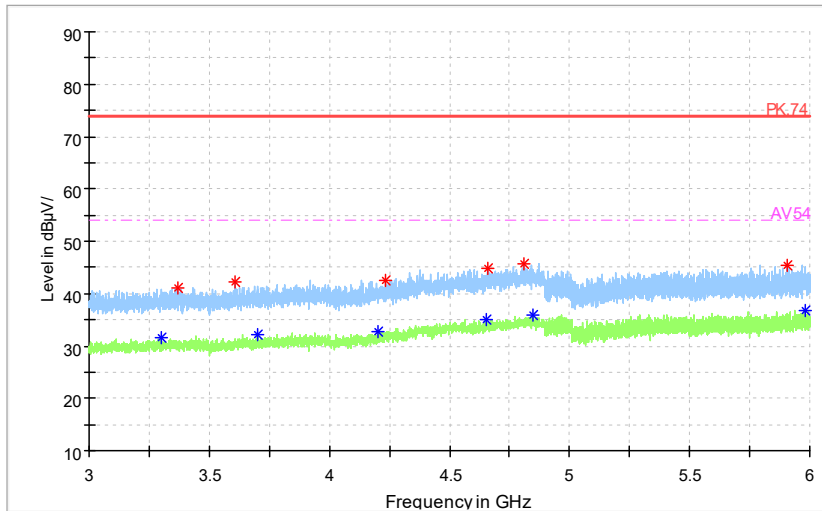

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

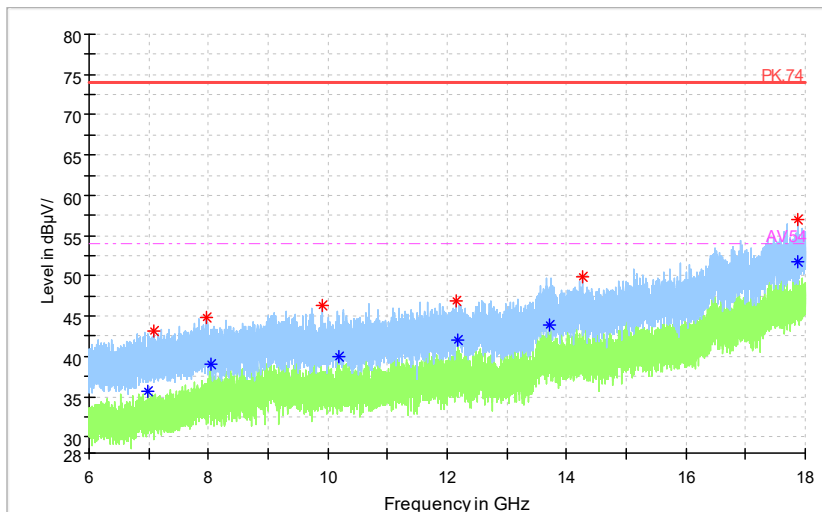

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 6GHz- 18GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

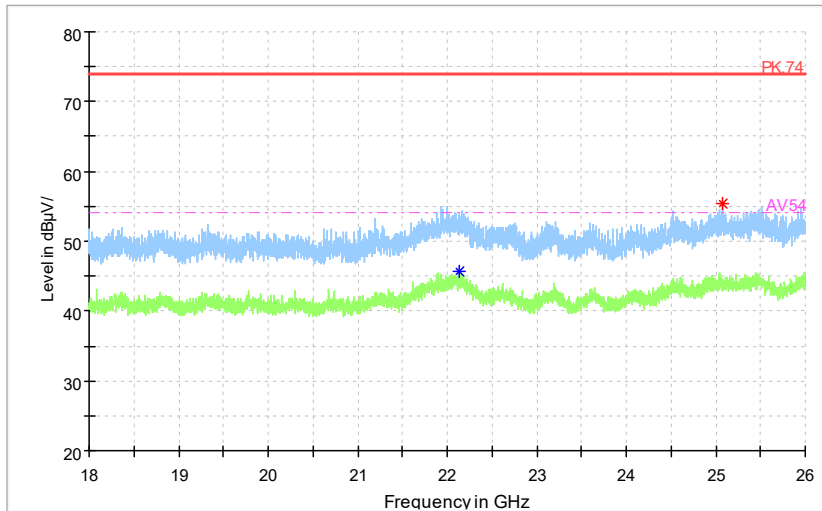

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type: GFSK


Full Spectrum

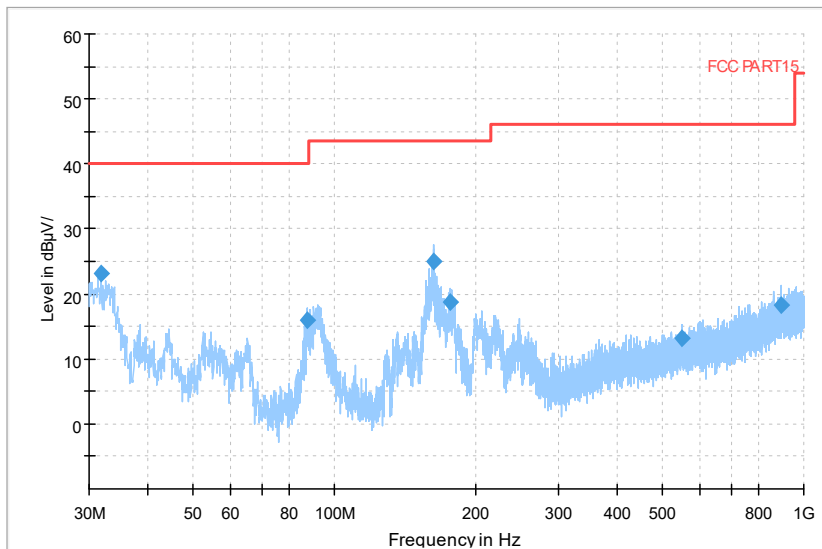

— Preview Result 1-PK+     — FCC PART15     ◆ Final\_Result QPK

Frequency Range: 30MHz-1000 MHz  
 Detector: QP mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

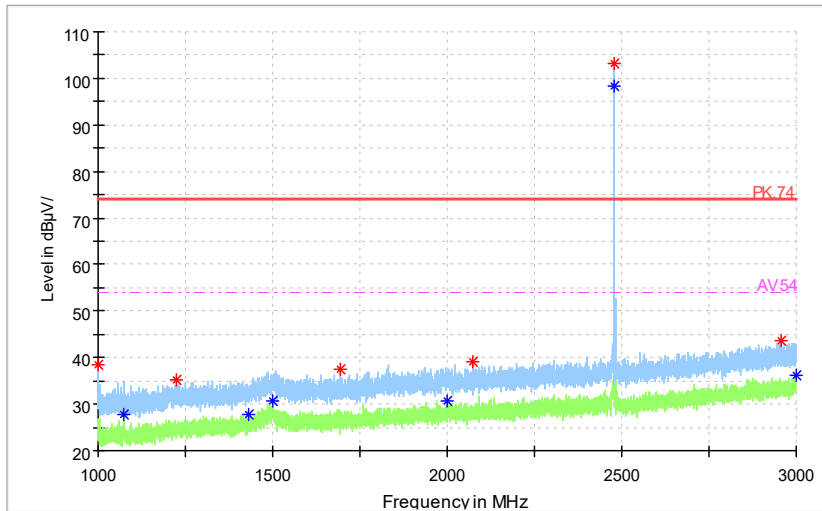

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK

Full Spectrum

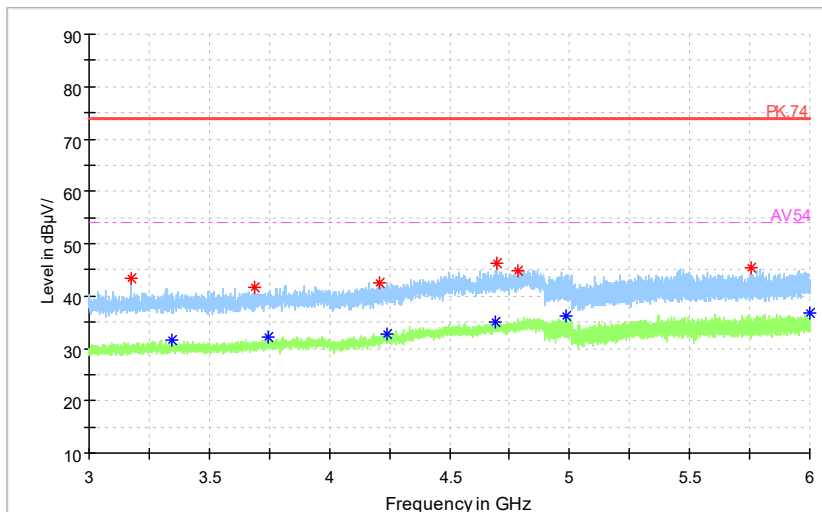


— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 3GHz-6GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK




Full Spectrum

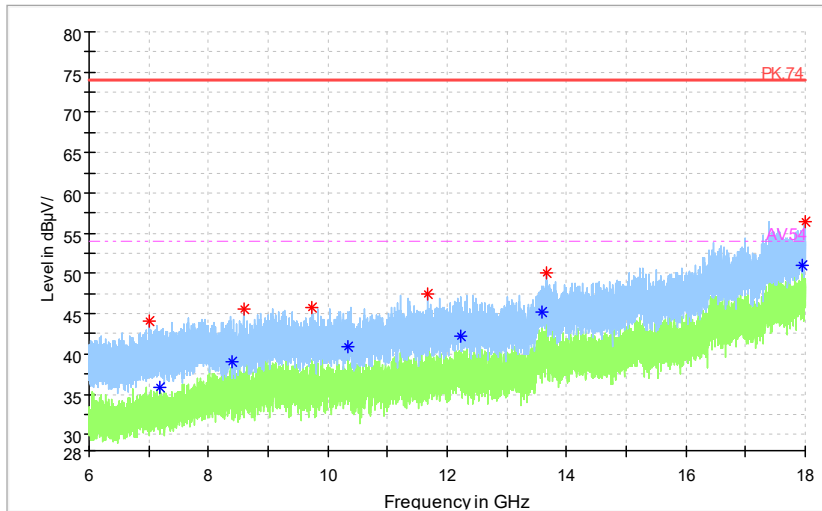

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 6GHz-18GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

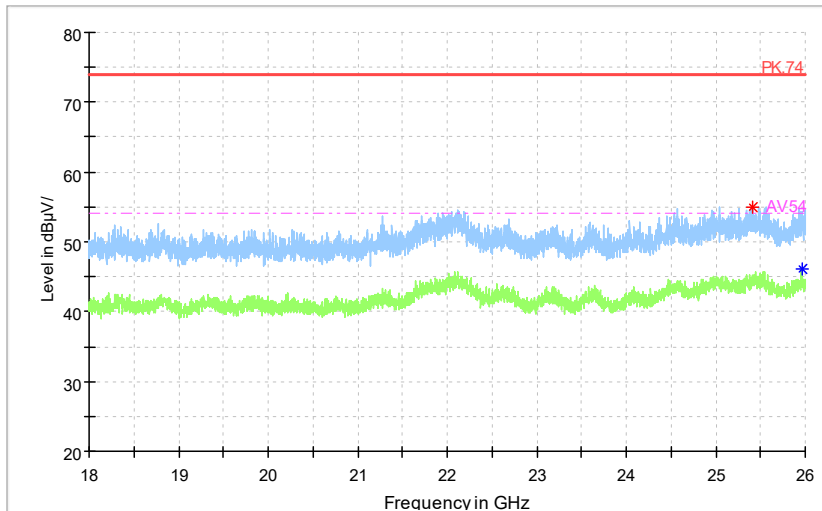

— Preview Result 2-AVG    — Preview Result 1-PK+    \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+    — PK.74    - - - AV54  
◆ Final\_Result PK+    ◆ Final\_Result AVG

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type:  $\pi/4$ DQPSK


Full Spectrum

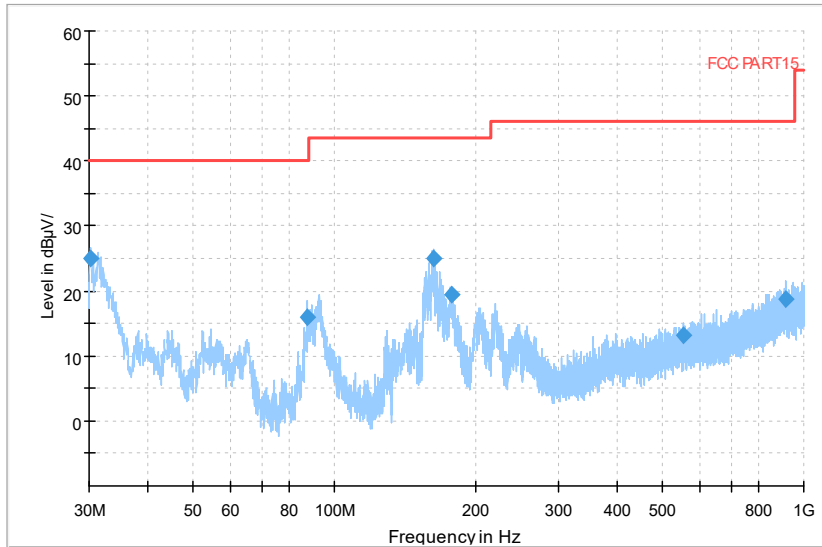

Preview Result 1-PK+    FCC PART15    Final\_Result QPK

Frequency Range: 30MHz-1000 MHz  
 Detector: QP mode  
 Modulation type: 8DPSK


Full Spectrum

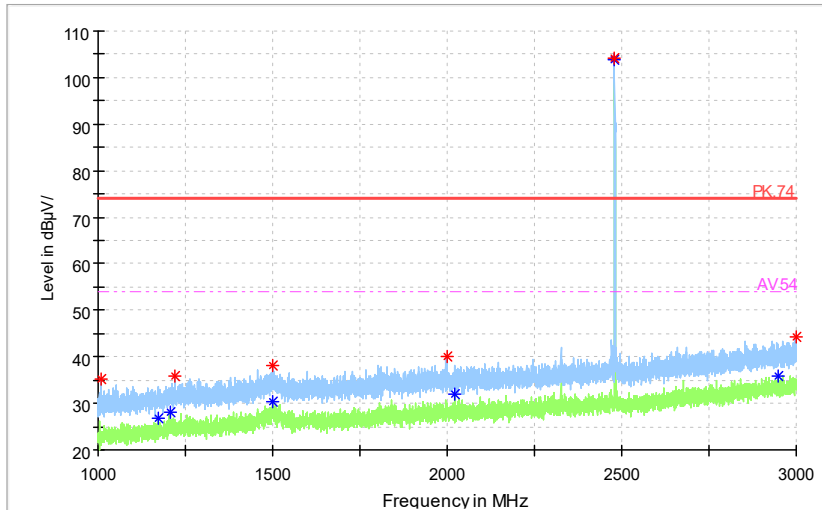

Preview Result 2-AVG    Preview Result 1-PK+    Critical\_Freqs AVG  
 Critical\_Freqs PK+    PK.74    AV.54  
 Final\_Result PK+    Final\_Result AVG

Frequency Range: 1GHz-3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK


Full Spectrum

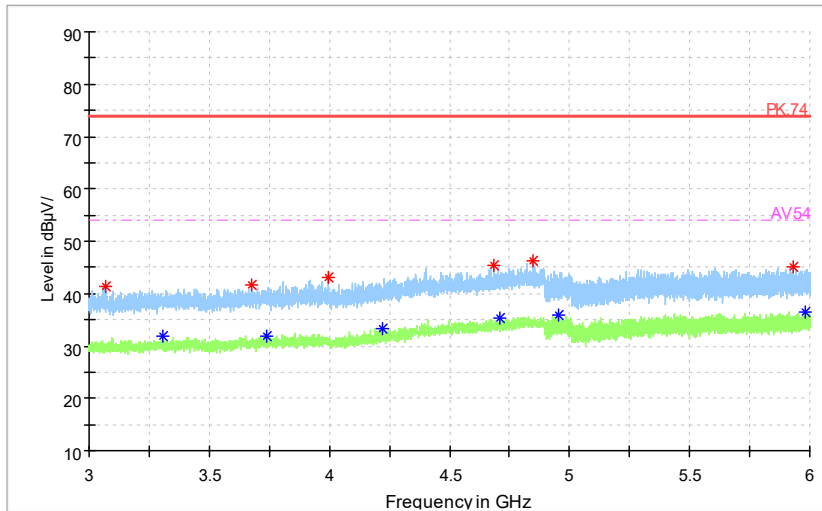

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

**Frequency Range: 3GHz-6GHz**  
**Detector: Av mode and PK mode**  
**Modulation type: 8DPSK**


Full Spectrum

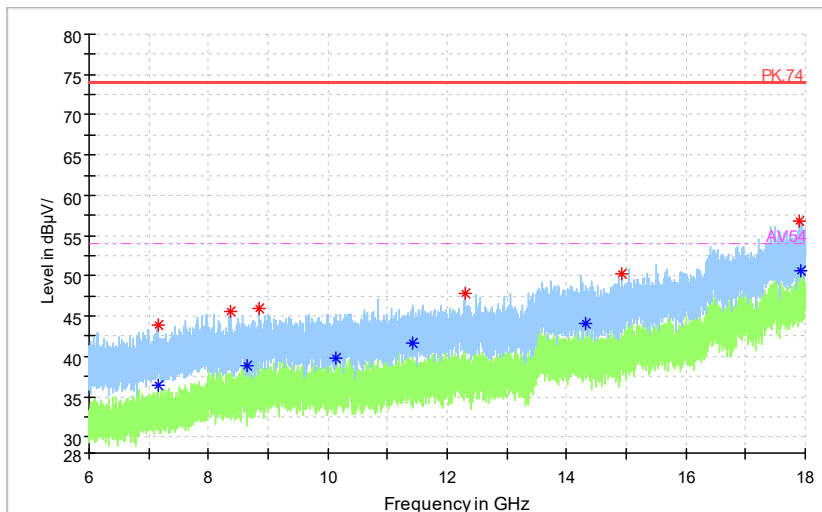

— Preview Result 2-AVG     — Preview Result 1-PK+     \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+     — PK.74     - - - AV54  
◆ Final\_Result PK+     ◆ Final\_Result AVG

**Frequency Range: 6GHz-18GHz**  
**Detector: Av mode and PK mode**  
**Modulation type: 8DPSK**

Full Spectrum

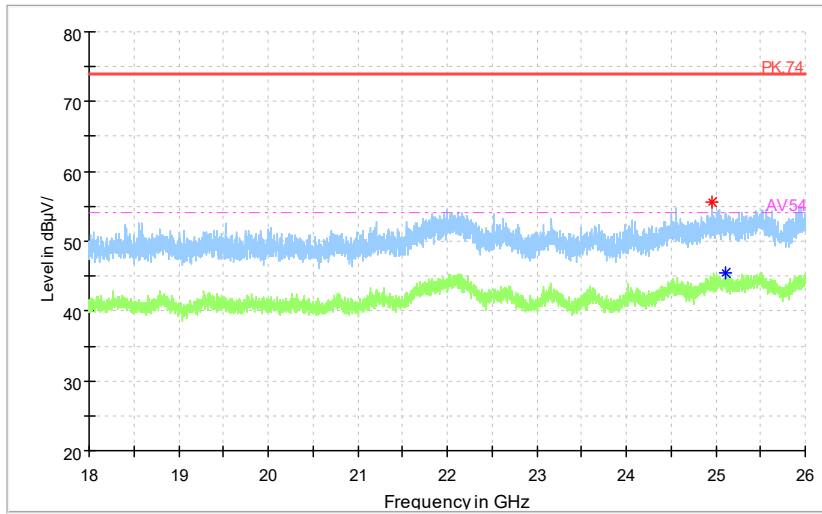

Frequency Range: 18GHz-26GHz  
 Detector: Av mode and PK mode  
 Modulation type: 8DPSK


### AC Power line Conducted Emission

A “reference path loss” Corr.(dB) is established and the  $L_{cable}+ATT+VDF$  is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result}=P_{mea}+ Corr.(dB)$$

Sample calculation:  $(31.69 \text{ dB}\mu\text{V}) = (1.99 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$ , the corresponding frequency is 0.350421MHz.

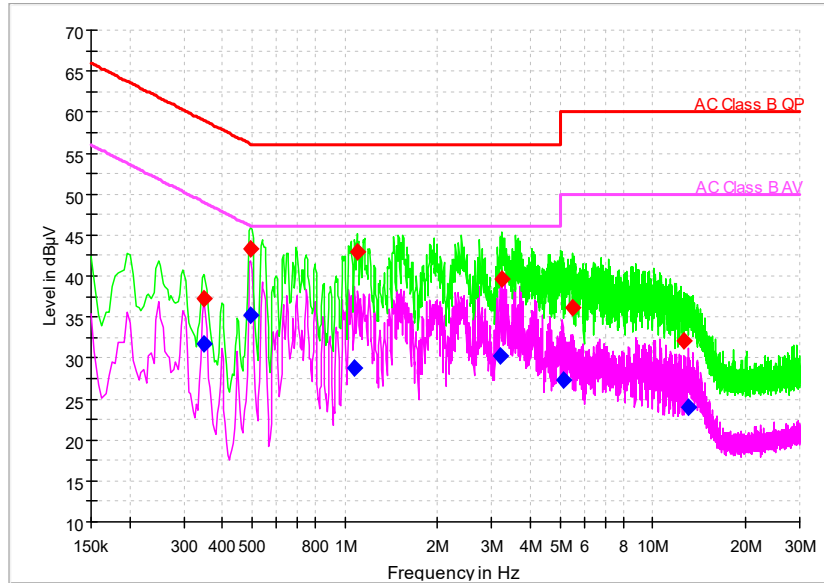

— Preview Result 2-AVG     — Preview Result 1-PK+     — AC Class B QP  
— AC Class B AV     ◆ Final\_Result QPK     ◆ Final\_Result AVG

L+N Line



**MEASUREMENT RESULT:**

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.350421	---	31.69	48.95	17.27	L1	29.7	---	1.99
0.350421	37.30	---	58.95	21.65	L1	29.7	7.6	---
0.495407	---	35.30	46.08	10.78	L1	29.7	---	5.6
0.495407	43.26	---	56.08	12.82	N	29.8	13.46	---
1.075350	---	28.83	46.00	17.17	N	29.8	---	-0.97
1.096671	42.95	---	56.00	13.05	N	29.8	13.15	---
3.190436	---	30.33	46.00	15.67	N	29.9	---	0.43
3.245871	39.57	---	56.00	16.43	N	29.9	9.67	---
5.152007	---	27.38	50.00	22.62	N	29.9	---	-2.52
5.493150	36.05	---	60.00	23.95	N	29.9	6.15	---
12.657150	32.08	---	60.00	27.92	L1	30.0	2.08	---
13.109164	---	24.04	50.00	25.96	N	30.1	---	-6.06

---End of Test Report---