



Certificate Number: 5055.02

TEST REPORT FOR WLAN TESTING

Report No.: SRTC2021-9004(F)-21063004(F)

Product Name: Smart Phone

Product Model: FCG01

Applicant: FCNT LIMITED

Manufacturer: FCNT LIMITED

Specification: FCC Part 15 Subpart C (2020)

FCC ID: 2AYY9FMP186

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388



CONTENTS

1. GENERAL INFORMATION.....	2
1.1 Notes of the test report.....	2
1.2 Information about the testing laboratory.....	2
1.3 Applicant's details.....	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3
2 DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 Final Equipment Build Status.....	4
2.2 Description of Test Modes.....	5
2.2.1 Test Mode Applicability and Tested Channel Detail.....	5
2.3 EUT Operating conditions.....	6
2.4 Support Equipment.....	6
3 REFERENCE SPECIFICATION.....	7
4 KEY TO NOTES AND RESULT CODES.....	7
5 RESULT SUMMARY.....	8
6 TEST RESULT.....	9
6.1 Peak Power Output.....	9
6.2 6dB Bandwidth.....	10
6.3 Transmitter Power Spectral Density.....	11
6.4 Conducted Out of band emission measurement.....	12
6.5 Band-edge measurement.....	13
6.6 Spurious Radiated Emissions.....	14
6.7 AC Power line Conducted Emission.....	19
7 MEASUREMENT UNCERTAINTIES.....	21
8 TEST EQUIPMENTS.....	22
APPENDIX A – TEST DATA OF CONDUCTED EMISSION.....	23
APPENDIX B – TEST DATA OF RADIATED EMISSION.....	42

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	FCNT LIMITED
Address:	Churinkan 7-10-1 Yamato, Kanagawa 2420007, Japan
City:	Yamato
Country or Region:	Japan
Contacted person:	Masahiro Kurosawa
Tel:	+81-50-3358-3533
Email:	kurosawa_masa@fcnt.com

1.4 Manufacturer's details

Company:	FCNT LIMITED
Address:	Churinkan 7-10-1 Yamato, Kanagawa 2420007, Japan
City:	Yamato
Country or Region:	Japan
Contacted person:	Masahiro Kurosawa
Tel:	+81-50-3358-3533
Email:	kurosawa_masa@fcnt.com



1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-06-24
Testing Start Date:	2021-07-02
Testing End Date:	2021-08-30

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	32

Normal Supply Voltage (V d.c.):	3.9
---------------------------------	-----



2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band:	2.412GHz~2.462GHz
Number of Channel For 20MHz:	11
Number of Channel For 40MHz:	7
Modulation Type:	802.11b 802.11g 802.11n (HT20/HT40)
Power Supply:	Charger
Software Revision:	V03RK26A-UD
Hardware Revision:	V1.2.0
IMEI:	359326120007212 359326120007980 359326120007790
Antenna type:	Refer to Note
Antenna connector:	Refer to Note

Note: Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band (GHz)	Antenna type	Connector Type
N/A	N/A	1.2dBi	2.4GHz~2.4835GHz	PIFA Antenna	N/A

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.



2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2



Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

2.3 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.4 Support Equipment

The following support equipment was used to exercise the DUT during testing:
 N/A



3 REFERENCE SPECIFICATION




Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e)	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested by: Mr. Liu Ce 	Approved date: 20210903

6 TEST RESULT

6.1 Peak Power Output

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.5 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.5 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits



6.6.3 Test Procedure Used

ANSI C63.10-2013

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- 2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings**Average Field Strength Measurements**

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup


For Radiated emission below 30MHz

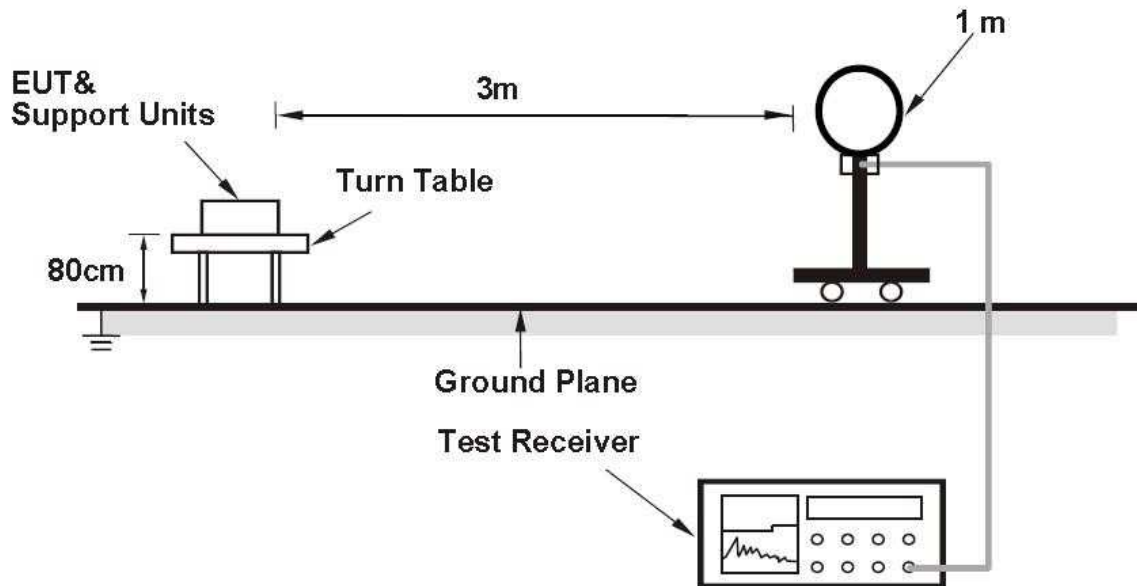

For Radiated emission 30MHz to 1GHz

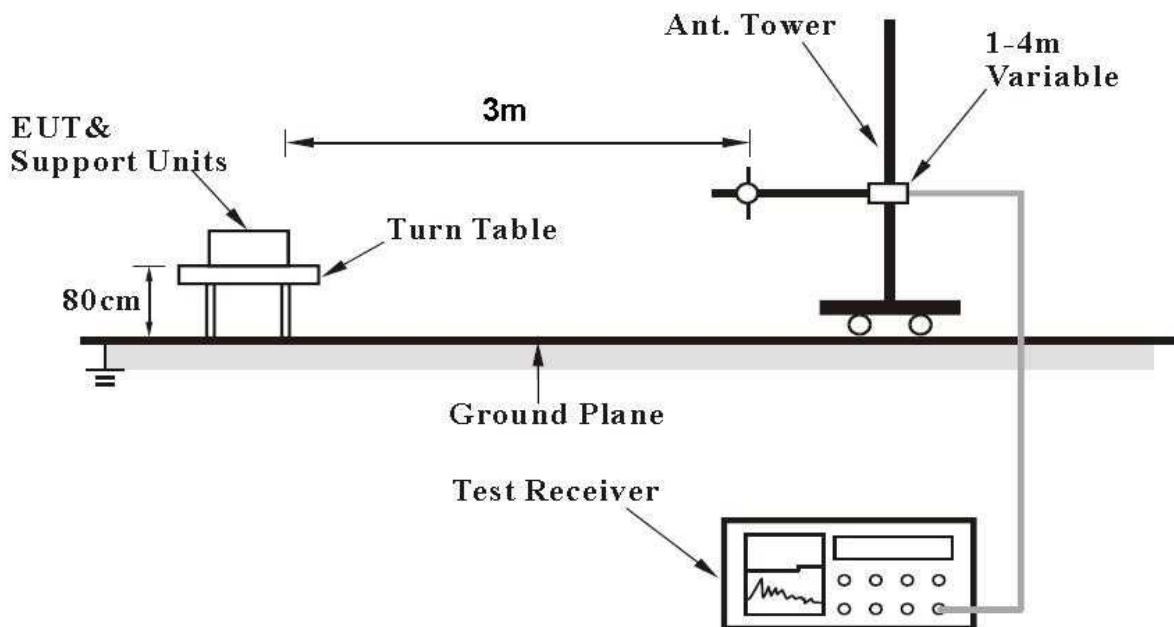

For Radiated emission above 1GHz

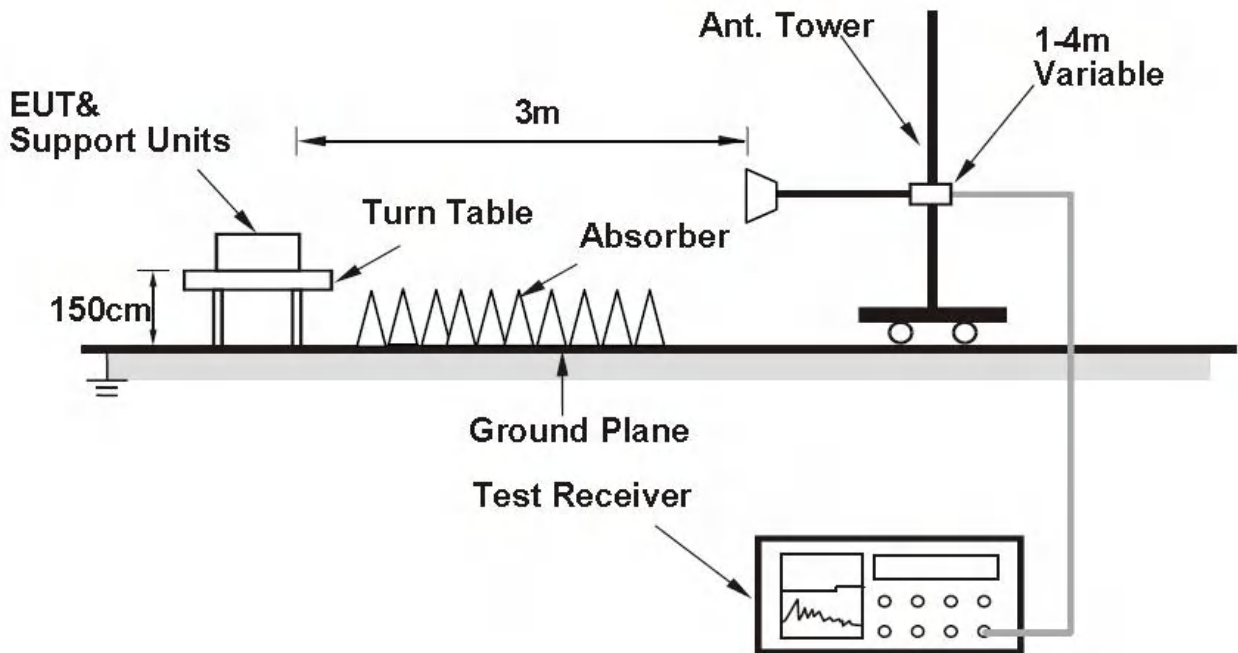

6.6.6 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/240V/60Hz.

6.7.3 Test Setup

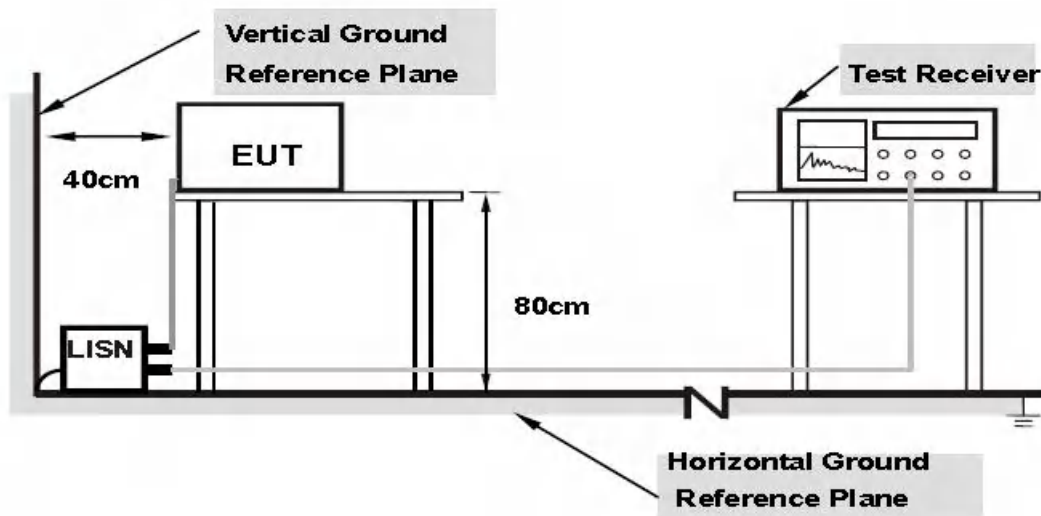

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in Appendix B.



7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	



8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2021.06.21	2022.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2021.05.18	2022.05.17
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2021.06.21	2022.06.20
4.	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
5.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
6.	Power Sensor E9323A	Agilent	MY52150008	2021.04.13	2022.04.12
7.	Signal Generator / SMBV100A	R&S	260910	2021.06.21	2022.06.20
8.	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
18.	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
20.	EMI test receiver	R&S	101574	2021.06.21	2022.06.20
21.	ESR3 EMI test receiver	R&S	102361	2021.04.12	2022.04.11
22.	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
23.	ENV216 AMN	R&S	101881	2021.06.21	2022.06.20
24.	WLAN AP WIA3300-20 (FCC ID: 2AHKT-WIA3300-20)	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---
26.	Horn antenna / SAS-574	A.H.SYSTEMS	2581	2021.04.22	2023.04.21
27.	Loop antenna / HFH2-Z2	R&S	100340	2021.08.21	2022.08.20
28.	VULB 9163 Ultra log test antenna	SCHWARZ-BECK	867	2021.05.29	2023.05.28



APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5Mbps)
802.11n HT40	MCS0(13.5Mbps)

Offset 1.2dB = Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

Duty Cycle

Modulation Type	Frequency (MHz)	Chain	Duty Cycle	Correction Factor(dB)
802.11b	2412	Chain0	99.15%	0.04
802.11g	2412	Chain0	98.69%	0.06
802.11n HT20	2412	Chain0	98.43%	0.07
802.11n HT40	2422	Chain0	95.77%	0.19

Conducted power

Mode	Tones/ RU Index	Freq(MHz)	Chain	Peak power output (dBm)	Average power output (dBm)
802.11b	NA	2412MHz	Chain0	16.67	13.66
	NA	2437MHz	Chain0	16.74	13.77
	NA	2462MHz	Chain0	16.67	13.69
802.11g	NA	2412MHz	Chain0	21.90	13.26
	NA	2437MHz	Chain0	22.05	13.42
	NA	2462MHz	Chain0	21.94	13.32
802.11n20M	NA	2412MHz	Chain0	21.75	13.08
	NA	2437MHz	Chain0	21.91	13.23
	NA	2462MHz	Chain0	21.81	13.13
802.11n40M	NA	2422MHz	Chain0	22.81	13.84
	NA	2437MHz	Chain0	22.83	13.91
	NA	2452MHz	Chain0	22.66	13.74

6dB Bandwidth

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	7.50
2437MHz	6	Chain0	7.39
2462MHz	11	Chain0	9.03

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain0






Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	16.05
2437MHz	6	Chain0	16.44
2462MHz	11	Chain0	16.37


Test Mode:802.11g Chain0

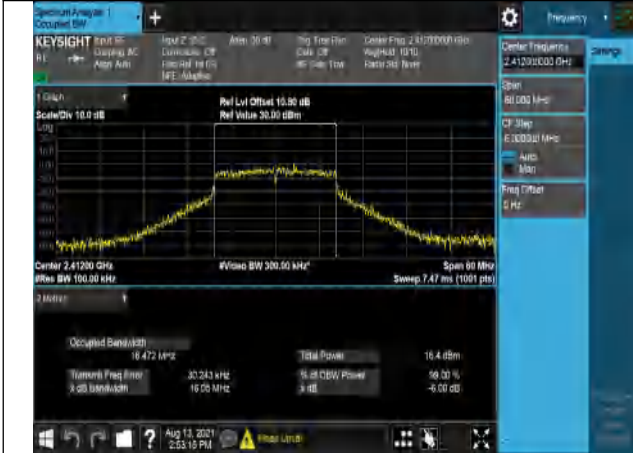

Test Mode:802.11g Chain0



Test Mode:802.11g Chain0

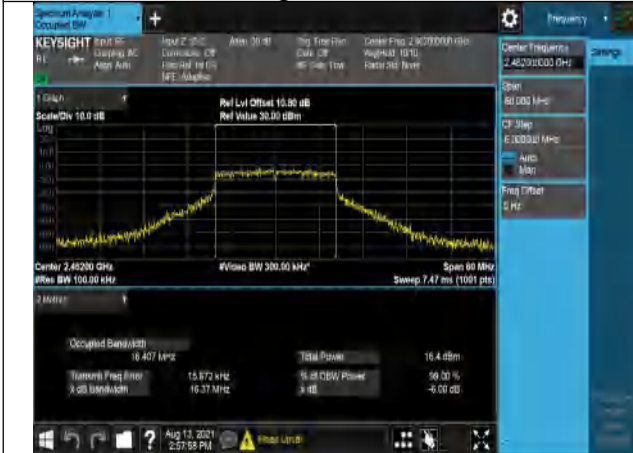



Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	17.67
2437MHz	6	Chain0	14.95
2462MHz	11	Chain0	17.66

Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0






Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2422MHz	3	Chain0	36.44
2437MHz	6	Chain0	34.45
2452MHz	9	Chain0	36.39

Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0

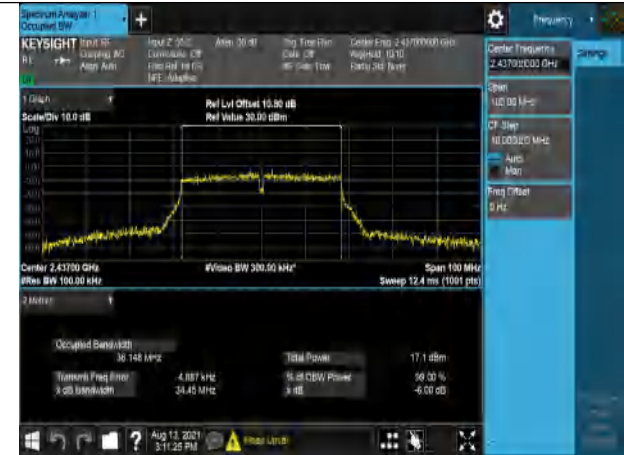

Test Mode:802. 11n HT40 Chain0



99% Bandwidth

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	13.757
2437MHz	6	Chain0	13.809
2462MHz	11	Chain0	13.768

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain0





Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	16.714
2437MHz	6	Chain0	16.868
2462MHz	11	Chain0	16.697


Test Mode:802.11g Chain0



Test Mode:802.11g Chain0



Test Mode:802.11g Chain0





Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	17.958
2437MHz	6	Chain0	17.839
2462MHz	11	Chain0	17.845


Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0





Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2422MHz	3	Chain0	36.166
2437MHz	6	Chain0	36.246
2452MHz	9	Chain0	36.265


Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0






Transmitter Power Spectral Density

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-11.746
2437MHz	6	Chain0	-9.673
2462MHz	11	Chain0	-9.768


Test Mode:802.11b Chain0

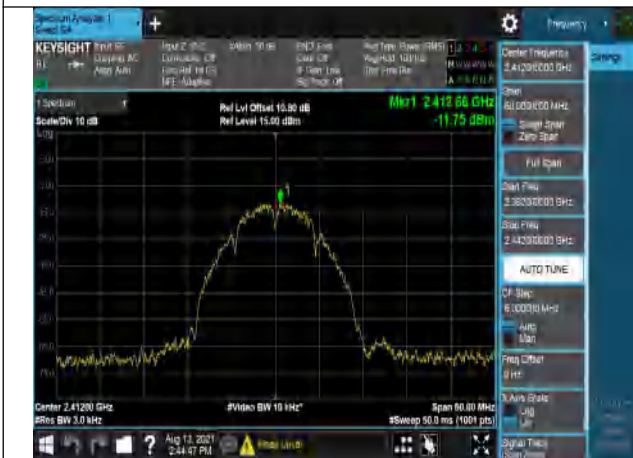

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0

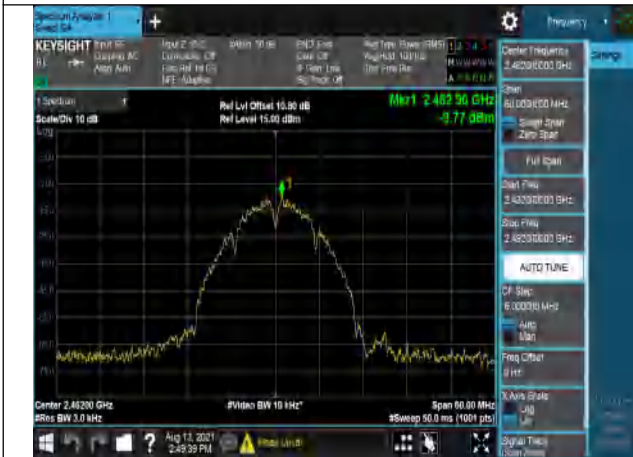




Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-13.154
2437MHz	6	Chain0	-13.533
2462MHz	11	Chain0	-14.027


Test Mode:802.11g Chain0



Test Mode:802.11g Chain0

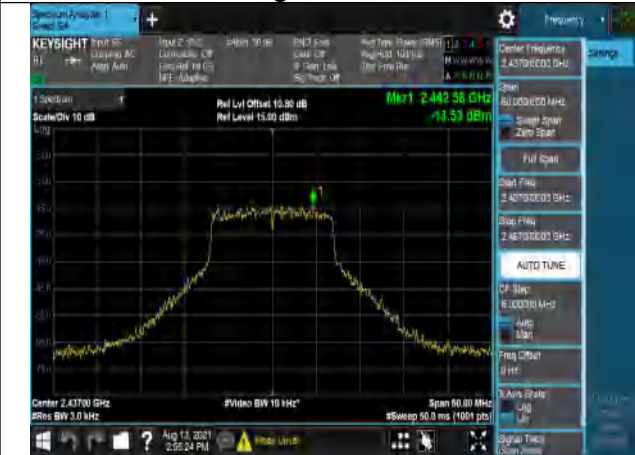

Test Mode:802.11g Chain0

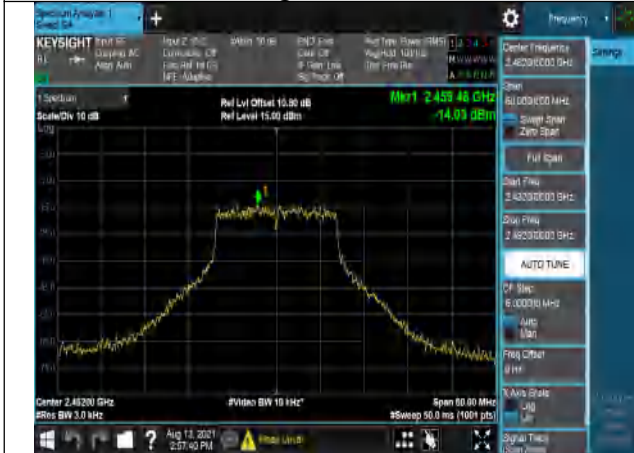



Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2422MHz	3	Chain0	-16.405
2437MHz	6	Chain0	-16.603
2452MHz	9	Chain0	-16.856

Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0





Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-13.909
2437MHz	6	Chain0	-14.252
2462MHz	11	Chain0	-14.089


Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0

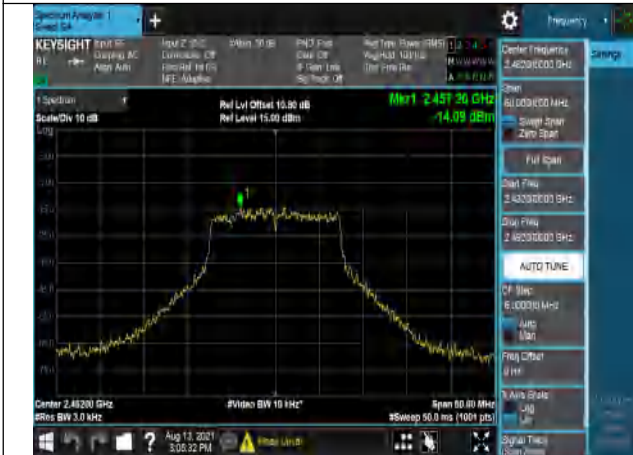

Conducted Out of band emission measurement

Test Mode:802.11b


Test Mode:802.11b Chain0 CH1



Test Mode:802.11b Chain0 CH6



Test Mode:802.11b Chain0 CH11





Test Mode:802.11g

Test Mode:802.11g Chain0 CH1



Test Mode:802.11g Chain0 CH6



Test Mode:802.11g Chain0 CH11






Test Mode:802. 11n HT20

Test Mode:802. 11n HT20 Chain0 CH1

Test Mode:802. 11n HT20 Chain0 CH6



Test Mode:802. 11n HT20 Chain0 CH11






Test Mode:802. 11n HT40

Test Mode:802. 11n HT40 Chain0 CH3

Test Mode:802. 11n HT40 Chain0 CH6



Test Mode:802. 11n HT40 Chain0 CH9



Band edge measurement

Test Mode:802.11b

Test Mode:802.11b Chain0 CH1



Test Mode:802.11b Chain0 CH11



Test Mode:802.11g

Test Mode:802.11g Chain0 CH1



Test Mode:802.11g Chain0 CH11





Test Mode:802. 11n HT20

Test Mode:802. 11n HT20 Chain0 CH1

Test Mode:802. 11n HT20 Chain0 CH11



Test Mode:802. 11n HT40

Test Mode:802. 11n HT40 Chain0 CH3

Test Mode:802. 11n HT40 Chain0 CH9





APPENDIX B – TEST DATA OF RADIATED EMISSION
Radiated Emission Band Edge

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (80.32 dBuV/m) = (46.32 dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2412MHz.

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	80.32	46.32	N/A	N/A	8.90	25.10

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.17	61.17	N/A	N/A	8.90	25.10
2	2390	39.86	5.86	-34.14	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.97	58.97	N/A	N/A	8.90	25.10
2	2390	40.23	6.23	-33.77	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.31	55.31	N/A	N/A	8.90	25.10
2	2390	35.38	1.38	-18.62	54.00	8.90	25.10



Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	86.77	52.77	N/A	N/A	8.90	25.10
2	2390	34.92	0.92	-19.08	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.09	62.09	N/A	N/A	8.90	25.10
2	2483.5	39.27	5.27	-34.73	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.69	59.69	N/A	N/A	8.90	25.10
2	2483.5	38.64	4.64	-35.36	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	90.90	56.90	N/A	N/A	8.90	25.10
2	2483.5	34.81	0.81	-19.19	54.00	8.90	25.10



Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	87.99	53.99	N/A	N/A	8.90	25.10
2	2483.5	34.24	0.24	-19.76	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.89	61.89	N/A	N/A	8.90	25.10
2	2390	39.15	5.15	-34.85	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.20	59.20	N/A	N/A	8.90	25.10
2	2390	40.00	6.00	-34.00	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.85	55.85	N/A	N/A	8.90	25.10
2	2390	34.66	0.66	-19.34	54.00	8.90	25.10



Carrier frequency (MHz): 2412
 Channel No.:1
 Test Mode: 802.11g
 Polarity:Horizontal
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	86.91	52.91	N/A	N/A	8.90	25.10
2	2390	35.00	1.00	-19.00	54.00	8.90	25.10

Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11g
 Polarity: Vertical
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.06	62.06	N/A	N/A	8.90	25.10
2	2483.5	39.03	5.03	-34.97	74.00	8.90	25.10

Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11g
 Polarity:Horizontal
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.41	59.41	N/A	N/A	8.90	25.10
2	2483.5	38.35	4.35	-35.65	74.00	8.90	25.10

Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11g
 Polarity: Vertical
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	90.32	56.32	N/A	N/A	8.90	25.10
2	2483.5	34.73	0.73	-19.27	54.00	8.90	25.10



Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	87.76	53.76	N/A	N/A	8.90	25.10
2	2483.5	35.29	1.29	-18.71	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.02	62.02	N/A	N/A	8.90	25.10
2	2390	39.47	5.47	-34.53	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.65	59.65	N/A	N/A	8.90	25.10
2	2390	39.72	5.72	-34.28	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	90.90	56.90	N/A	N/A	8.90	25.10
2	2390	35.68	1.68	-18.32	54.00	8.90	25.10



Carrier frequency (MHz): 2412
 Channel No.:1
 Test Mode: 802.11n(HT20)
 Polarity:Horizontal
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	87.98	53.98	N/A	N/A	8.90	25.10
2	2390	34.70	0.70	-19.30	54.00	8.90	25.10

Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11n(HT20)
 Polarity: Vertical
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	94.77	60.77	N/A	N/A	8.90	25.10
2	2483.5	40.28	6.28	-33.72	74.00	8.90	25.10

Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11n(HT20)
 Polarity:Horizontal
 Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.23	58.23	N/A	N/A	8.90	25.10
2	2483.5	40.06	6.06	-33.94	74.00	8.90	25.10

Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11n(HT20)
 Polarity: Vertical
 Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	90.96	56.96	N/A	N/A	8.90	25.10
2	2483.5	34.44	0.44	-19.56	54.00	8.90	25.10



Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.91	54.91	N/A	N/A	8.90	25.10
2	2483.5	35.08	1.08	-18.92	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.82	61.82	N/A	N/A	8.90	25.10
2	2390	40.29	6.29	-33.71	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.14	59.14	N/A	N/A	8.90	25.10
2	2390	39.88	5.88	-34.12	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.40	55.40	N/A	N/A	8.90	25.10
2	2390	34.65	0.65	-19.35	54.00	8.90	25.10



Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	87.29	53.29	N/A	N/A	8.90	25.10
2	2390	33.96	-0.04	-20.04	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.59	61.59	N/A	N/A	8.90	25.10
2	2483.5	39.17	5.17	-34.83	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.44	59.44	N/A	N/A	8.90	25.10
2	2483.5	38.85	4.85	-35.15	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Average


No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	90.63	56.63	N/A	N/A	8.90	25.10
2	2483.5	34.22	0.22	-19.78	54.00	8.90	25.10



Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	87.97	53.97	N/A	N/A	8.90	25.10
2	2483.5	33.40	-0.60	-20.60	54.00	8.90	25.10

Copy of Copy of 002C_FCC

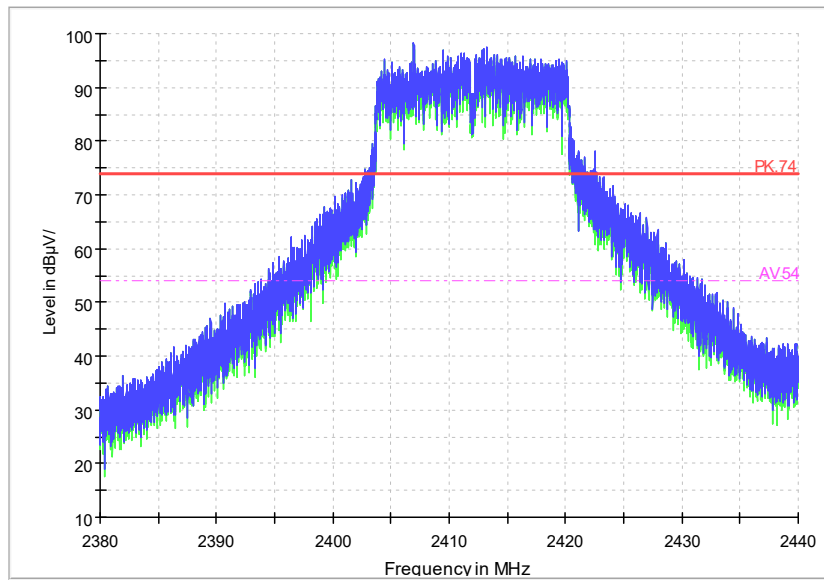

Radiated Emission Band Edge for 2412MHz



Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: (26.08 dB μ V/m) = (47.28 dB μ V) + (-21.2 dB/m), the corresponding frequency is 30.3395MHz.

The worst case attitude: The EUT lay down.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.3395	26.08	-21.2	47.28	Vertical	40
87.1815	16.71	-22.2	38.91	Vertical	40
165.2665	25.81	-21.9	47.71	Vertical	43.5
178.3615	21.23	-21.1	42.33	Vertical	43.5
555.934	13.25	-9.5	22.75	Vertical	46
948.202	19.11	-2.8	21.91	Vertical	46

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.4065	25.29	-20.9	46.19	Vertical	40
87.909	17.97	-22	39.97	Vertical	40
165.0725	25.76	-21.9	47.66	Vertical	43.5
177.8765	21.46	-21.2	42.66	Vertical	43.5
509.3255	12.36	-10.6	22.96	Vertical	46
922.8365	18.79	-3	21.79	Vertical	46

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.4365	25.7	-21.1	46.8	Vertical	40
87.715	17.19	-22	39.19	Vertical	40
163.763	25.96	-21.9	47.86	Vertical	43.5
178.992	20.96	-21.1	42.06	Vertical	43.5
518.8315	12.81	-10.4	23.21	Vertical	46
950.627	19.01	-2.7	21.71	Vertical	46



For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.2425	25.74	-21.2	46.94	Vertical	40
87.3755	16.33	-22.1	38.43	Vertical	40
163.278	25.72	-21.9	47.62	Vertical	43.5
177.925	21.2	-21.2	42.4	Vertical	43.5
551.5205	13.08	-9.7	22.78	Vertical	46
947.0865	19.14	-2.8	21.94	Vertical	46

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097	25.26	-21.2	46.46	Vertical	40
87.715	16.76	-22	38.76	Vertical	40
163.278	25.74	-21.9	47.64	Vertical	43.5
178.798	20.88	-21.1	41.98	Vertical	43.5
521.8385	12.9	-10.4	23.3	Vertical	46
920.266	18.79	-3	21.79	Vertical	46

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.4065	25.5	-20.9	46.4	Vertical	40
87.521	16.28	-22.1	38.38	Vertical	40
160.4165	22.68	-22	44.68	Vertical	43.5
179.5255	20.32	-21.1	41.42	Vertical	43.5
542.9845	13.18	-9.8	22.98	Vertical	46
920.9935	18.79	-3	21.79	Vertical	46

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.2125	24.51	-20.9	45.41	Vertical	40
92.759	18.26	-20.7	38.96	Vertical	43.5
164.248	25.74	-21.9	47.64	Vertical	43.5
177.634	21.03	-21.2	42.23	Vertical	43.5
519.85	12.79	-10.4	23.19	Vertical	46
908.626	18.59	-3.1	21.69	Vertical	46



For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.552	24.69	-20.9	45.59	Vertical	40
87.618	16.34	-22	38.34	Vertical	40
163.1325	25.71	-21.9	47.61	Vertical	43.5
177.1005	20.93	-21.2	42.13	Vertical	43.5
532.3145	13.2	-10.1	23.3	Vertical	46
941.509	19.1	-2.8	21.9	Vertical	46

For 802.11n(HT20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.6005	24.71	-20.8	45.51	Vertical	40
87.0845	14.84	-22.2	37.04	Vertical	40
162.9385	25.94	-21.9	47.84	Vertical	43.5
178.022	21	-21.2	42.2	Vertical	43.5
554.673	13.17	-9.6	22.77	Vertical	46
944.7585	19.14	-2.8	21.94	Vertical	46

For 802.11n(HT40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.358	25.43	-20.9	46.33	Vertical	40
87.812	16.37	-22	38.37	Vertical	40
163.3265	25.98	-21.9	47.88	Vertical	43.5
177.1975	21.03	-21.2	42.23	Vertical	43.5
554.9155	13.21	-9.6	22.81	Vertical	46
946.8925	19.05	-2.8	21.85	Vertical	46

For 802.11n(HT40) Channel No.:6


Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.3395	26.14	-21.2	47.34	Vertical	40
87.909	16.59	-22	38.59	Vertical	40
163.2295	25.91	-21.9	47.81	Vertical	43.5
177.4885	21.02	-21.2	42.22	Vertical	43.5
538.668	13.12	-9.9	23.02	Vertical	46
916.6285	18.6	-3	21.6	Vertical	46



For 802.11n(HT40) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.485	25.65	-21.1	46.75	Vertical	40
87.7635	16.25	-22	38.25	Vertical	40
163.4235	26.16	-21.9	48.06	Vertical	43.5
177.1005	20.88	-21.2	42.08	Vertical	43.5
540.1715	13.18	-9.9	23.08	Vertical	46
938.502	19.08	-2.8	21.88	Vertical	46


Full Spectrum

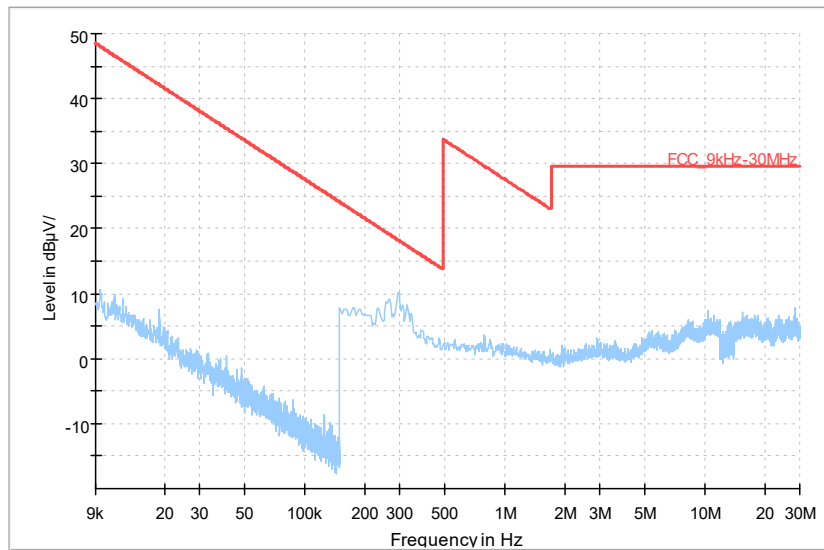


— Preview Result 1-PK+ — FCC_9kHz-30MHz

Frequency Range: 9kHz -30MHz

Carrier frequency (MHz): 2412
 Channel No.:1

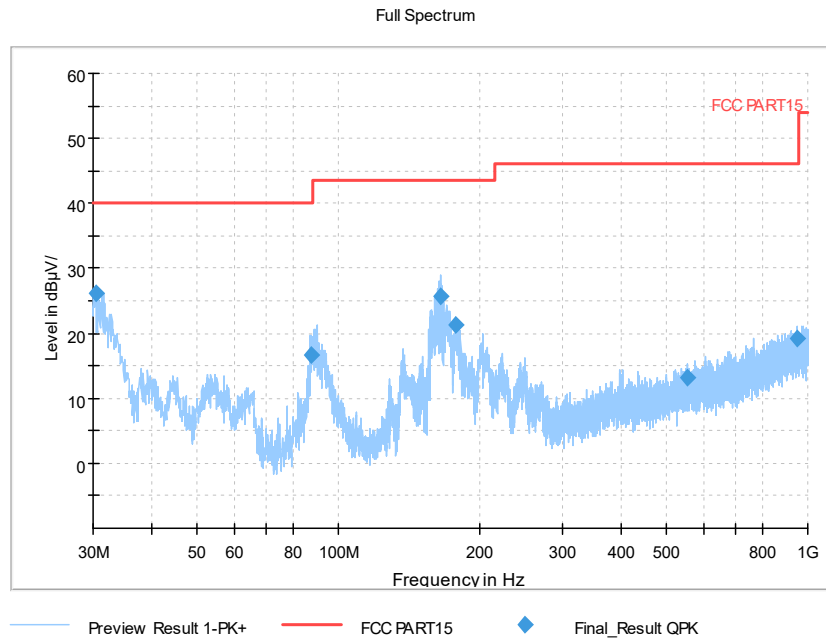


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

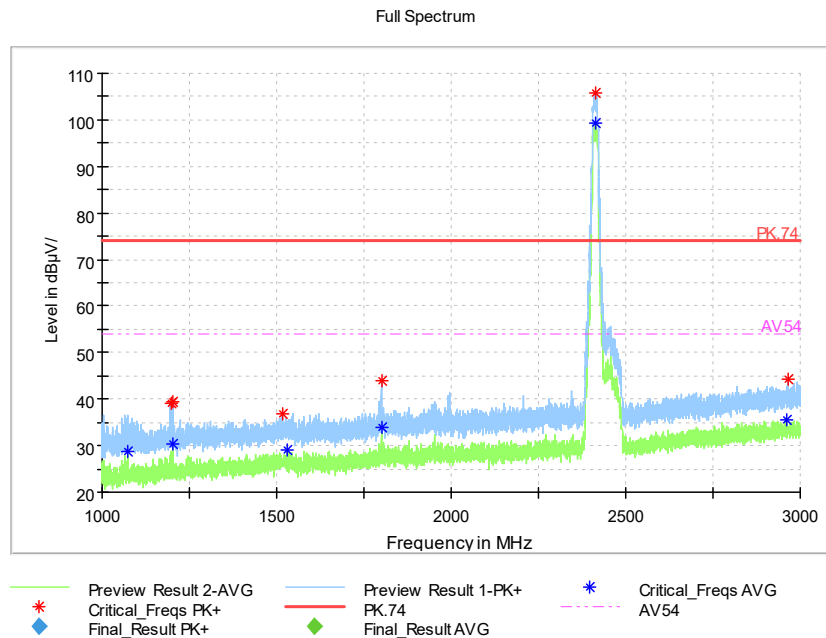

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

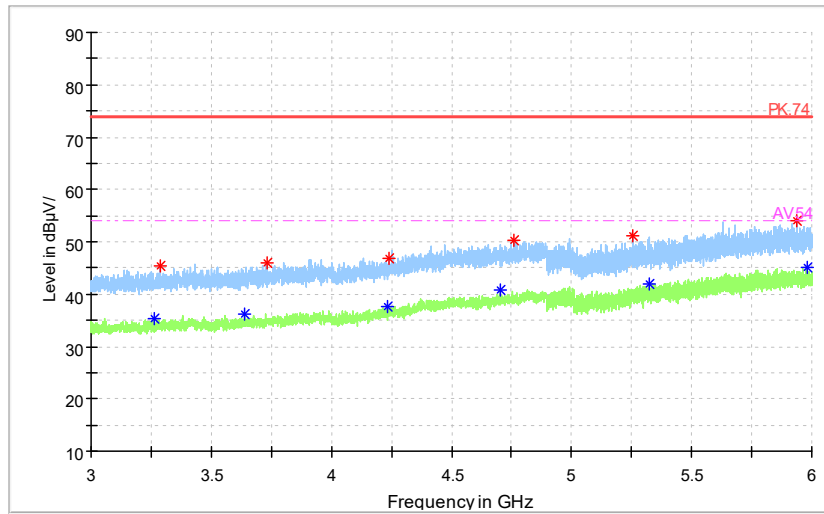

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

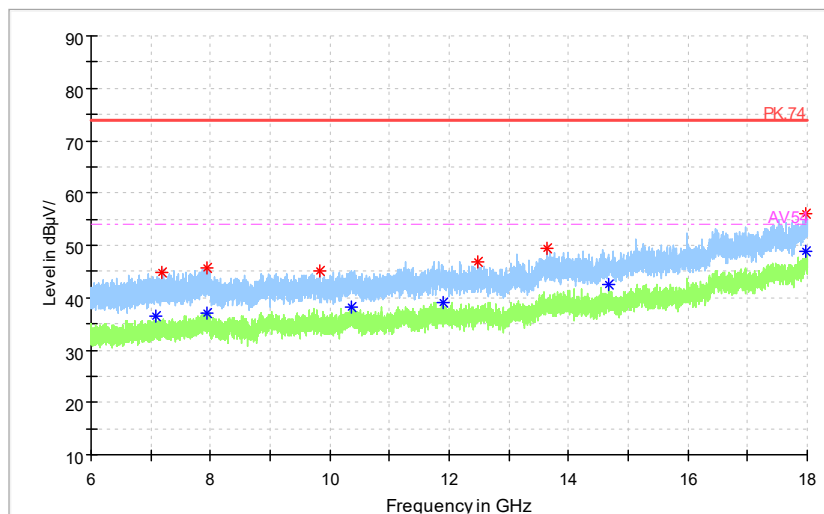

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

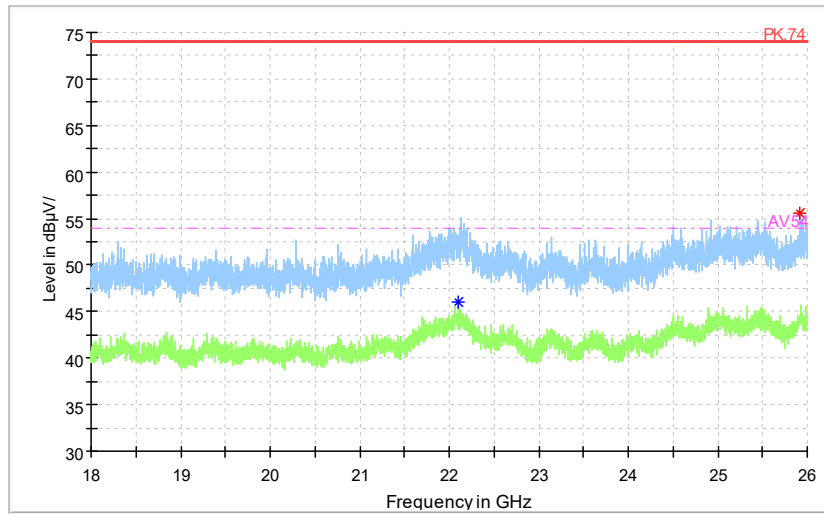

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

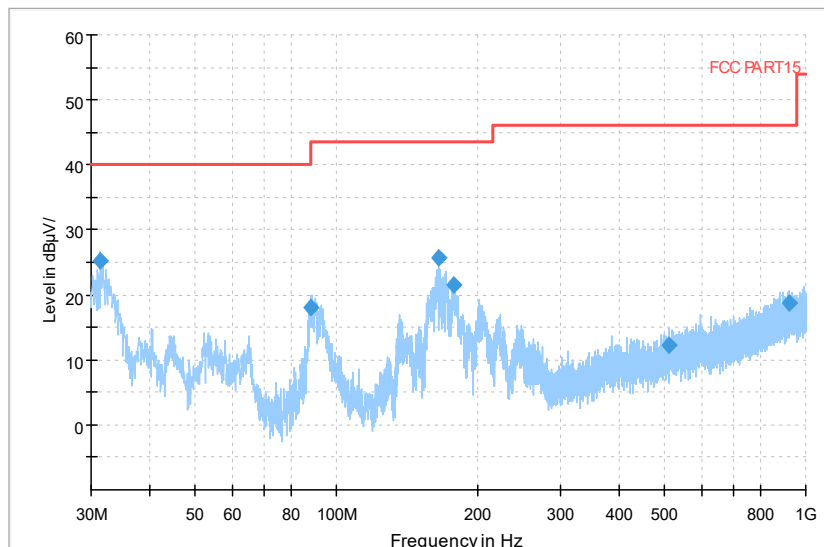

— Preview Result 1-PK+ — FCC PART15 ◆ Final_Result QPK

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g


Full Spectrum

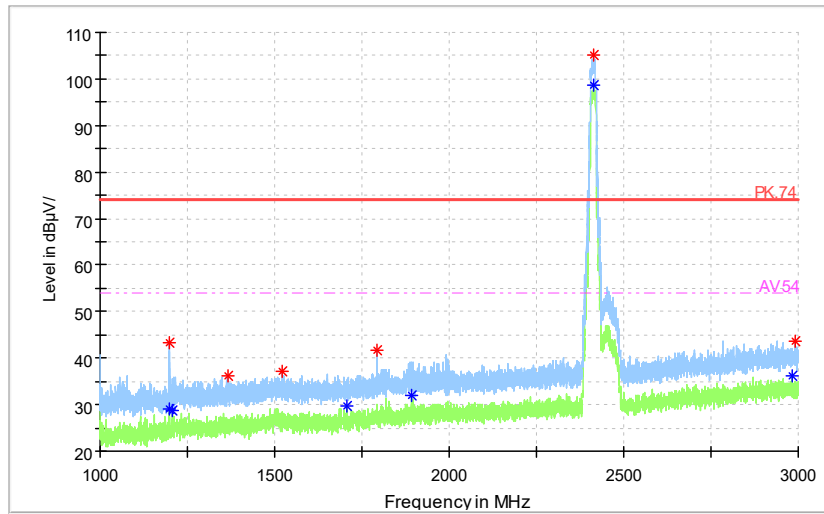

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

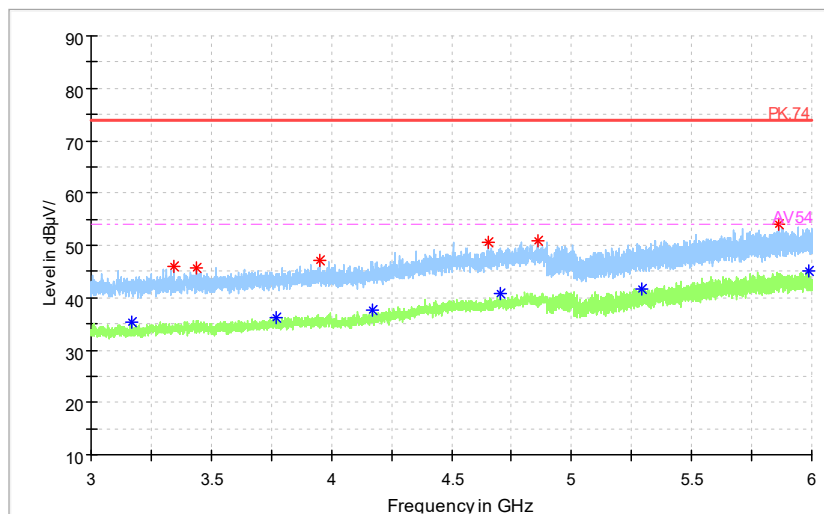

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

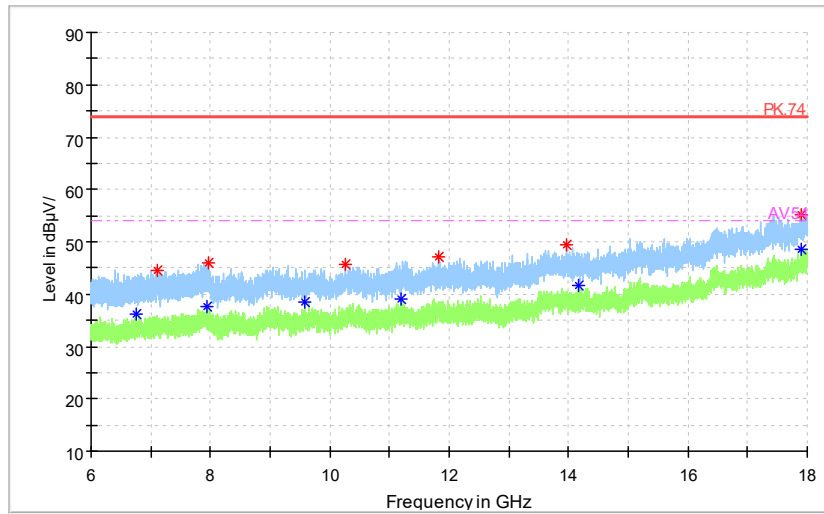

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum



— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG


Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

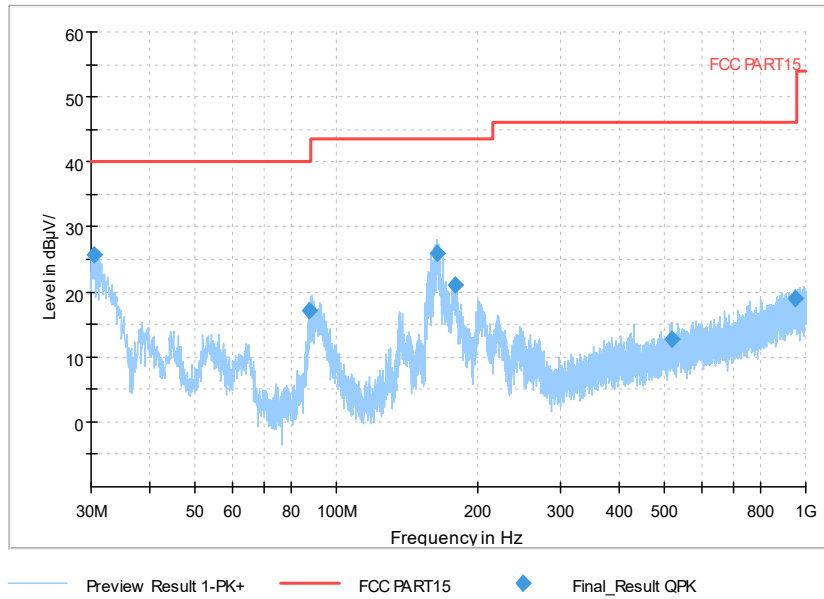


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)

Full Spectrum

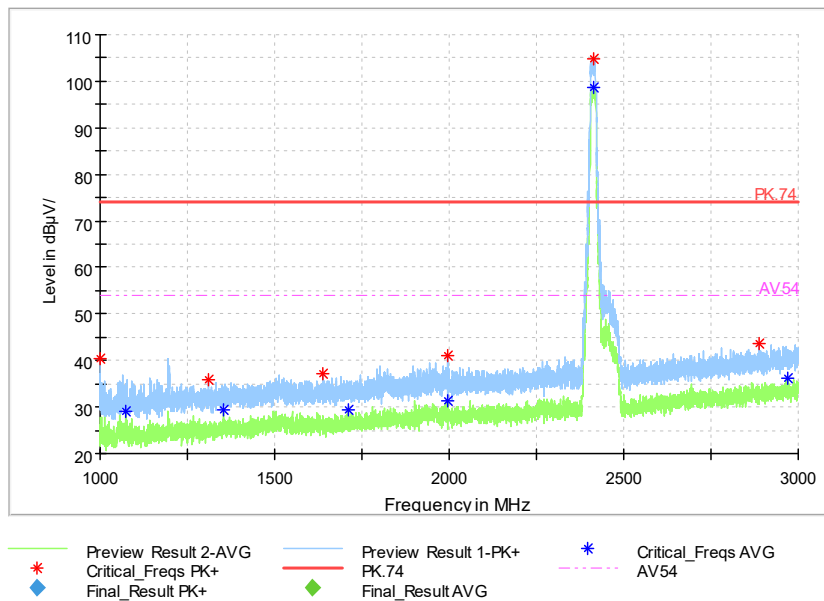

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)


Full Spectrum

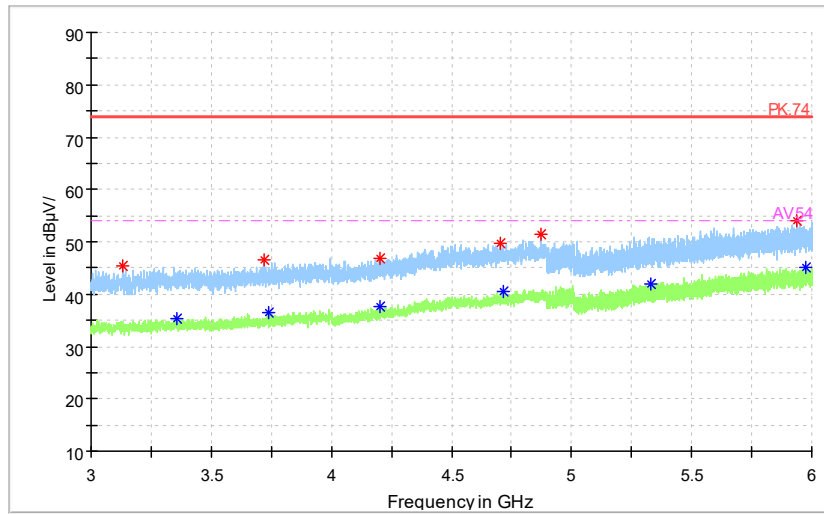

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Full Spectrum

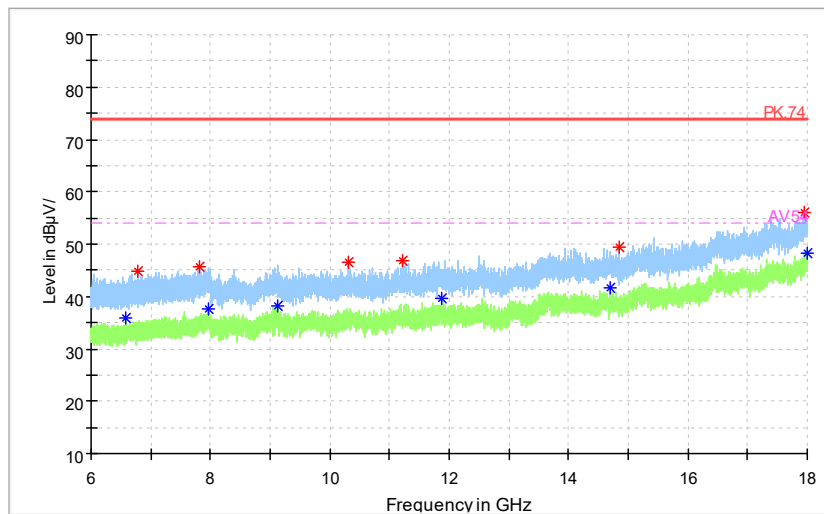


— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)




Full Spectrum

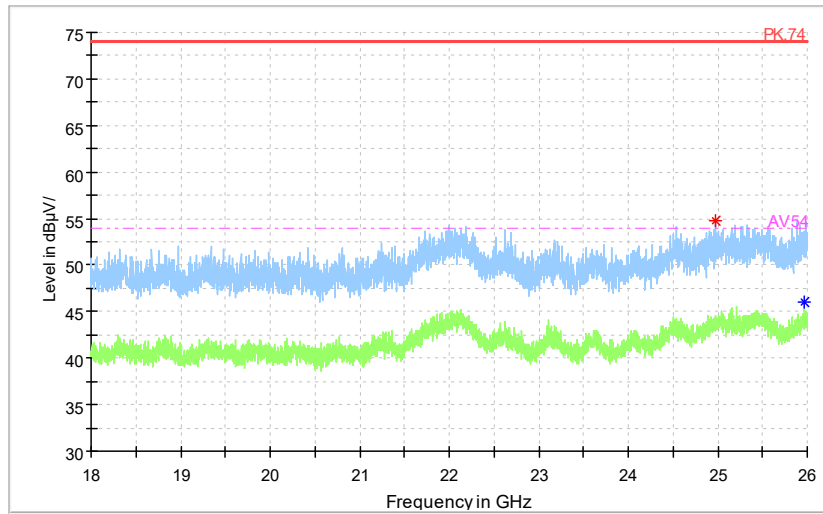


- Preview Result 2-AVG
- Critical_Freqs PK+
- Final_Result PK+
- Preview Result 1-PK+
- PK.74
- Final_Result AVG
- Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2437
 Channel No.:6

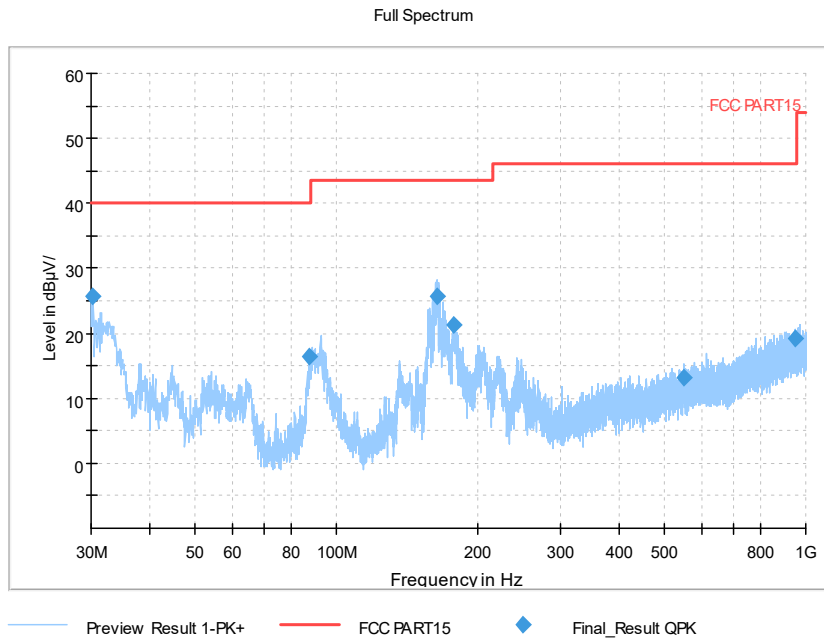


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

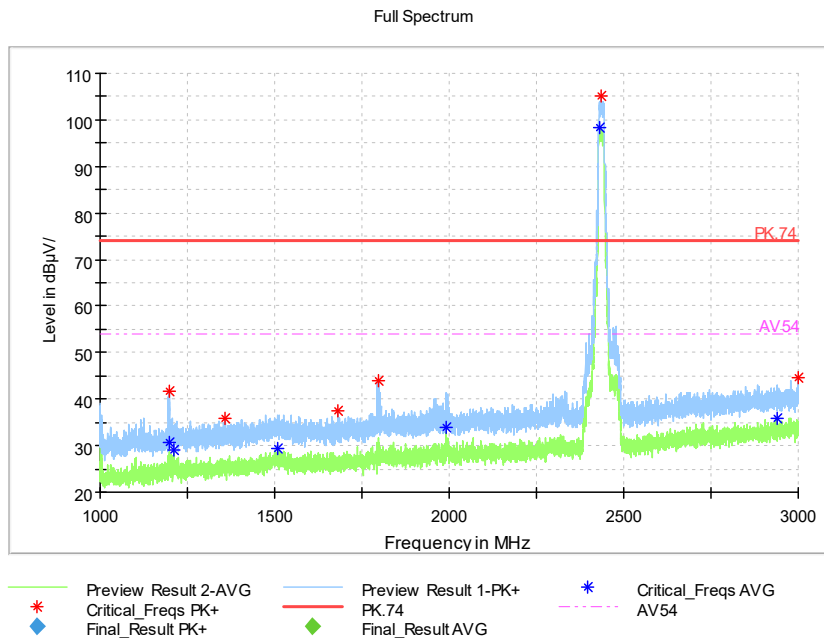

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

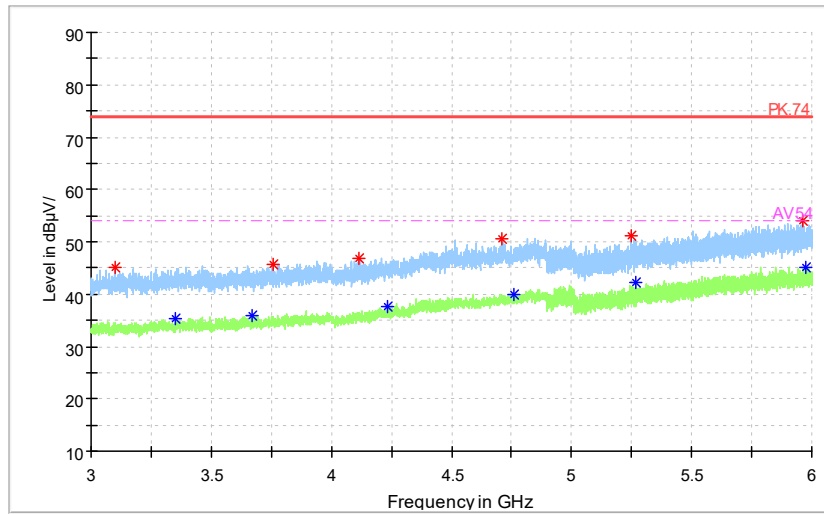

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
* Final_Result PK+ — Final_Result AVG * AV54

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

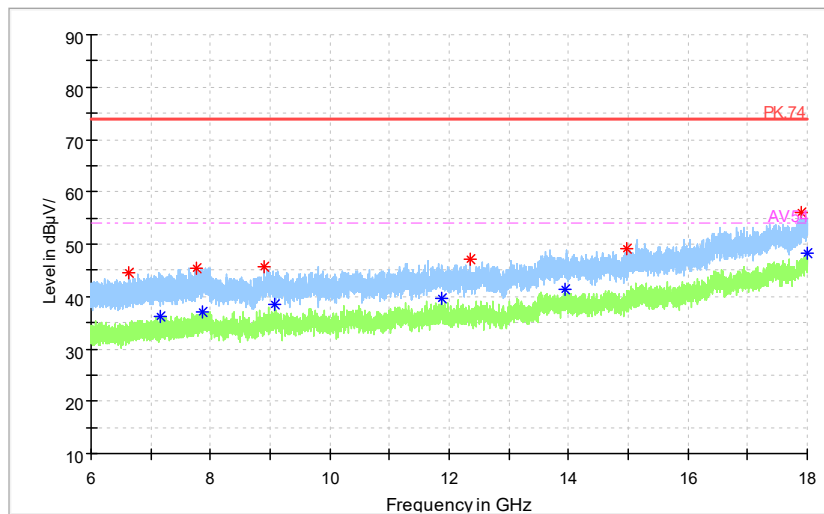

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
* Final_Result PK+ — Final_Result AVG * AV54


Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum




Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

Full Spectrum

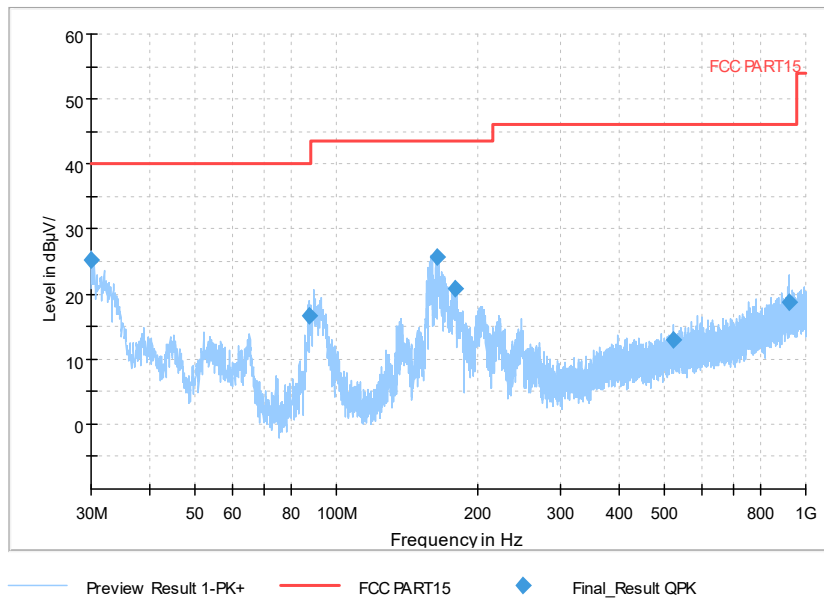

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g


Full Spectrum

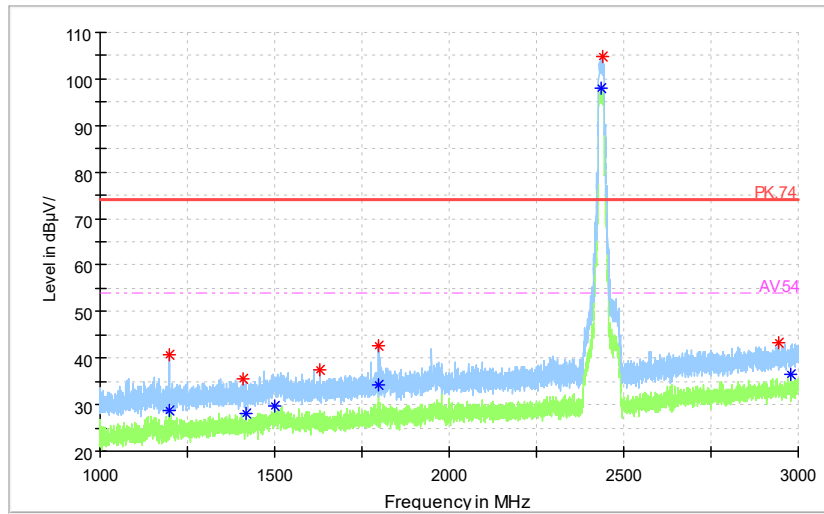

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

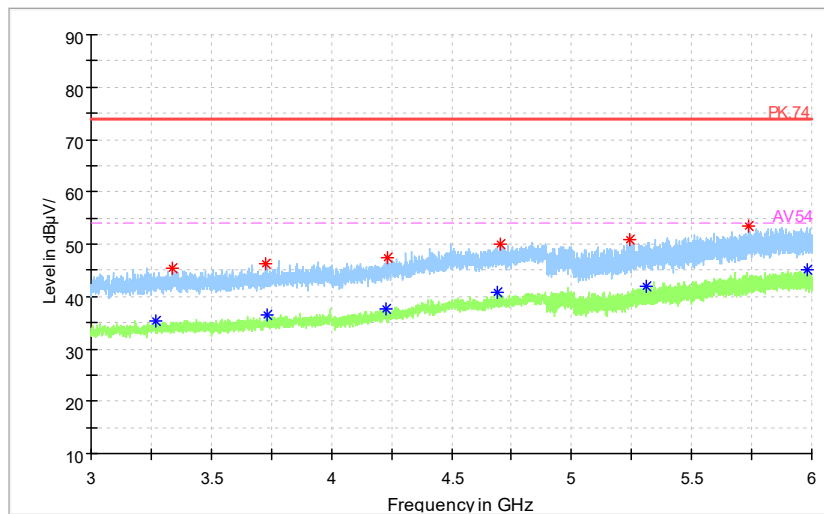

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

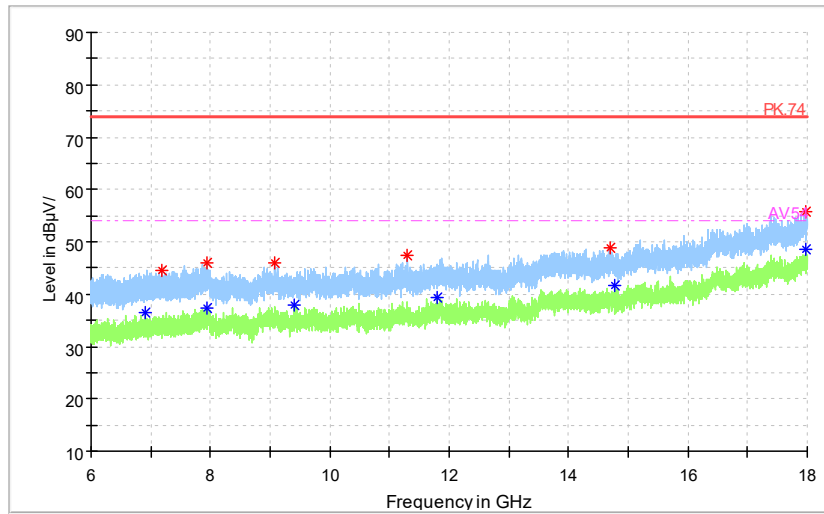

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum



— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG


Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

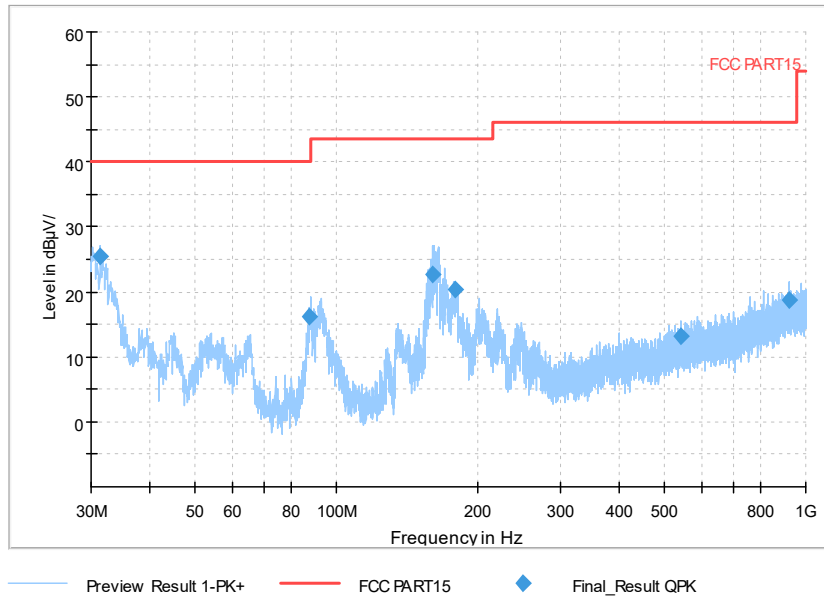

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)


Full Spectrum

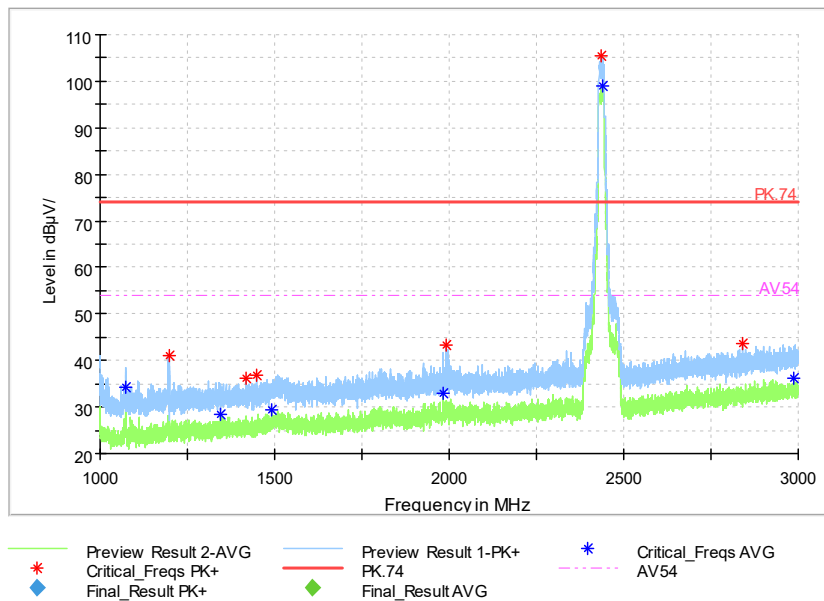

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)




Full Spectrum

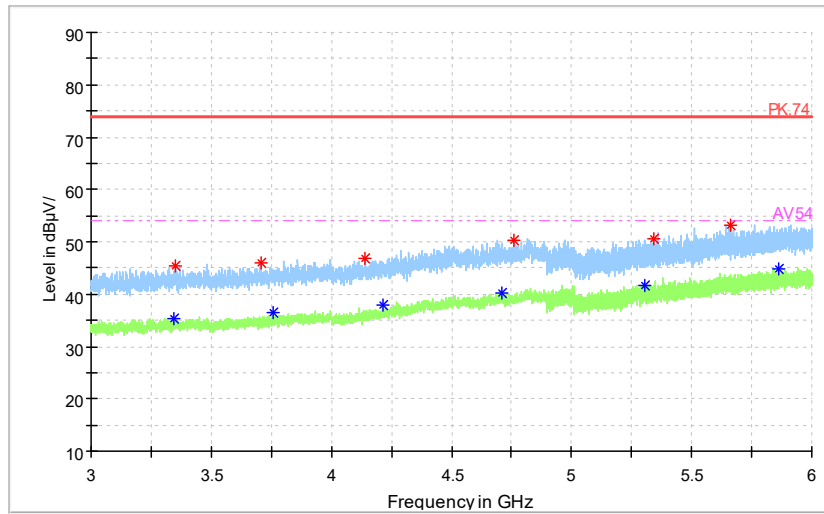

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

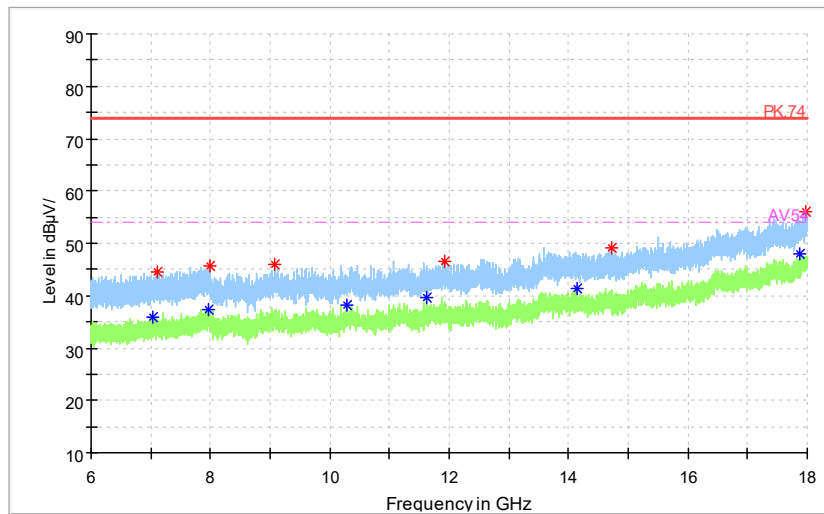


Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)



Full Spectrum

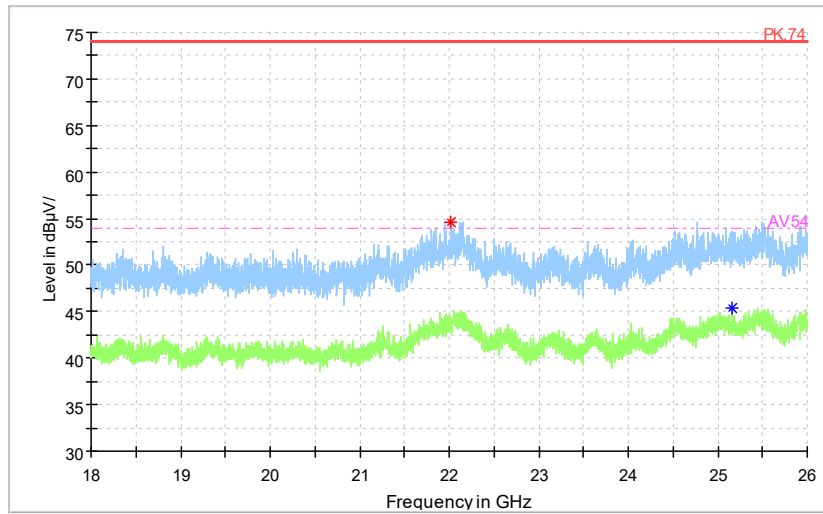


- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs PK+
- PK.74
- Final_Result PK+
- Final_Result AVG
- Critical_Freqs AVG
- AV54


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)



Carrier frequency (MHz): 2462
Channel No.:11

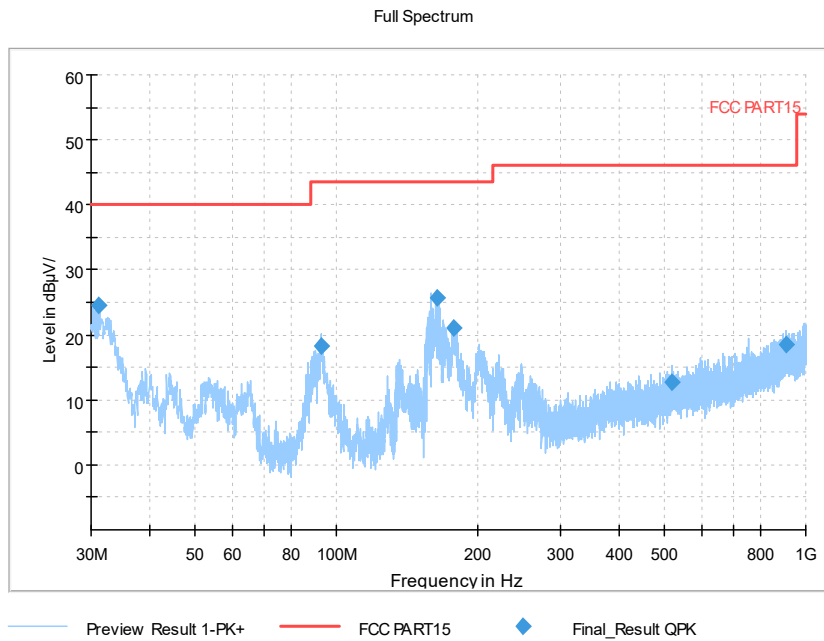


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

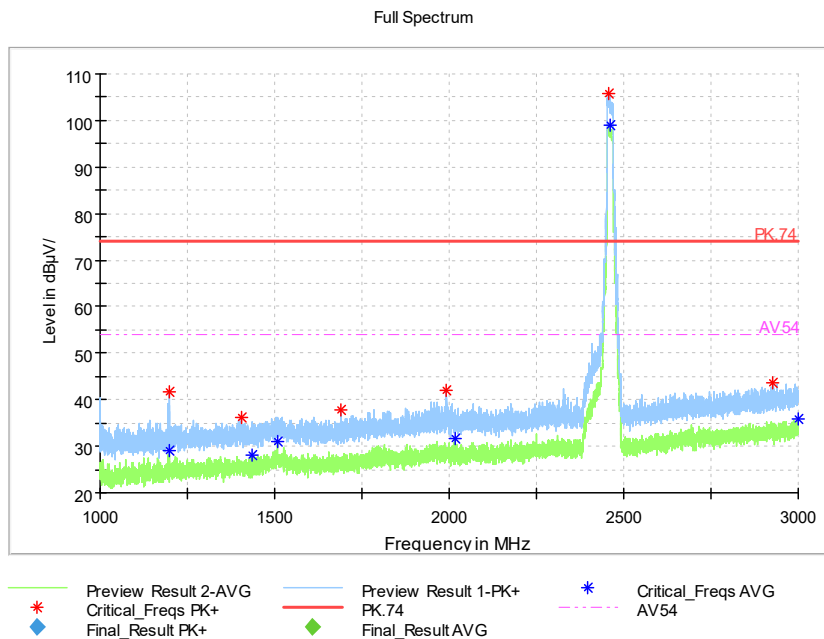

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b




Full Spectrum

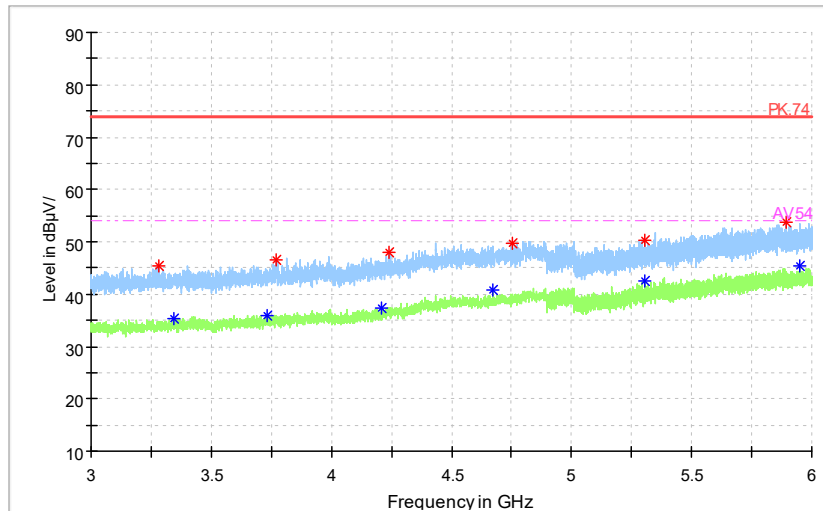

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

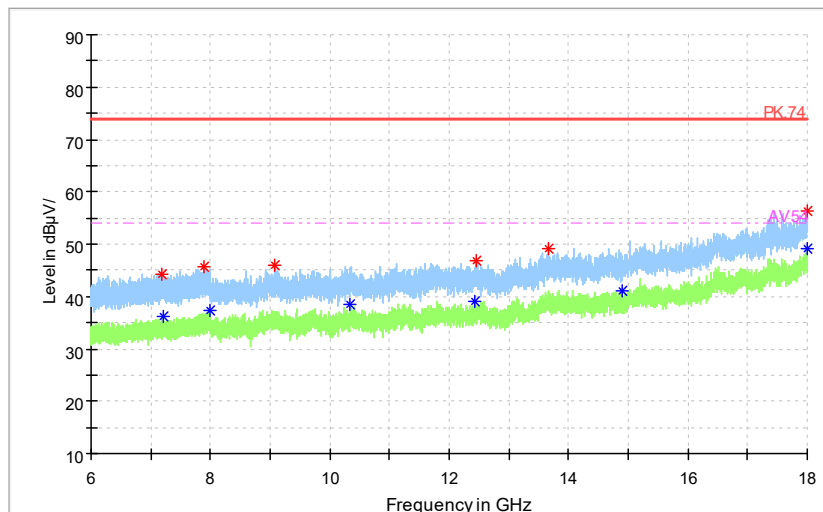

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum



— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b


Full Spectrum

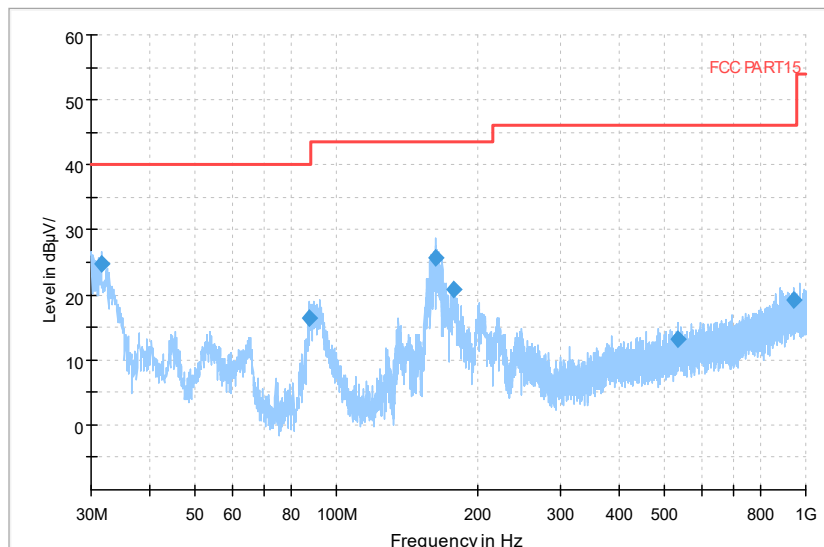

— Preview Result 1-PK+ — FCC PART15 ◆ Final_Result QPK

Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g


Full Spectrum

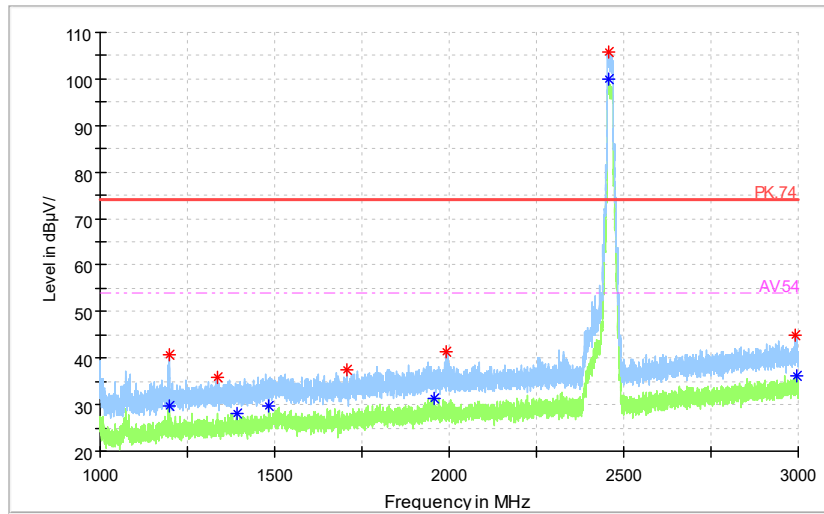

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

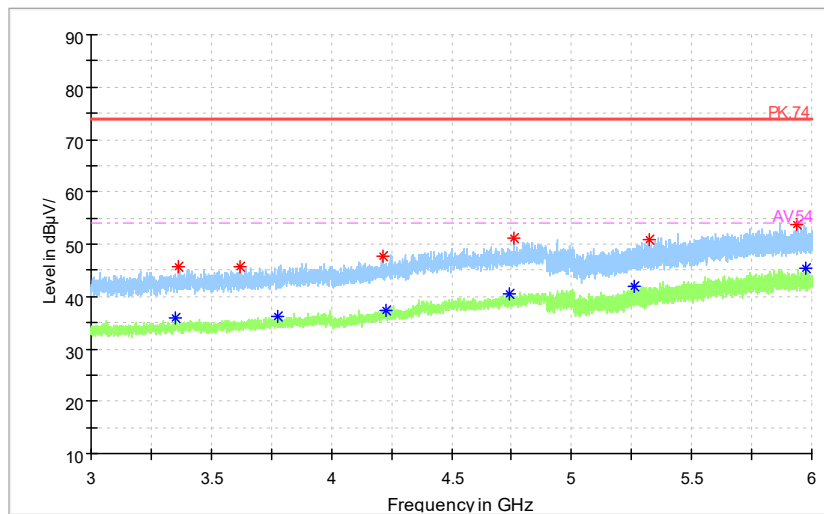

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

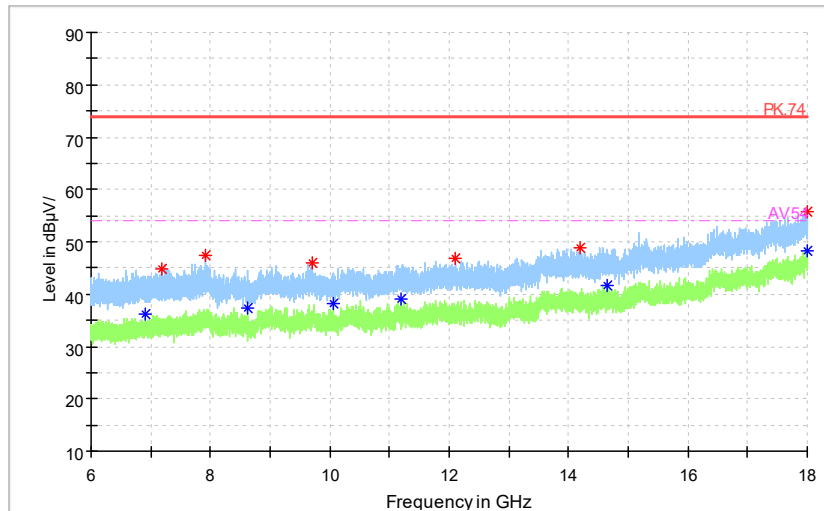

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g


Full Spectrum

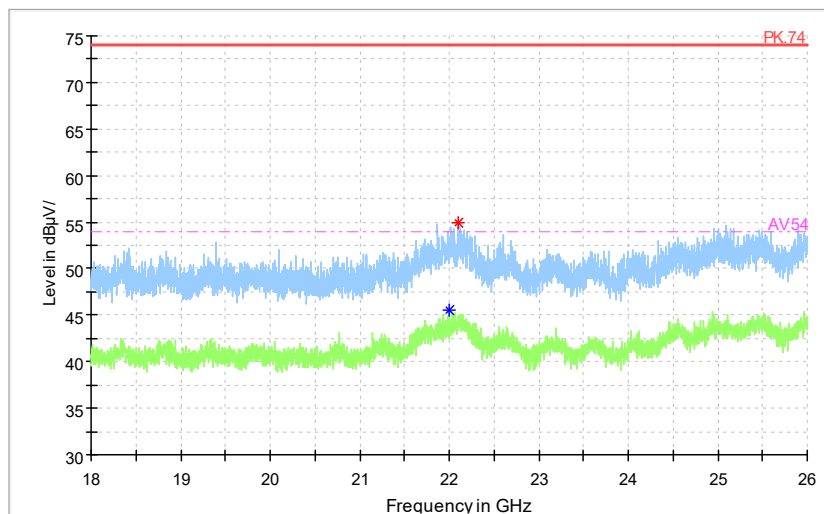

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 - - - AV54
◆ Final_Result PK+ ◆ Final_Result AVG


Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

Full Spectrum

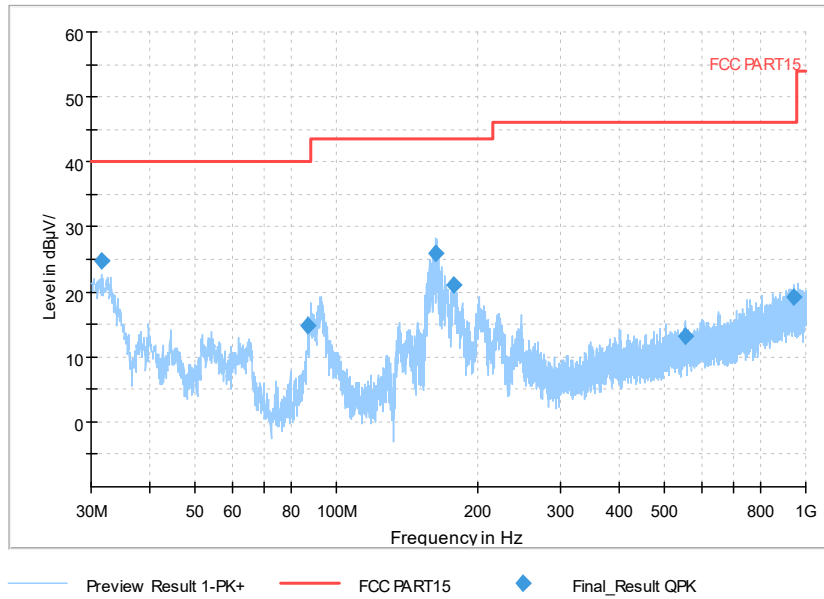


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT20)

Full Spectrum

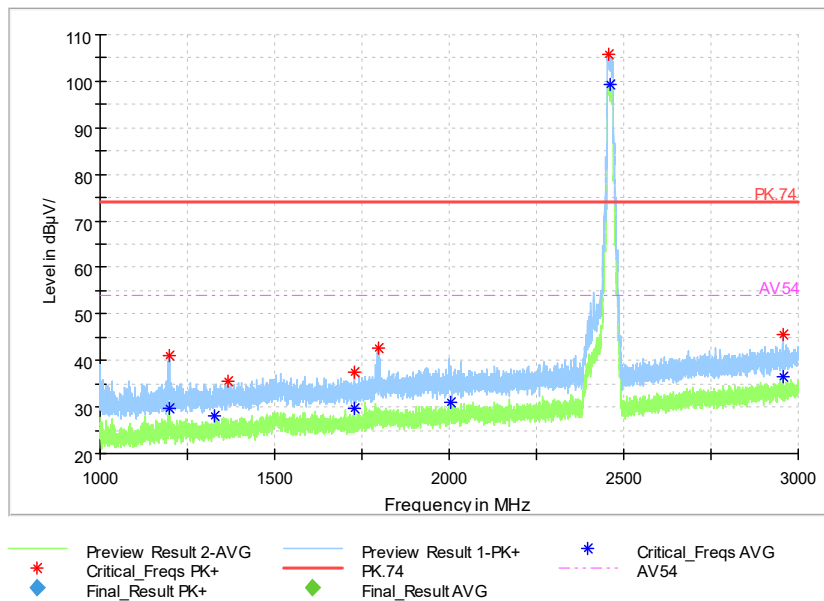


Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

Full Spectrum

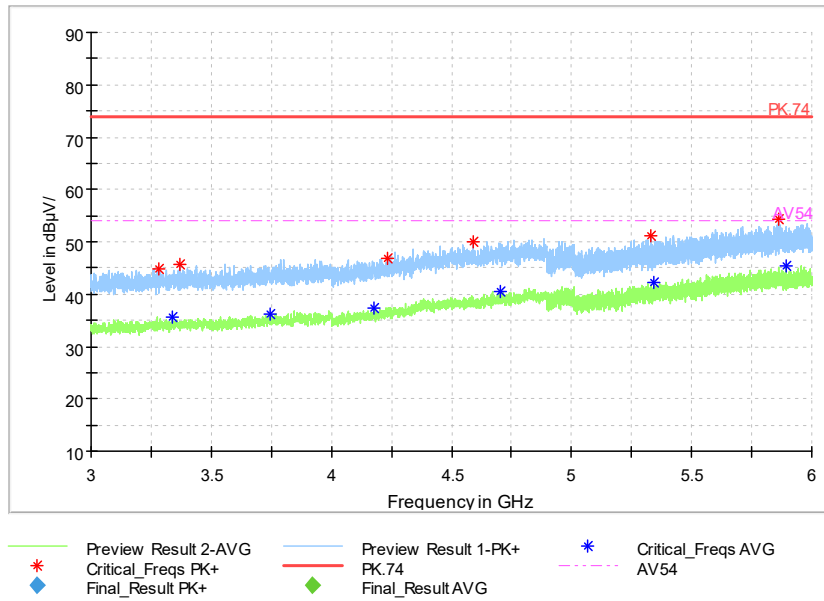

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)


Full Spectrum

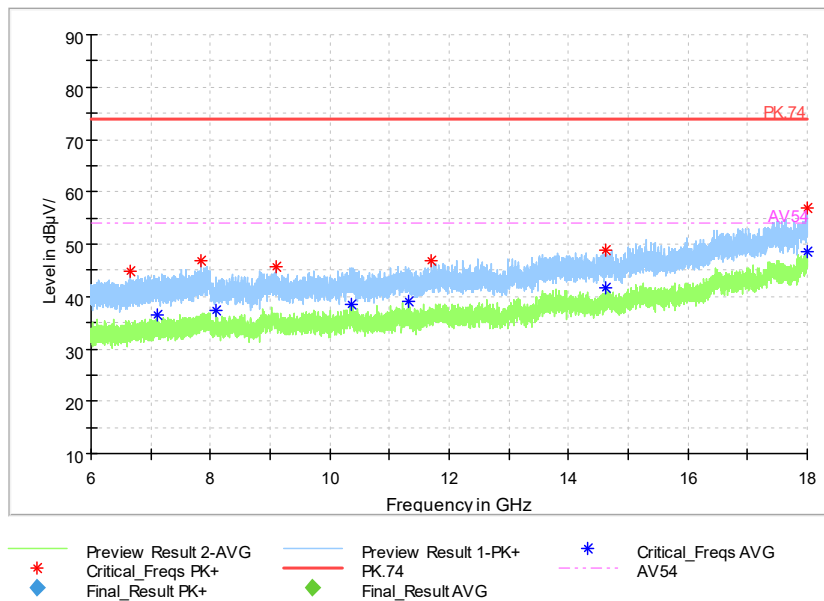

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)




Full Spectrum

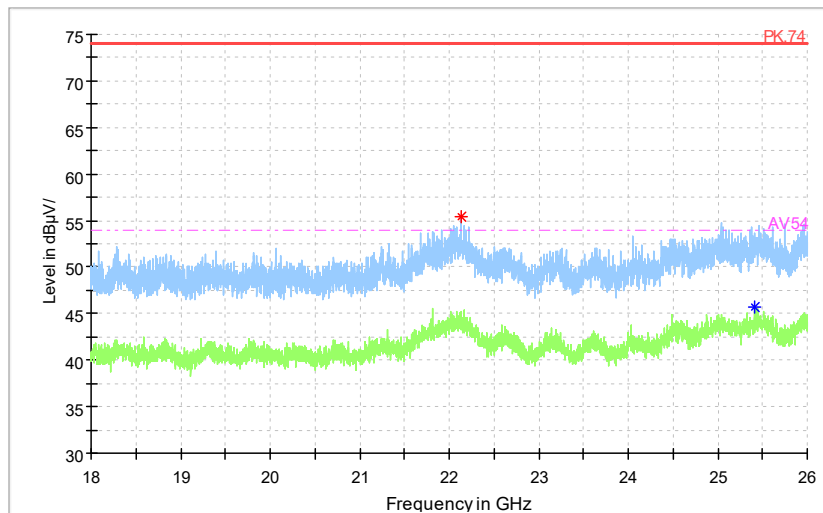


- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs PK+
- PK.74
- Final_Result PK+
- Final_Result AVG
- Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2422
 Channel No.:3

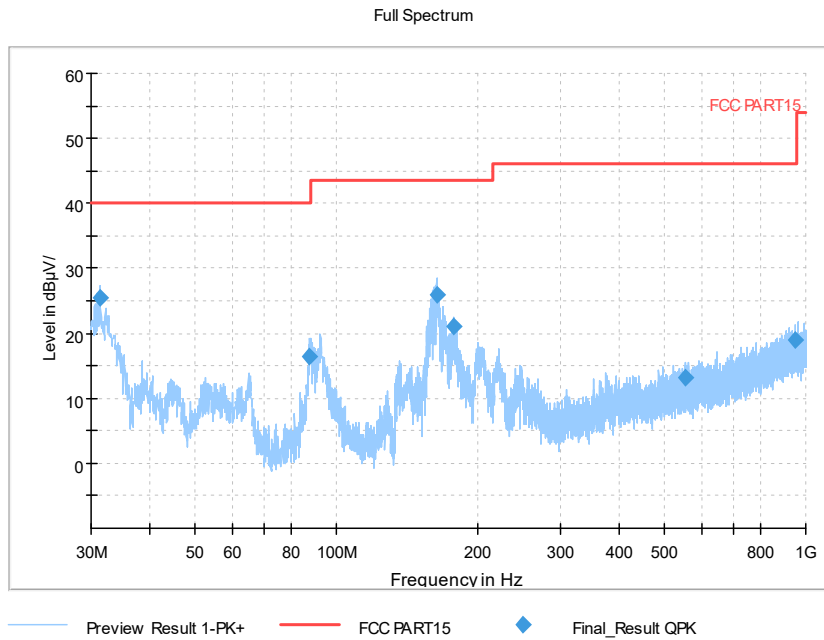


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT40)

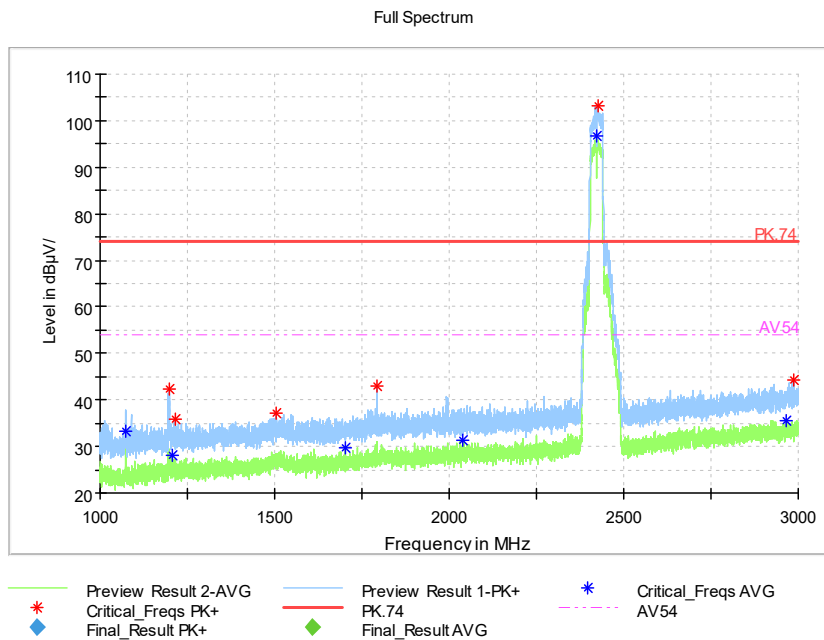

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)




Full Spectrum

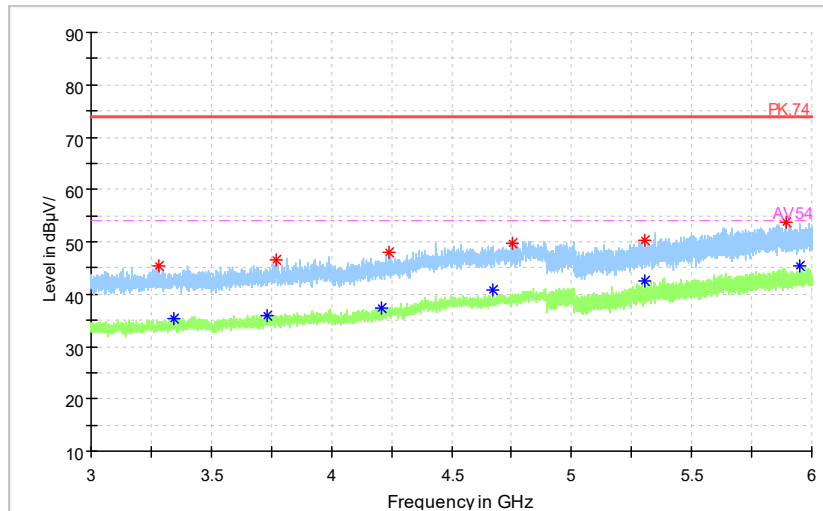

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

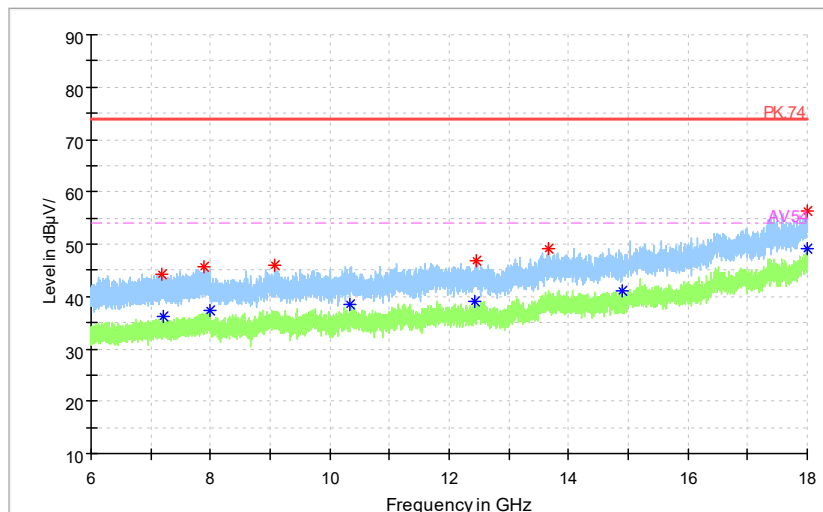


Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)




Full Spectrum

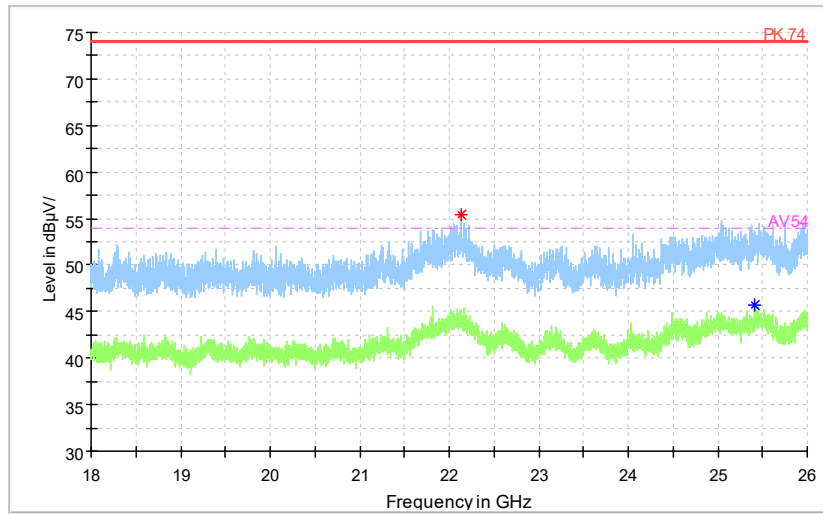


- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs PK+
- PK.74
- Final_Result PK+
- Final_Result AVG
- Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Carrier frequency (MHz): 2437
 Channel No.:6

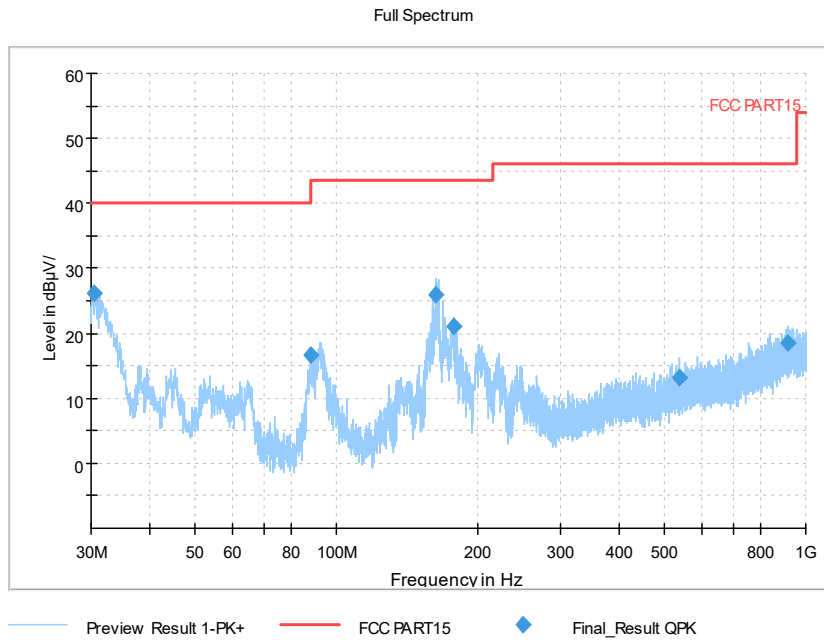


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT40)

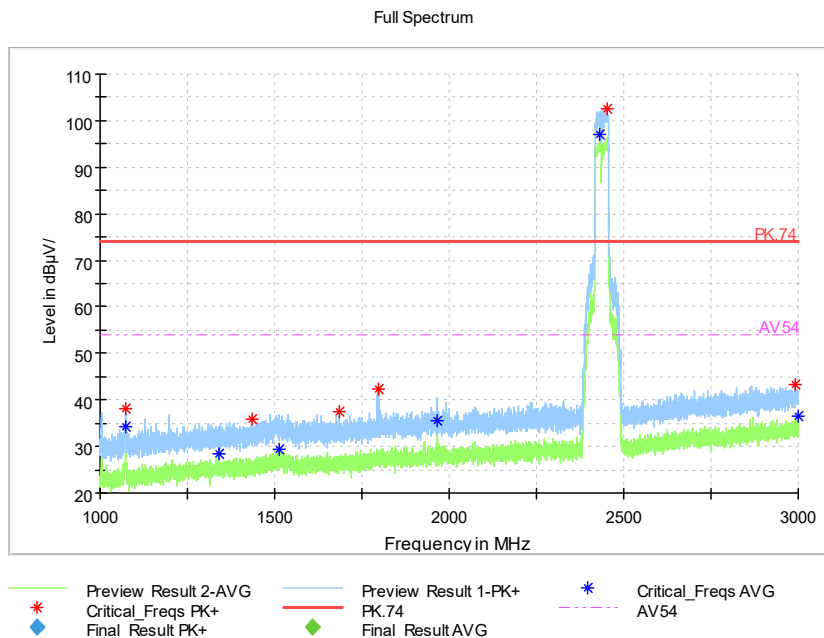

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)




Full Spectrum

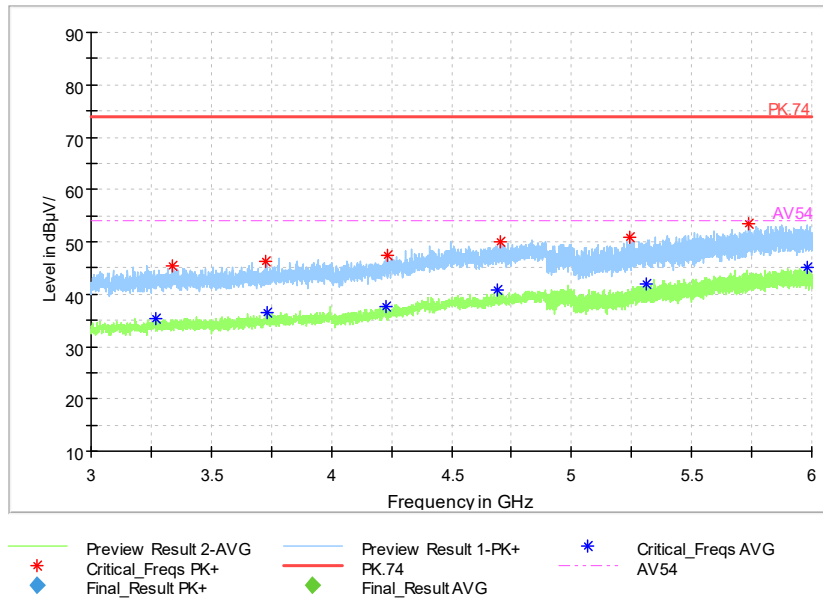

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

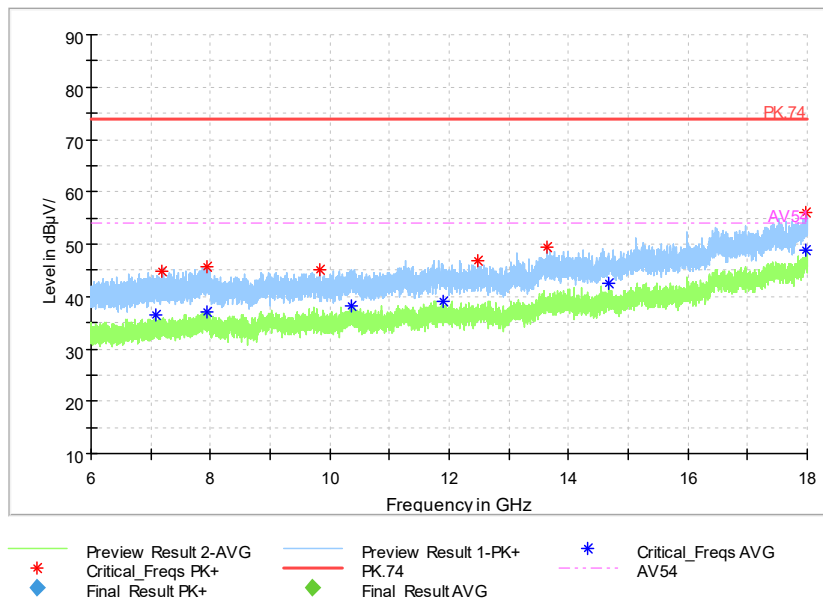

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)




Full Spectrum

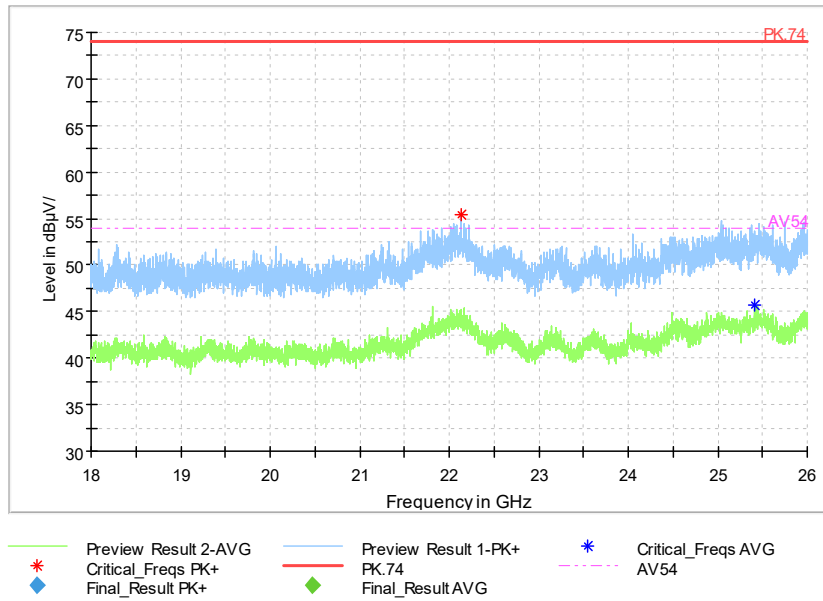


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Carrier frequency (MHz): 2452
 Channel No.:9

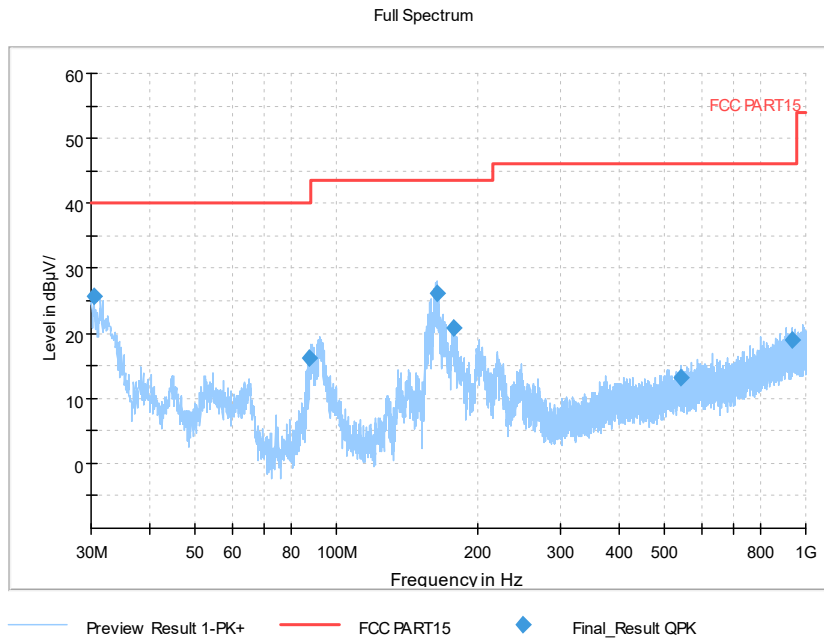


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Test Mode: 802.11n(HT40)

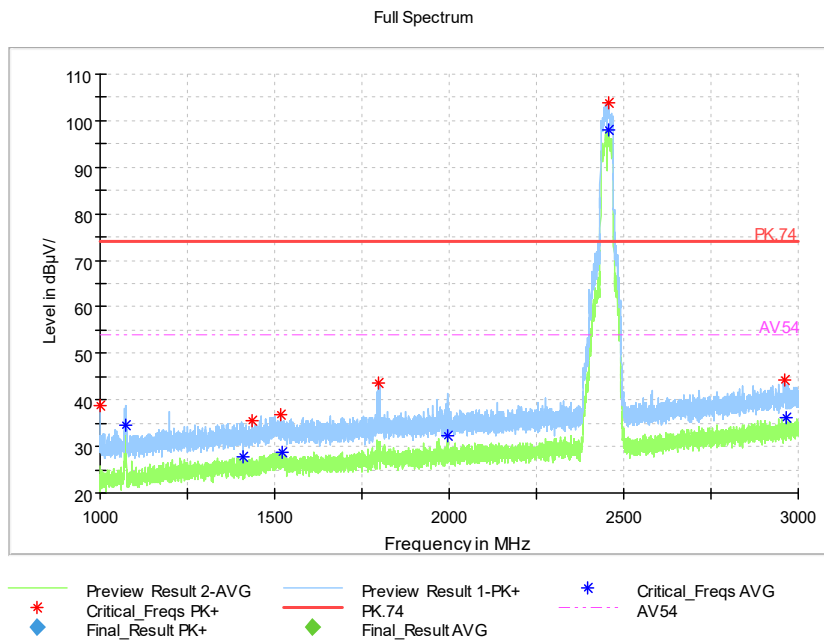

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)




Full Spectrum

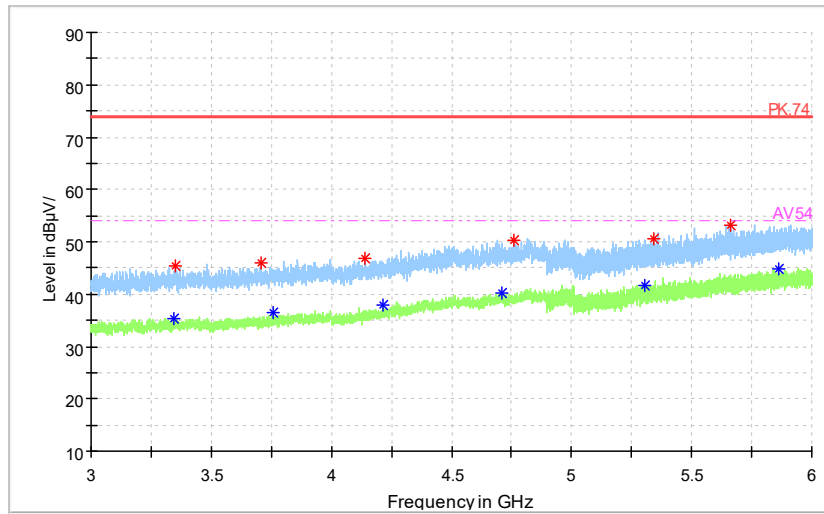

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

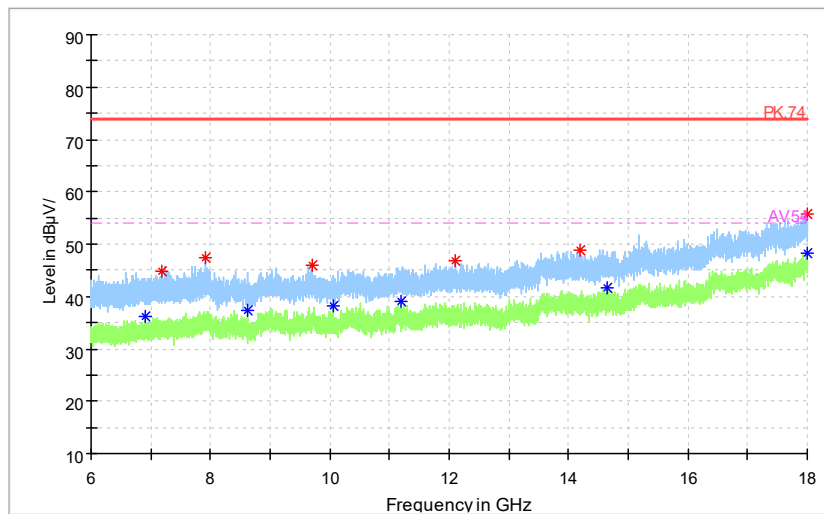


Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)



Full Spectrum

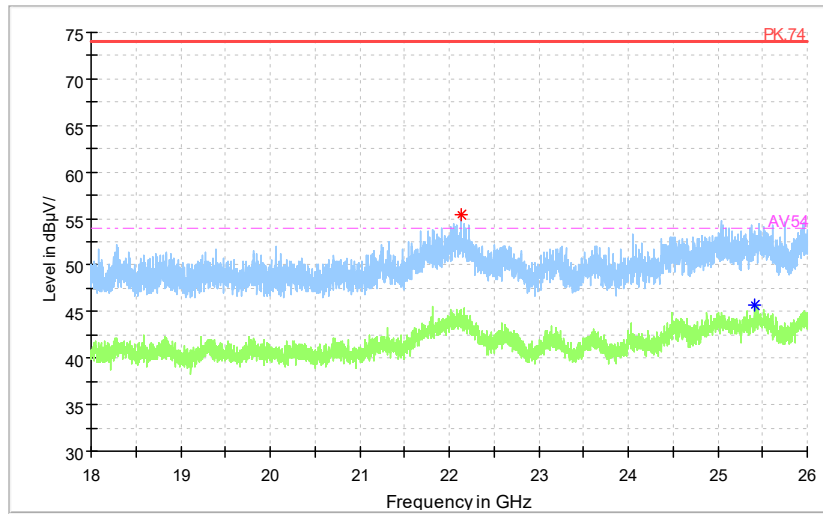

- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs PK+
- PK.74
- Final_Result PK+
- Final_Result AVG
- Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


AC Power line Conducted Emission

A “reference path loss” Corr.(dB) is established and the $L_{cable}+ATT+VDF$ is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result}=P_{mea}+ Corr.(dB)$$

Sample calculation: $(37.45 \text{ dB}\mu\text{V}) = (7.65 \text{ dB}\mu\text{V}) + (29.8 \text{ dB})$, the corresponding frequency is 0.350421MHz.

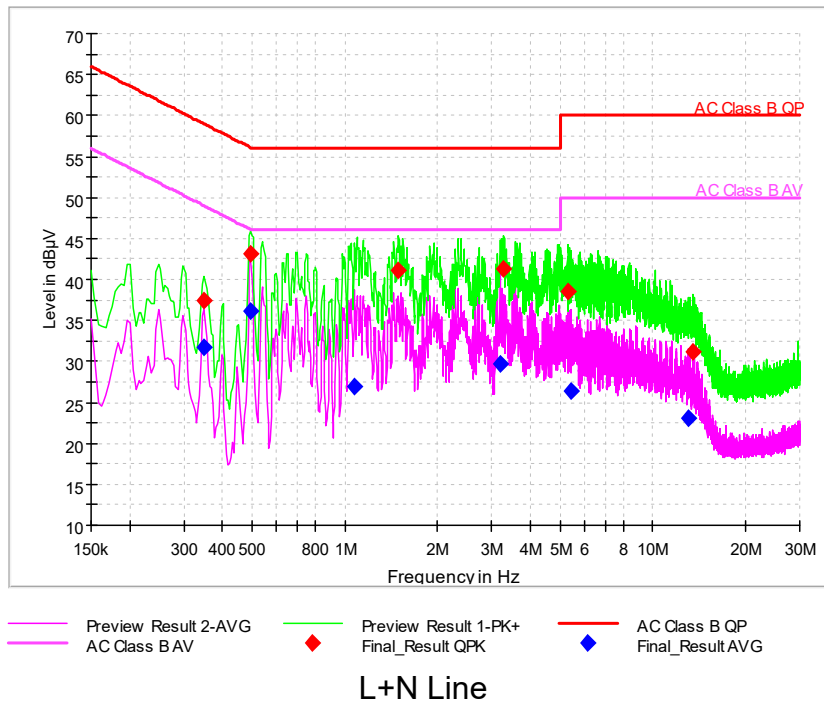



MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.350421	37.45	---	58.95	21.50	N	29.8	7.65	---
0.350421	---	31.69	48.95	17.26	L1	29.7	---	1.99
0.495407	---	36.13	46.08	9.94	L1	29.7	---	6.43
0.495407	43.21	---	56.08	12.87	L1	29.7	13.51	---
1.075350	---	26.85	46.00	19.15	N	29.8	---	-2.95
1.493250	41.15	---	56.00	14.85	N	29.8	11.35	---
3.186171	---	29.66	46.00	16.34	L1	29.8	---	-0.14
3.288514	41.23	---	56.00	14.77	L1	29.8	11.43	---
5.331107	38.45	---	60.00	21.55	L1	29.8	8.65	---
5.433450	---	26.46	50.00	23.54	N	29.9	---	-3.44
13.109164	---	23.13	50.00	26.87	N	30.1	---	-6.97
13.561179	31.17	---	60.00	28.83	N	30.1	1.07	---

---End of the test report---