

Measurement Results

1-0437/20-01-04_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	4
2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	7
3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	10
4. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	13
5. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	15
6. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	17
7. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	19
8. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	21
9. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	23
10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	25
11. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	28
12. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	31
13. FCC Part 15.247 TX Spurious Conduced ~ BT LE 1 Msps	34
14. FCC Part 15.247 TX Spurious Conduced ~ BT LE 1 Msps	36
15. FCC Part 15.247 TX Spurious Conduced ~ BT LE 1 Msps	38
16. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps	40
17. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps	43

EUT Summary

EUT DEFINITION	
Manufacturer	KUNBUS GmbH
Type	KE2640MODA2
Kind	NI
Serial Number Setup Number	M1 1.0
Version SW FW HW	1.2.0 1.3 PR100332R03
Comment 1 2	
Temperature [°C] Min Nom Max	-40 20 85
Voltage [V] Min Nom Max @Current Max [A]	5 5 5 @1

EUT Common Settings BT Low Energy	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	Yes
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:11:35
Ambit Temp [°C] Humidity [rel%]	23.8 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2401
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2401 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.46 15.56 15
Start [MHz] Stop [MHz]	2400.000 2402.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	741	kHz	INFO

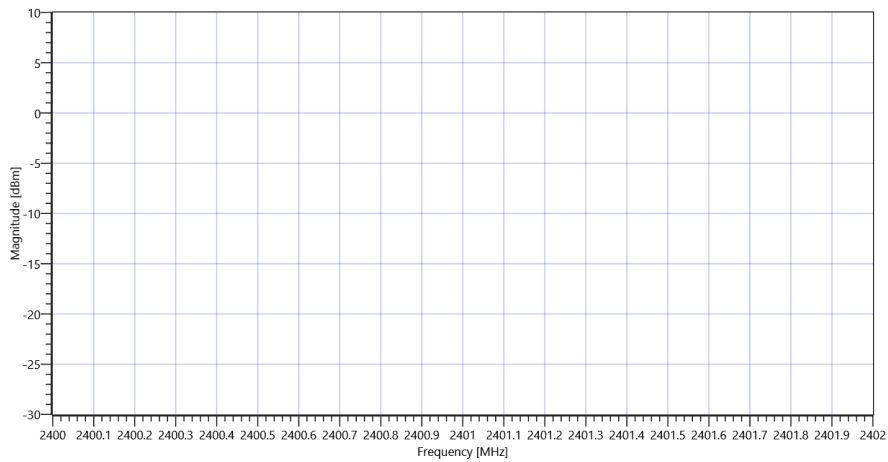


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_14012021_091211.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.46 15.56 20
Start [MHz] Stop [MHz]	2400.000 2402.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	8.58	dBm	PASS
Peak Power	---	1000	7.211075	mW	PASS
Frequency at Peak	---	---	2400.704	MHz	INFO

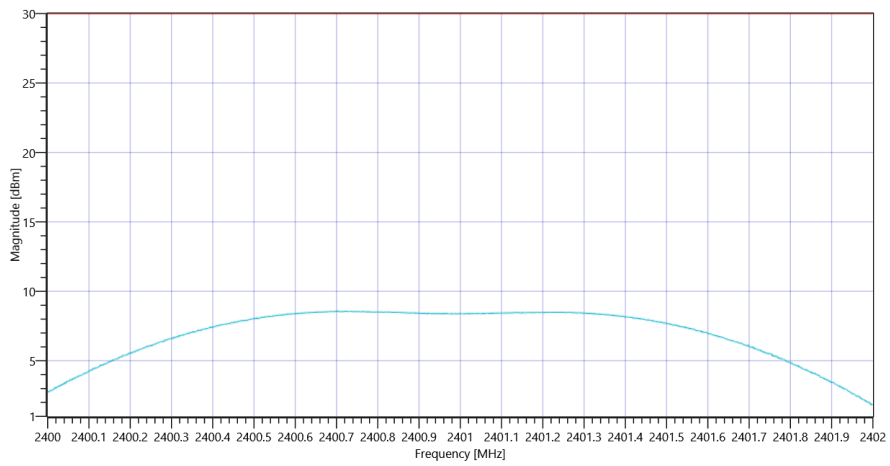

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_14012021_091231.png

TEST FINISHED

General Verdict

14.01.2021 09:12:32 / RT: 56 s

PASS

2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:38:07
Ambit Temp [°C] Humidity [rel%]	23.9 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.16 15.48 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	748	kHz	INFO

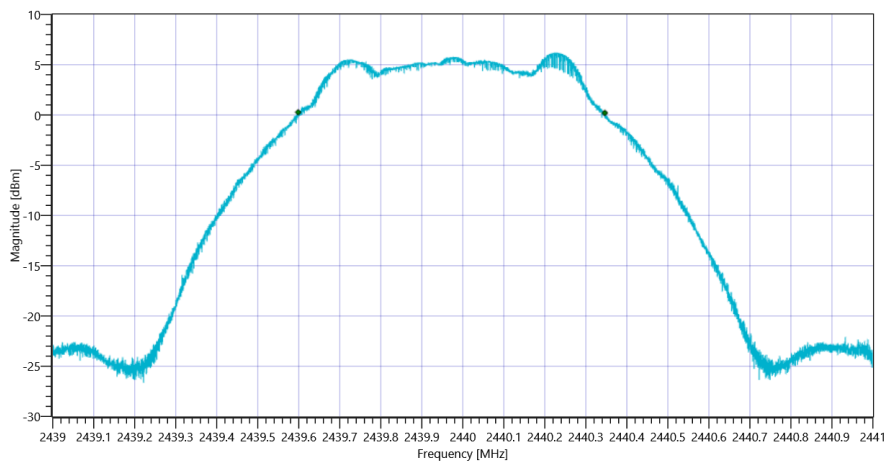


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_14012021_093839.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.16 15.48 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	7.13	dBm	PASS
Peak Power	---	1000	5.164164	mW	PASS
Frequency at Peak	---	---	2440.188	MHz	INFO

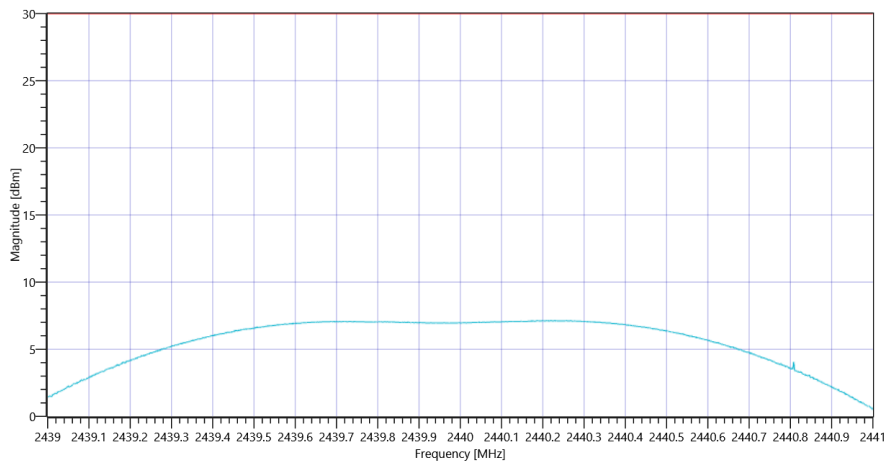

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_14012021_093858.png

TEST FINISHED

General Verdict

14.01.2021 09:38:59 / RT: 51 s

PASS

3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 10:00:59
Ambit Temp [°C] Humidity [rel%]	24.0 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.73 15.41 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	763	kHz	INFO

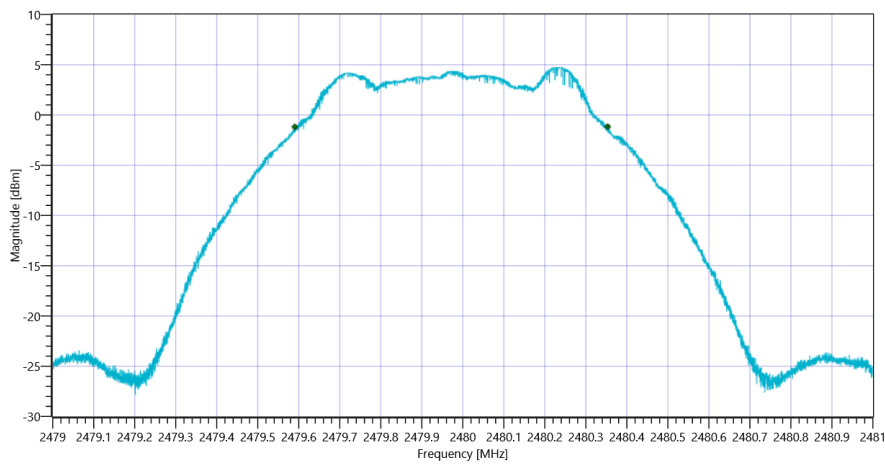


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_14012021_100130.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.73 15.41 20
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	5.74	dBm	PASS
Peak Power	---	1000	3.74973	mW	PASS
Frequency at Peak	---	---	2479.7	MHz	INFO

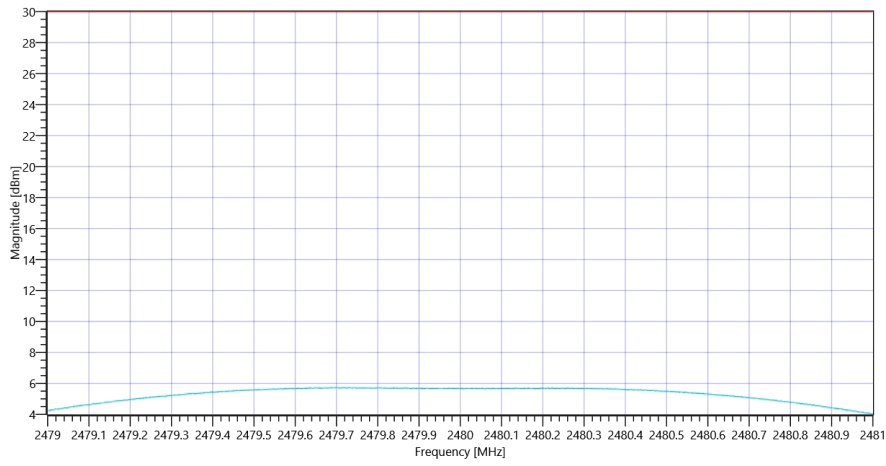

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_14012021_100149.png

TEST FINISHED

General Verdict

14.01.2021 10:01:50 / RT: 50 s

PASS

4. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:12:36
Ambit Temp [°C] Humidity [rel%]	23.8 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6DB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2401
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2401 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.47 15.56 15
Start [MHz] Stop [MHz]	2400.000 2402.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	735	kHz	PASS

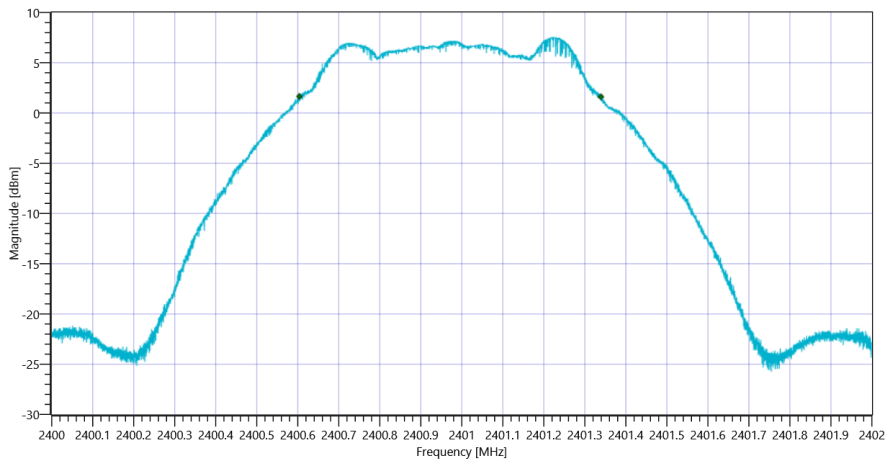

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_14012021_091548.png

TEST FINISHED

General Verdict	14.01.2021 09:15:49 / RT: 192 s	PASS
-----------------	---------------------------------	------

5. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:39:03
Ambit Temp [°C] Humidity [rel%]	23.9 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6DB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.14 15.48 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	746	kHz	PASS

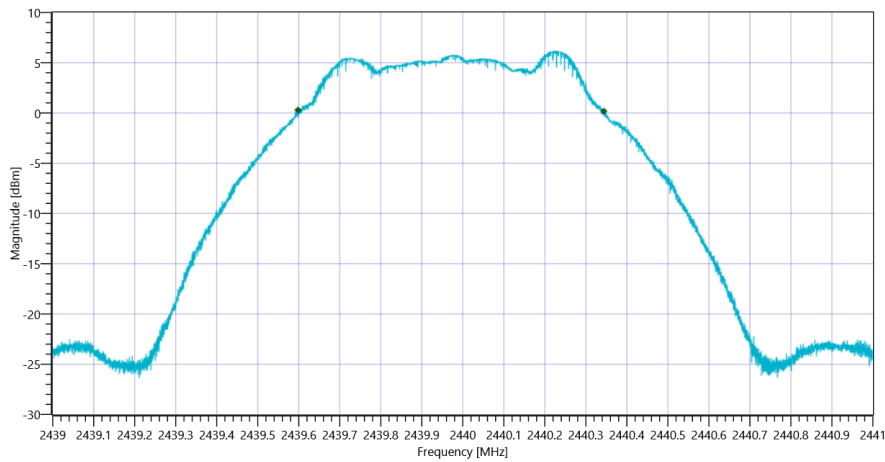

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_14012021_093935.png

TEST FINISHED

General Verdict	14.01.2021 09:39:35 / RT: 31 s	PASS
-----------------	--------------------------------	------

6. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 10:01:54
Ambit Temp [°C] Humidity [rel%]	24.0 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6DB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.69 15.41 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	763	kHz	PASS

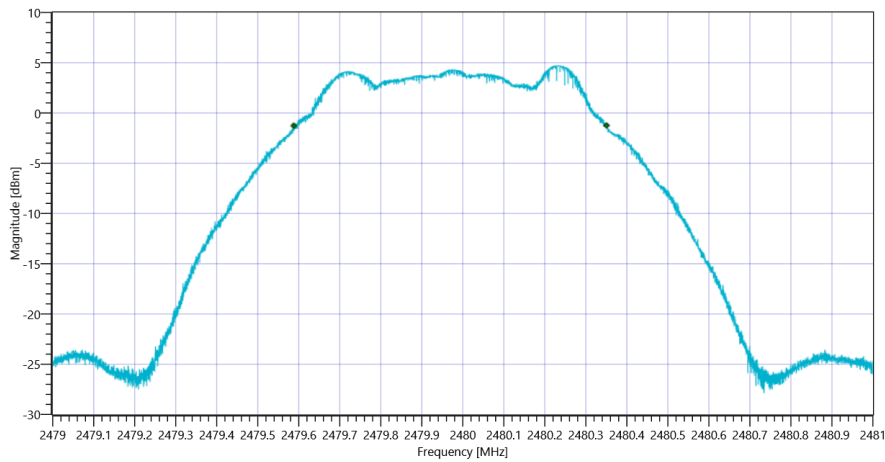

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_14012021_100225.png

TEST FINISHED

General Verdict	14.01.2021 10:02:25 / RT: 31 s	PASS
-----------------	--------------------------------	------

7. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:15:53
Ambit Temp [°C] Humidity [rel%]	23.8 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2401
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2401 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.46 15.56 15
Start [MHz] Stop [MHz]	2400.250 2401.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-8.33	dBm/3KHz	PASS

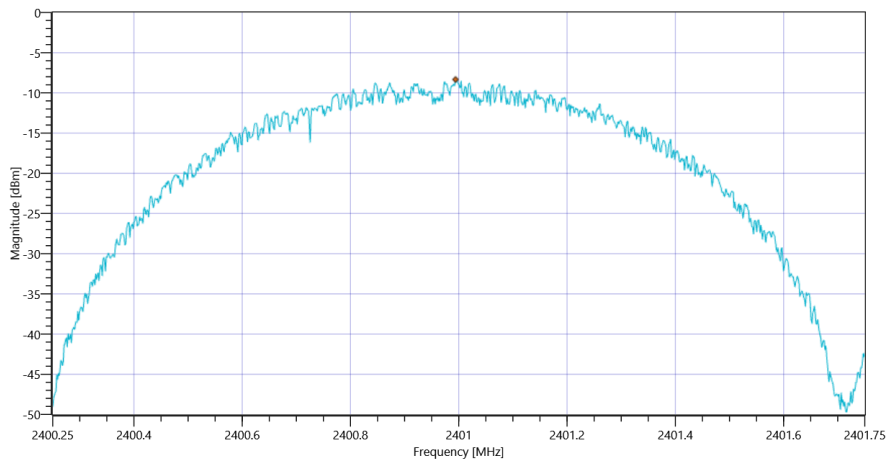

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_14012021_091645.png

TEST FINISHED

General Verdict	14.01.2021 09:16:45 / RT: 52 s	PASS
-----------------	--------------------------------	------

8. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:39:39
Ambit Temp [°C] Humidity [rel%]	23.9 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.11 15.48 15
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-9.77	dBm/3KHz	PASS

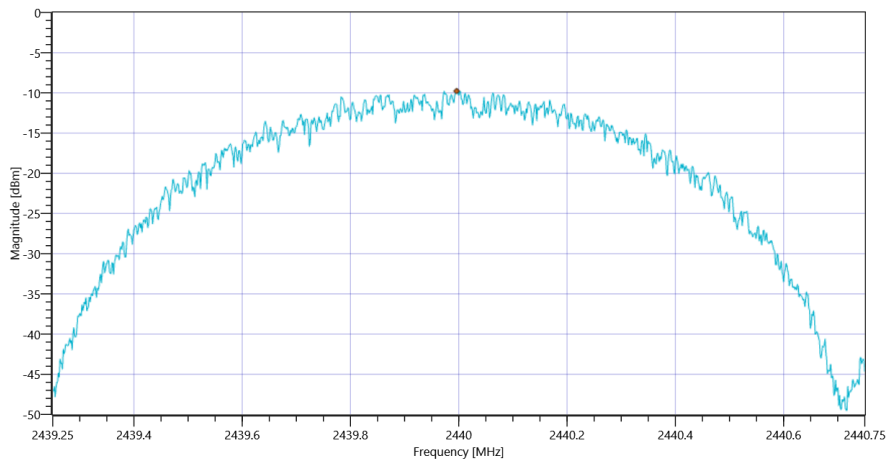

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_14012021_094021.png

TEST FINISHED

General Verdict	14.01.2021 09:40:21 / RT: 41 s	PASS
-----------------	--------------------------------	------

9. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 10:02:30
Ambit Temp [°C] Humidity [rel%]	24.0 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.68 15.41 15
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11	dBm/3KHz	PASS

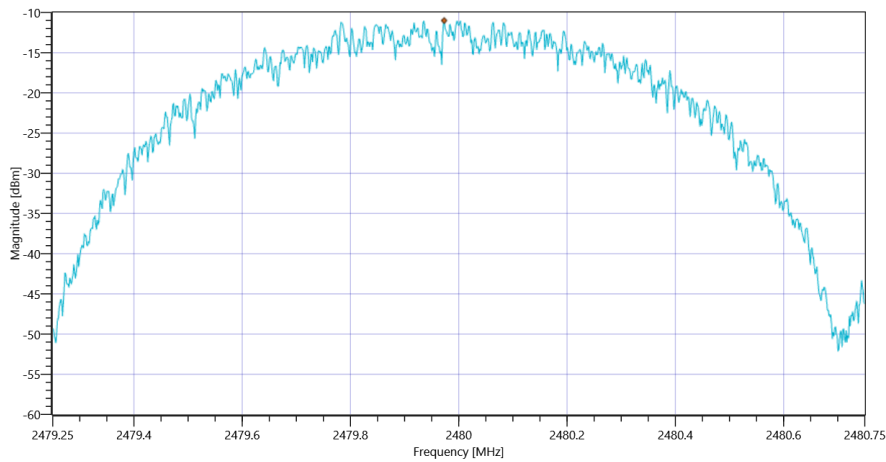

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_14012021_100310.png

TEST FINISHED

General Verdict	14.01.2021 10:03:10 / RT: 40 s	PASS
-----------------	--------------------------------	------

10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:16:49
Ambit Temp [°C] Humidity [rel%]	23.8 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20DB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2401
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2401 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.47 15.56 15
Start [MHz] Stop [MHz]	2400.000 2402.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1051	kHz	INFO
T1 99%	2400.000000	---	2400.4551	MHz	PASS
T2 99%	---	2483.500000	2401.5061	MHz	PASS

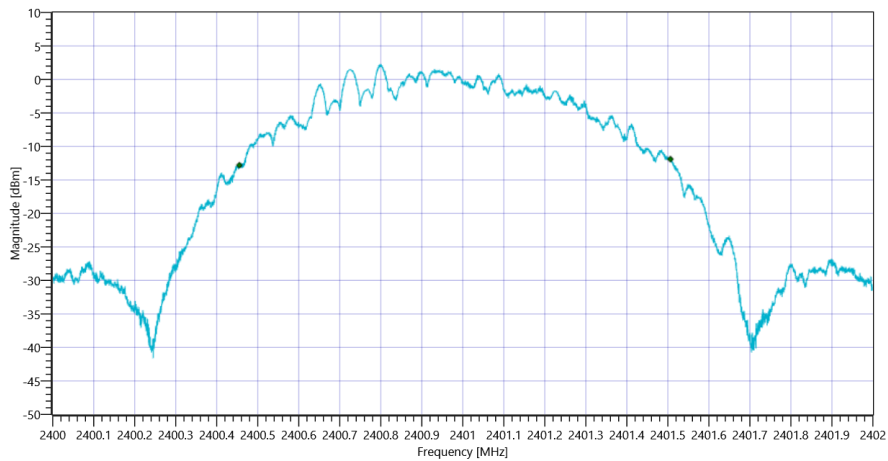


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_14012021_092651.png

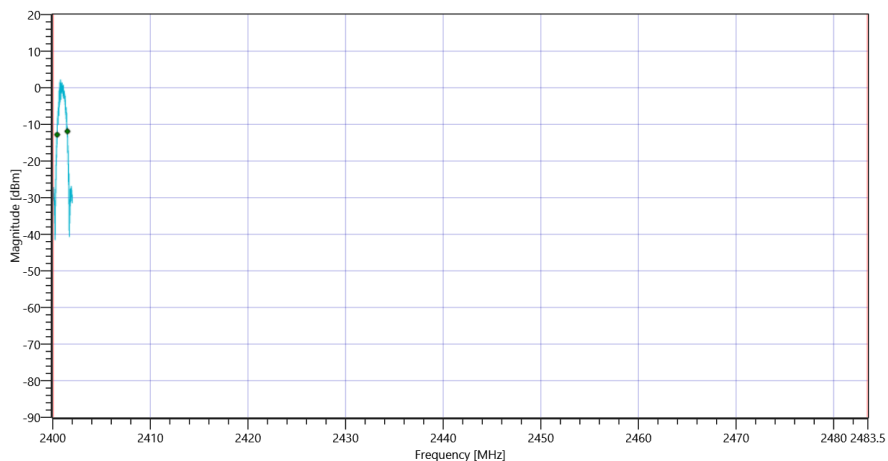


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_14012021_092657.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1186	kHz	INFO
T1 20DB	2400.000000	---	2400.3948	MHz	PASS
T2 20dB	---	2483.500000	2401.5806	MHz	PASS

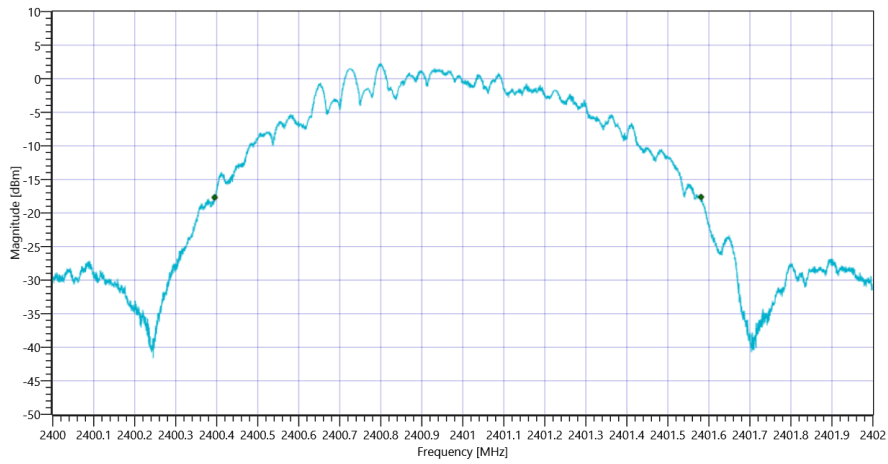

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_14012021_092703.png

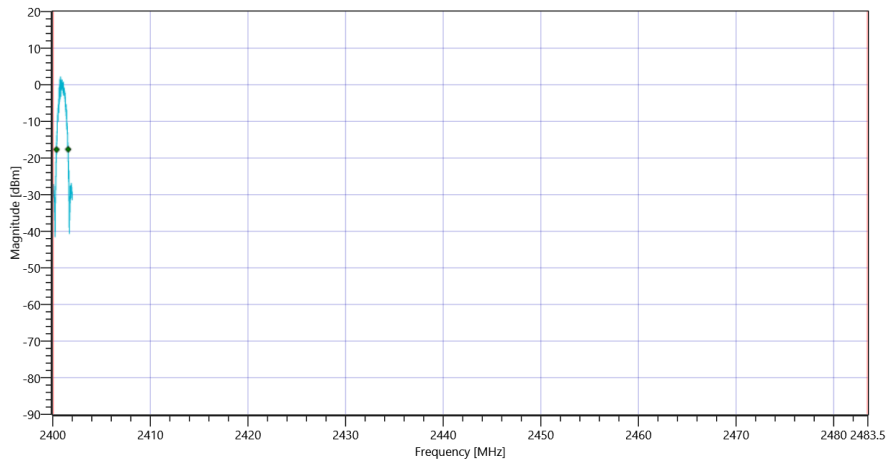

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_14012021_092709.png

TEST FINISHED

General Verdict

14.01.2021 09:27:10 / RT: 620 s

PASS

11. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:40:25
Ambit Temp [°C] Humidity [rel%]	23.9 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20DB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.09 15.48 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1052	kHz	INFO
T1 99%	2400.000000	---	2439.4553	MHz	PASS
T2 99%	---	2483.500000	2440.5077	MHz	PASS

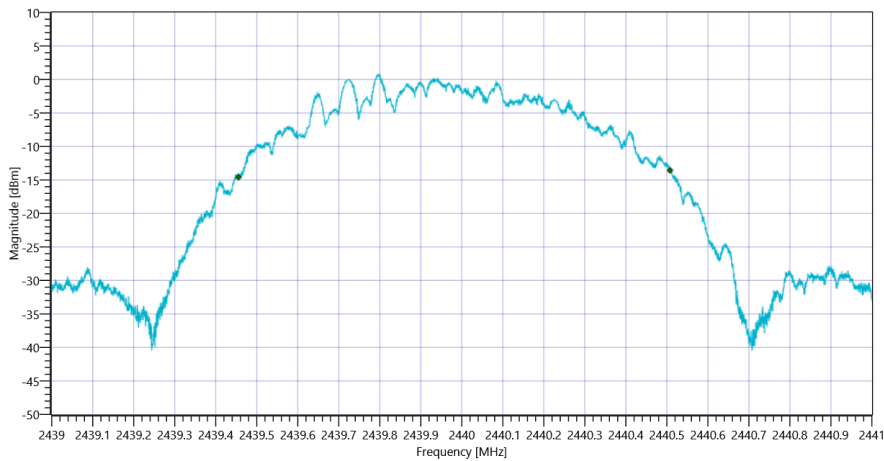


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_14012021_094057.png

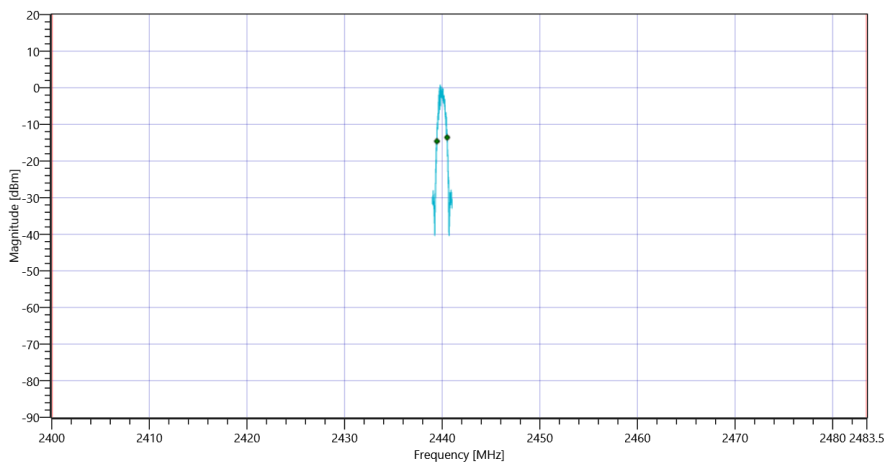


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_14012021_094103.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1188	kHz	INFO
T1 20DB	2400.000000	---	2439.3920	MHz	PASS
T2 20dB	---	2483.500000	2440.5796	MHz	PASS

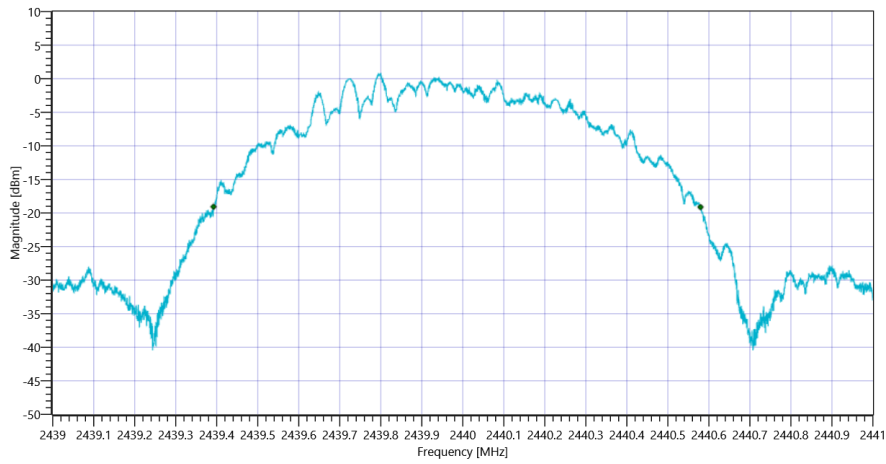

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS 20dB_14012021_094109.png

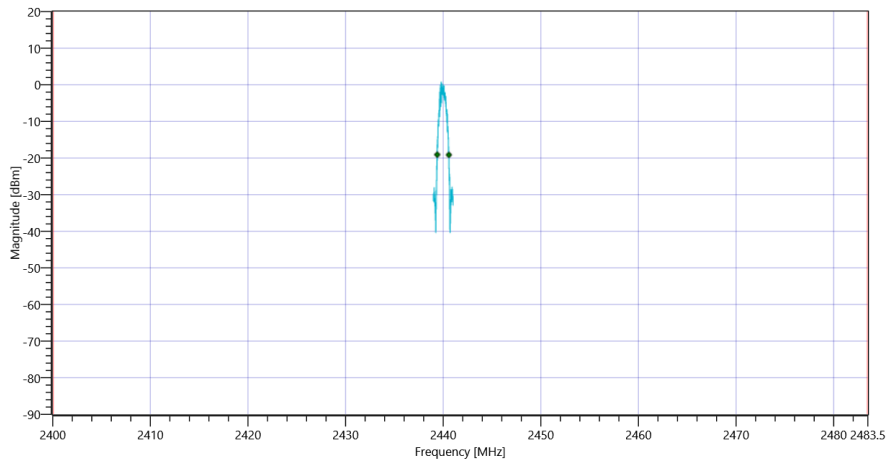

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS_14012021_094115.png

TEST FINISHED

General Verdict

14.01.2021 09:41:16 / RT: 50 s

PASS

12. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 10:03:15
Ambit Temp [°C] Humidity [rel%]	24.0 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20DB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.65 15.41 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1057	kHz	INFO
T1 99%	2400.000000	---	2479.4501	MHz	PASS
T2 99%	---	2483.500000	2480.5075	MHz	PASS

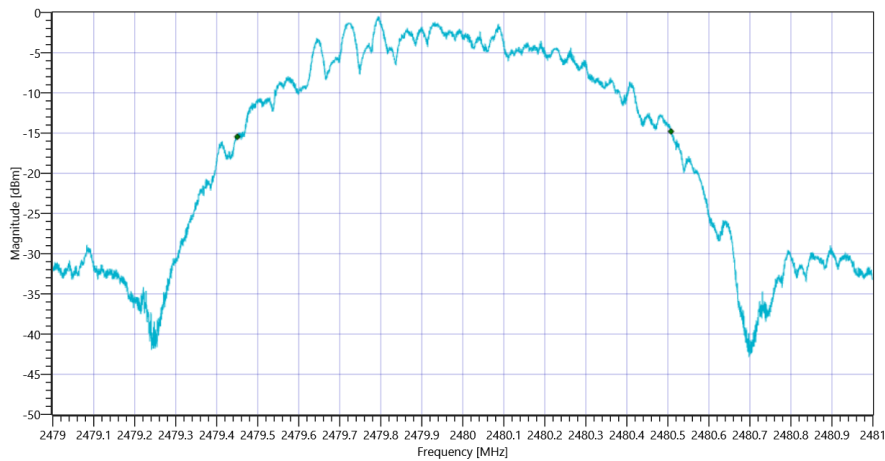


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_14012021_100346.png

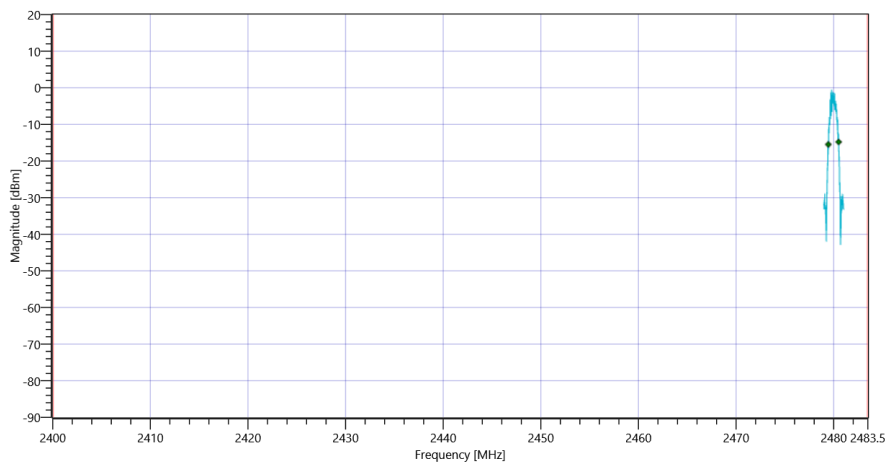


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_14012021_100351.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1188	kHz	INFO
T1 20DB	2400.000000	---	2479.3888	MHz	PASS
T2 20dB	---	2483.500000	2480.5766	MHz	PASS

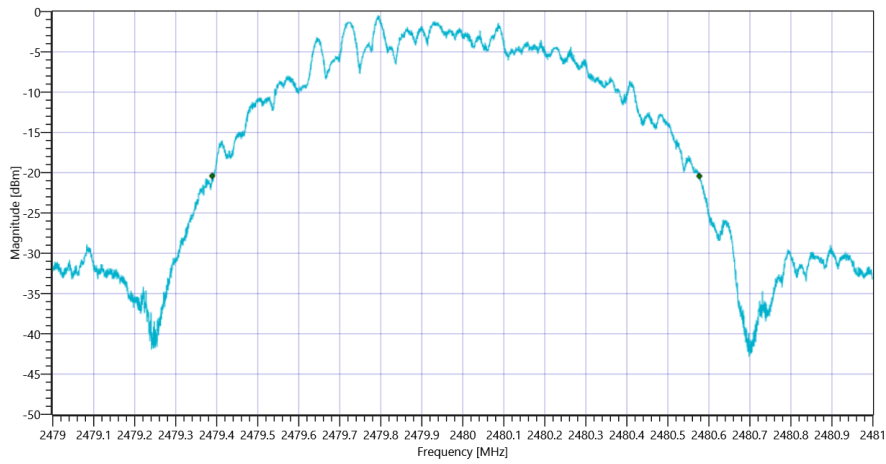

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_14012021_100358.png

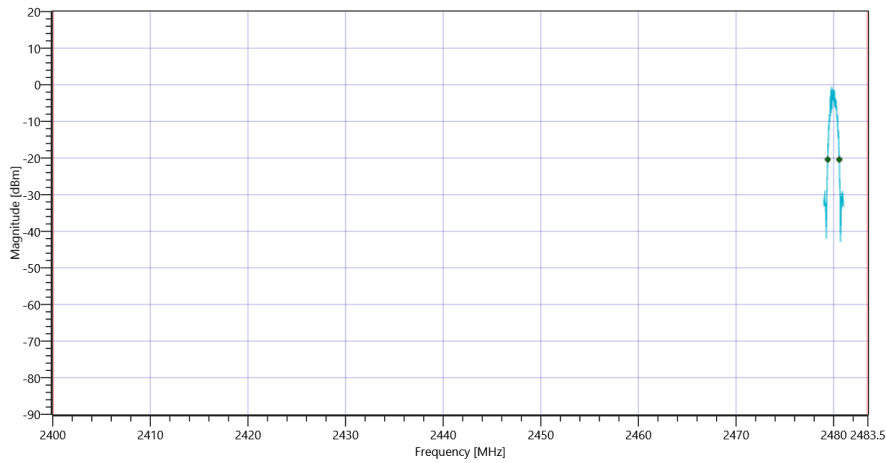

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_14012021_100404.png

TEST FINISHED

General Verdict

14.01.2021 10:04:04 / RT: 49 s

PASS

13. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp

Test References	
TC Start	14.01.2021 09:27:14
Ambit Temp [°C] Humidity [rel%]	23.9 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msp
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2401
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2401 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.48 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2401.33 MHz	---	---	7.34	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	15.68	dB	INFO

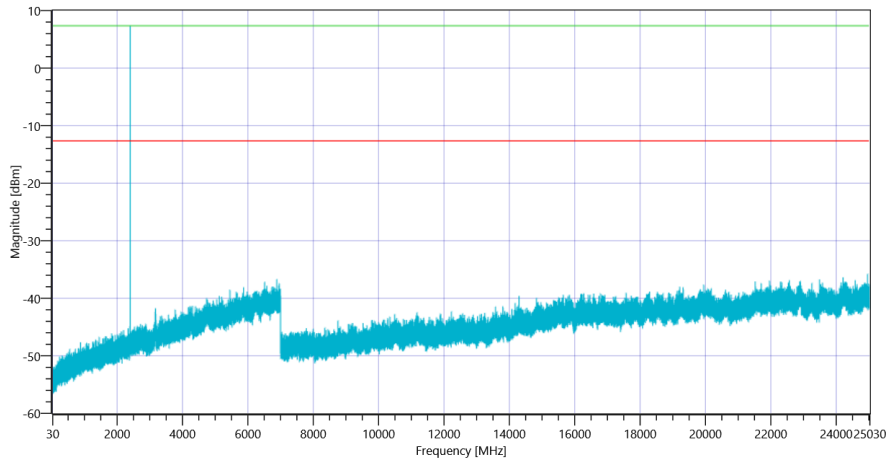

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2401_14012021_093224.png

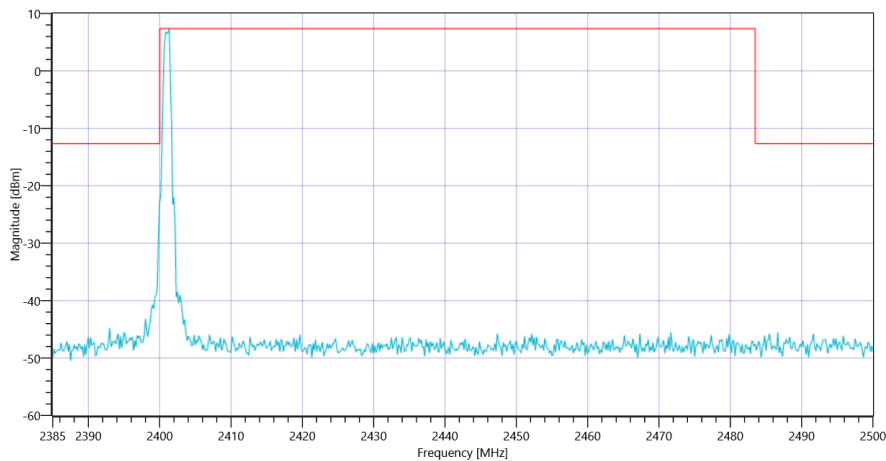

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2401_14012021_093228.png

TEST FINISHED

General Verdict

14.01.2021 09:32:29 / RT: 315 s

PASS

14. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:41:20
Ambit Temp [°C] Humidity [rel%]	23.9 25
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.10 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	5.62	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 6778.667 MHz	0	---	21.96	dB	INFO

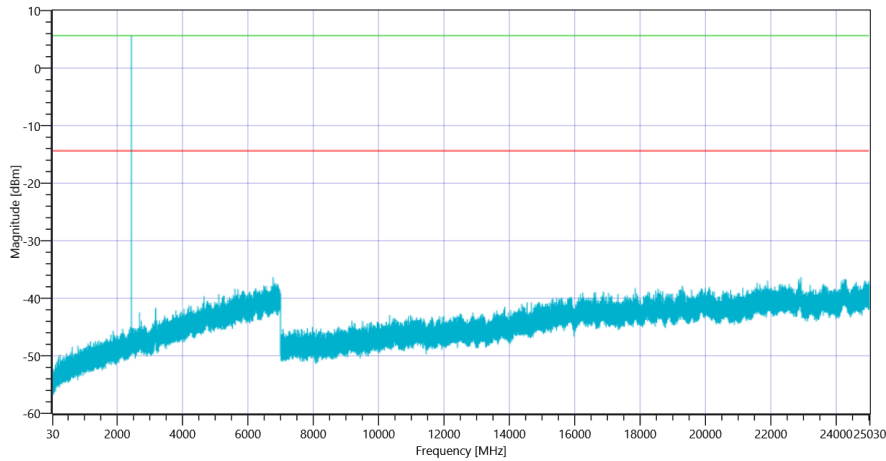

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_14012021_094624.png

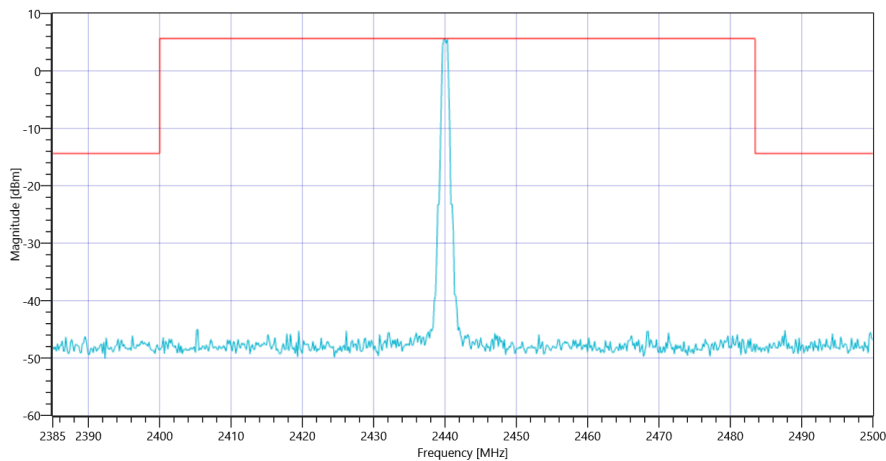

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_14012021_094629.png

TEST FINISHED

General Verdict

14.01.2021 09:46:30 / RT: 309 s

PASS

15. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp

Test References	
TC Start	14.01.2021 10:04:09
Ambit Temp [°C] Humidity [rel%]	24.0 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msp
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.67 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2479.83 MHz	---	---	4.08	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22857.333 MHz	0	---	20.85	dB	INFO

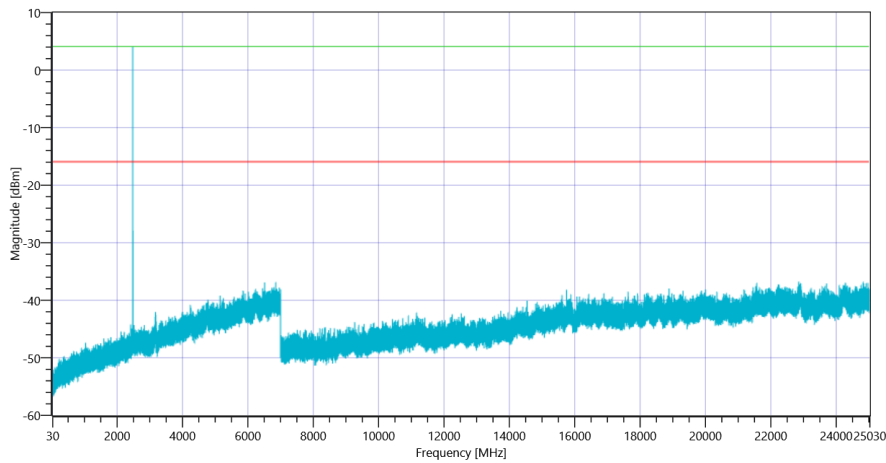

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_14012021_100913.png

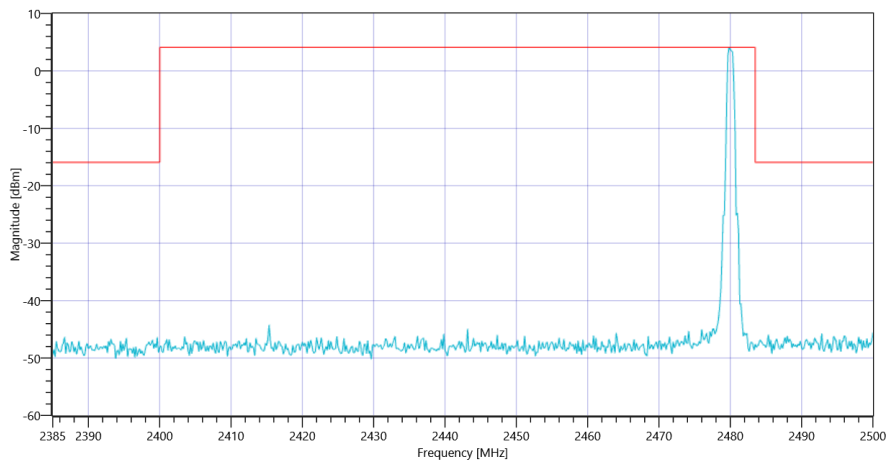

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_14012021_100917.png

TEST FINISHED

General Verdict

14.01.2021 10:09:19 / RT: 310 s


PASS

16. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 09:32:33
Ambit Temp [°C] Humidity [rel%]	23.8 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2401
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Antenna Gain Table	
Freq [MHz]	Gain [dBi]
1000	0
2402	0
2500	0

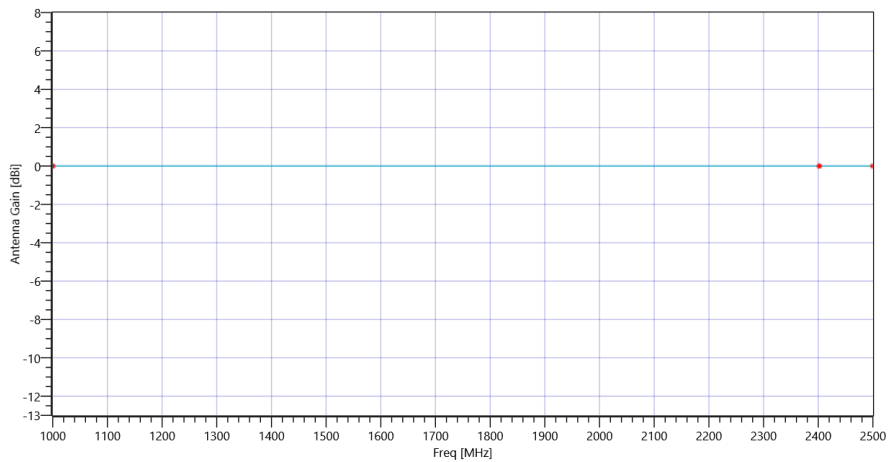

Plot_GainTable_14012021_093240.png

Test at TX 2401 MHz

Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

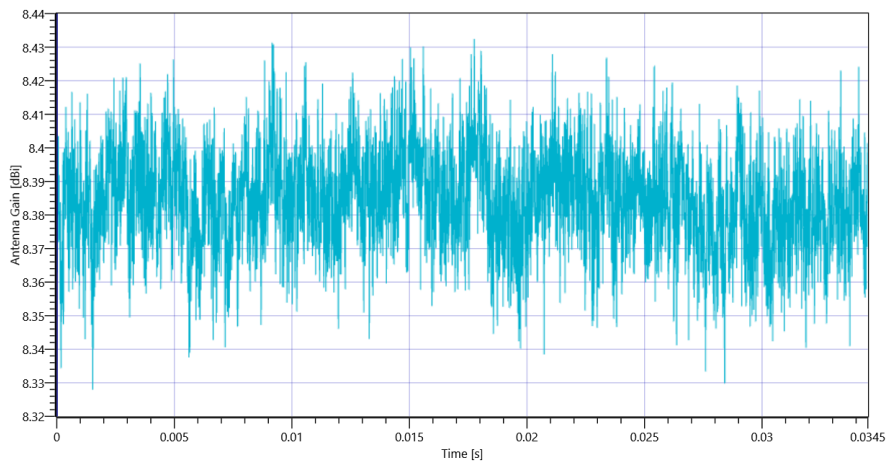


Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps 2401 MHz - DutyCycle_14012021_093623.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.51 15.56 20
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain	
Considered Antenna Gain: [dBi]:	0 @ 2389.5MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	INFO
Band Power Avg	---	---	-52.03	dBm	INFO
Band Power Avg DC corrected	---	---	-52.03	dBm	PASS

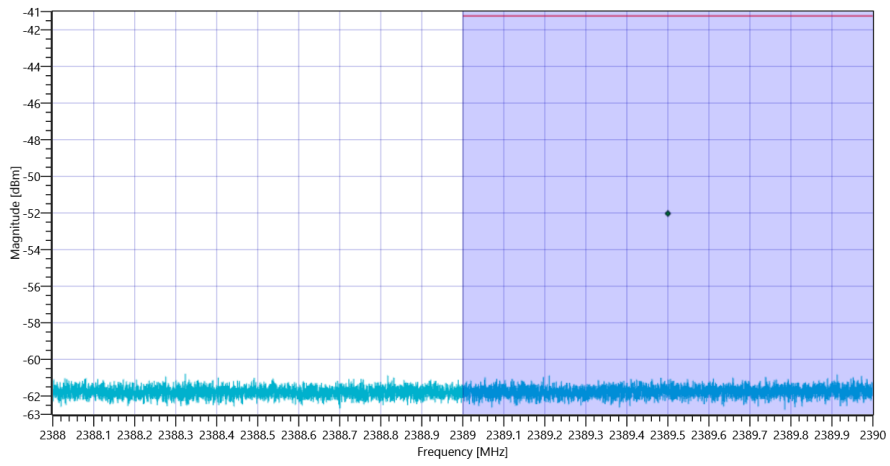

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps_14012021_093650.png

TEST FINISHED

General Verdict

14.01.2021 09:36:51 / RT: 257 s


PASS

17. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps

Test References	
TC Start	14.01.2021 10:09:23
Ambit Temp [°C] Humidity [rel%]	24.0 24
System Version	1.9.9.2
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Antenna Gain Table	
Freq [MHz]	Gain [dBi]
1000	0
2402	0
2500	0

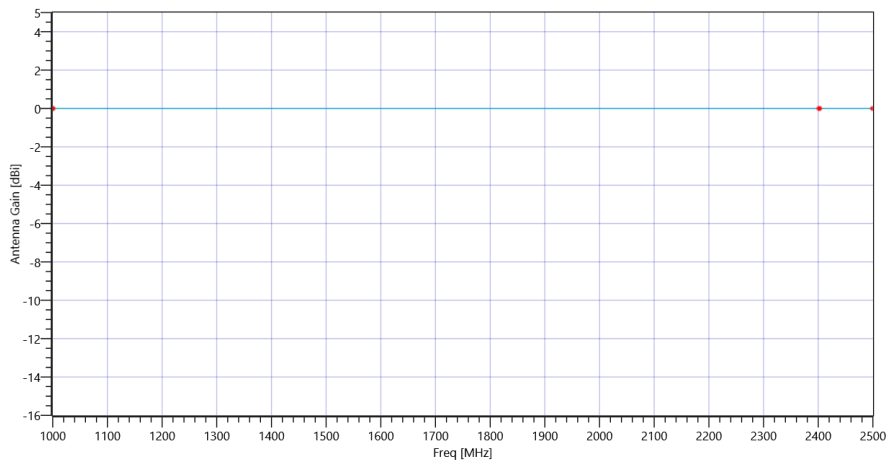

Plot_GainTable_14012021_100930.png

Test at TX 2480 MHz

Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

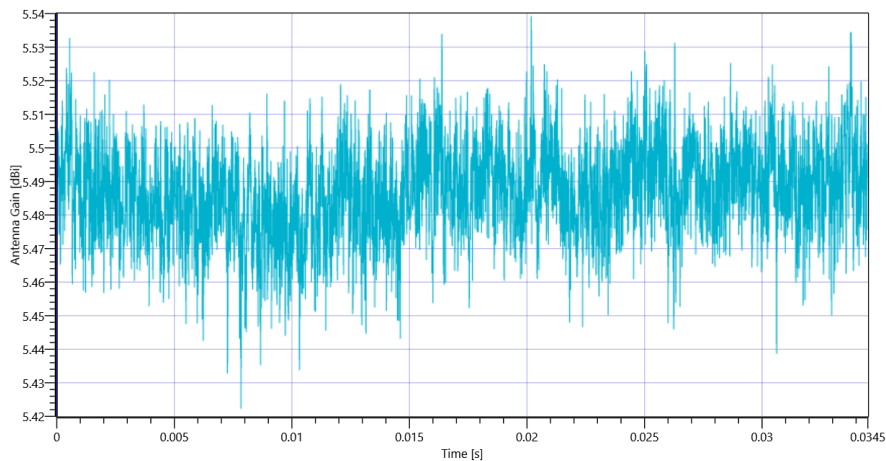


Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps 2480 MHz - DutyCycle_14012021_100947.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.69 15.41 20
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain	
Considered Antenna Gain: [dBi]:	0 @ 2484MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	INFO
Band Power Avg	---	---	-50.91	dBm	INFO
Band Power Avg DC corrected	---	---	-50.91	dBm	PASS

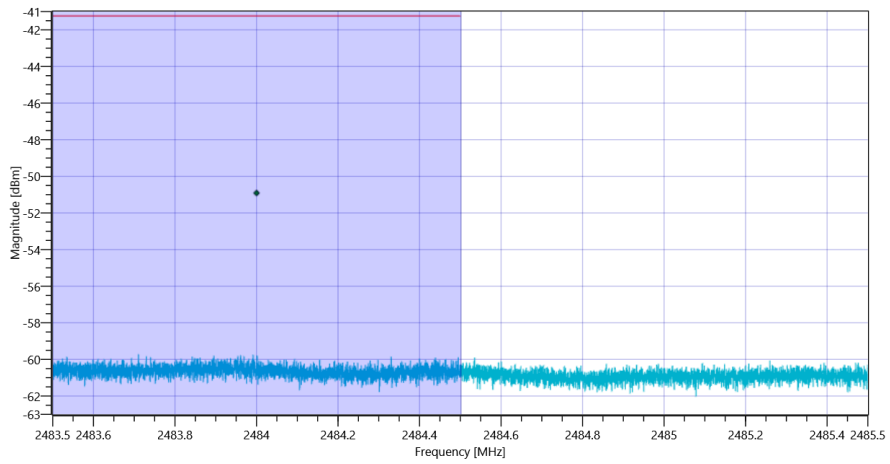

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ BT LE 1 Msps_14012021_101013.png

TEST FINISHED

General Verdict

14.01.2021 10:10:14 / RT: 50 s

PASS

- END OF DOCUMENT -