

# RADIO TEST REPORT

**Product** : Gaming Headset  
**Model Name** : PRO-HS  
**FCC ID** : 2AYYS-PRO-HS  
**Test Regulation** : FCC 47 CFR Part 15 Subpart C (Section 15.247)  
**Received Date** : 2024/3/4  
**Test Date** : 2024/3/12 ~ 2024/3/18  
**Issued Date** : 2024/4/15

**Applicant** : Luxshare Precision Industry Co., Ltd.  
Floor 2,Block A,Sanyo New Industrial Area, West Haoyi  
Community,Shajing Subdistrict Office, Bao an District  
Shenzhen, P. R. China

**Issued By** : Underwriters Laboratories Taiwan Co., Ltd.  
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd.,  
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
Telephone :+886-2-7737-3000  
Facsimile (FAX) :+886-3-583-7948



---

# Table of Contents

<b>1. Attestation of Test Results</b> .....	<b>4</b>
<b>2. Summary of Test Results</b> .....	<b>5</b>
<b>3. Test Methodology and Reference Procedures</b> .....	<b>6</b>
<b>4. Facilities and Accreditation</b> .....	<b>6</b>
<b>5. Measurement Uncertainty</b> .....	<b>7</b>
<b>6. Equipment under Test</b> .....	<b>8</b>
6.1. Description of EUT .....	8
6.2. Channel List.....	9
6.3. Test Condition .....	10
6.4. Description of Available Antennas.....	11
6.5. Test Mode Applicability and Tested Channel Detail .....	12
6.6. Duty cycle.....	13
<b>7. Test Equipment</b> .....	<b>14</b>
<b>8. Description of Test Setup</b> .....	<b>16</b>
<b>9. Test Results</b> .....	<b>19</b>
9.1. 6dB Bandwidth .....	19
9.2. Conducted Output Power.....	22
9.3. Power Spectral Density .....	25
9.4. Conducted Out of Band Emission .....	28
9.5. Radiated Spurious Emission.....	35
9.6. AC Power Line Conducted Emission.....	55

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 1. Attestation of Test Results

**APPLICANT:** Luxshare Precision Industry Co., Ltd.  
Floor 2,Block A,Sanyo New Industrial Area, West Haoyi  
Community,Shajing Subdistrict Office, Bao an District Shenzhen, P.  
R. China

**MANUFACTURER:** Luxshare Precision Industry Co., Ltd.  
2nd floor,A building,Sanyo New Industrial Area,West of  
Maoyi,Shajing Street,Ban'an District,Shenzhen City,Guangdong  
Province,China

**EUT DESCRIPTION:** Gaming Headset

**BRAND:** ALIENWARE

**MODEL:** PRO-HS

**SAMPLE STAGE:** Engineering Verification Test sample

**DATE of TESTED:** 2024/3/12 ~ 2024/3/18

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart C (Section 15.247)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:



Sally Lu  
Project Handler

Date : 2024/4/15

Approved and Authorized By:



Eric Lee  
Senior Laboratory Engineer

Date : 2024/4/15

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
Telephone : +886-2-7737-3000  
Facsimile (FAX) : +886-3-583-7948

## 2. Summary of Test Results

Summary of Test Results		
FCC Clause	Test Items	Result
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Conducted Output Power	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Antenna Port Emission	PASS
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS
15.207	AC Power Conducted Emission	PASS
15.203	Antenna Requirement	PASS

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

### 3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB558074 D01 Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

### 4. Facilities and Accreditation

<b>Test Location</b>	Underwriters Laboratories Taiwan Co., Ltd.
<b>Address</b>	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
<b>Accreditation Certificate</b>	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

#### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 5. Measurement Uncertainty

For statement of conformity, Simple acceptance (Section 3.1.4 of IEC Guide 115) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

Determining compliance based on the results of the compliance measurement, not considering measurement instrumentation uncertainty.

Measurement	Frequency	Uncertainty
Conducted disturbance at mains terminals ports	150kHz ~ 30MHz	3.1 dB
RF Conducted	9 kHz - 40GHz	2.3 dB
Radiated disturbance below 30MHz	9 kHz - 30 MHz	3.2 dB
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	6.1 dB
Radiated disturbance above 1 GHz	1GHz ~ 40GHz	5.1 dB

## 6. Equipment under Test

### 6.1. Description of EUT

<b>Product</b>	Gaming Headset
<b>Brand Name</b>	ALIENWARE
<b>Model Name</b>	PRO-HS
<b>Normal Voltage</b>	5Vdc from host 3.7Vdc from battery

<b>Operating Frequency</b>	2402MHz ~ 2480MHz
<b>Modulation</b>	GFSK
<b>Transfer Rate</b>	Up to 2 Mbps
<b>Maximum Output Power</b>	7.32 dBm
<b>Sample ID</b>	Conducted Test: 6998225 Radiated Test: 6998225

Note:

1. The EUT contains following accessory devices:

<b>Product</b>	<b>Brand</b>	<b>Model</b>	<b>Description</b>
FT573439P Battery	Hangzhou Future Power	FT573439P	3.7Vdc, 750 mAh
Charging cable	LUXSHARE	HW7RR	Length: 2m
USB Dongle	ALIENWARE	UD2202u	Compliance Approval ID: CCAQ22LP0250T6
USB-C adapter	DELL	LX001	-
Microphone	ALIENWARE	Pro-HS microphone	-

2. The EUT may have a lot of colors for marketing requirement.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual, the laboratory shall not be held responsible.

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



## 6.2. Channel List

40 channels are provided for BT-LE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 6.3. Test Condition

Test Item	Test Site No.	Environmental Condition	Input Power	Test Date	Tested by
Antenna Port Conducted Measurement	SR4	22~26°C/ 62~68%RH	5Vdc & 3.7Vdc	2024/03/15~ 2024/03/18	Rex Chen
Radiated Spurious Emission	966-2	22~26°C/ 62~68%RH	5Vdc & 3.7Vdc	2024/03/12~ 2024/03/15	Rex Chen
AC power Line Conducted Emission	SR1	22~26°C/ 62~68%RH	5Vdc & 3.7Vdc	2024/03/14~ 2024/03/15	Rex Chen

FCC Test Firm Registration Number: 498077

IC Company Number: 23421

#### Sample Calculation:

##### Antenna Port Conducted Measurement:

- Where relevant, the follow sample calculation is provided:  
 Result Value (dBm) = Reading Value (dBm) +Attenuator Factor (dB) + Cable Loss (dB).  
 Example: Result Value (10dBm) = Reading Value (-2dBm) +Attenuator Factor (10dB) + Cable Loss(2dB).  
 \*Test plot only shown the “Result Value”.

##### Radiated Spurious Emission:

- Where relevant, the follow sample calculation is provided:  
 Result Value (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).  
 Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).  
 Example: Result Value (34.5dBuV/m) = Reading Value (40.1dBuV) + Antenna Factor (18.7dB/m) + Cable Loss (4.2dB) - Preamp Factor (28.5dB).

##### AC power Line Conducted Emission:

- Where relevant, the follow sample calculation is provided:  
 Result Value (dBuV) = Reading Value (dBuV) + Correction Factor (dB).  
 Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).  
 Example: Result Value (53.7dBuV) = Reading Value (35.1dBuV) + Insertion loss(18.1dB) + Cable loss(0.5dB).

#### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

#### 6.4. Description of Available Antennas

Ant. No.	Transmitter Circuit	Brand Name	Model Name	Ant. Type	Frequency Band (MHz)	Maximum Gain (dBi)
0	Chain 0	Top-link	24001136	Monopole	2400~2500	1.24

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual, the laboratory shall not be held responsible.


## 6.5. Test Mode Applicability and Tested Channel Detail

- The fundamental of the EUT was investigated in three orthogonal axes X-Y/Y-Z/X-Z, it was determined that X-Y plane was worst-case. Therefore, all final radiated testing was performed with the EUT in X-Y plane.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.
- For below 1 GHz radiated emission and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Item	Modulation Type	Available Channel	Test Channel	Data Rate
Radiated Emissions	GFSK	0 to 39	0,19,39	1 Mbps
	GFSK	1 to 38	1,19,38	2 Mbps
Radiated Emissions (Below 1GHz)	GFSK	0 to 39	0	1 Mbps
AC Power Line Conducted Emission	GFSK	0 to 39	0	1 Mbps
				2 Mbps
Antenna Port Conducted Measurement	GFSK	0 to 39	0,19,39	1 Mbps
	GFSK	1 to 38	1,19,38	2 Mbps

### 6.6. Duty cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle	Duty Factor (dB)	VBW Set (above 1GHz)
BT LE(1Mbps)	2.120	2.500	0.8480	0.72	510Hz
BT LE(2Mbps)	1.064	2.504	0.4249	3.72	1kHz

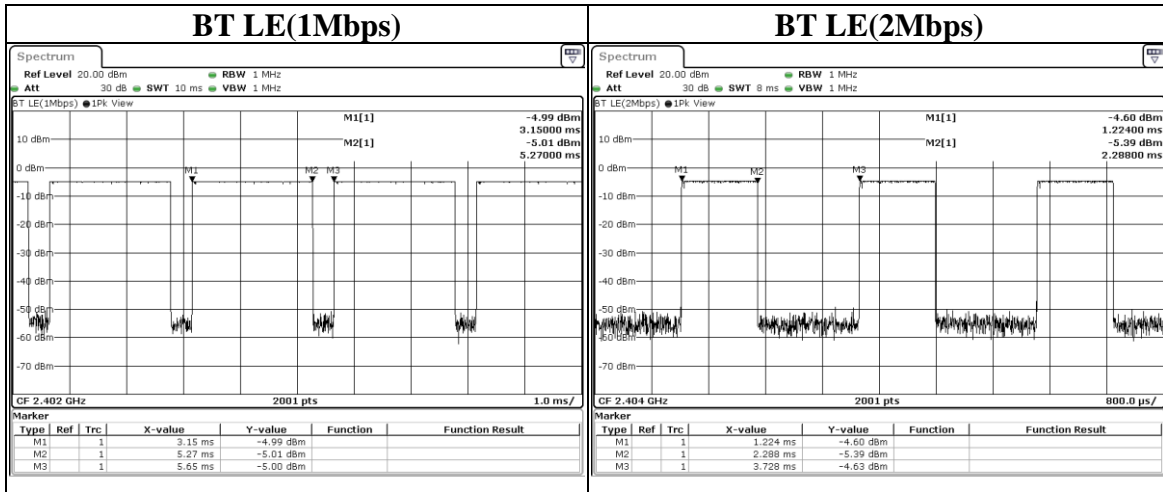

## 7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
<b>Radiated Spurious Emission</b>					
Spectrum Analyzer	Keysight	N9010A	MY56070827	2023/4/7	2024/4/6
EMI Test Receiver	Rohde & Schwarz	ESR7	101754	2023/11/22	2024/11/21
Loop Antenna	ETS lindgren	6502	00213440	2023/12/13	2024/12/12
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	2024/1/5	2025/1/4
Horn Antenna (1-18 GHz)	Schwarzbeck	BBHA 9120 D	01690	2023/12/8	2024/12/7
Horn Antenna (18-40 GHz)	Schwarzbeck	BBHA 9170	781	2023/12/27	2024/12/26
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	2023/6/7	2024/6/6
Preamplifier (1-18 GHz)	EMCI	EMC051835BE	980406	2024/1/23	2025/1/22
Preamplifier (18-40GHz)	EMCI	EMC184040SEE	980426	2023/5/9	2024/5/8
Cables (9k-18 GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2023/11/29	2024/11/28
Cables (18-40GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	2023/11/29	2024/11/28

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
<b>Antenna Port Conducted Measurement</b>					
Signal Analyzer	Rohde & Schwarz	FSVA3044	101281	2023/3/21	2024/3/20
Signal Analyzer	Rohde & Schwarz	FSV40	101490	2023/9/13	2024/9/12
Attenuator	EMCI	EMC-40ATK2W10	17002	2023/11/15	2024/11/14
USB Power Sensor	Anritsu	MA24408A	12031	2023/7/12	2024/7/11
Temperature & Humidity Test Chamber	GIANT FORCE	GTH-150- 40-CP-AR	MAA1701-010	2024/3/6	2025/3/5
<b>AC power Line Conducted Emission</b>					
EMI Test Receiver	Rohde & Schwarz	ESR7	101753	2023/10/23	2024/10/22
Two-Line V-Network	Rohde & Schwarz	ENV216	102136	2023/5/24	2024/5/23
Impuls-Begrenzer Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102219-Qt	2023/9/7	2024/9/6
Cables	TITAN	CFD200	T0732ACFD 20020A300-2	2023/5/23	2024/5/22

UL Software		
Description	Name	Version
Radiated measurement	e3	6.191211 (V6)
Conducted measurement	RF-Conducted-FCC 15247	ver 1.0
AC power Line Conducted Emission	EZ_EMG	UL-3A1.2

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 8. Description of Test Setup

### Normal Mode

#### Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	Laptop	DELL	Latitude E5470	CXSKWF2	Provide by Lab
B	Microphone	ALIENWARE	Pro-HS microphone	NA	Provide by Client

#### I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	Charging cable	LUXSHARE	HW7RR	2	Provide by Client

### Charging Mode

#### Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	Adapter	HTC	TCP900-US	79H00130-01M	Provide by Lab
B	Microphone	ALIENWARE	Pro-HS microphone	NA	Provide by Client

#### I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	Charging cable	LUXSHARE	HW7RR	2	Provide by Client




## Test Setup

Controlled using a bespoke application (Airoha Tool Kit – V3.8.0.6) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

## Setup Diagram for Test

### Normal Mode

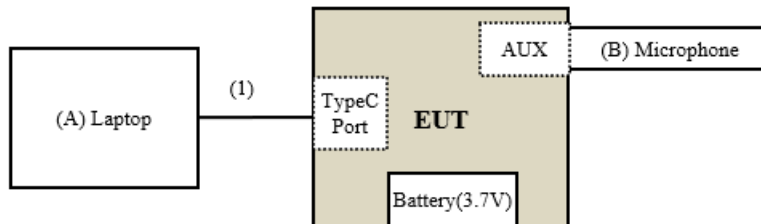

-----  
**Under Table**

-----  
**Remote Site**

## **Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

**Charging Mode**

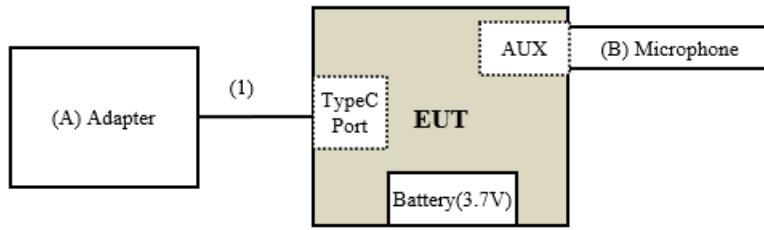

-----  
**Under Table**

-----  
**Remote Site**

## 9. Test Results

### 9.1. 6dB Bandwidth


#### Requirements

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Test procedure

- a. Set resolution bandwidth (RBW) = 100kHz.
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

**Test Data**

Mode	CH	Freq (MHz)	6dB BW (MHz)	Limit (MHz)	Result
BT LE(1Mbps)	0	2402	0.664	0.5	PASS
BT LE(1Mbps)	19	2440	0.659	0.5	PASS
BT LE(1Mbps)	39	2480	0.655	0.5	PASS
BT LE(2Mbps)	1	2404	1.241	0.5	PASS
BT LE(2Mbps)	19	2440	1.238	0.5	PASS
BT LE(2Mbps)	38	2478	1.241	0.5	PASS


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

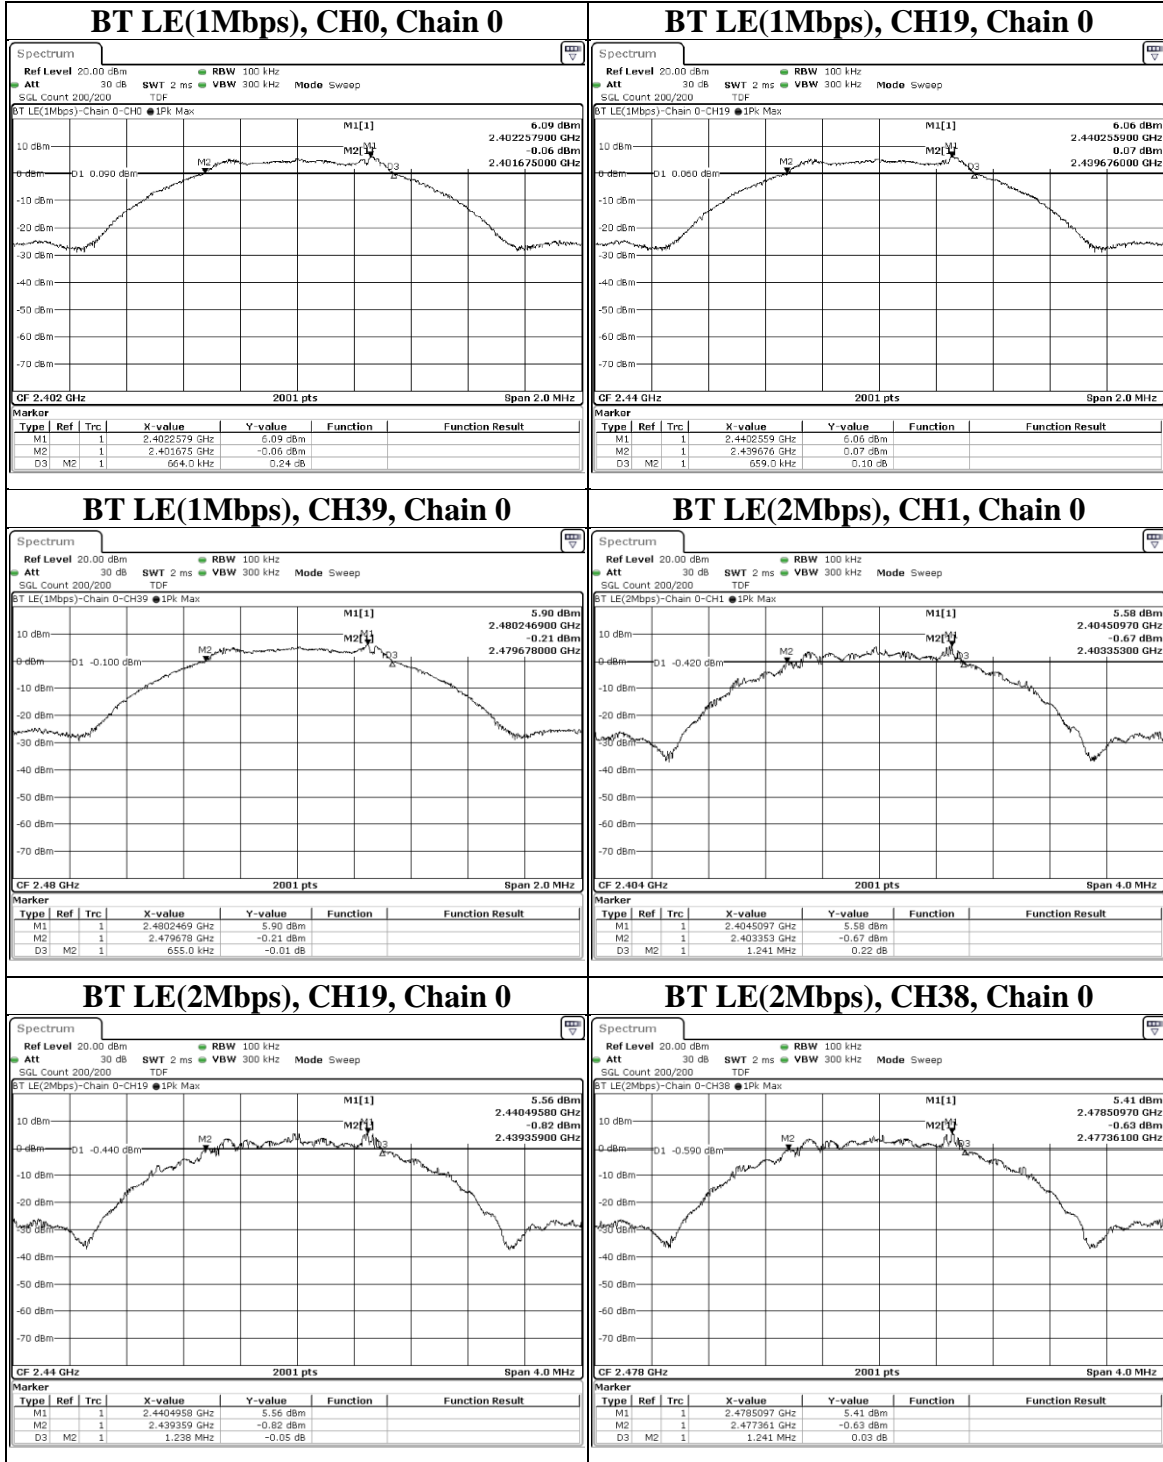

## 9.2. Conducted Output Power

### Requirements

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Note:

1.  $P_{Out}$  = maximum conducted output power in dBm,  $G_{TX}$  = the maximum transmitting antenna directional gain in dBi, B is the 26 dB emission bandwidth in megahertz
2. If EUT with Multiple Transmitter Output:
  - a. Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / Nant]$  dBi.  
Nant: Number of Transmit Antennas  
G1, G2, ..., Gn: Gain of Individual Antennas  
Example: two antenna and gain 5 dBi / 3dBi, so if it was used for TxBF power measurement  
Directional Gain =  $10 \log[(105/20 + 103/20)^2 / 2]$  dBi = 7.07 dBi
  - b. Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices, CDD  
Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;  
Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;  
Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .  
Example: Maximum antenna gain = 5 dBi and  $NANT \leq 4$ , so if it was used for CDD power measurement  
Directional Gain = 5 dBi + Array Gain = 5 dBi + 0 dB = 5 dBi
  - c. For power measurement of KDB 662911 is used with multiple transmitter output. Total conducted power is the sum of the conducted power levels measured at the various output ports.

### Test Procedure


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.  
added to measured value.

- a. Set the RBW  $\geq$  DTS bandwidth.
- b. Set VBW  $\geq 3 \times$  RBW.
- c. Set span  $\geq 3 \times$  RBW.
- d. Sweep time = auto couple.
- e. Detector = peak.
- f. Trace mode = max hold.
- g. Allow trace to fully stabilize.
- h. Use peak marker function to determine the peak amplitude level.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
Telephone : +886-2-7737-3000  
Facsimile (FAX) : +886-3-583-7948

---

**Test Setup**

The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.

## Test Data

### Peak Power

#### BT LE\_1Mbps

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	5.395	7.32	30	PASS
19	2440	5.297	7.24	30	PASS
39	2480	5.176	7.14	30	PASS

#### BT LE\_2Mbps

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2404	5.37	7.30	30	PASS
19	2440	5.297	7.24	30	PASS
38	2478	5.164	7.13	30	PASS

### Average Power (Reference Only)

#### BT LE\_1Mbps

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	5.248	7.20
19	2440	5.164	7.13
39	2480	5.047	7.03

#### BT LE\_2Mbps

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	5.224	7.18
19	2440	5.14	7.11
38	2478	5.023	7.01

## Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



## 9.3. Power Spectral Density

### Requirements

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz (If  $G_{TX} > 6$  dBi, then  $PSD = 8 - (G_{TX} - 6)$ ).


Note:

1. PSD = power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz.
2.  $G_{TX}$  = the maximum transmitting antenna directional gain in dBi.
3. If EUT with Multiple Transmitter Output:
  - a. Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / Nant]$  dBi.  
Nant: Number of Transmit Antennas  
 $G1, G2, \dots, Gn$ : Gain of Individual Antennas  
Example: two antenna and gain 5 dBi / 3dBi, so if it was used for power density measurement  
Directional Gain =  $10 \log[(10^{5/20} + 10^{3/20})^2 / 2]$  dBi = 7.07 dBi
  - b. "PSD per chain" of the report shown is maximum value for each chain, at the "Total PSD" is summing entire spectra across corresponding frequency bins on the various outputs by computer, refer KDB 662911 Method a) for calculating total power density.
  - c. Method a) of power density measurement of KDB 662911 is used for calculating total power density with multiple transmitter output. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

### Test procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times RBW$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

**Test Data**

<b>Mode</b>	<b>CH</b>	<b>Freq (MHz)</b>	<b>PSD (dBm/3kHz)</b>	<b>Limit (dBm/3kHz)</b>	<b>Result</b>
BT LE(1Mbps)	0	2402	-10.52	8	PASS
BT LE(1Mbps)	19	2440	-10.84	8	PASS
BT LE(1Mbps)	39	2480	-11.05	8	PASS
BT LE(2Mbps)	1	2404	-12.69	8	PASS
BT LE(2Mbps)	19	2440	-13.24	8	PASS
BT LE(2Mbps)	38	2478	-12.64	8	PASS


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

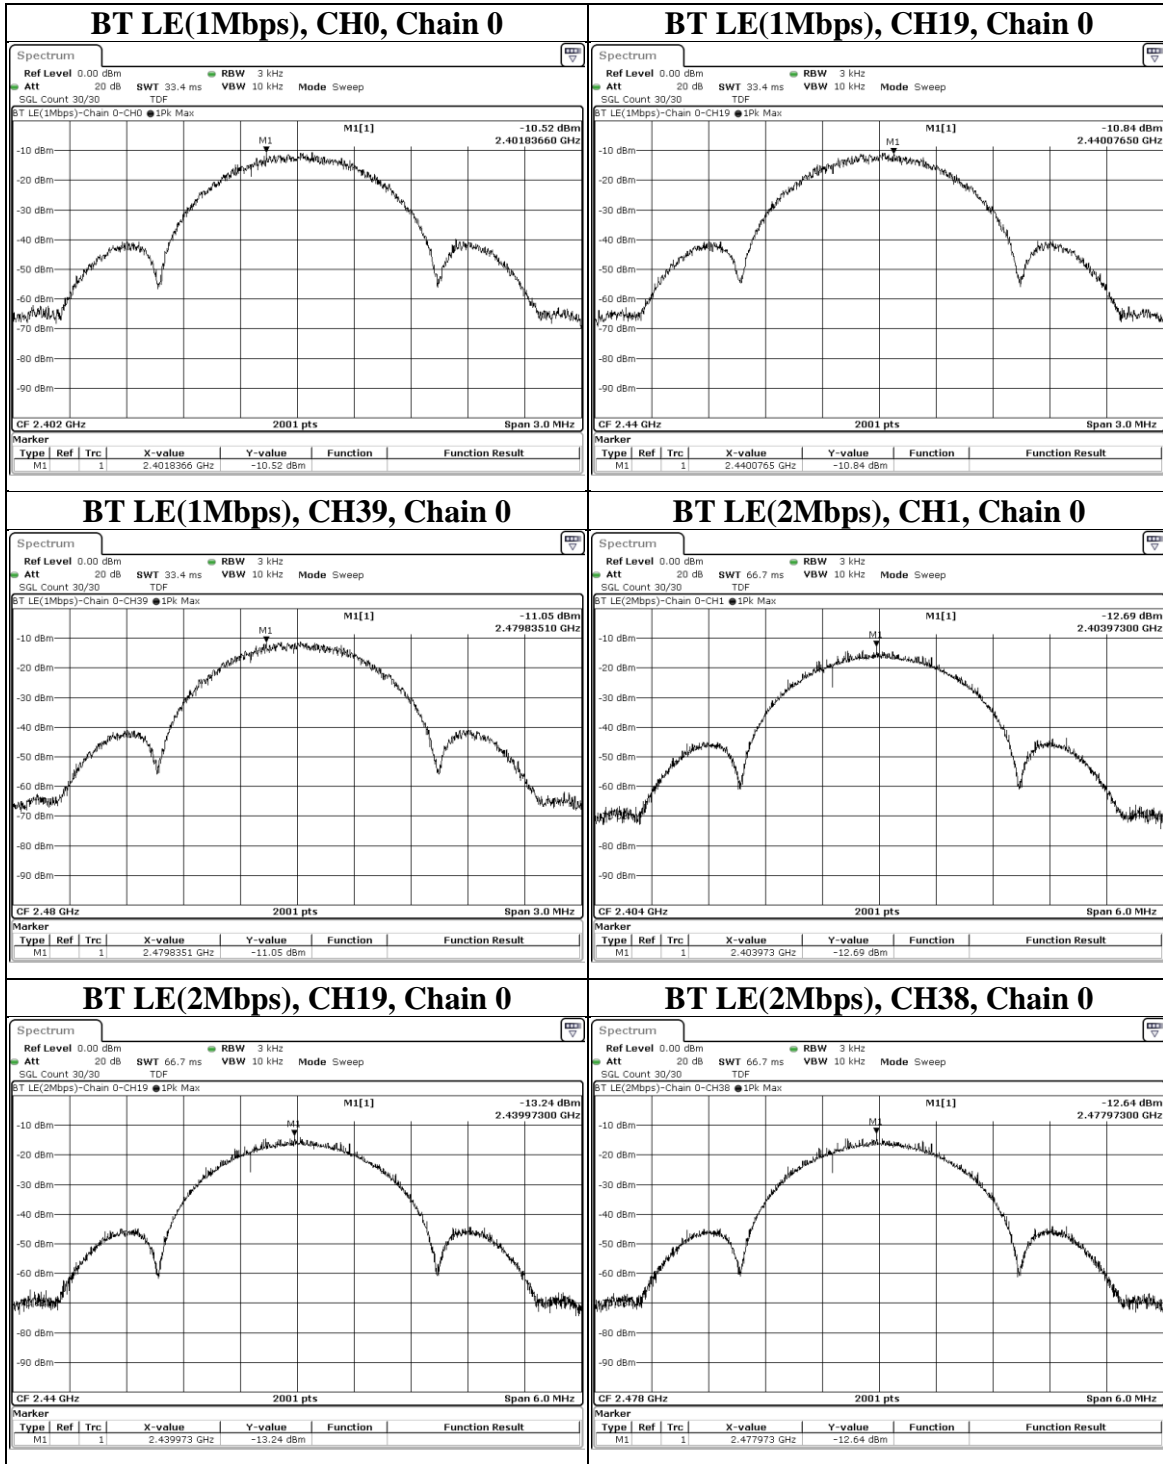

## 9.4. Conducted Out of Band Emission

### Requirements

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b) (3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209 (a) is not required.

### Test procedure


Measurement Procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

### **Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000


Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


### Test Data

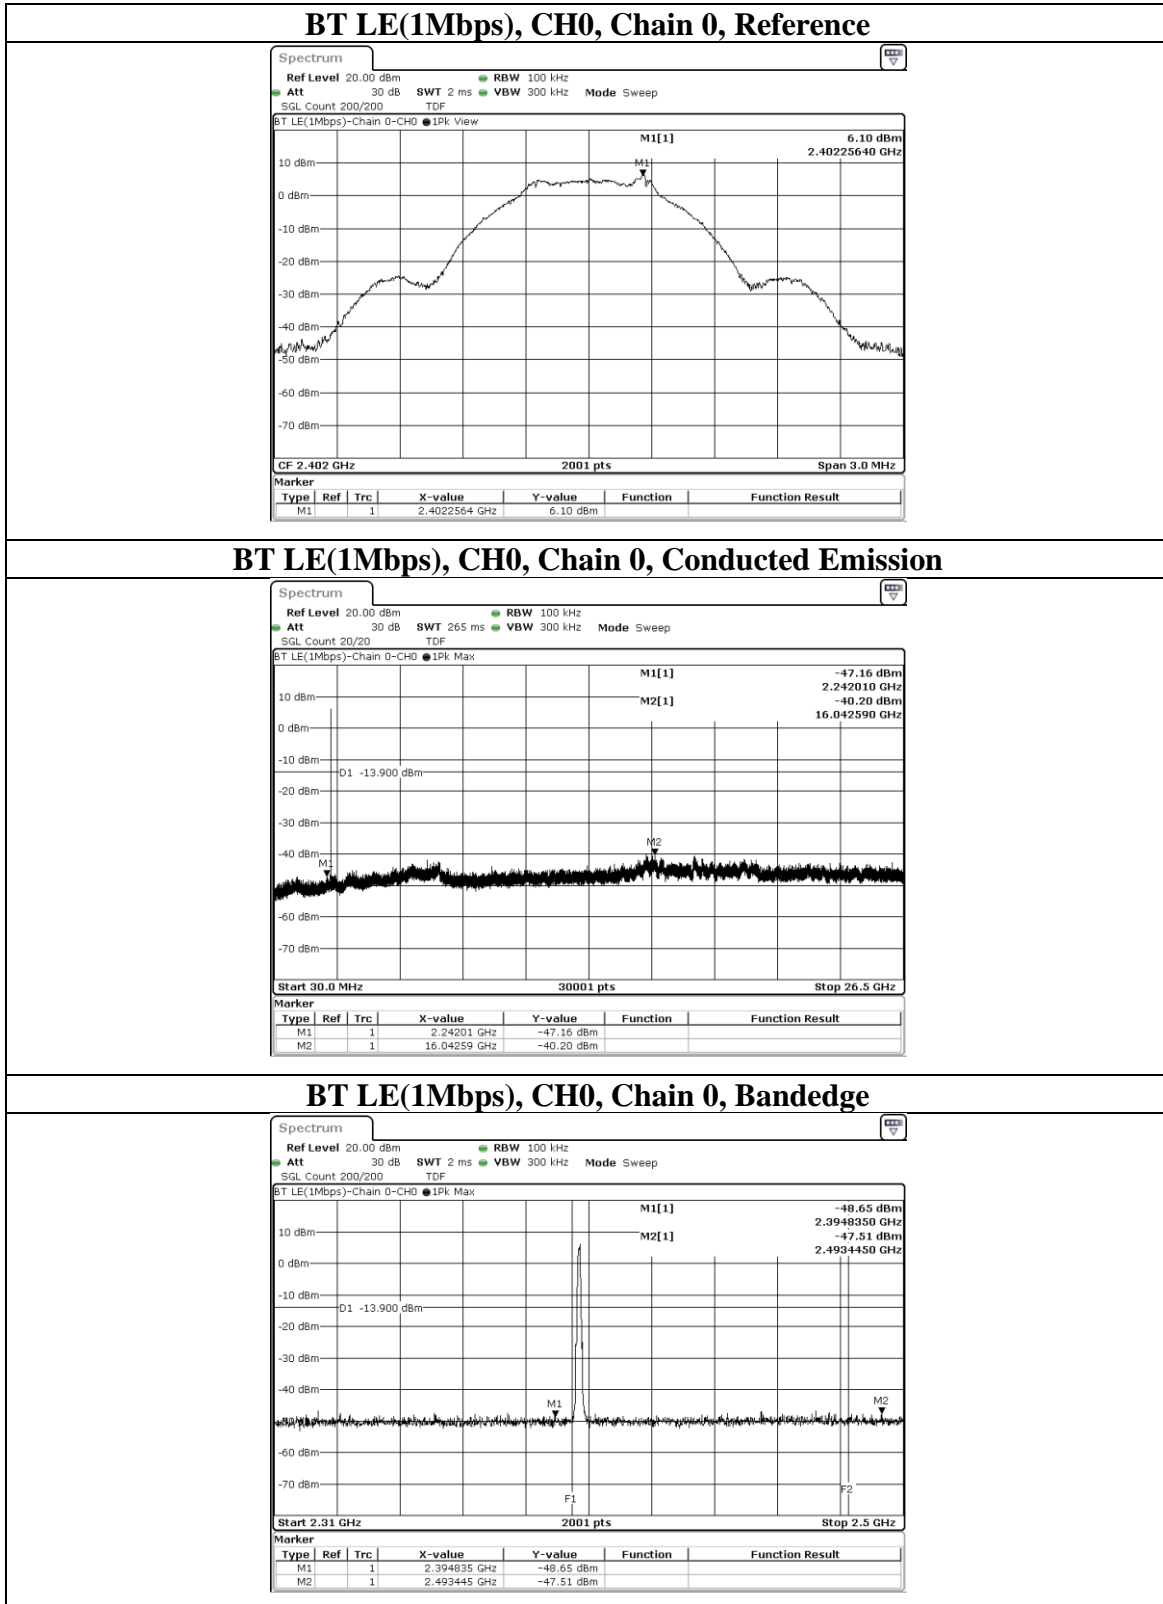


### BT LE(1Mbps), CH19, Chain 0, Reference

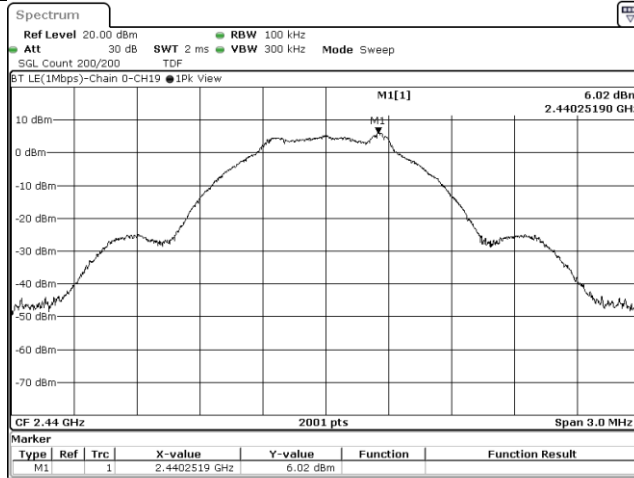


### BT LE(1Mbps), CH19, Chain 0, Conducted Emission

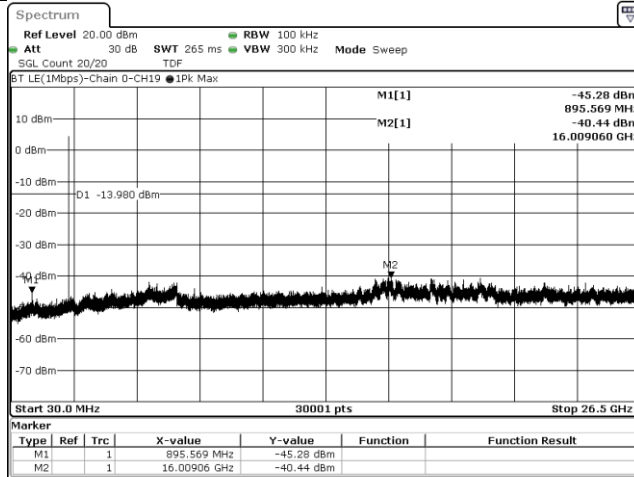


### BT LE(1Mbps), CH19, Chain 0, Bandedge

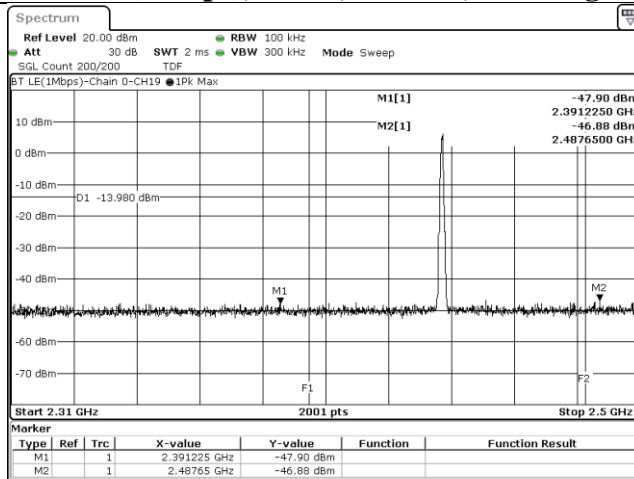


### BT LE(1Mbps), CH39, Chain 0, Reference

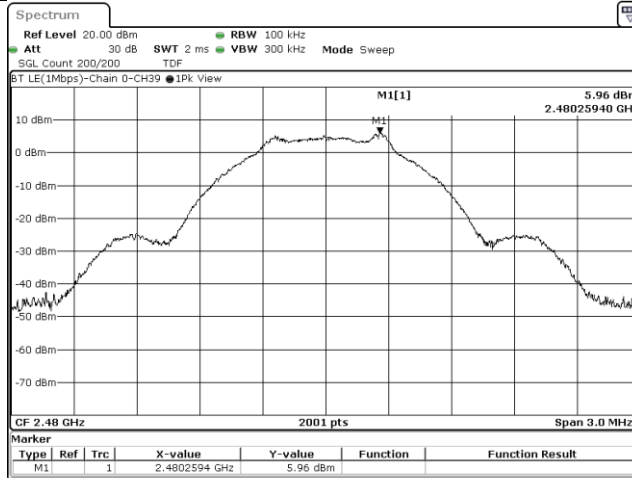


### BT LE(1Mbps), CH39, Chain 0, Conducted Emission

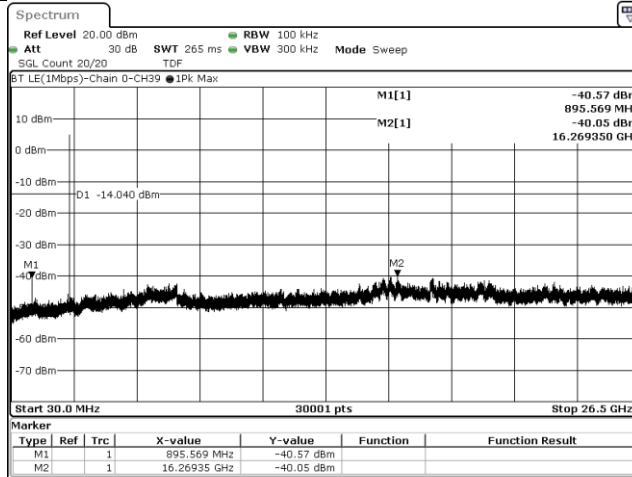


### BT LE(1Mbps), CH39, Chain 0, Bandedge

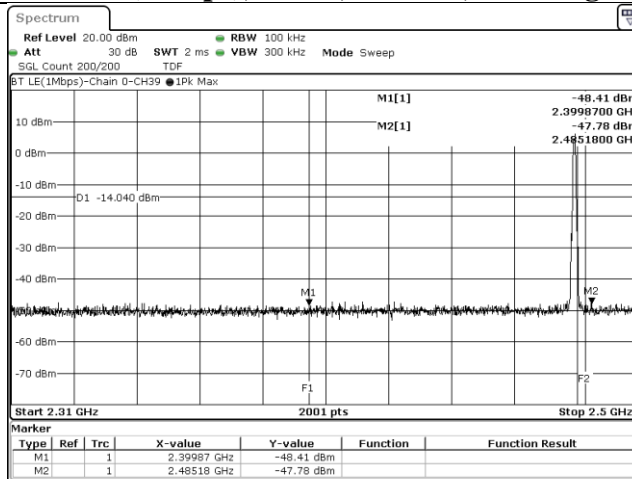


### BT LE(2Mbps), CH1, Chain 0, Reference

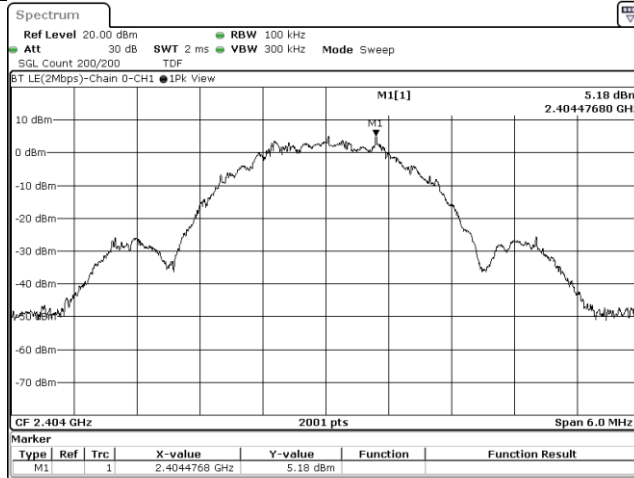

### BT LE(2Mbps), CH1, Chain 0, Conducted Emission

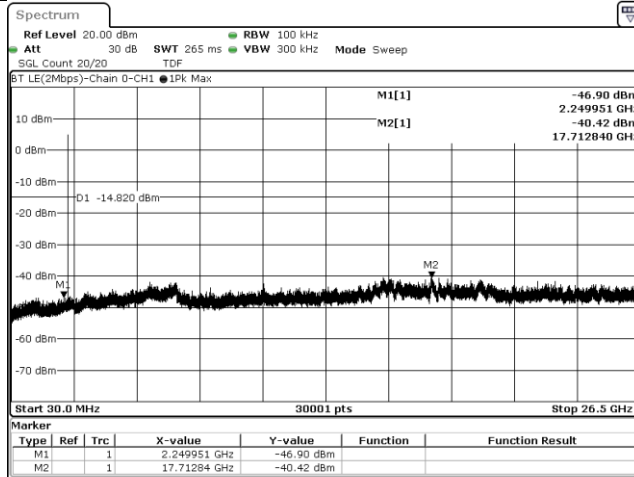


### BT LE(2Mbps), CH1, Chain 0, Bandedge

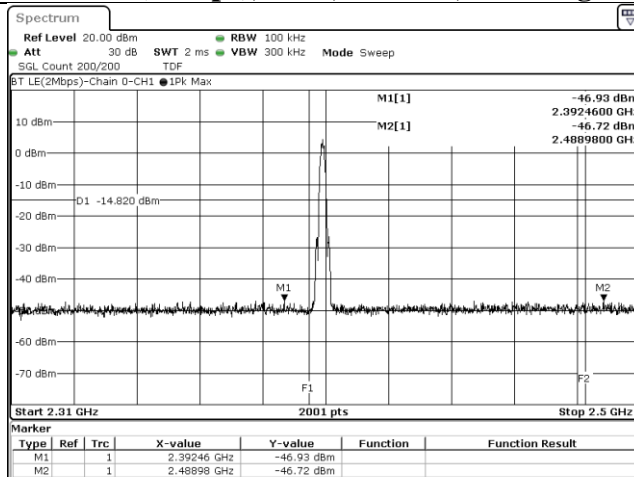





### BT LE(2Mbps), CH19, Chain 0, Reference

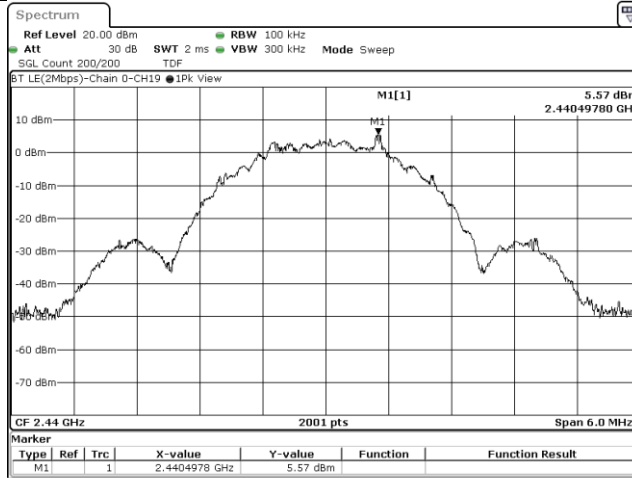


### BT LE(2Mbps), CH19, Chain 0, Conducted Emission

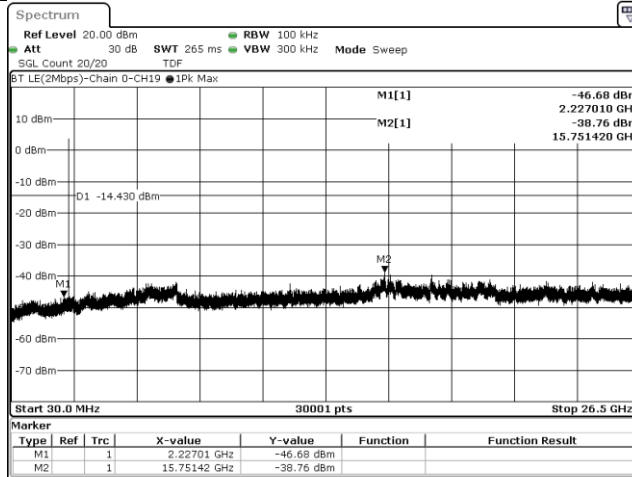


### BT LE(2Mbps), CH19, Chain 0, Bandedge

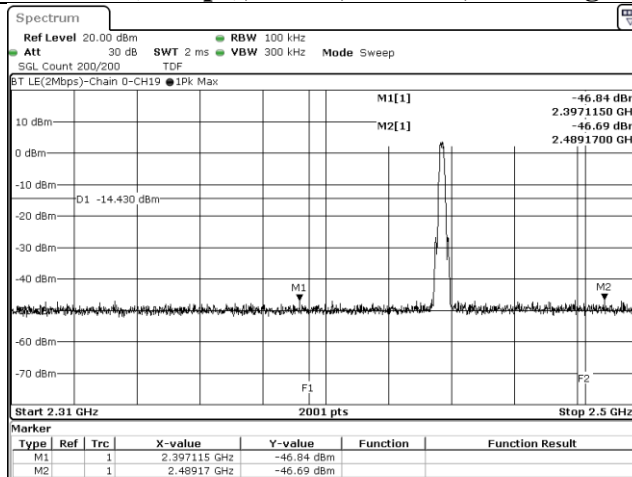


### BT LE(2Mbps), CH38, Chain 0, Reference

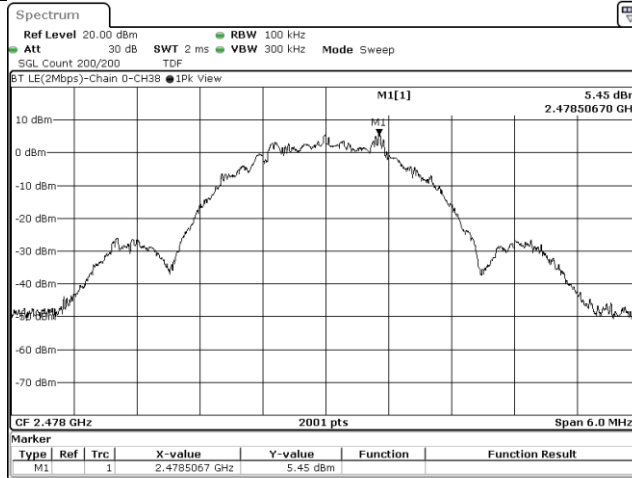

### BT LE(2Mbps), CH38, Chain 0, Conducted Emission

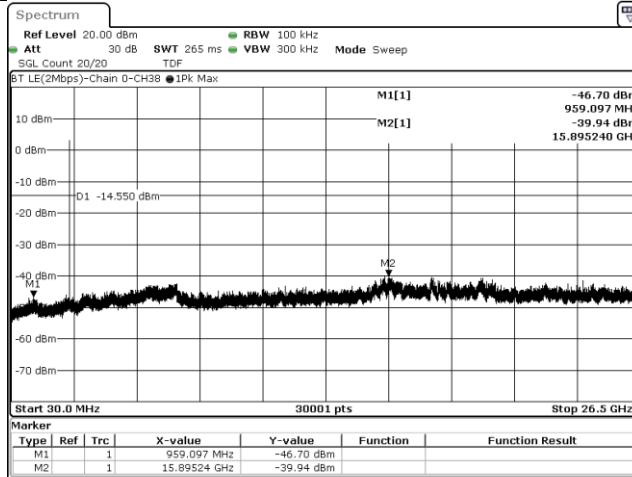

### BT LE(2Mbps), CH38, Chain 0, Bandedge

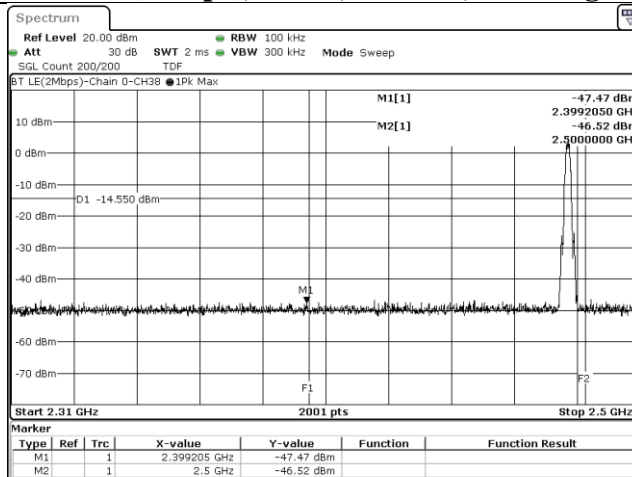

## 9.5. Radiated Spurious Emission

### Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.

Peak

Frequency	RBW	VBW
9 kHz~150 kHz	200 Hz	600 Hz
150 kHz~30 MHz	10 kHz	30 kHz
30 MHz~1 GHz	120 kHz	360 kHz
Above 1GHz	1 MHz	3 MHz


Average for above 1GHz

RBW	VBW
1MHz	Refer to section 6.6 for duty cycle.


- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
- e. Test data of Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation "\*" = The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

### Test Setup


<Frequency Range 9 kHz ~ 30 MHz>

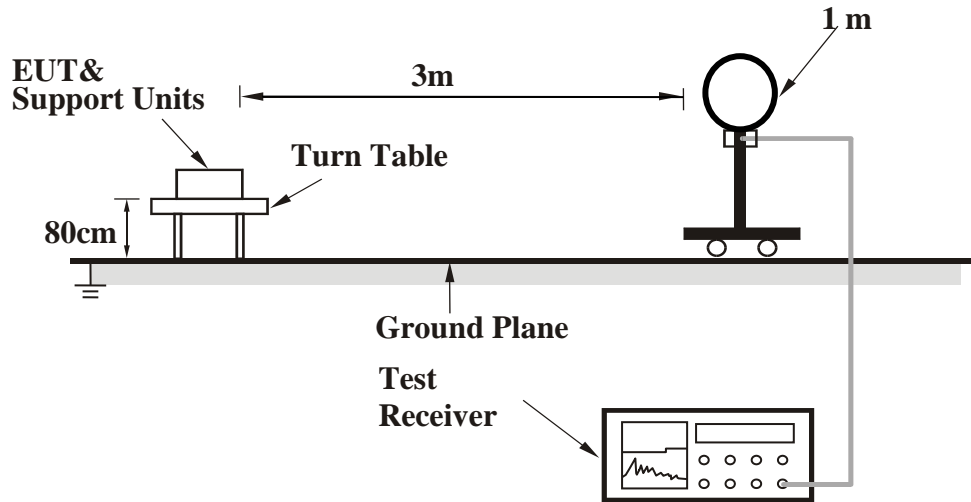

<Frequency Range 30 MHz ~ 1 GHz >

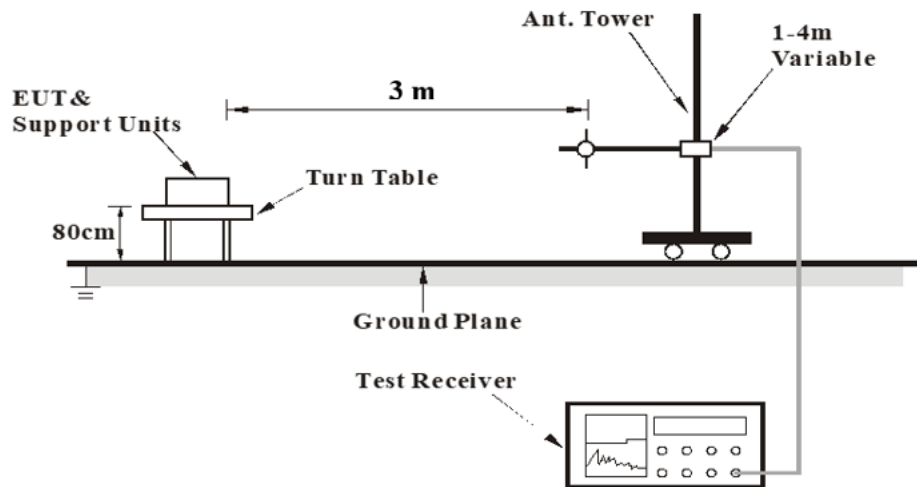

<Frequency Range above 1 GHz>

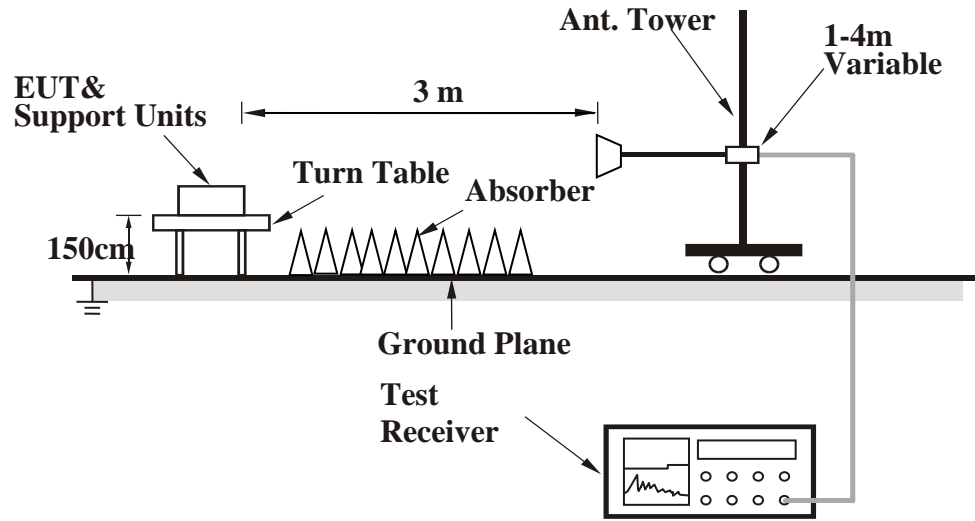

For the actual test configuration, please refer to the Setup Configurations.

**Test Data****Above 1 GHz**

Mode	BT-LE-1Mbps	Channel	0
------	-------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal		2313.04	28.3	12.81	41.11	54	-12.89	AVG
		2343.82	40.15	12.68	52.83	74	-21.17	PK
	@	2402	90.61	12.43	103.04	N/A	N/A	PK
	@	2402	90.25	12.43	102.68	N/A	N/A	AVG
	*	4804	36	2.88	38.88	74	-35.12	PK
Vertical		2335.27	40.32	12.72	53.04	74	-20.96	PK
		2338.31	29.1	12.71	41.81	54	-12.19	AVG
	@	2402	100.04	12.43	112.47	N/A	N/A	PK
	@	2402	99.26	12.43	111.69	N/A	N/A	AVG
	*	4804	37.02	2.88	39.9	74	-34.1	PK

**Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



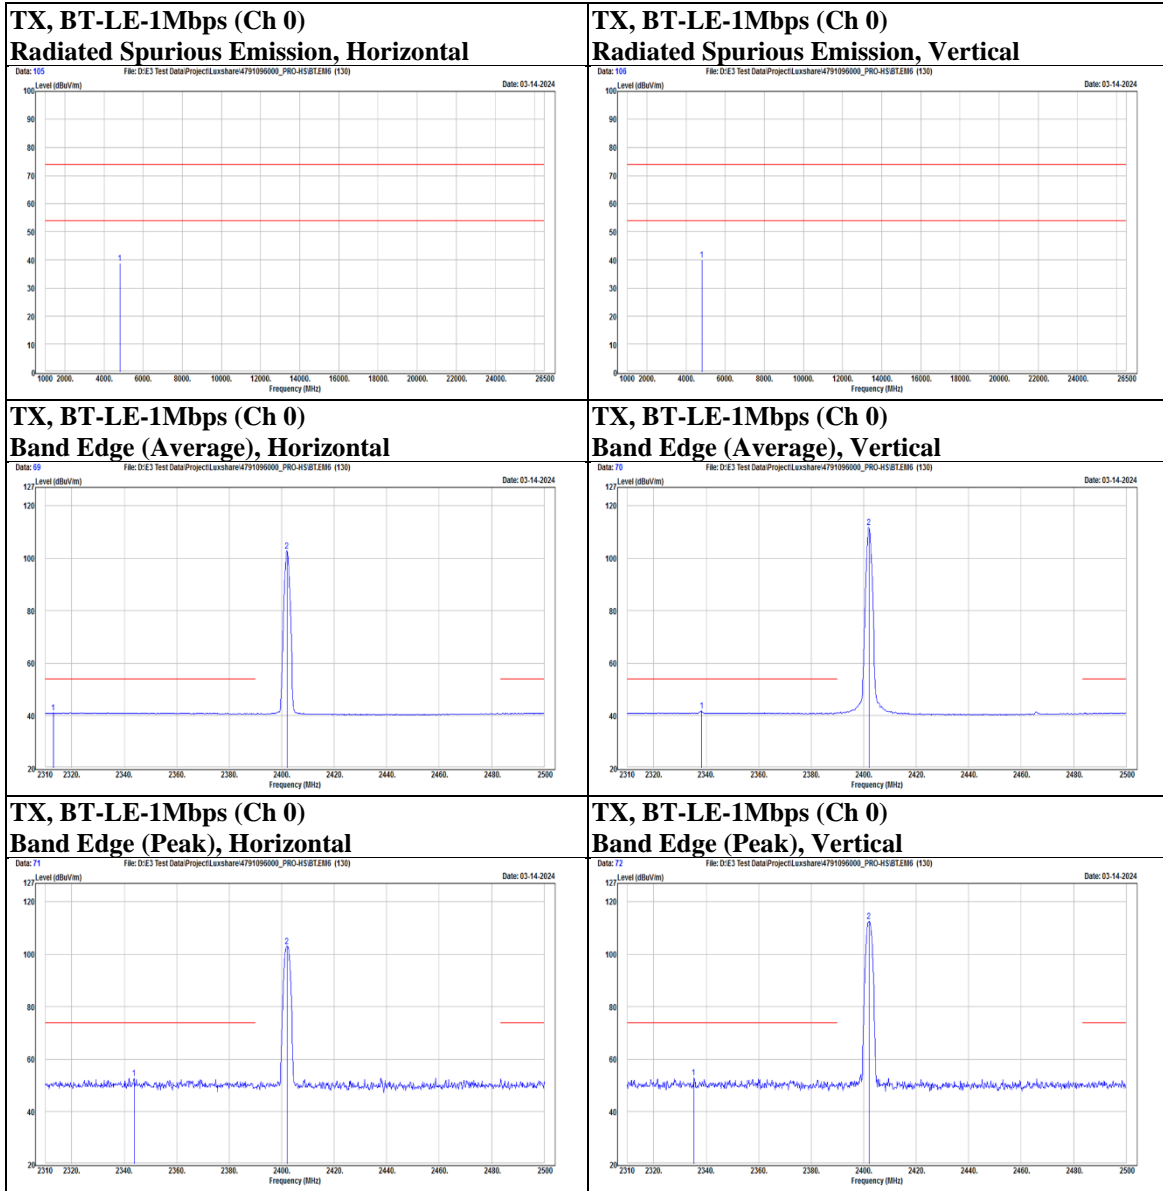

Mode	BT-LE-1Mbps	Channel	19
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2326.72	28.34	12.76	41.1	54	-12.9	AVG
		2331.28	40.47	12.74	53.21	74	-20.79	PK
	@	2440	91.14	12.19	103.33	N/A	N/A	PK
	@	2440	90.44	12.19	102.63	N/A	N/A	AVG
		2496.01	28.54	12.48	41.02	54	-12.98	AVG
		2498.29	39.65	12.5	52.15	74	-21.85	PK
	*	4880	36.58	3.06	39.64	74	-34.36	PK
Vertical		2323.11	40.07	12.77	52.84	74	-21.16	PK
		2376.31	29.22	12.54	41.76	54	-12.24	AVG
	@	2440	99.55	12.19	111.74	N/A	N/A	PK
	@	2440	98.66	12.19	110.85	N/A	N/A	AVG
		2485.75	40.13	12.39	52.52	74	-21.48	PK
		2492.02	28.58	12.45	41.03	54	-12.97	AVG
	*	4880	36.34	3.06	39.4	74	-34.6	PK


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

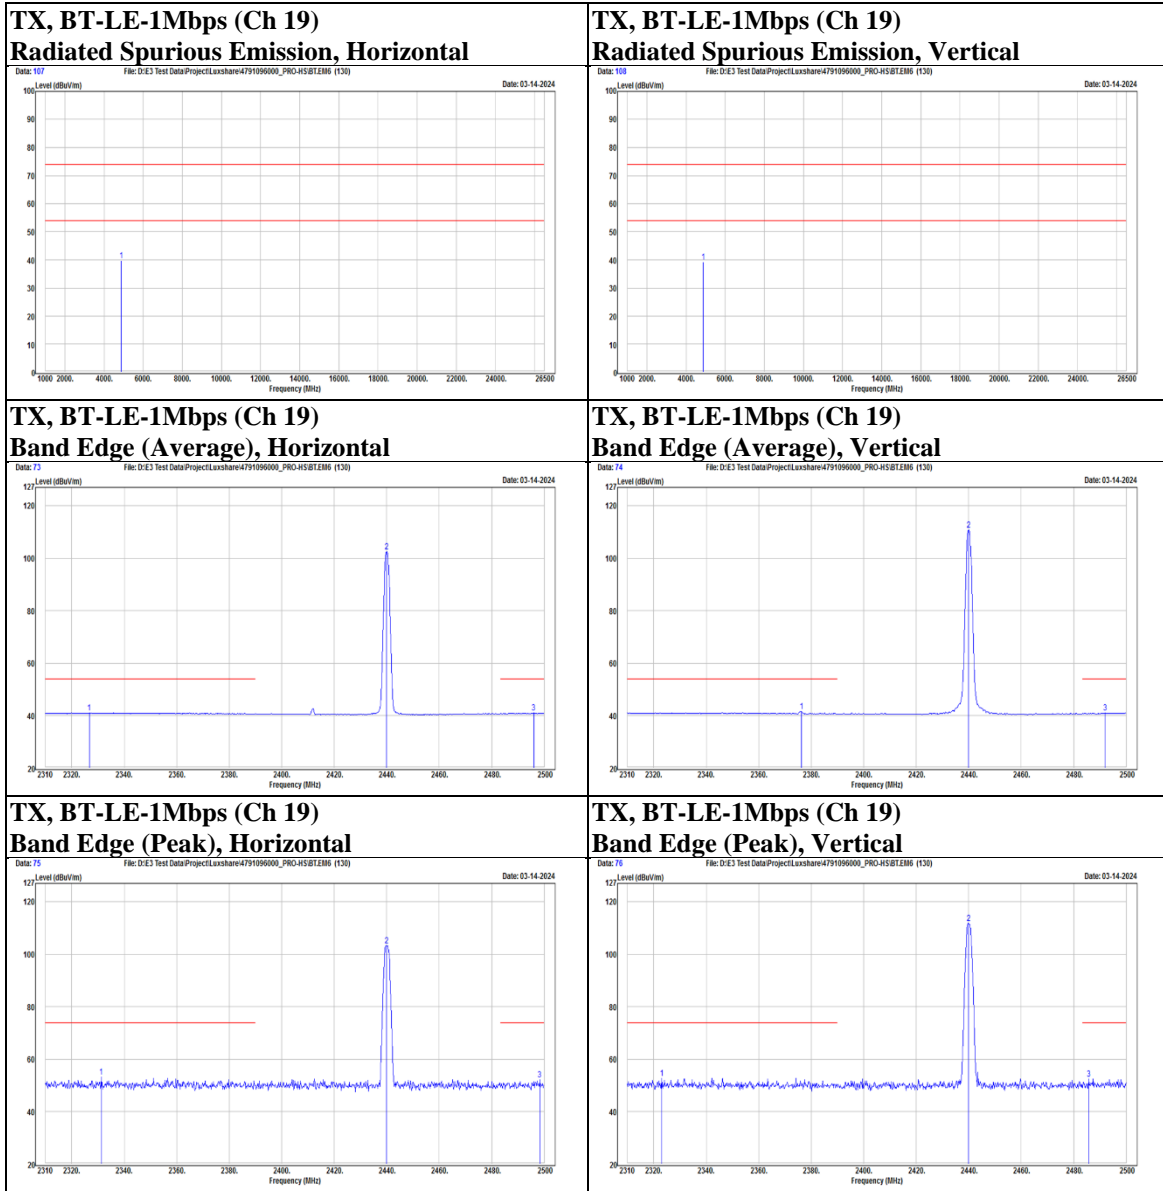

Mode	BT-LE-1Mbps	Channel	39
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2480	91.37	12.35	103.72	N/A	N/A	PK
	@	2480	90.83	12.35	103.18	N/A	N/A	AVG
		2483.66	29.15	12.38	41.53	54	-12.47	AVG
		2495.82	39.8	12.47	52.27	74	-21.73	PK
	*	4960	35.94	3.2	39.14	74	-34.86	PK
Vertical	@	2480	98.23	12.35	110.58	N/A	N/A	PK
	@	2480	97.65	12.35	110	N/A	N/A	AVG
		2483.66	31.58	12.38	43.96	54	-10.04	AVG
		2498.48	39.83	12.5	52.33	74	-21.67	PK
	*	4960	38.76	3.2	41.96	74	-32.04	PK


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

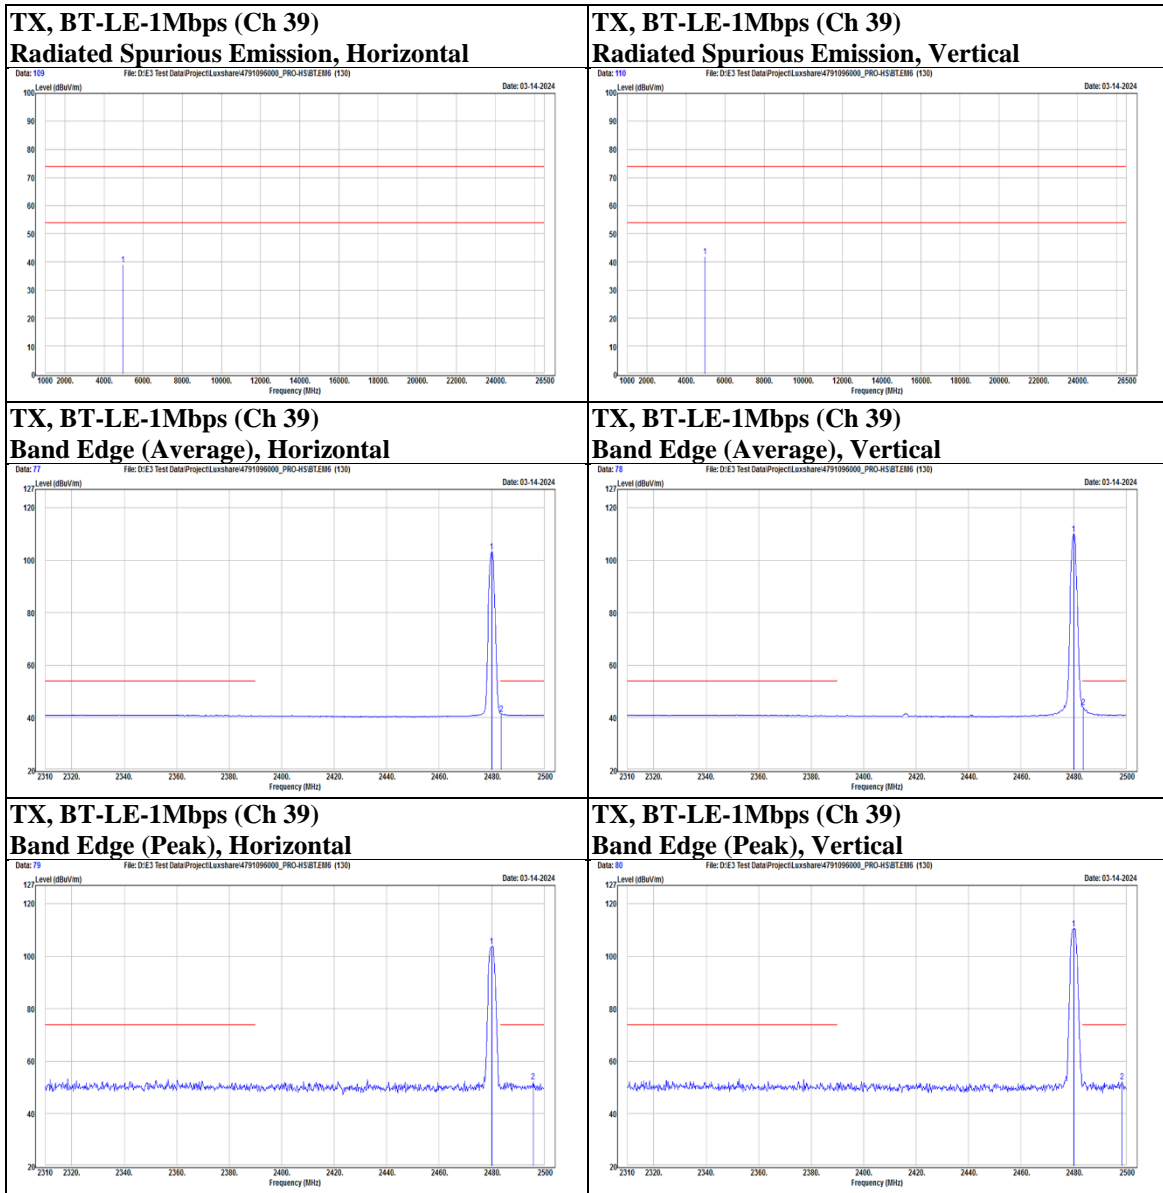

Mode	BT-LE-2Mbps	Channel	1
------	-------------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2334.7	40.29	12.72	53.01	74	-20.99	PK
		2340.59	28.7	12.7	41.4	54	-12.6	AVG
	@	2404	90.47	12.42	102.89	N/A	N/A	PK
	@	2404	88.31	12.42	100.73	N/A	N/A	AVG
	*	4808	36.22	2.9	39.12	74	-34.88	PK
Vertical		2310.19	40.94	12.83	53.77	74	-20.23	PK
		2340.59	30.4	12.7	43.1	54	-10.9	AVG
	@	2404	100.1	12.42	112.52	N/A	N/A	PK
	@	2404	97.29	12.42	109.71	N/A	N/A	AVG
	*	4808	36.32	2.9	39.22	74	-34.78	PK


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

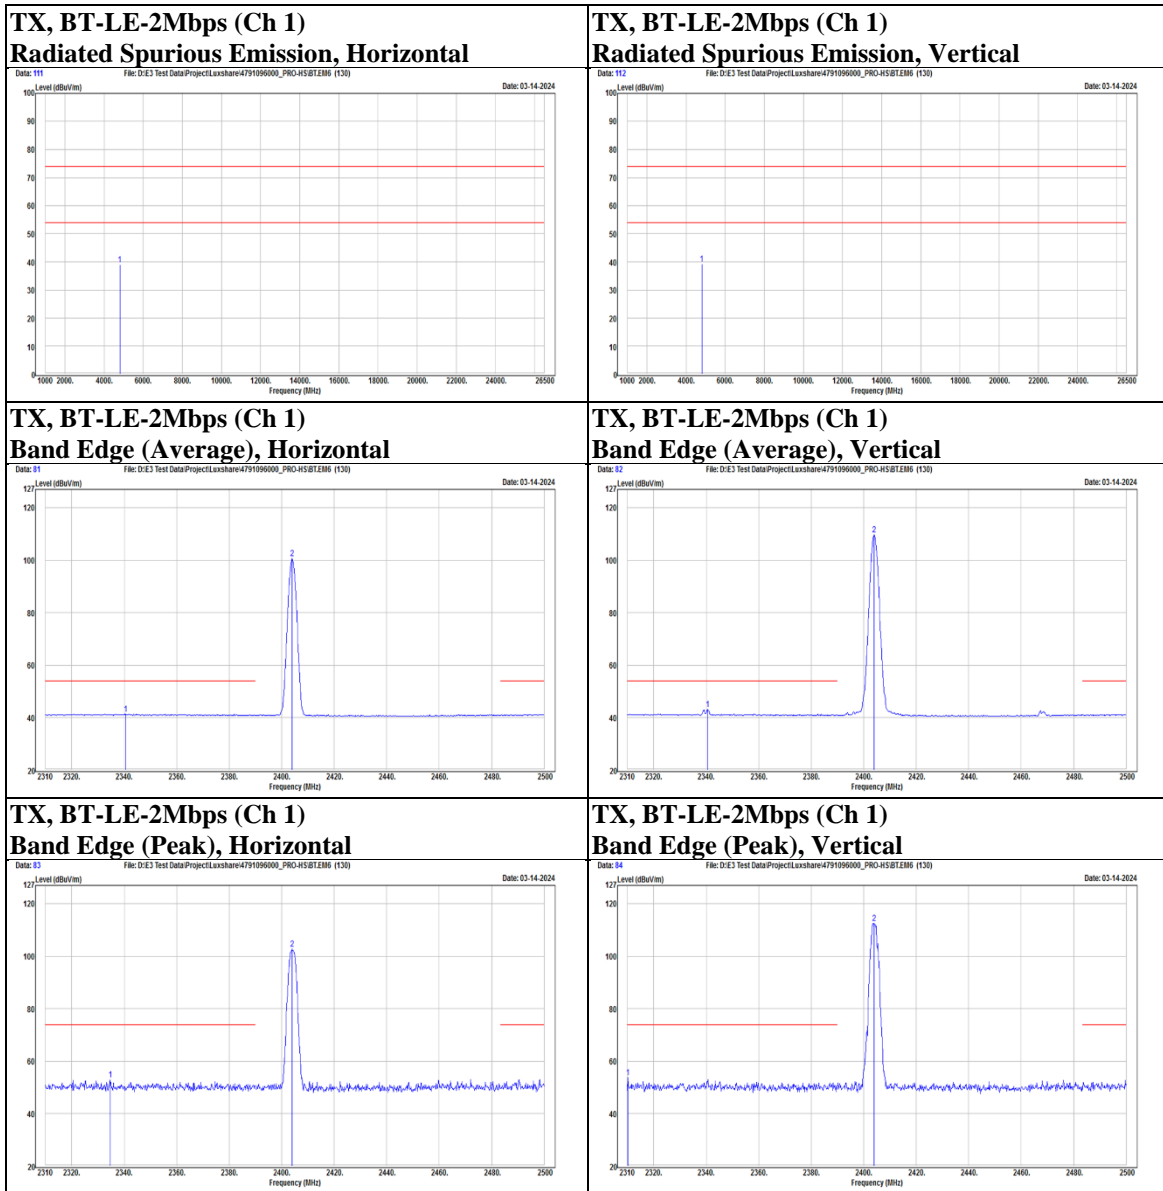

Mode	BT-LE-2Mbps	Channel	19
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2311.71	28.62	12.82	41.44	54	-12.56	AVG
		2350.66	40.13	12.65	52.78	74	-21.22	PK
	@	2440	90.72	12.19	102.91	N/A	N/A	PK
	@	2440	89.16	12.19	101.35	N/A	N/A	AVG
		2486.32	39.61	12.41	52.02	74	-21.98	PK
		2498.86	28.9	12.5	41.4	54	-12.6	AVG
	*	4880	36.73	3.06	39.79	74	-34.21	PK
Vertical		2339.83	40.81	12.7	53.51	74	-20.49	PK
		2376.5	30.93	12.54	43.47	54	-10.53	AVG
	@	2440	97.5	12.19	109.69	N/A	N/A	PK
	@	2440	97.31	12.19	109.5	N/A	N/A	AVG
		2494.3	39.76	12.47	52.23	74	-21.77	PK
		2499.43	28.81	12.51	41.32	54	-12.68	AVG
	*	4880	36.94	3.06	40	74	-34	PK

**Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



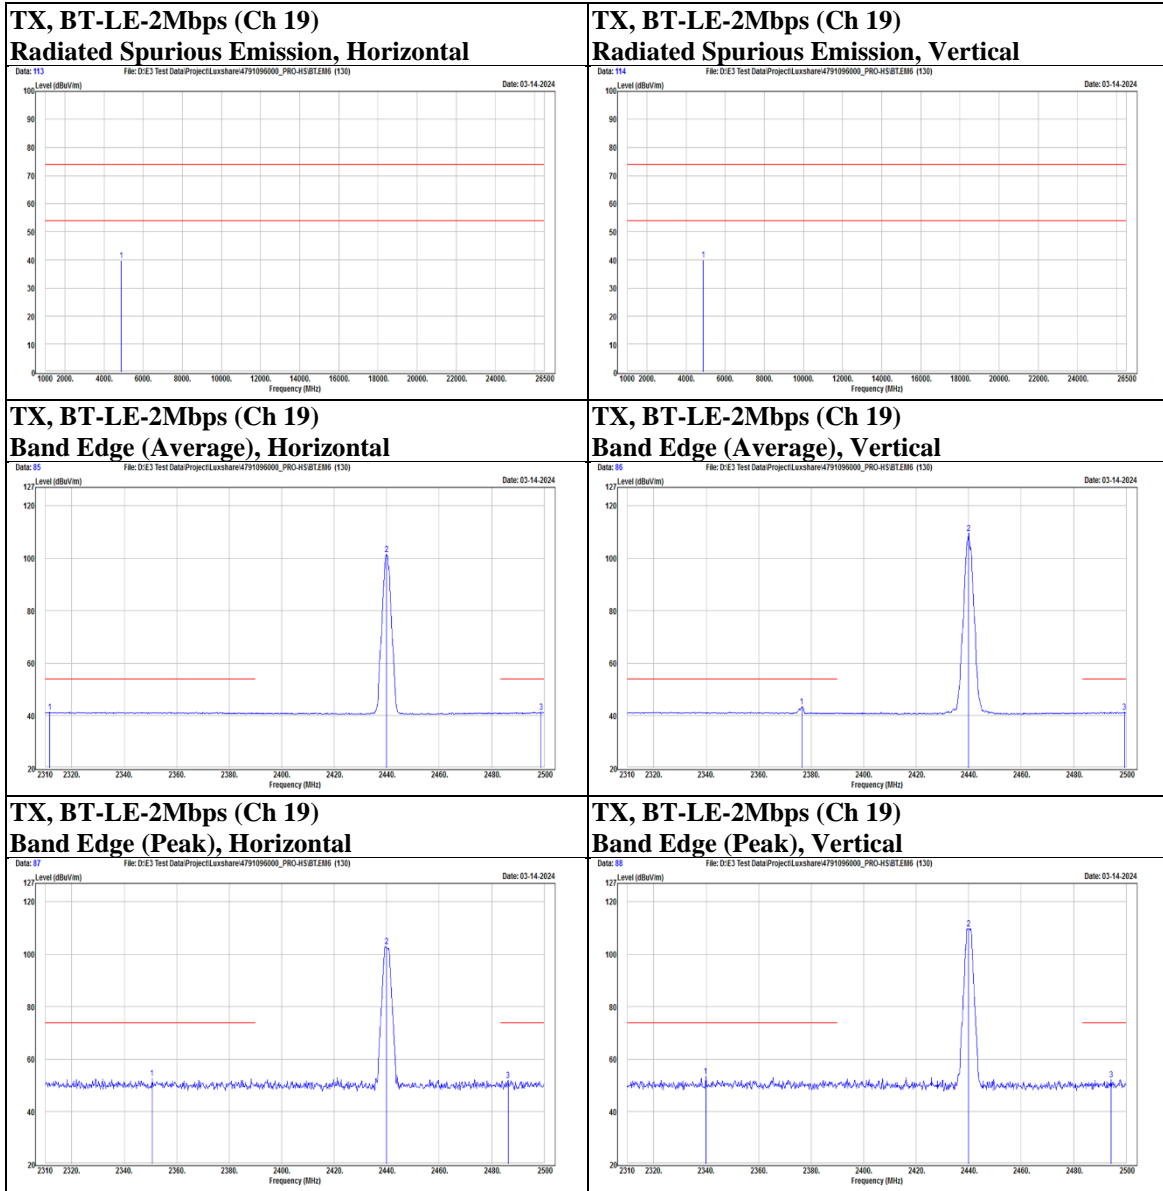

Mode	BT-LE-2Mbps	Channel	37
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2476	91.18	12.33	103.51	N/A	N/A	PK
	@	2476	89.4	12.33	101.73	N/A	N/A	AVG
		2484.8	40.15	12.39	52.54	74	-21.46	PK
		2498.67	28.83	12.5	41.33	54	-12.67	AVG
	*	4952	35.8	3.14	38.94	74	-35.06	PK
Vertical	@	2476	98.19	12.33	110.52	N/A	N/A	PK
	@	2476	94.56	12.33	106.89	N/A	N/A	AVG
		2483.85	29.5	12.38	41.88	54	-12.12	AVG
		2496.96	39.93	12.48	52.41	74	-21.59	PK
	*	4952	35.79	3.14	38.93	74	-35.07	PK


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

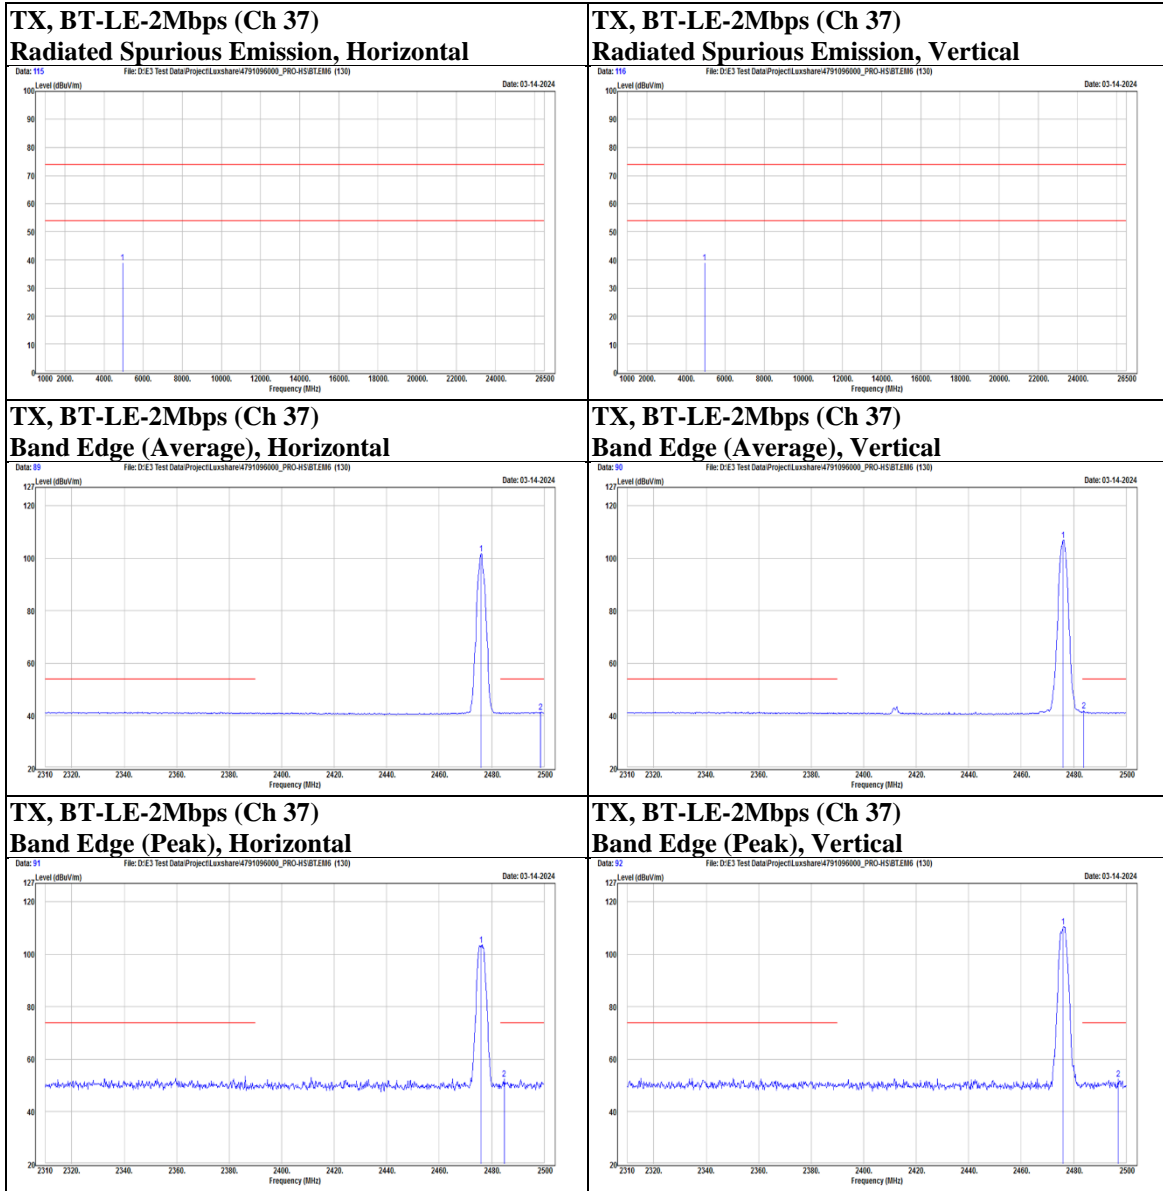

### Below 1 GHz

Mode	BT-LE-1Mbps	Channel	0
------	-------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal		112.45	48.08	-14.55	33.53	43.5	-9.97	PK
		141.55	47.57	-12.36	35.21	43.5	-8.29	PK
		165.8	44.08	-11.65	32.43	43.5	-11.07	PK
		223.03	45.16	-14.15	31.01	46	-14.99	PK
		291.9	41.37	-10.7	30.67	46	-15.33	PK
		329.73	36.74	-9.4	27.34	46	-18.66	PK
Vertical		114.39	53.02	-14.44	38.58	43.5	-4.92	PK
		159.98	40.95	-11.68	29.27	43.5	-14.23	PK
		191.99	41.99	-14.35	27.64	43.5	-15.86	PK
		221.09	41.06	-14.21	26.85	46	-19.15	PK
		291.9	40.06	-10.7	29.36	46	-16.64	PK
		307.42	39.09	-10.39	28.7	46	-17.3	PK

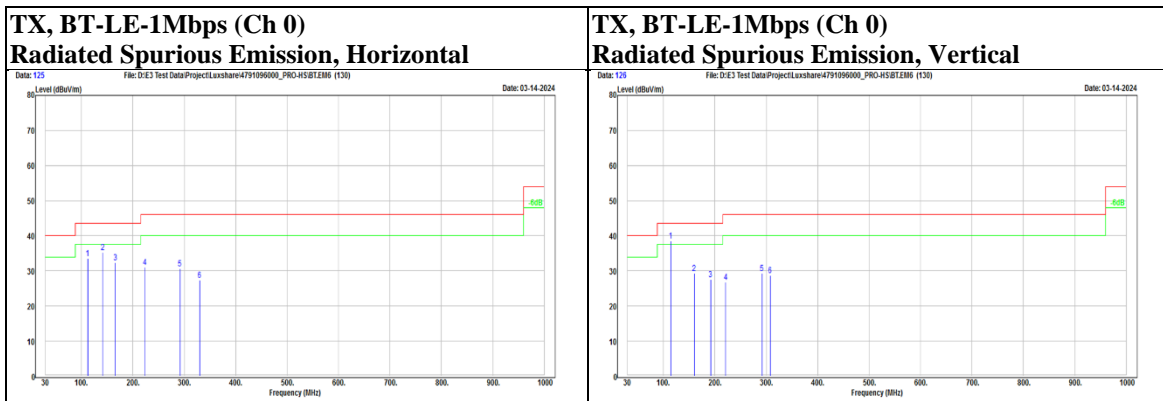


### Charging Mode

#### Below 1 GHz

Mode	Charging Mode	Channel	0
------	---------------	---------	---

Polarization	Notation @	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		112.45	46.8	-14.55	32.25	43.5	-11.25	PK
		139.61	46.45	-12.6	33.85	43.5	-9.65	PK
		185.2	43.73	-13.55	30.18	43.5	-13.32	PK
		204.6	42.99	-14.66	28.33	43.5	-15.17	PK
		308.39	44.3	-10.35	33.95	46	-12.05	PK
		331.67	41.85	-9.37	32.48	46	-13.52	PK
Vertical		110.51	49.22	-14.81	34.41	43.5	-9.09	PK
		133.79	50.81	-13.23	37.58	43.5	-5.92	PK
		161.92	44	-11.75	32.25	43.5	-11.25	PK
		190.05	42.44	-14.17	28.27	43.5	-15.23	PK
		307.42	37.14	-10.39	26.75	46	-19.25	PK
		371.44	33.85	-8.45	25.4	46	-20.6	PK

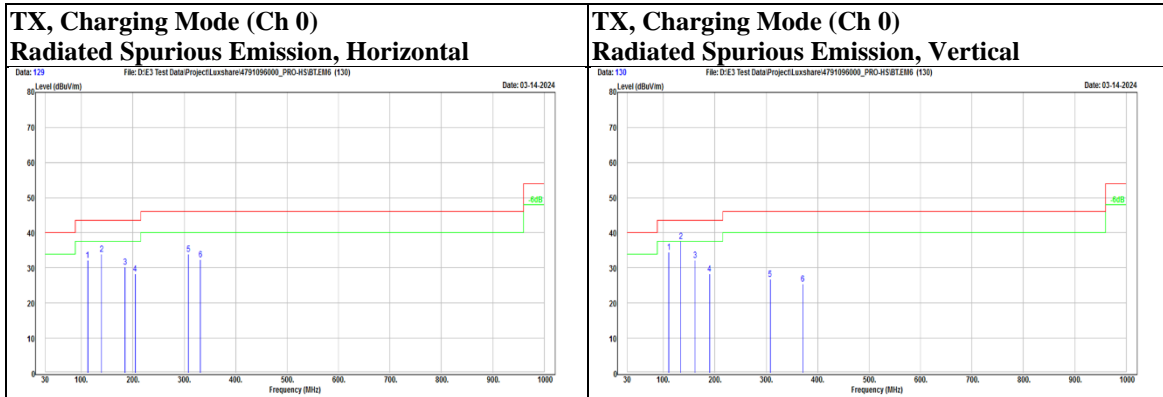

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

**9 kHz ~ 30 MHz Data:**

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

**KDB 414788 D01 OATS and Chamber Correlation Justification**

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

## 9.6. AC Power Line Conducted Emission

### Requirements

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dB $\mu$ V) = Reading value (dB $\mu$ V) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dB $\mu$ V) - Limit value (dB $\mu$ V).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
Telephone : +886-2-7737-3000  
Facsimile (FAX) : +886-3-583-7948

## Test Setup

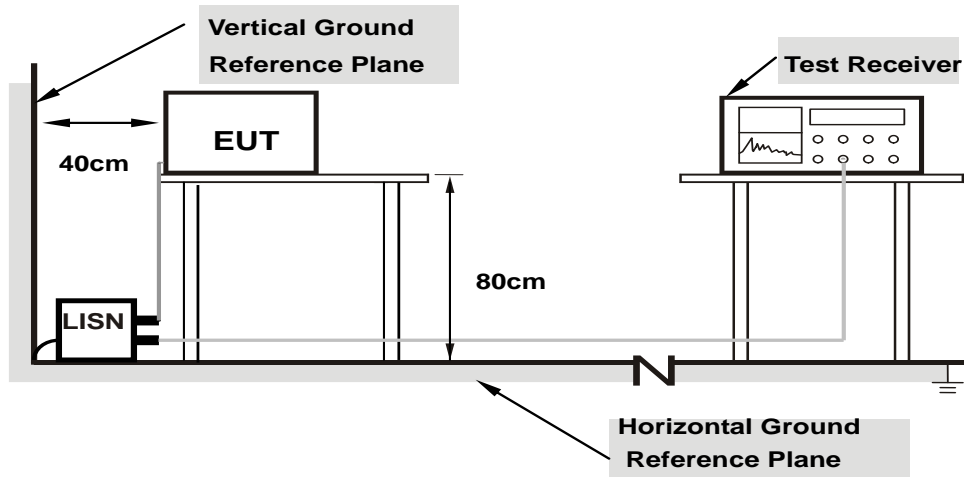


**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the Setup Configurations.



### Test Data

Mode	BLE(1M)_TX2402	Channel	0
------	----------------	---------	---

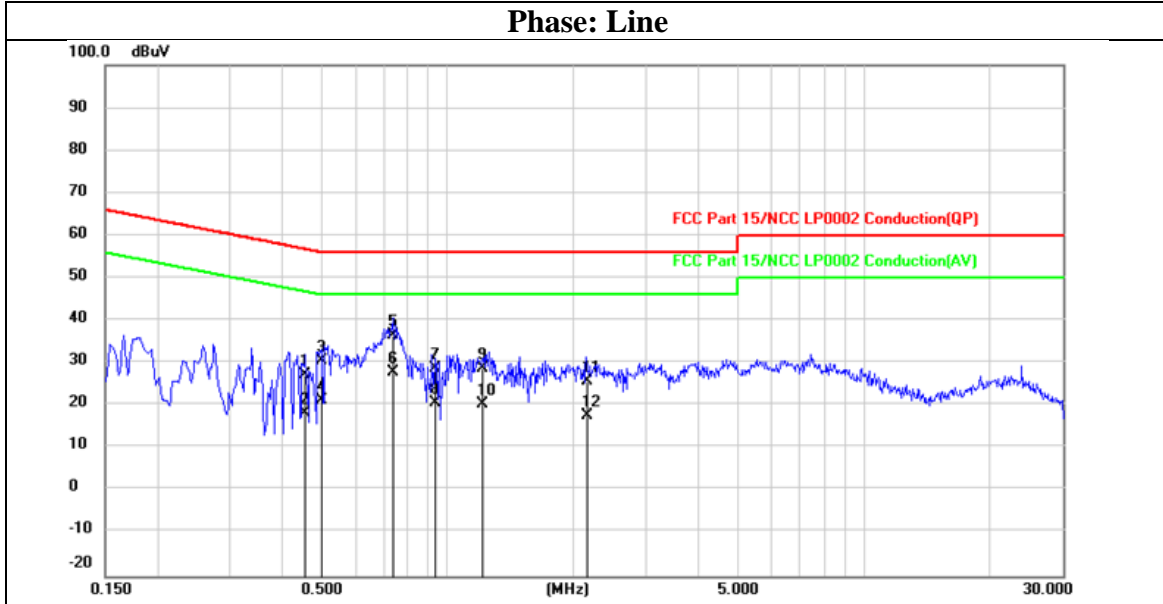

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.4535	17.39	9.95	27.34	56.81	-29.47	QP
2	0.4535	8.27	9.95	18.22	46.81	-28.59	AVG
3	0.4993	20.67	9.95	30.62	56.01	-25.39	QP
4	0.4993	11.27	9.95	21.22	46.01	-24.79	AVG
5	0.7403	26.56	9.96	36.52	56.00	-19.48	QP
6	0.7403	18.00	9.96	27.96	46.00	-18.04	AVG
7	0.9295	18.75	9.98	28.73	56.00	-27.27	QP
8	0.9295	10.69	9.98	20.67	46.00	-25.33	AVG
9	1.2109	18.69	9.98	28.67	56.00	-27.33	QP
10	1.2109	10.24	9.98	20.22	46.00	-25.78	AVG
11	2.1645	15.83	10.01	25.84	56.00	-30.16	QP
12	2.1645	7.64	10.01	17.65	46.00	-28.35	AVG

### Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	BLE(1M)_TX2402	Channel	0
------	----------------	---------	---

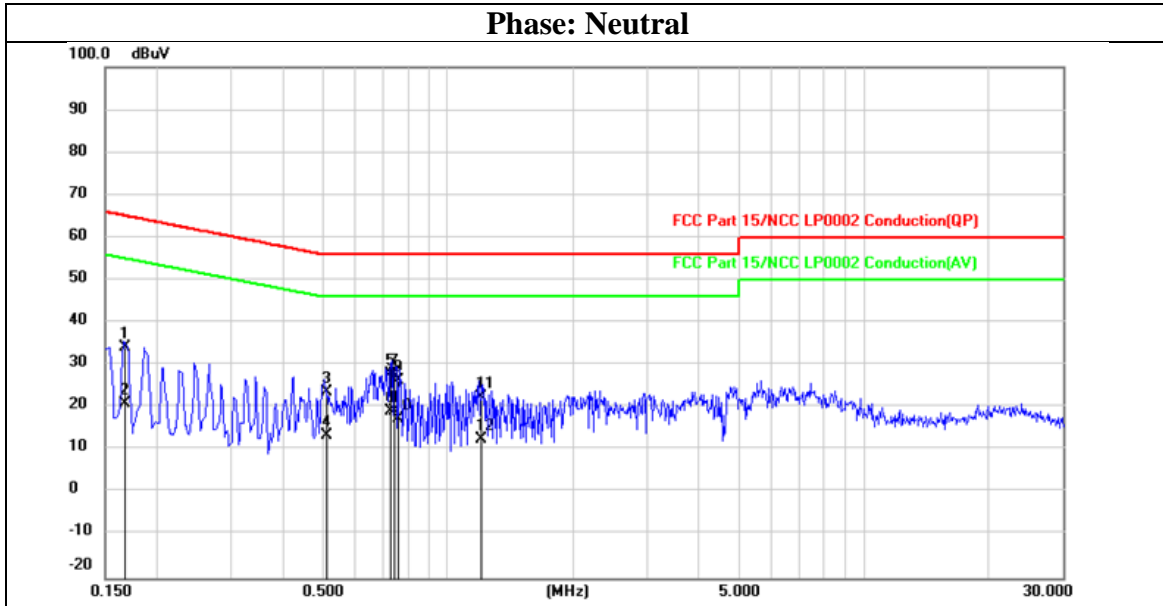

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1669	24.32	9.95	34.27	65.11	-30.84	QP
2	0.1669	11.08	9.95	21.03	55.11	-34.08	AVG
3	0.5105	13.67	9.95	23.62	56.00	-32.38	QP
4	0.5105	3.45	9.95	13.40	46.00	-32.60	AVG
5	0.7296	17.84	9.96	27.80	56.00	-28.20	QP
6	0.7296	9.06	9.96	19.02	46.00	-26.98	AVG
7	0.7454	17.90	9.96	27.86	56.00	-28.14	QP
8	0.7454	9.06	9.96	19.02	46.00	-26.98	AVG
9	0.7591	16.48	9.97	26.45	56.00	-29.55	QP
10	0.7591	7.36	9.97	17.33	46.00	-28.67	AVG
11	1.1963	12.34	9.97	22.31	56.00	-33.69	QP
12	1.1963	2.56	9.97	12.53	46.00	-33.47	AVG

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

### Charging Mode

Mode	Charging Mode	Channel	N/A
------	---------------	---------	-----

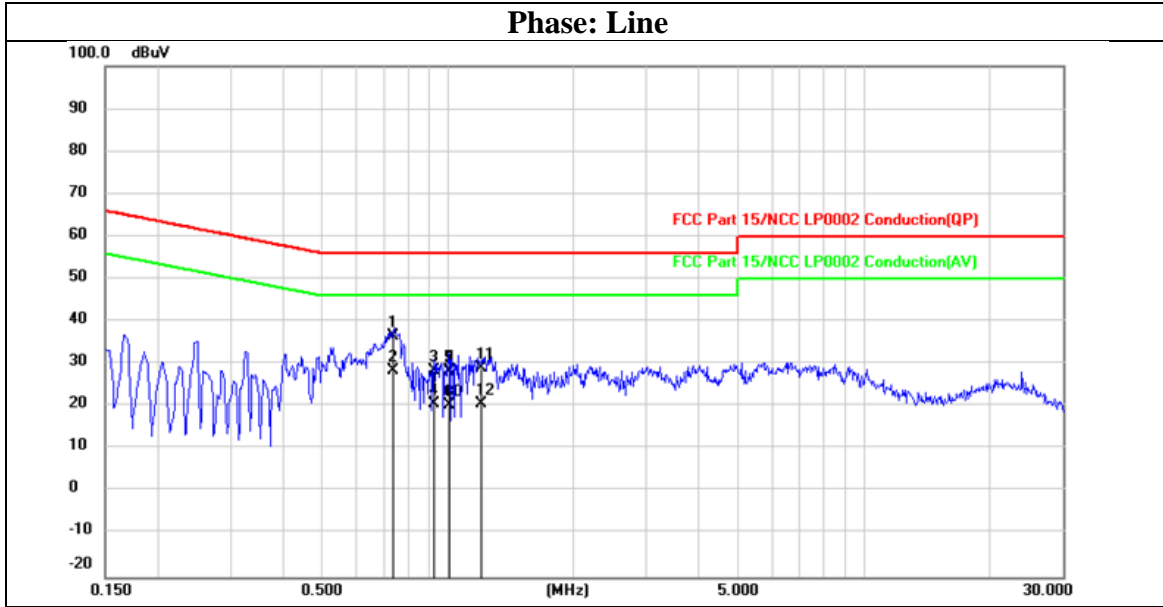

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.7398	26.62	9.96	36.58	56.00	-19.42	QP
2	0.7398	18.37	9.96	28.33	46.00	-17.67	AVG
3	0.9271	18.53	9.98	28.51	56.00	-27.49	QP
4	0.9271	10.78	9.98	20.76	46.00	-25.24	AVG
5	1.0109	18.37	9.98	28.35	56.00	-27.65	QP
6	1.0109	10.29	9.98	20.27	46.00	-25.73	AVG
7	1.0112	18.25	9.98	28.23	56.00	-27.77	QP
8	1.0112	10.25	9.98	20.23	46.00	-25.77	AVG
9	1.0114	18.20	9.98	28.18	56.00	-27.82	QP
10	1.0114	10.29	9.98	20.27	46.00	-25.73	AVG
11	1.1970	18.94	9.98	28.92	56.00	-27.08	QP
12	1.1970	10.76	9.98	20.74	46.00	-25.26	AVG

### Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	Charging Mode	Channel	N/A
------	---------------	---------	-----

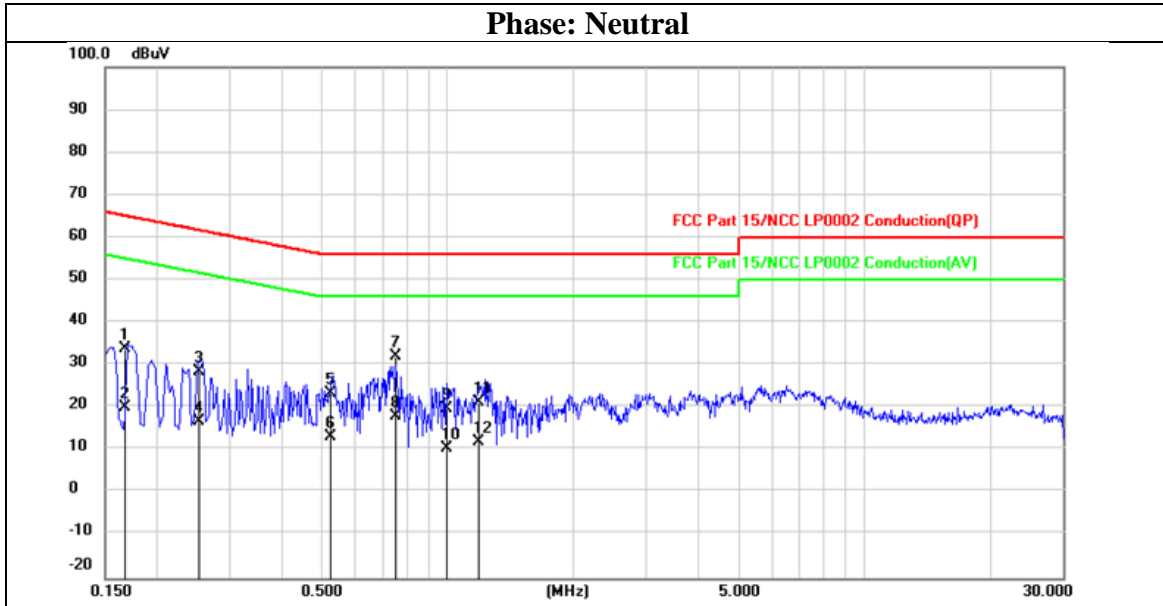

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1663	23.76	9.95	33.71	65.14	-31.43	QP
2	0.1663	10.24	9.95	20.19	55.14	-34.95	AVG
3	0.2513	18.60	9.94	28.54	61.71	-33.17	QP
4	0.2513	6.68	9.94	16.62	51.71	-35.09	AVG
5	0.5192	13.34	9.95	23.29	56.00	-32.71	QP
6	0.5192	3.21	9.95	13.16	46.00	-32.84	AVG
7	0.7463	22.00	9.96	31.96	56.00	-24.04	QP
8	0.7463	8.12	9.96	18.08	46.00	-27.92	AVG
9	0.9989	9.74	9.97	19.71	56.00	-36.29	QP
10	0.9989	0.60	9.97	10.57	46.00	-35.43	AVG
11	1.1914	11.38	9.97	21.35	56.00	-34.65	QP
12	1.1914	2.09	9.97	12.06	46.00	-33.94	AVG

**END OF REPORT**

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1