


ANT2


802.11a-5180




802.11a-5200

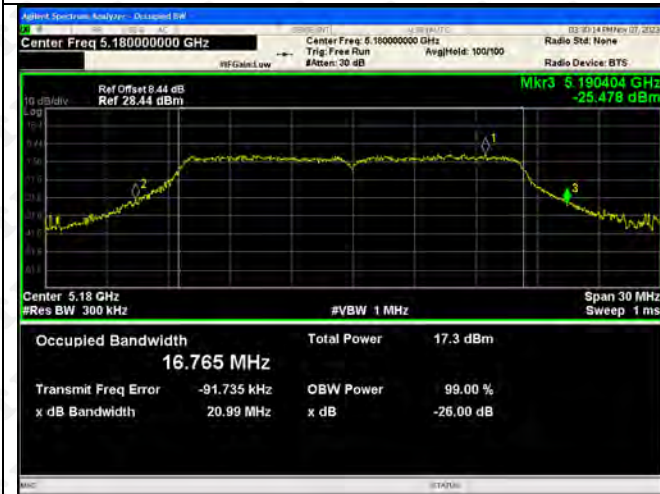

802.11a-5240

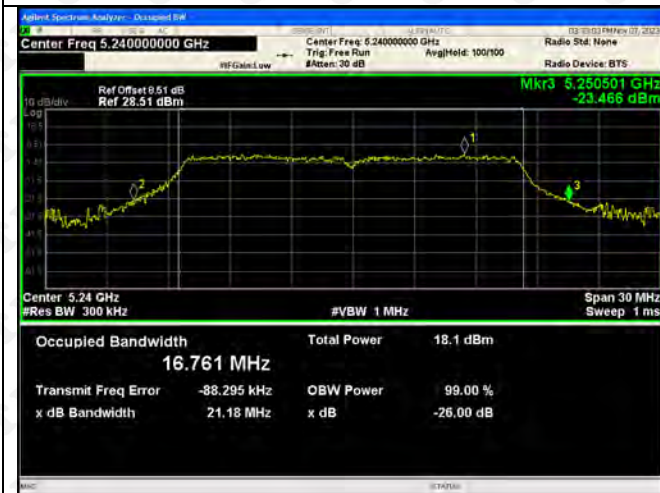


802.11ac(VH20)-5180

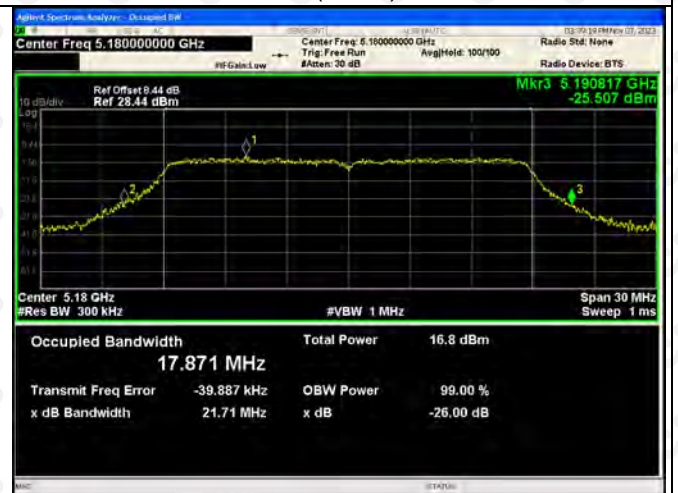


802.11ac(VH20)-5200


802.11ac(VH20)-5240

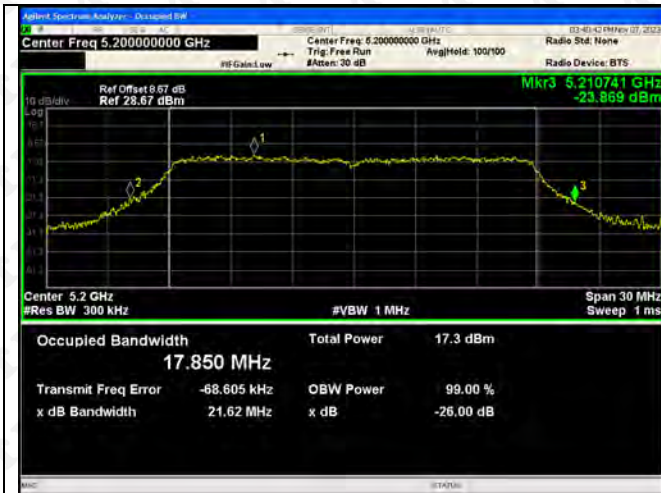

802.11ac(VH40)-5190

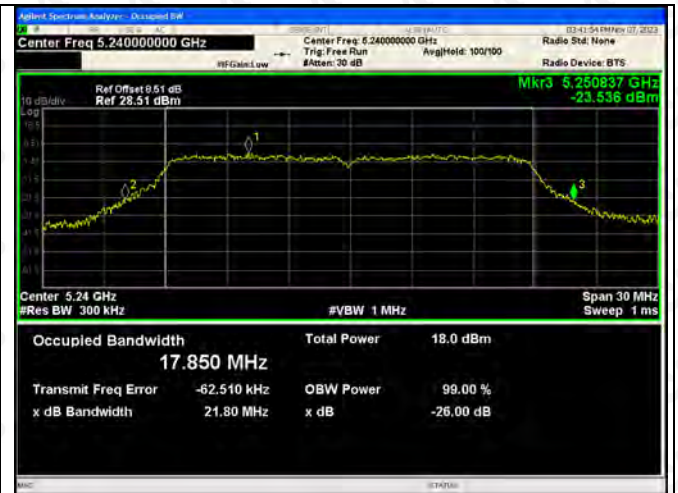

802.11ac(VH40)-5230

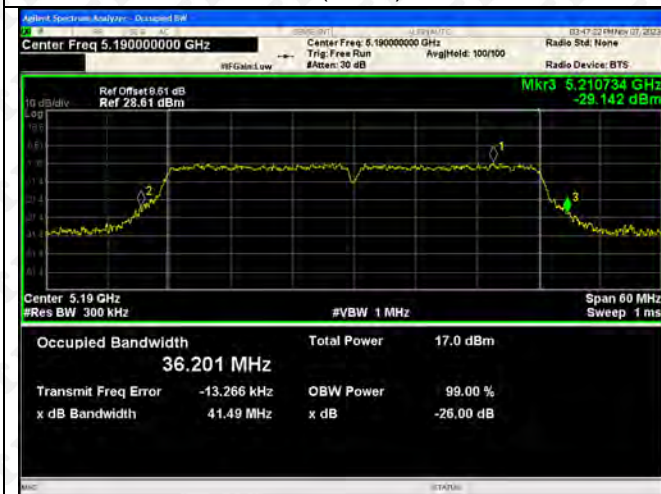

802.11ac(VH80)-5210




802.11n(HT20)-5180




802.11n(HT20)-5200



802.11n(HT20)-5240

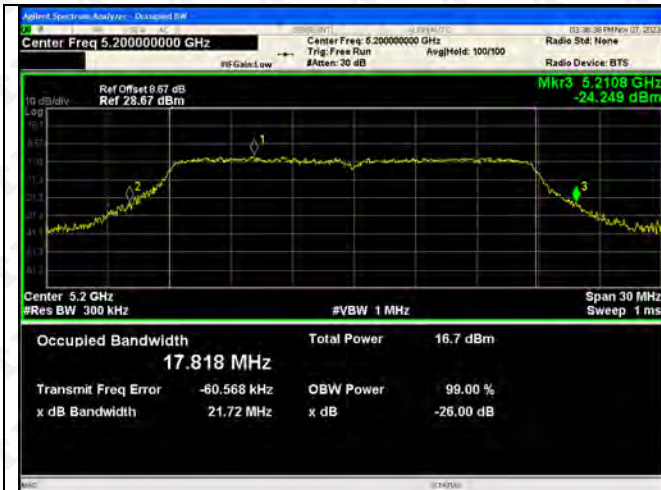

802.11n(HT40)-5190

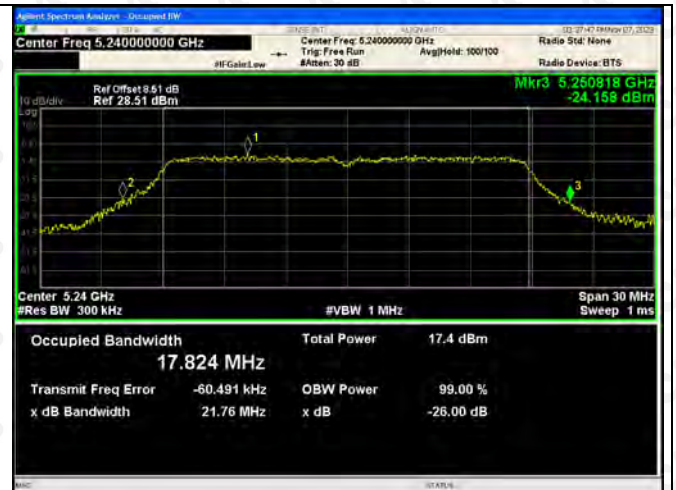


802.11n(HT40)-5230



5250-5350MHz-Power
ANT1



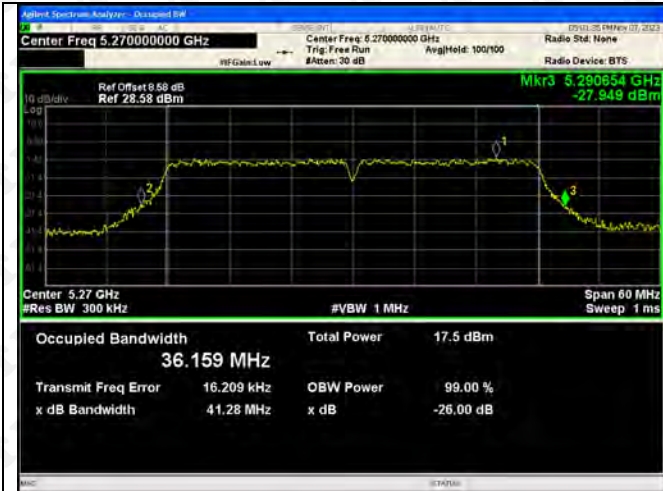


802.11ac(VH80)-5290




802.11n(HT20)-5260




802.11n(HT20)-5280

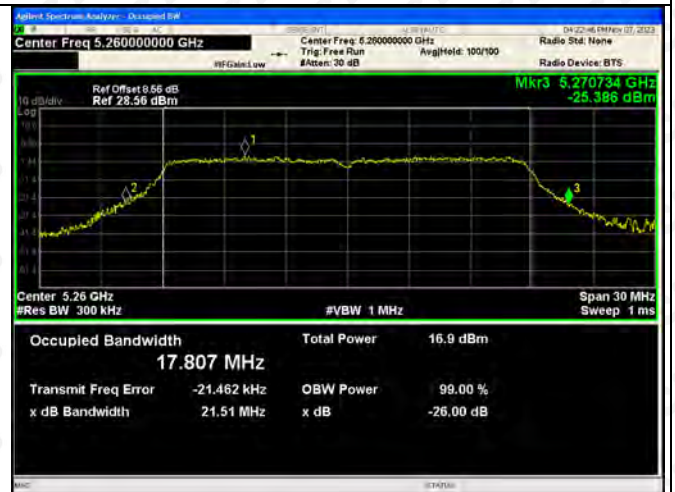


802.11n(HT20)-5320

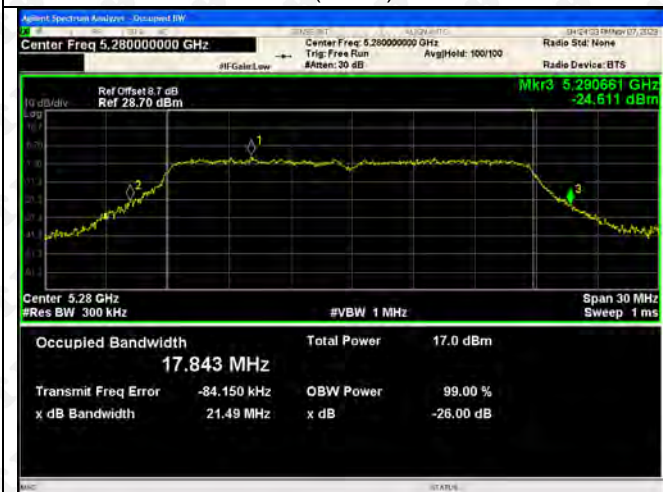

802.11n(HT40)-5270

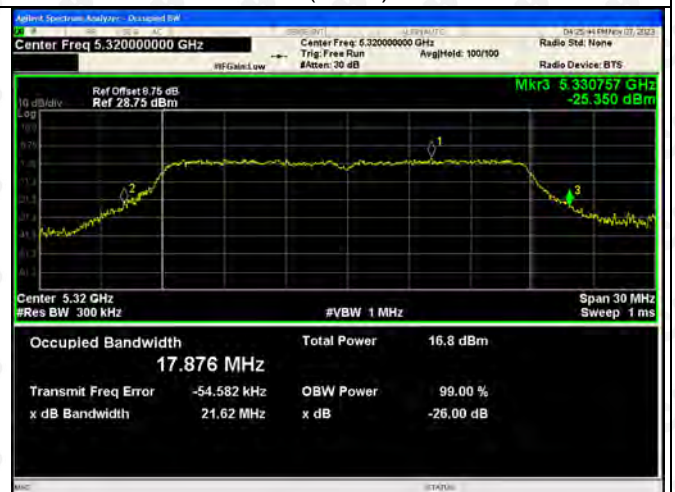

802.11n(HT40)-5310

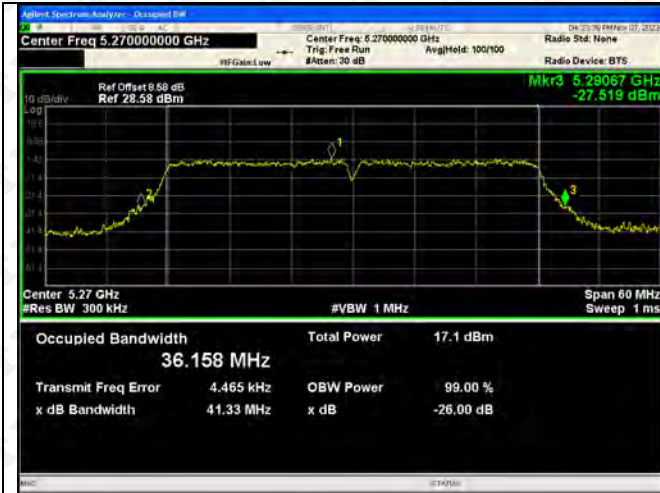

ANT2

802.11a-5260




802.11a-5280



802.11a-5320




802.11ac(VH20)-5260

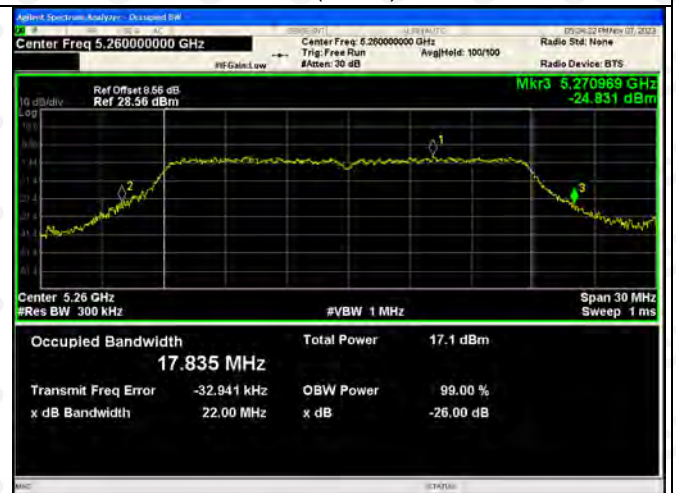

802.11ac(VH20)-5280


802.11ac(VH20)-5320

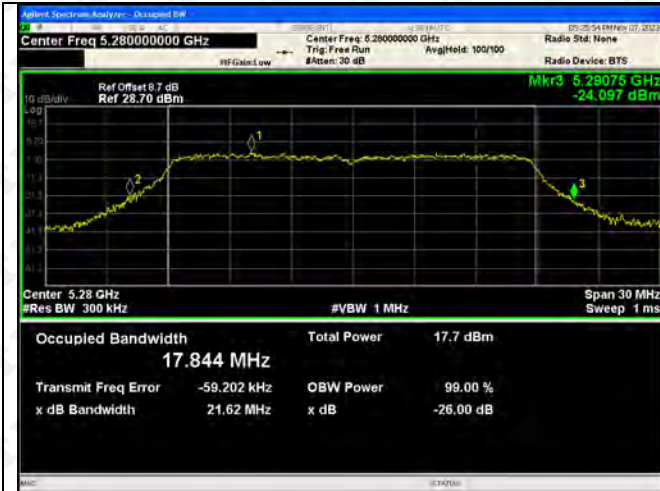


802.11ac(VH40)-5270




802.11ac(VH40)-5310

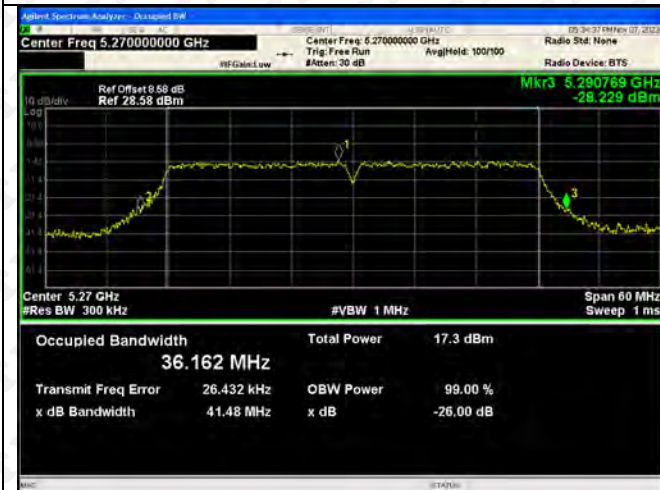


802.11ac(VH80)-5290

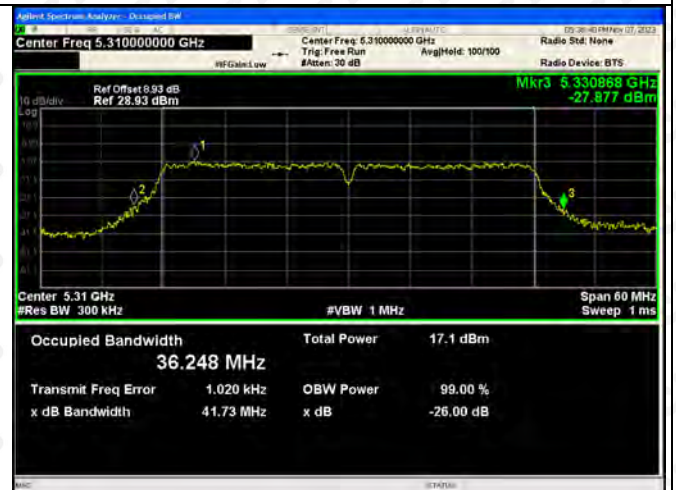


802.11n(HT20)-5260

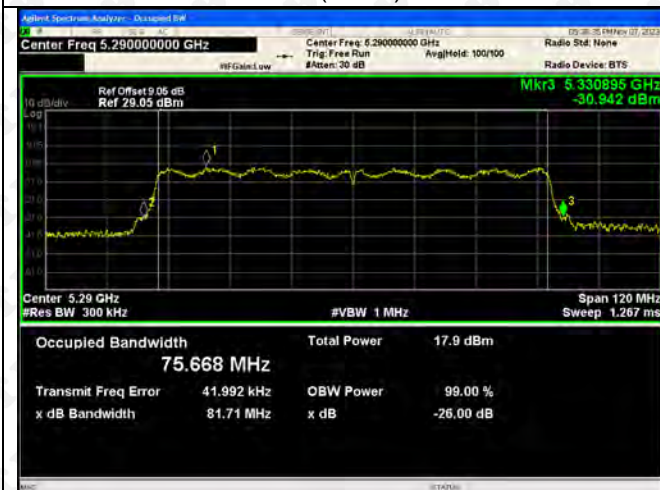

802.11n(HT20)-5280

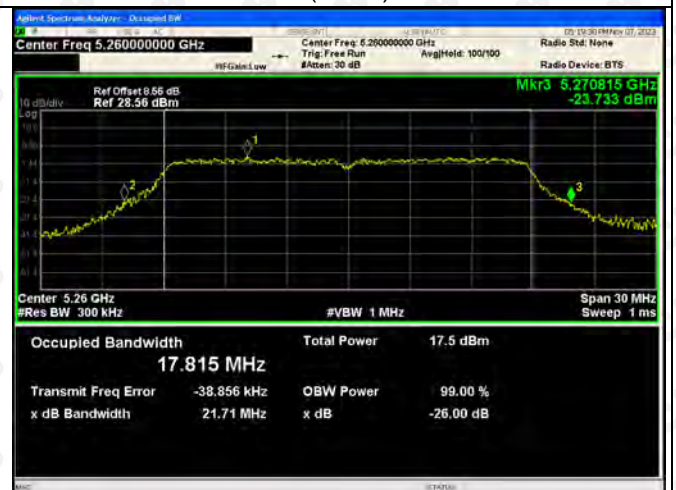


802.11n(HT20)-5320

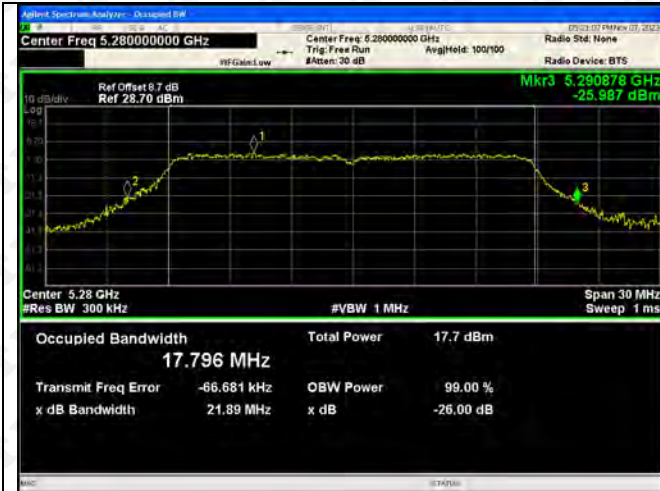

802.11n(HT40)-5270



802.11n(HT40)-5310

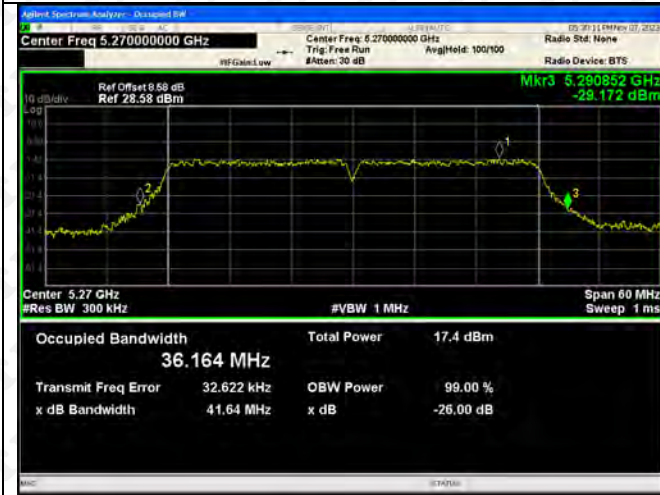

5470-5725MHz-Power
ANT1






802.11ac(VH80)-5530




802.11n(HT20)-5500

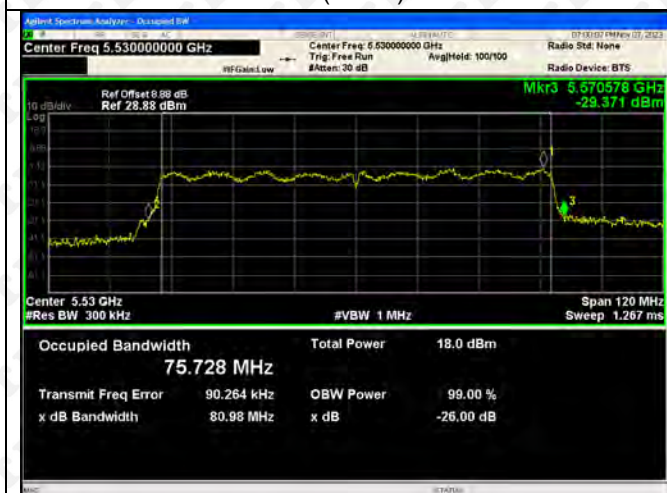

802.11n(HT20)-5580




802.11n(HT20)-5700

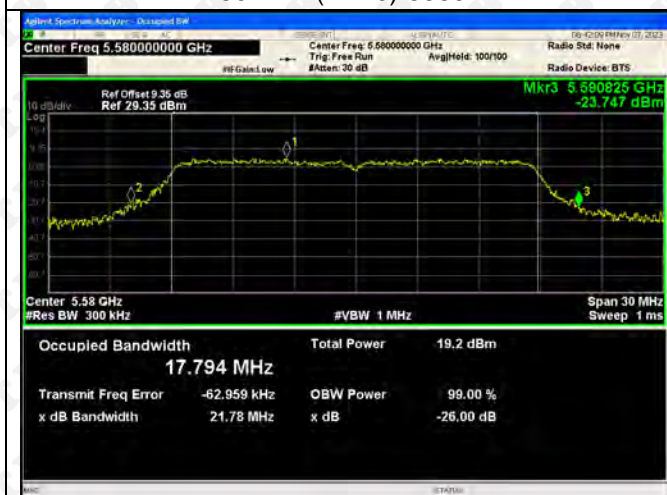





802.11n(HT40)-5510



802.11n(HT40)-5670

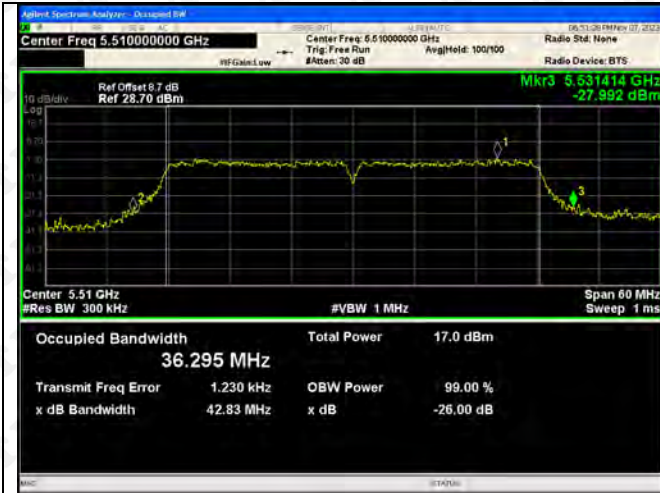


ANT2

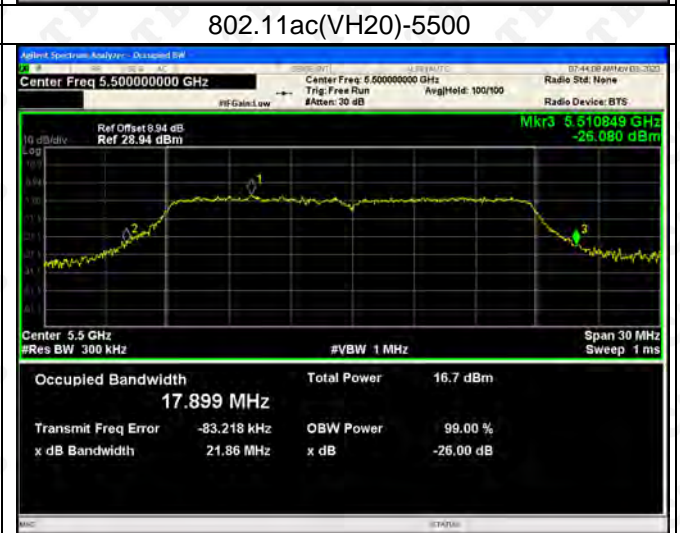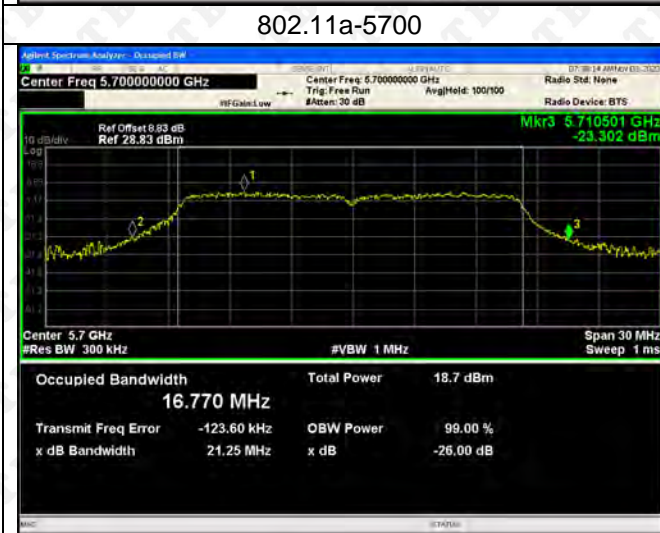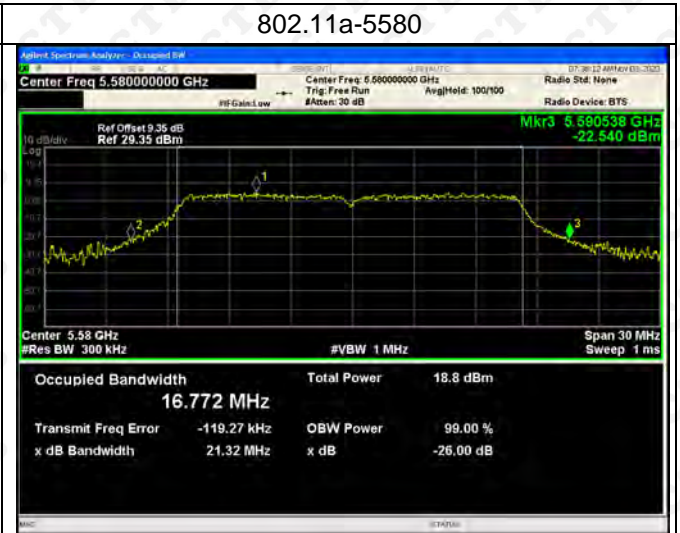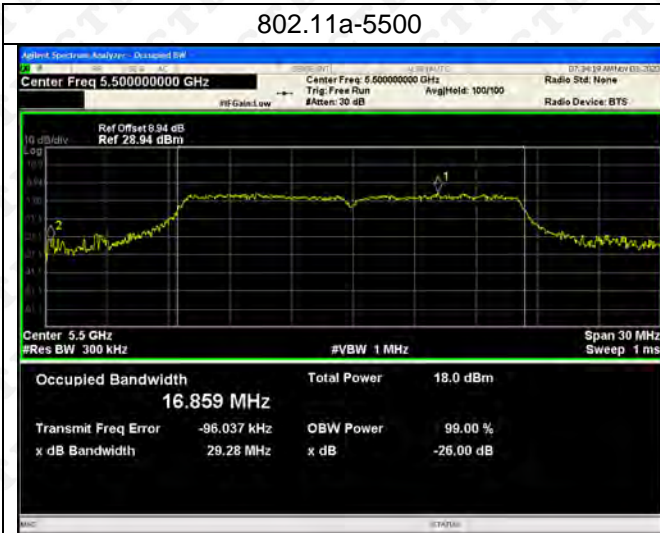


802.11ac(VH20)-5580


802.11ac(VH20)-5700

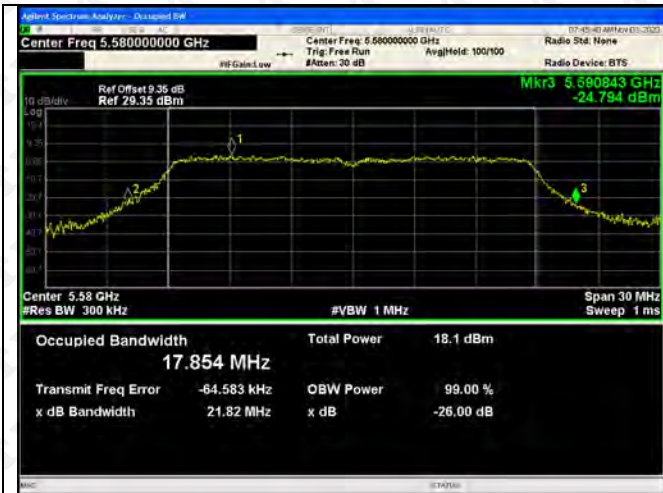


802.11ac(VH40)-5510

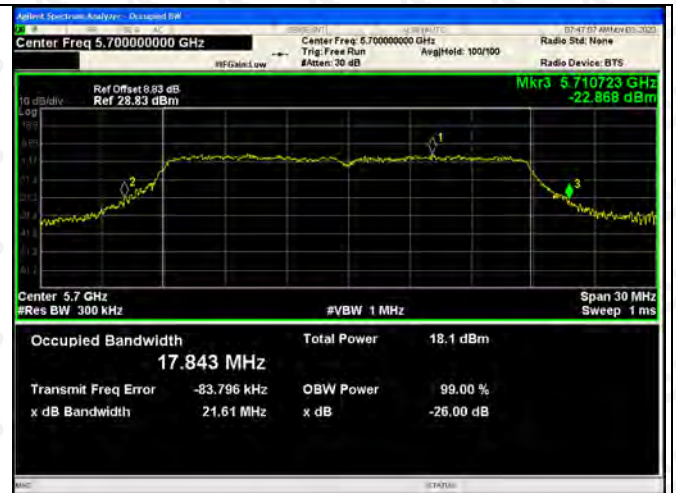

802.11ac(VH40)-5670

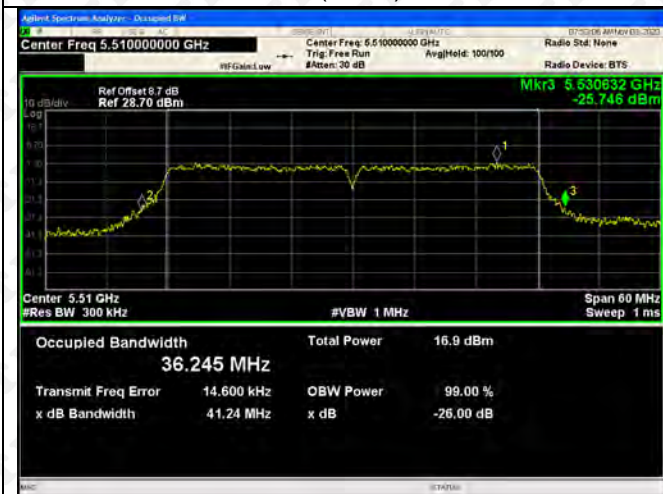

802.11ac(VH80)-5530

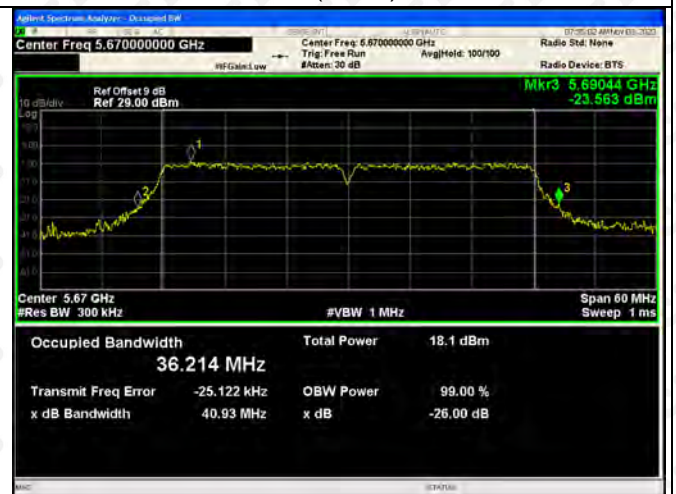


802.11n(HT20)-5500




802.11n(HT20)-5580





802.11n(HT20)-5700

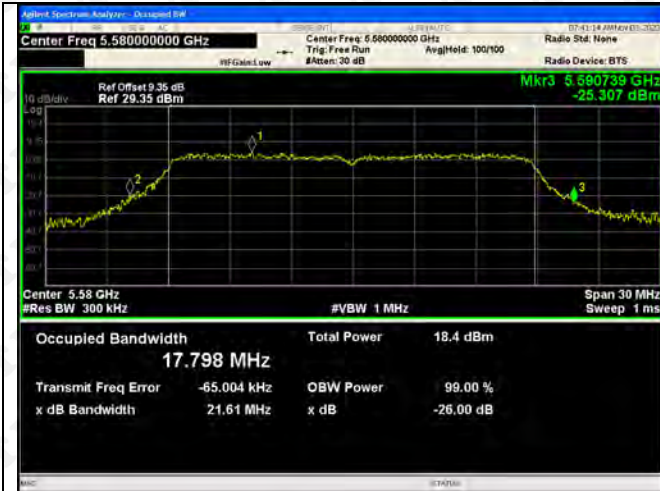

802.11n(HT40)-5510

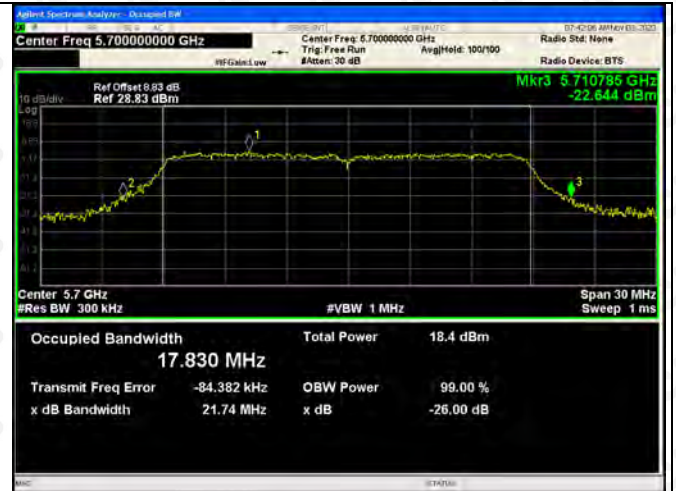

802.11n(HT40)-5670

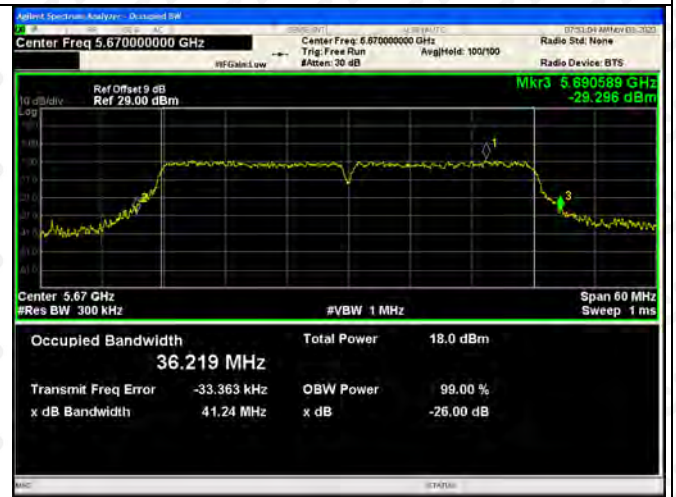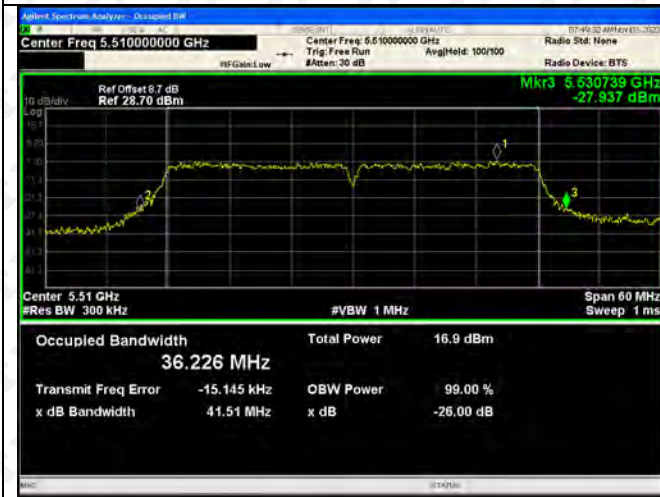

5725-5850MHz:-Power
ANT1






802.11ac(VH80)-5775



802.11n(HT20)-5745

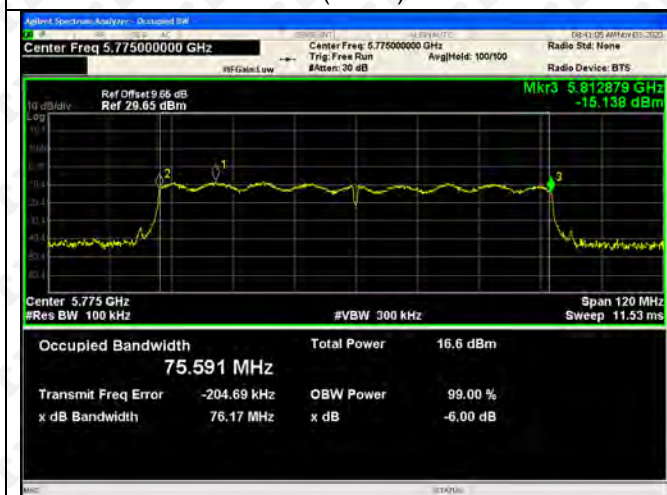

802.11n(HT20)-5785





802.11n(HT20)-5825







802.11n(HT40)-5795




802.11n(HT40)-5825

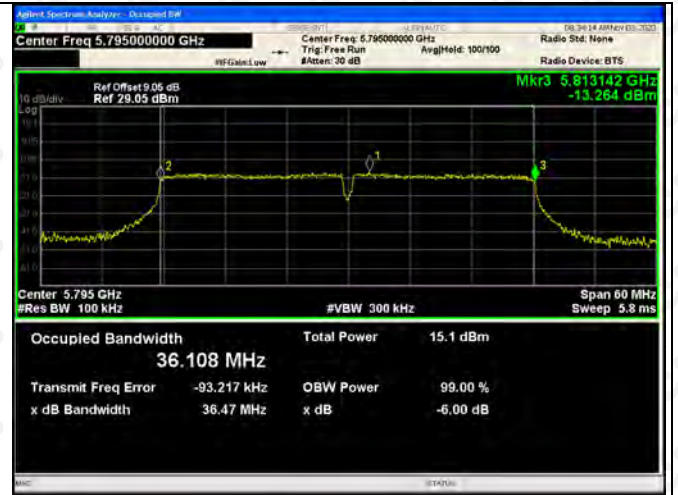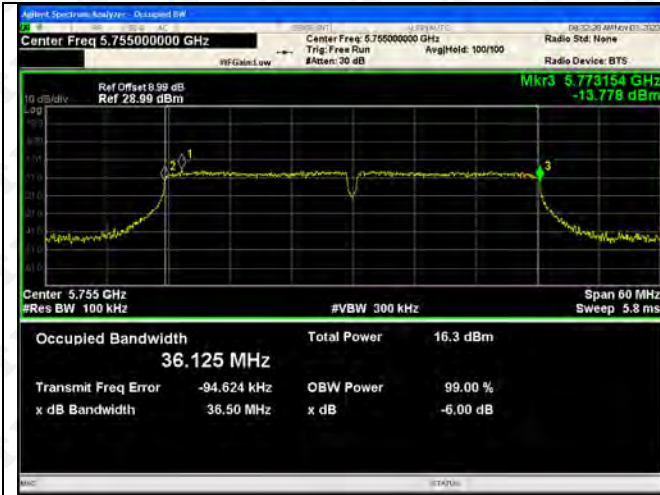

ANT2

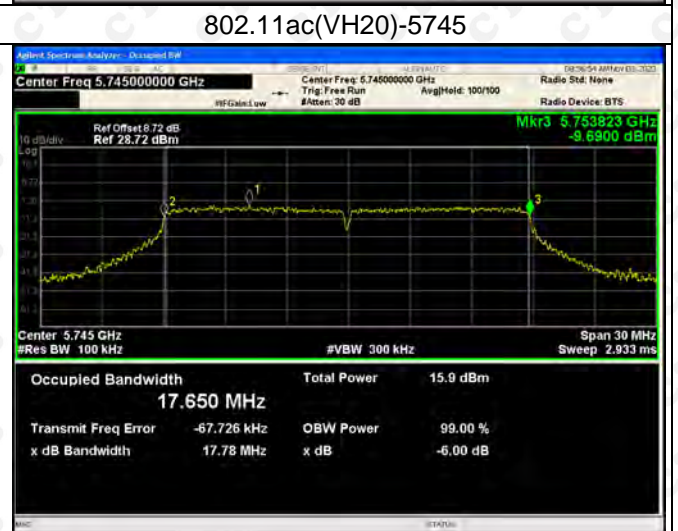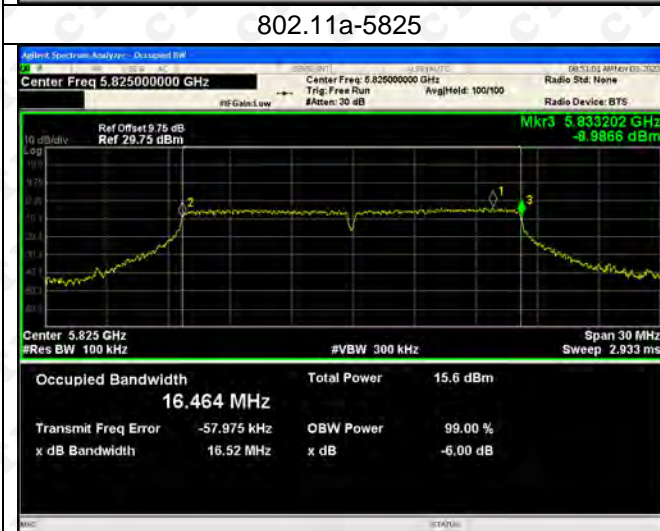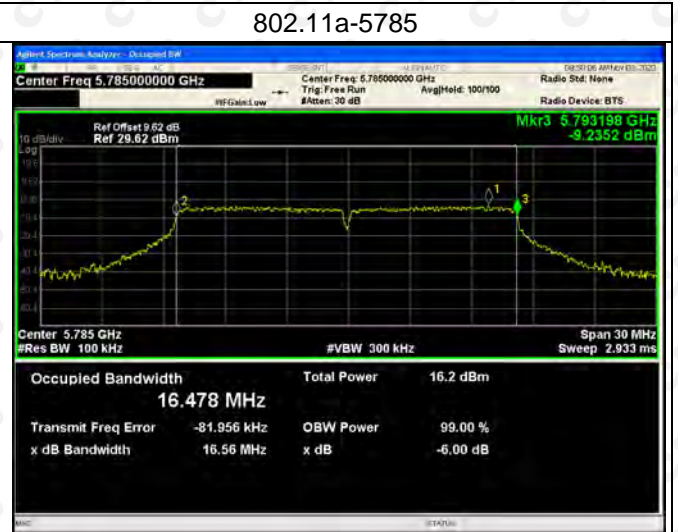


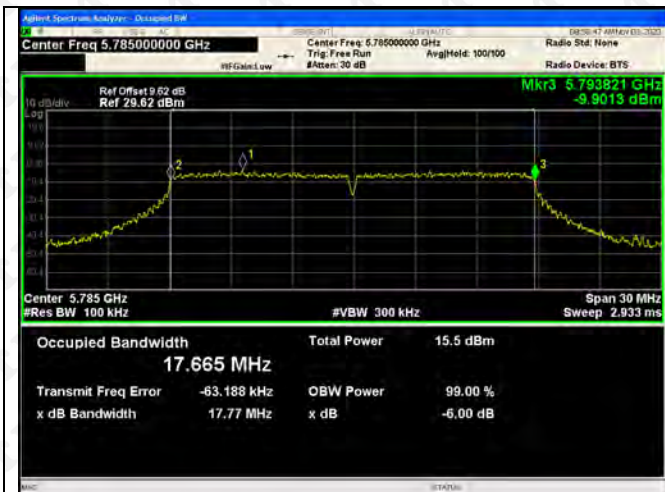


802.11ac(VH40)-5755




802.11ac(VH40)-5795

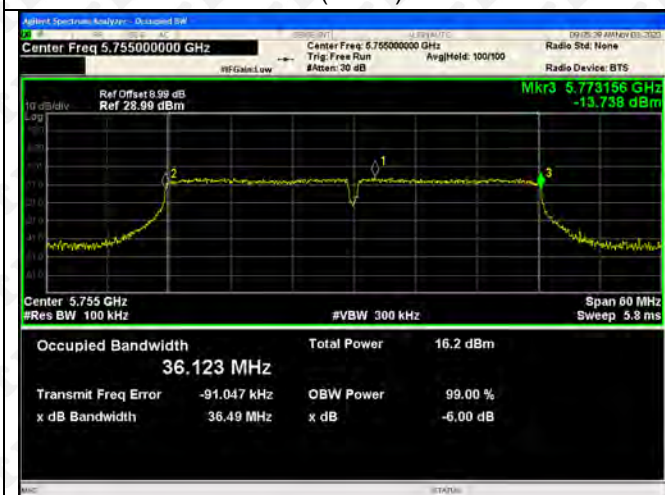

802.11ac(VH80)-5775

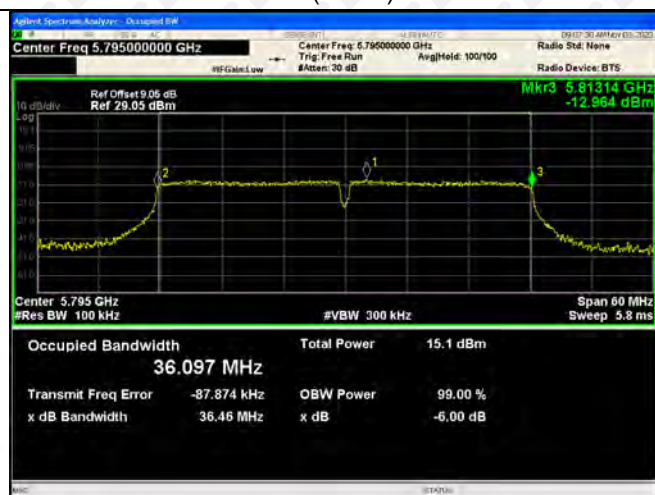


802.11n(HT20)-5745

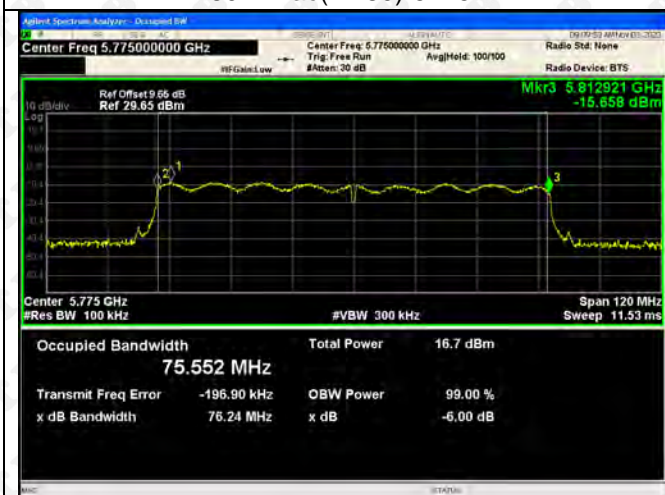


802.11n(HT20)-5785





802.11n(HT20)-5825

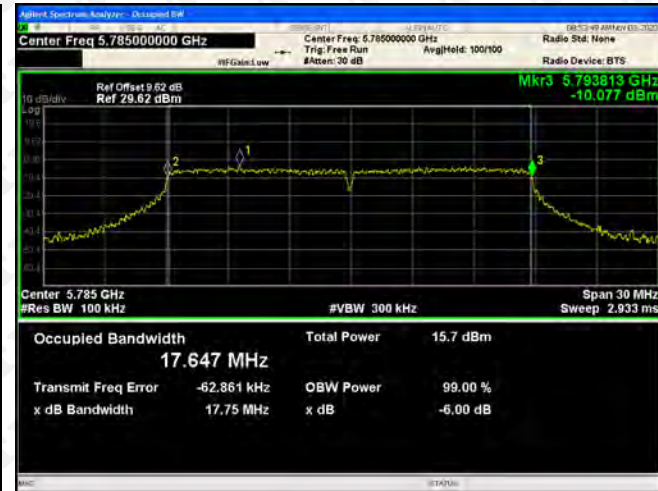

802.11n(HT40)-5795

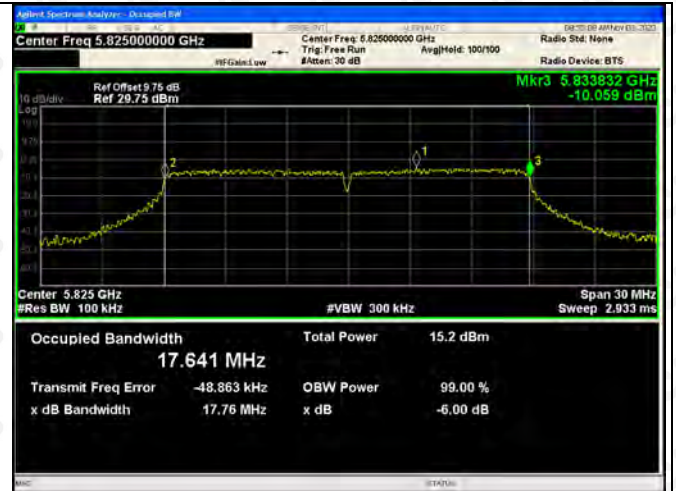


802.11n(HT40)-5825

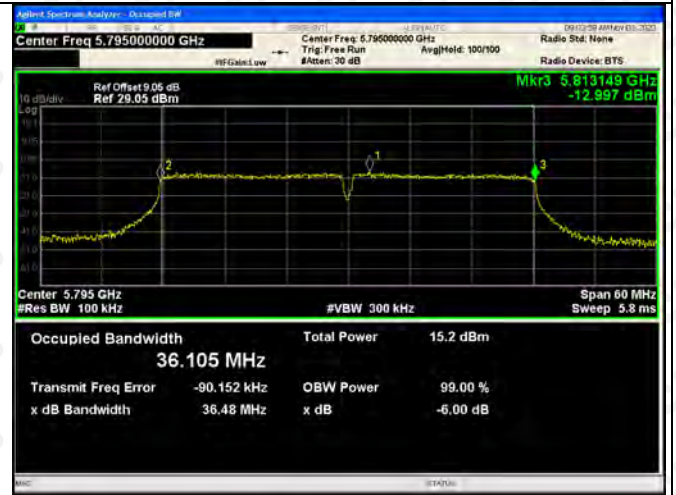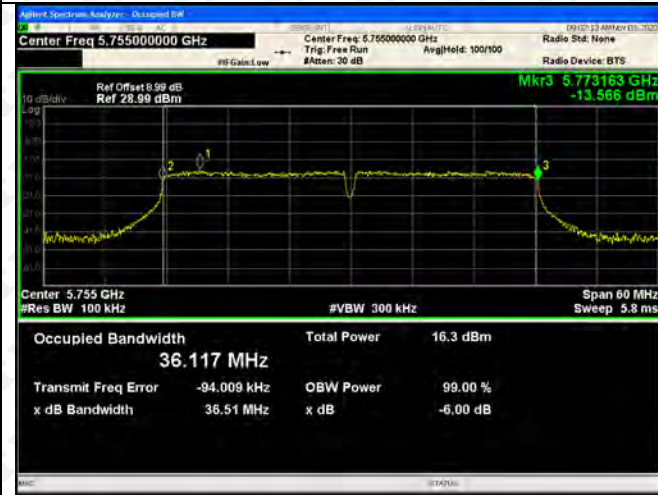

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

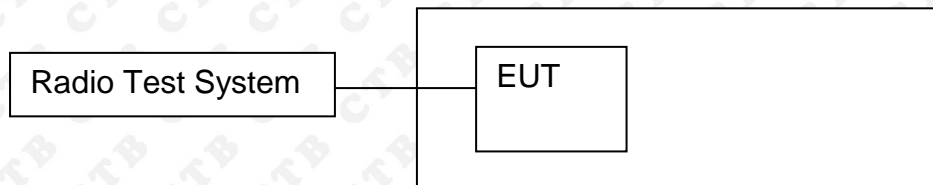

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.I.a).

b) Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the

measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

11.4 Test Result

5150-5250MHz:MHz

ANT1+ANT2

| Test mode | Test Channel (MHz) | PSD [dBm/MHz] ANT 1 | PSD [dBm/MHz] ANT 2 | PSD [dBm/MHz] Total | Limit (dBm) | Result |
|----------------|--------------------|---------------------|---------------------|---------------------|-------------|--------|
| 802.11a | 5180 | 1.557 | 0.588 | / | 11 | Pass |
| | 5200 | 1.193 | 0.624 | / | 11 | Pass |
| | 5240 | 1.757 | 1.293 | / | 11 | Pass |
| 802.11n(HT20) | 5180 | -0.088 | -0.26 | 2.837 | 11 | Pass |
| | 5200 | -0.01 | 0.22 | 3.117 | 11 | Pass |
| | 5240 | 0.592 | 1.087 | 3.857 | 11 | Pass |
| 802.11n(HT40) | 5190 | -3.029 | -3.304 | -0.154 | 11 | Pass |
| | 5230 | -2.489 | -2.408 | 0.562 | 11 | Pass |
| 802.11ac(VH20) | 5210 | -4.57 | -4.487 | -1.518 | 11 | Pass |
| | 5180 | 0.184 | 0.214 | 3.209 | 11 | Pass |
| | 5200 | 0.305 | -0.486 | 2.938 | 11 | Pass |
| 802.11ac(VH40) | 5240 | 1 | 0.445 | 3.742 | 11 | Pass |
| | 5190 | -2.996 | -2.738 | 0.145 | 11 | Pass |
| 802.11ac(VH80) | 5230 | -2.382 | -2.259 | 0.690 | 11 | Pass |

5250-5350 MHzMHz

ANT1+ANT2

| Test mode | Test Channel (MHz) | PSD [dBm/MHz] ANT 1 | PSD [dBm/MHz] ANT 2 | PSD [dBm/MHz] Total | Limit (dBm) | Result |
|----------------|--------------------|---------------------|---------------------|---------------------|-------------|--------|
| 802.11a | 5260 | 1.069 | 0.694 | / | 11 | Pass |
| | 5280 | 0.623 | 0.936 | / | 11 | Pass |
| | 5320 | 1.811 | 0.403 | / | 11 | Pass |
| 802.11n(HT20) | 5260 | -0.037 | 0.285 | 3.137 | 11 | Pass |
| | 5280 | -0.003 | 0.556 | 3.296 | 11 | Pass |
| | 5320 | -0.245 | -0.091 | 2.843 | 11 | Pass |
| 802.11n(HT40) | 5270 | -2.931 | -2.949 | 0.070 | 11 | Pass |
| | 5310 | -2.984 | -2.906 | 0.065 | 11 | Pass |
| 802.11ac(VH20) | 5260 | -4.7 | -4.929 | -1.803 | 11 | Pass |
| | 5280 | 0.081 | 0.607 | 3.362 | 11 | Pass |
| | 5320 | 0.251 | 0.774 | 3.531 | 11 | Pass |
| 802.11ac(VH40) | 5270 | -0.28 | 0.055 | 2.901 | 11 | Pass |
| | 5310 | -3.178 | -2.721 | 0.067 | 11 | Pass |
| 802.11ac(VH80) | 5290 | -2.134 | -2.957 | 0.484 | 11 | Pass |


5470-5725MHz:
 ANT1+ANT2

| Test mode | Test Channel (MHz) | PSD [dBm/MHz] ANT 1 | PSD [dBm/MHz] ANT 2 | PSD [dBm/MHz] Total | Limit (dBm) | Result |
|----------------|--------------------|---------------------|---------------------|---------------------|-------------|--------|
| 802.11a | 5500 | 0.428 | 1.1 | / | 11 | Pass |
| | 5580 | 1.651 | 1.826 | / | 11 | Pass |
| | 5700 | 1.4 | 1.94 | / | 11 | Pass |
| 802.11n(HT20) | 5500 | 0.153 | -0.167 | 3.006 | 11 | Pass |
| | 5580 | 1.635 | 1.056 | 4.365 | 11 | Pass |
| | 5700 | 1.984 | 1.066 | 4.560 | 11 | Pass |
| 802.11n(HT40) | 5510 | -2.998 | -3.166 | -0.071 | 11 | Pass |
| | 5670 | -1.733 | -2.069 | 1.113 | 11 | Pass |
| 802.11ac(VH20) | 5530 | -4.407 | -4.409 | -1.398 | 11 | Pass |
| | 5500 | 0.949 | -0.16 | 3.440 | 11 | Pass |
| | 5580 | 1.983 | 1.225 | 4.631 | 11 | Pass |
| 802.11ac(VH40) | 5700 | 2.004 | 1.437 | 4.740 | 11 | Pass |
| | 5510 | -2.886 | -3.146 | -0.004 | 11 | Pass |
| 802.11ac(VH80) | 5670 | -1.66 | -1.894 | 1.235 | 11 | Pass |

 5725-5850MHz:
 ANT1+ANT2

| Test mode | Test Channel (MHz) | PSD [dBm/MHz] ANT 1 | PSD [dBm/MHz] ANT 2 | PSD [dBm/MHz] Total | Limit (dBm) | Result |
|----------------|--------------------|---------------------|---------------------|---------------------|-------------|--------|
| 802.11a | 5745 | -2.454 | -2.93 | / | 30 | Pass |
| | 5785 | -3.141 | -3.336 | / | 30 | Pass |
| | 5825 | -3.594 | -3.637 | / | 30 | Pass |
| 802.11n(HT20) | 5745 | -3.904 | -3.993 | -0.938 | 30 | Pass |
| | 5785 | -4.39 | -4.267 | -1.318 | 30 | Pass |
| | 5825 | -4.453 | -4.628 | -1.529 | 30 | Pass |
| 802.11n(HT40) | 5755 | -6.759 | -6.744 | -3.741 | 30 | Pass |
| | 5795 | -7.791 | -7.51 | -4.638 | 30 | Pass |
| 802.11ac(VH20) | 5745 | -8.379 | -8.275 | -5.316 | 30 | Pass |
| | 5785 | -3.731 | -3.67 | -0.690 | 30 | Pass |
| | 5825 | -4.055 | -3.973 | -1.004 | 30 | Pass |
| 802.11ac(VH40) | 5755 | -4.342 | -4.315 | -1.318 | 30 | Pass |
| | 5795 | -6.728 | -6.78 | -3.744 | 30 | Pass |
| 802.11ac(VH80) | 5775 | -7.773 | -7.686 | -4.719 | 30 | Pass |

Test Graph:
5150-5250MHz
ANT1

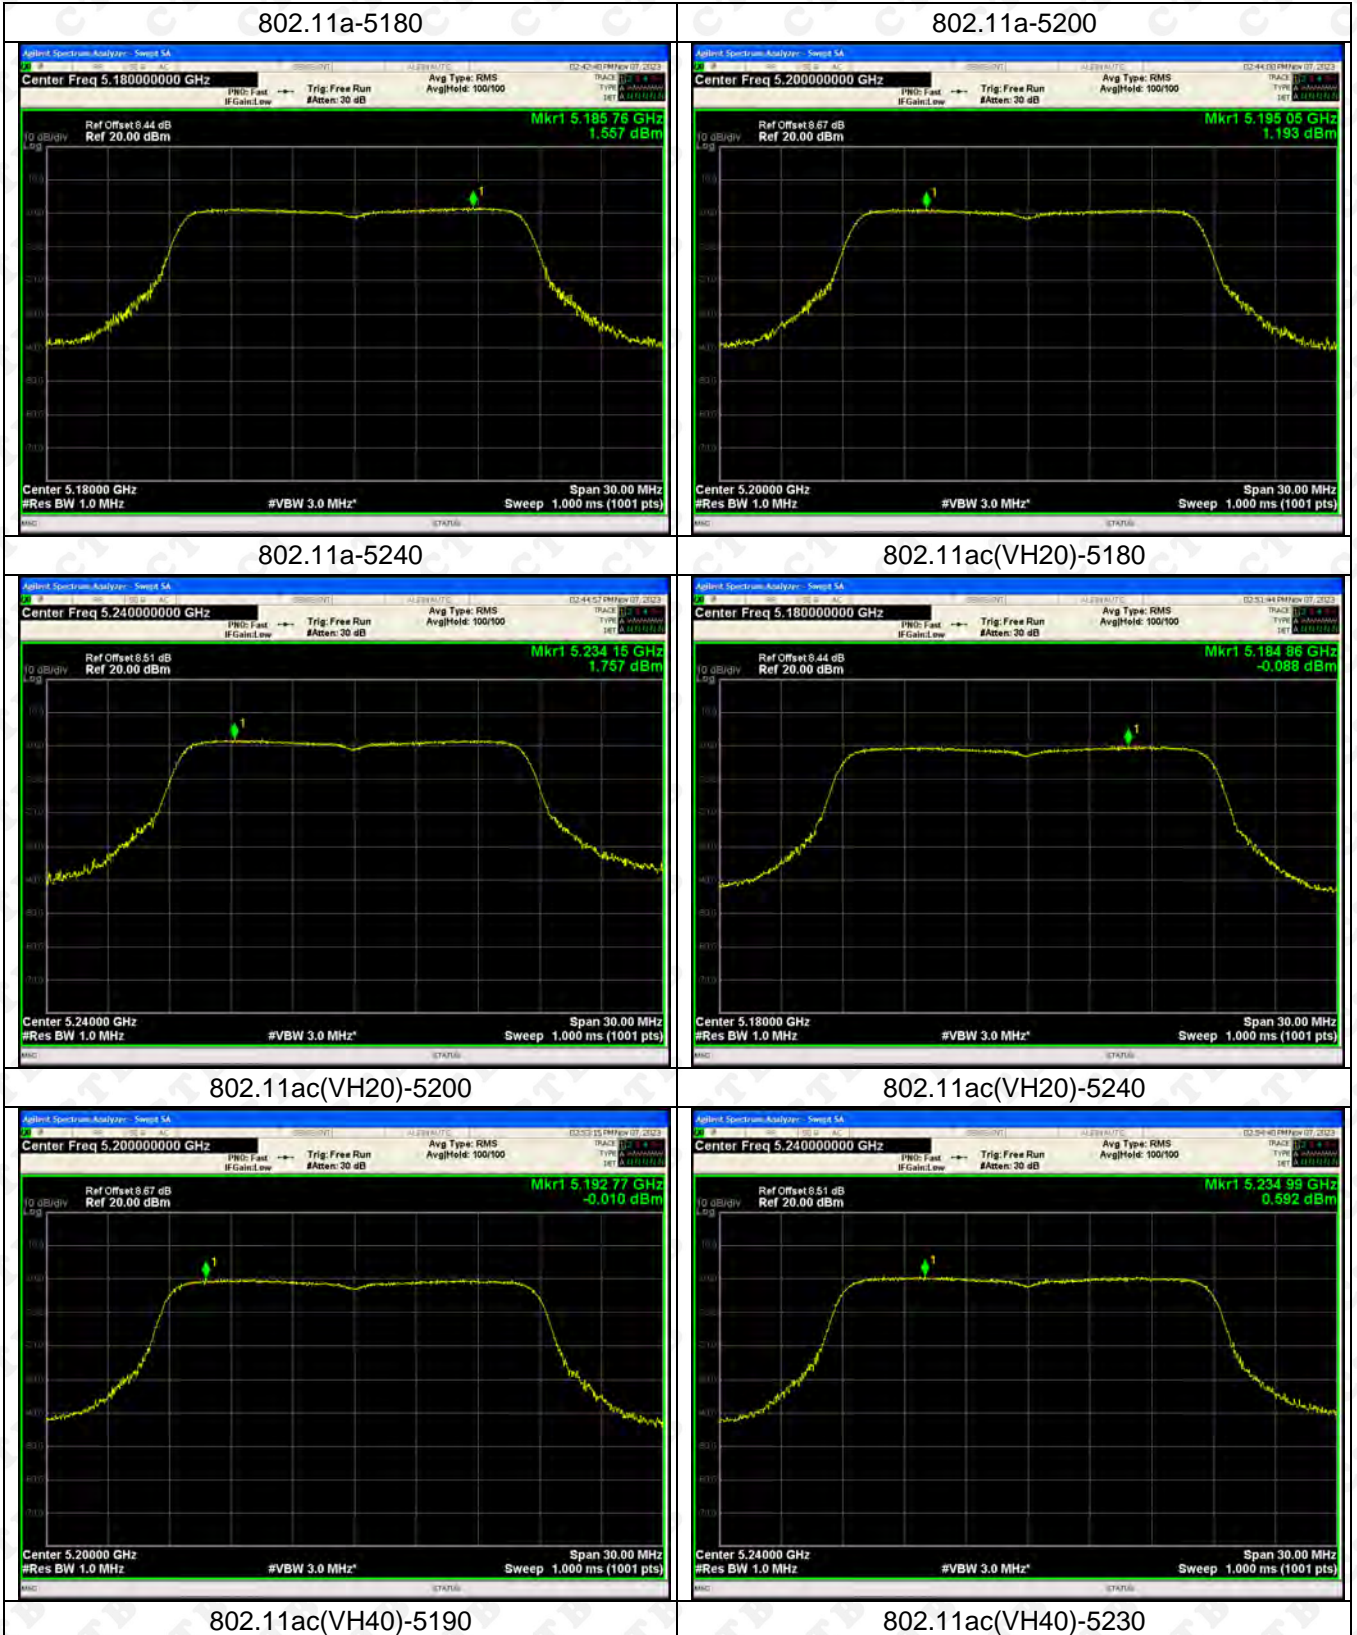



802.11ac(VH80)-5210



802.11n(HT20)-5180



802.11n(HT20)-5200




802.11n(HT20)-5240




802.11n(HT40)-5190



802.11n(HT40)-5230

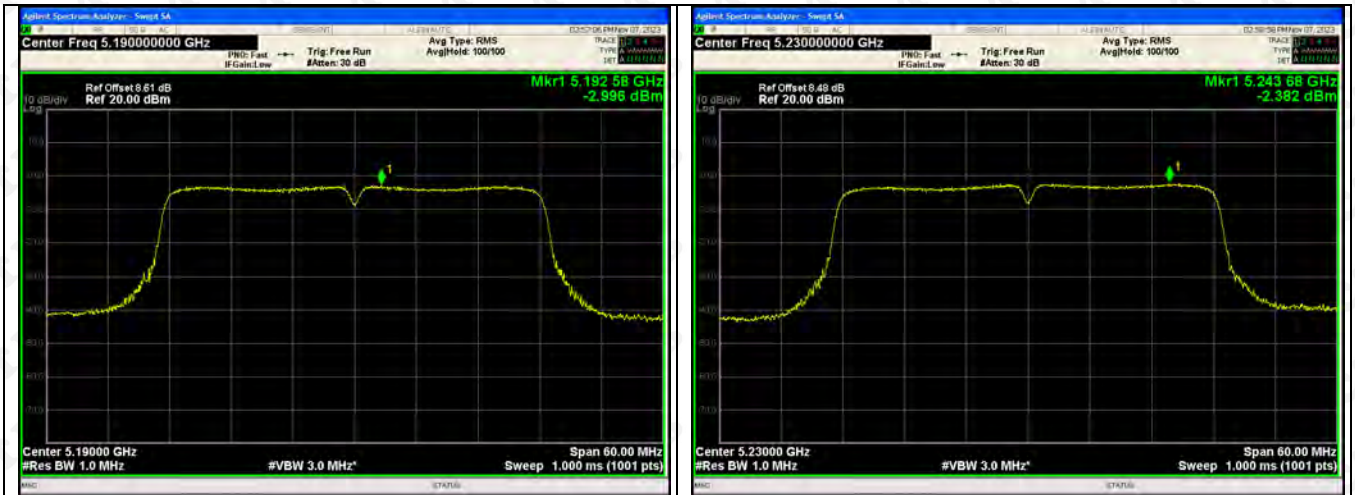

ANT2

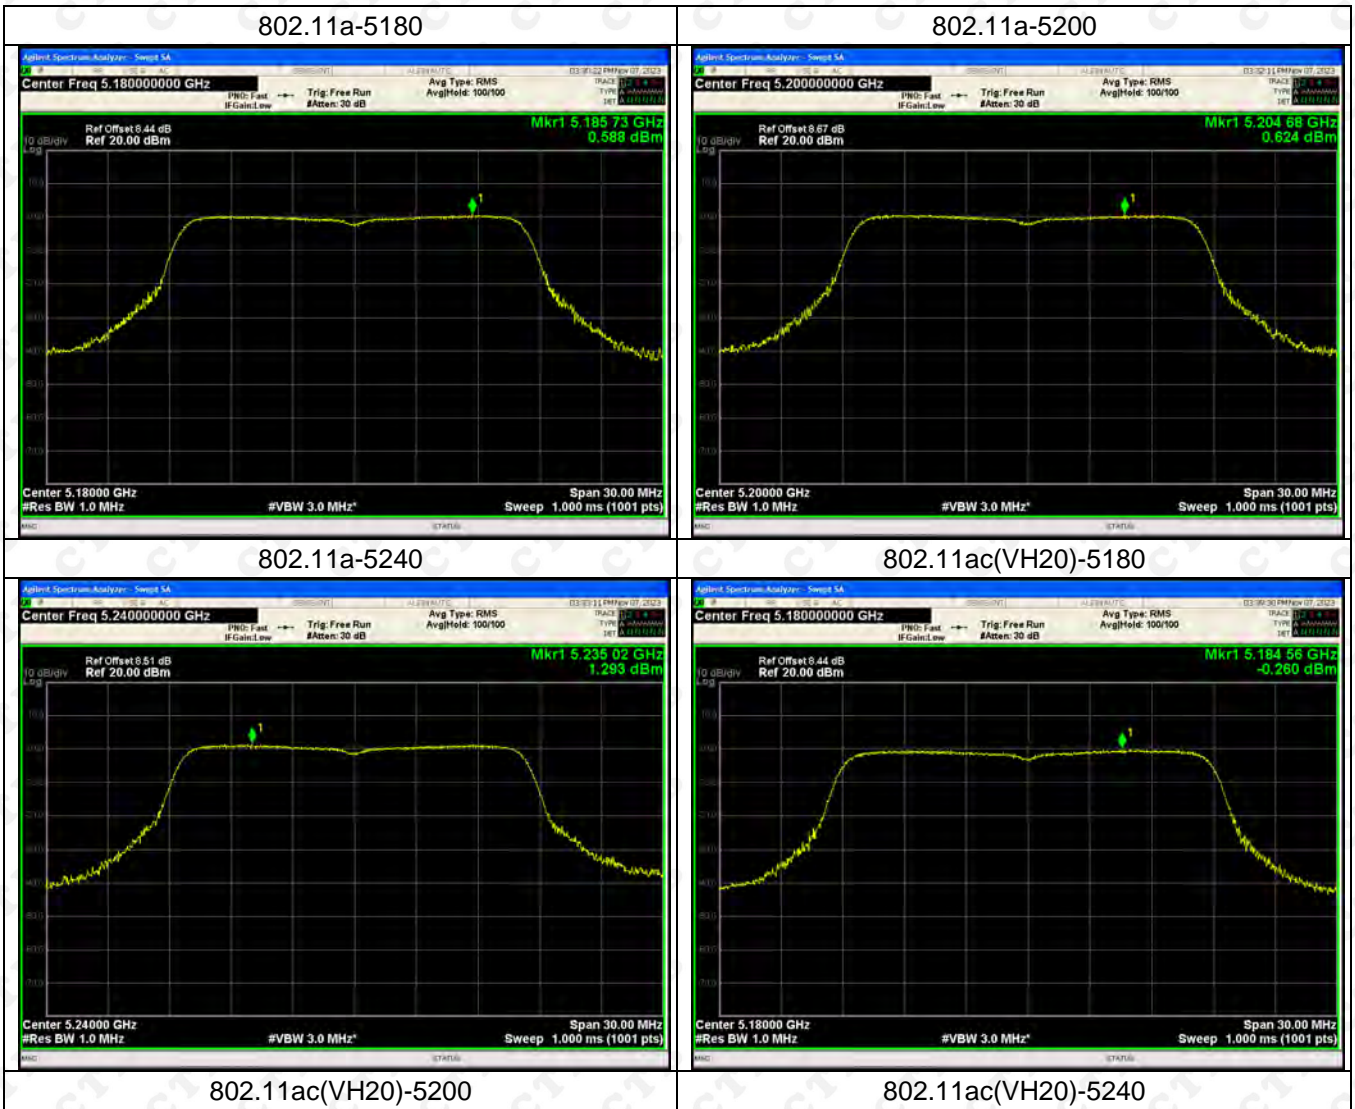



802.11ac(VH40)-5190



802.11ac(VH40)-5230



802.11ac(VH80)-5210



802.11n(HT20)-5180



802.11n(HT20)-5200



802.11n(HT20)-5240




802.11n(HT40)-5190




802.11n(HT40)-5230




5250-5350MHz
ANT1

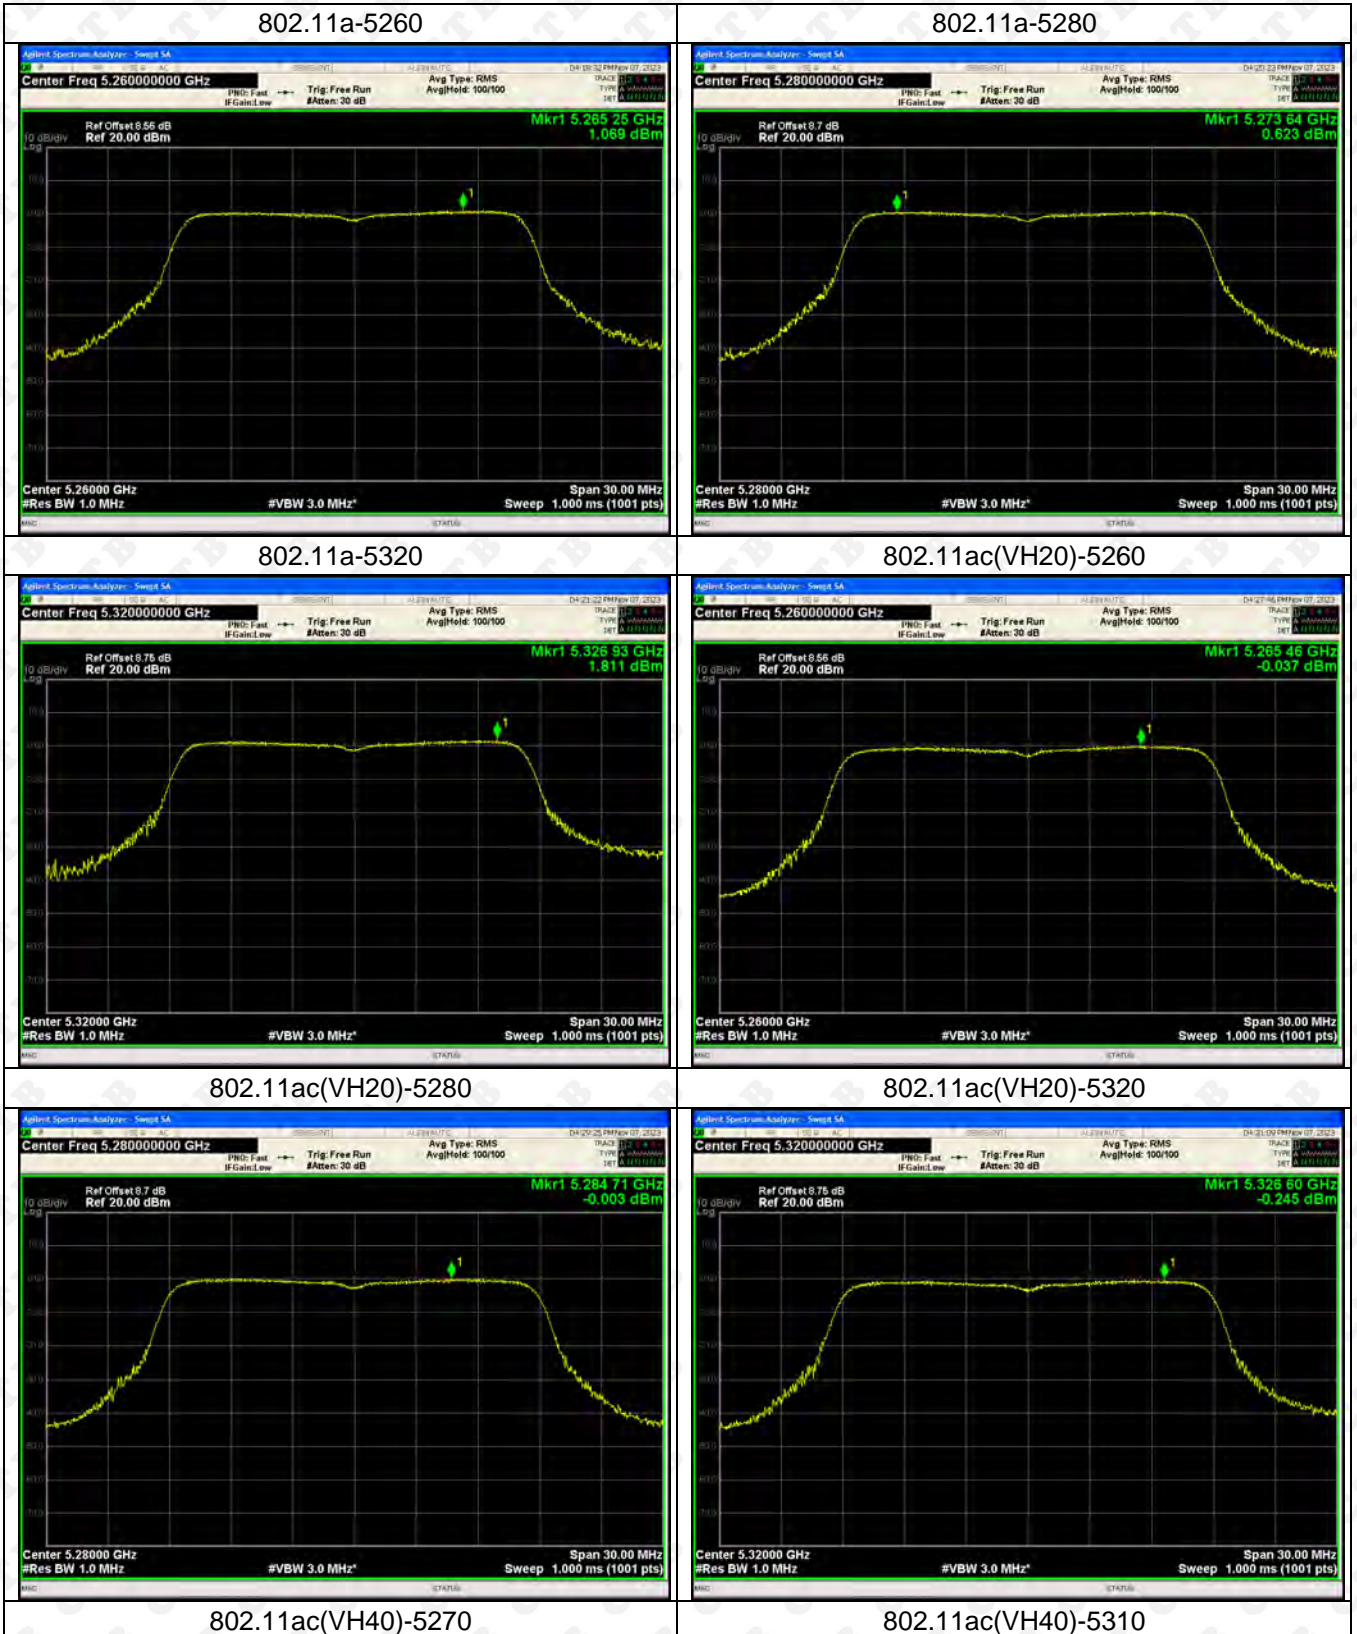

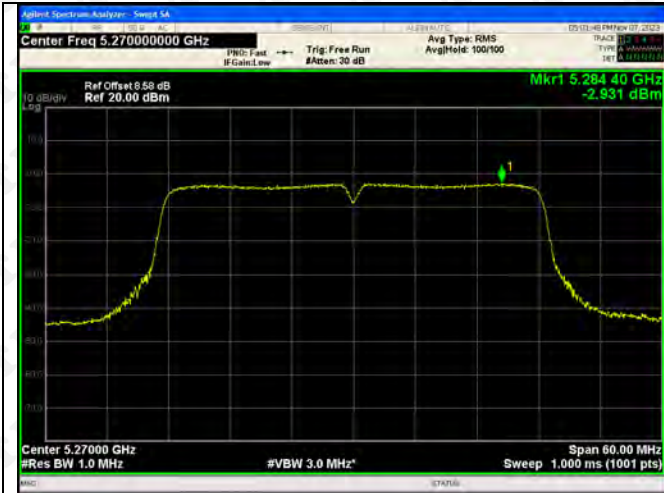


802.11ac(VH80)-5290

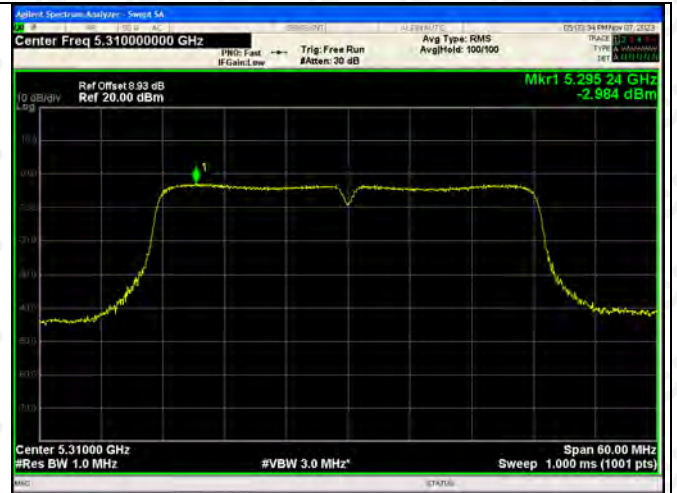

802.11n(HT20)-5260



802.11n(HT20)-5280

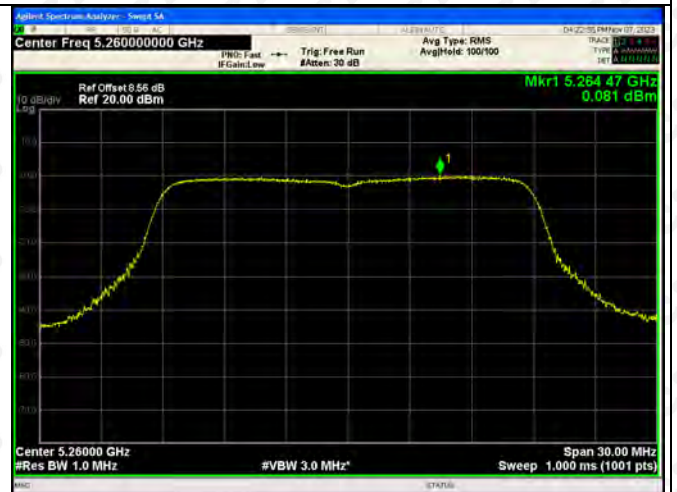

802.11n(HT20)-5320




802.11n(HT40)-5270



802.11n(HT40)-5310



ANT2

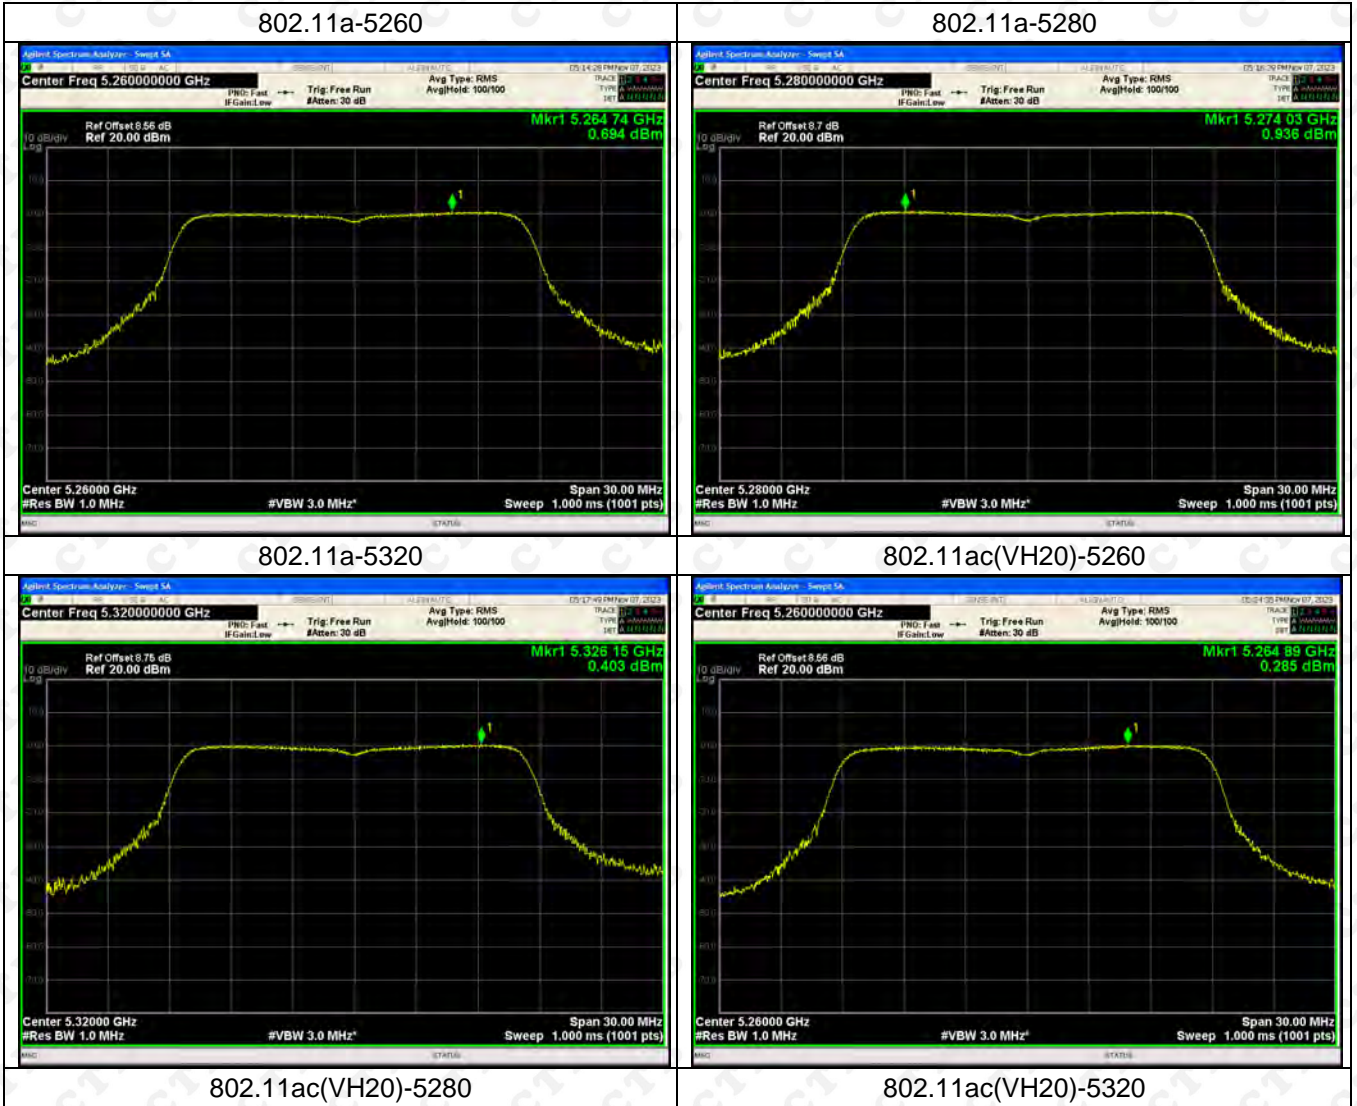



802.11ac(VH40)-5270



802.11ac(VH40)-5310



802.11ac(VH80)-5290




802.11n(HT20)-5260



802.11n(HT20)-5280





802.11n(HT20)-5320

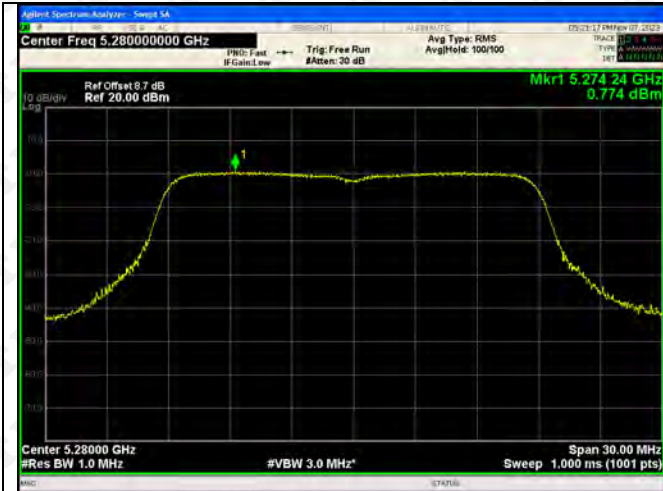


802.11n(HT40)-5270




802.11n(HT40)-5310

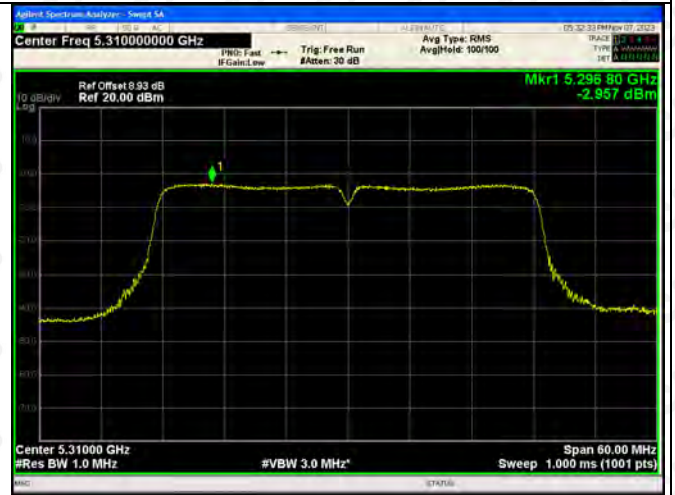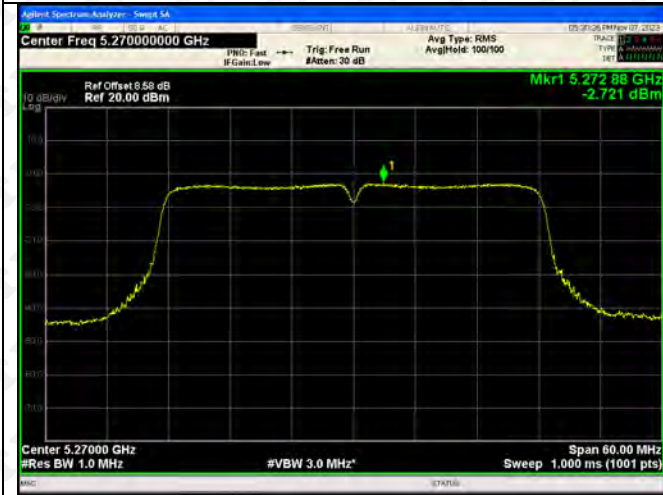


5470-5725MHzANT1

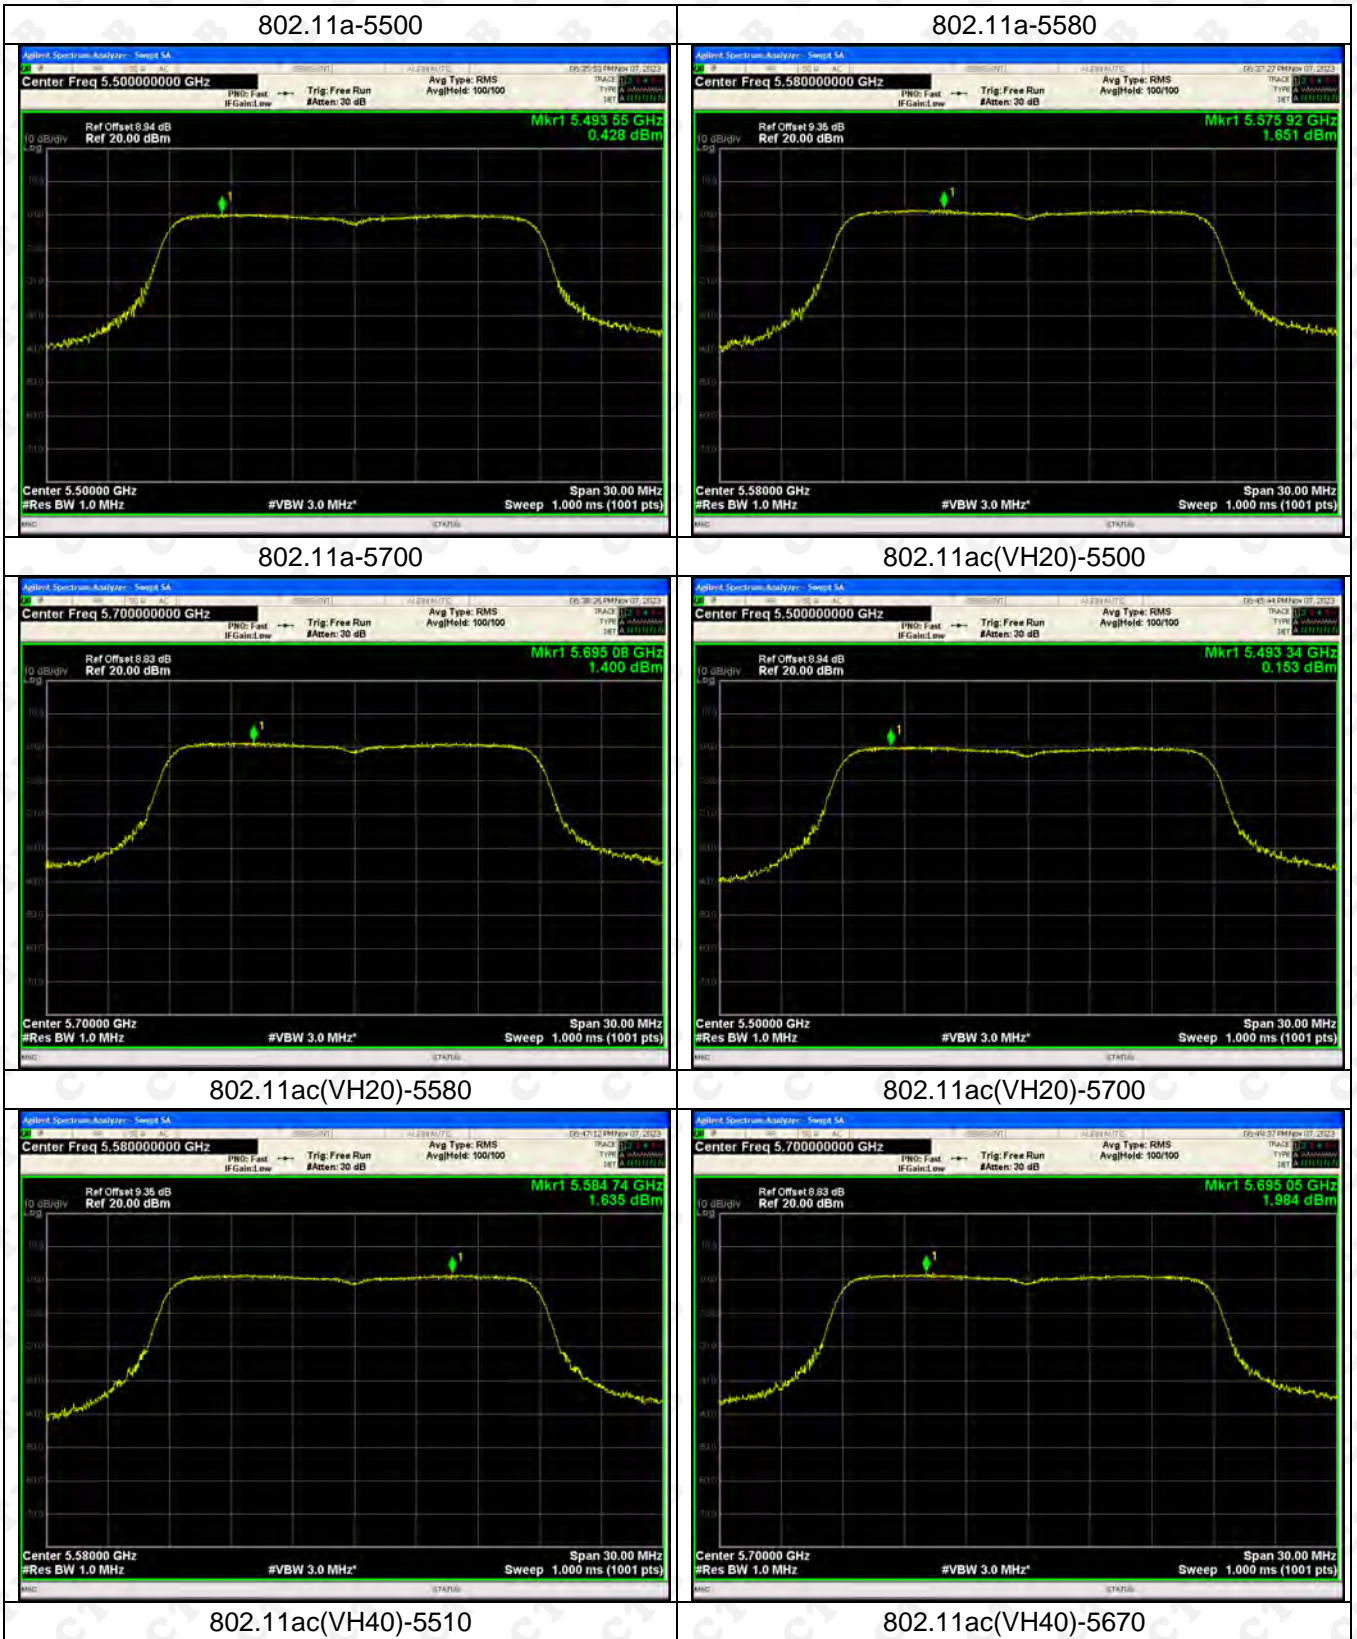

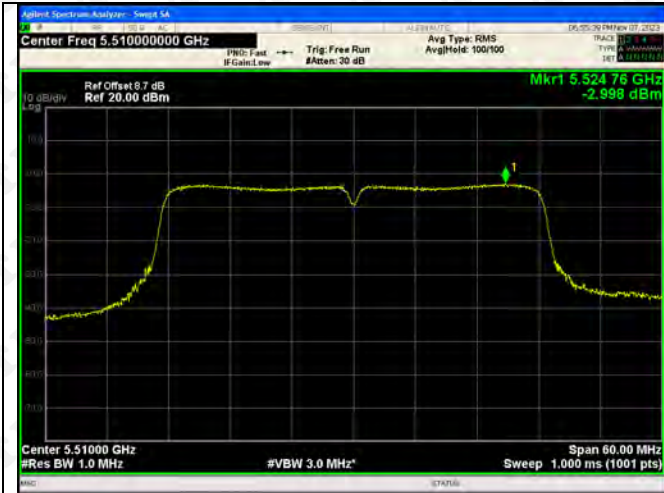


802.11ac(VH80)-5530

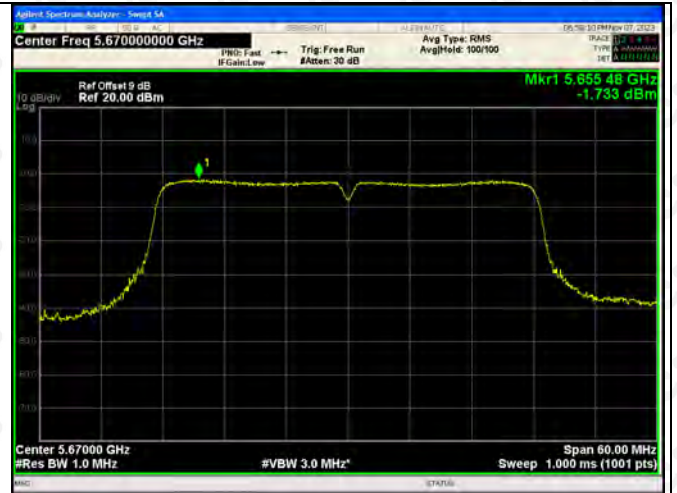


802.11n(HT20)-5500




802.11n(HT20)-5580

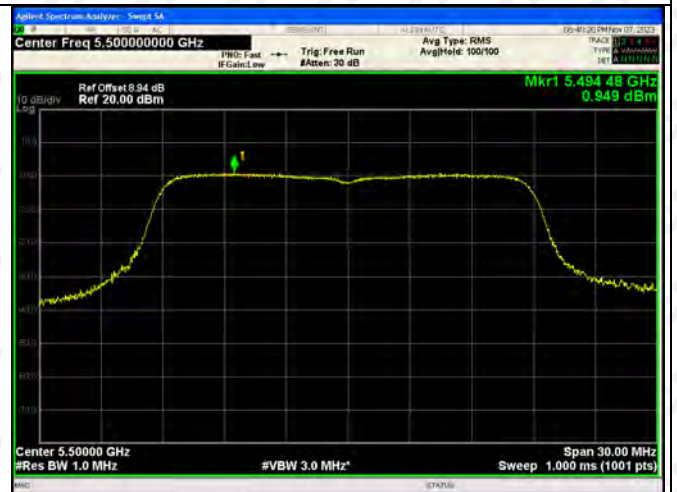



802.11n(HT20)-5700

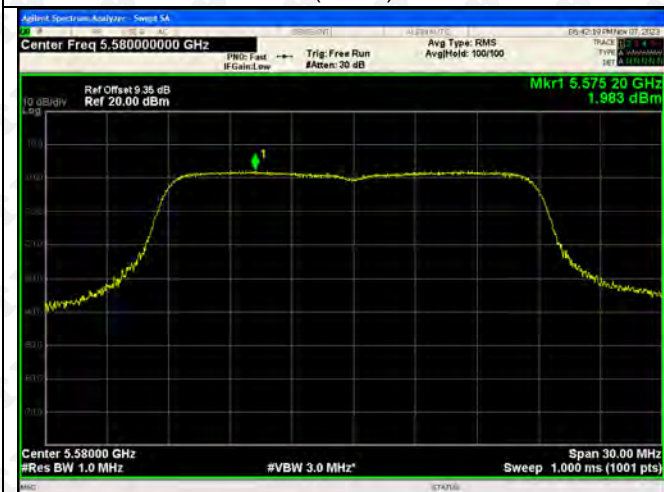

802.11n(HT40)-5510

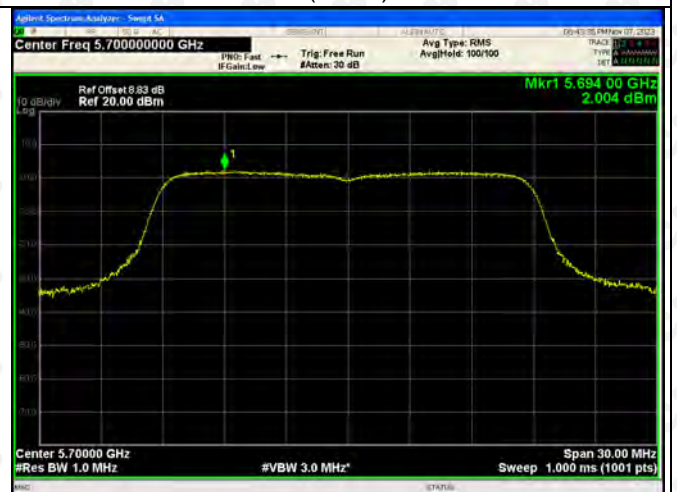

802.11n(HT40)-5670

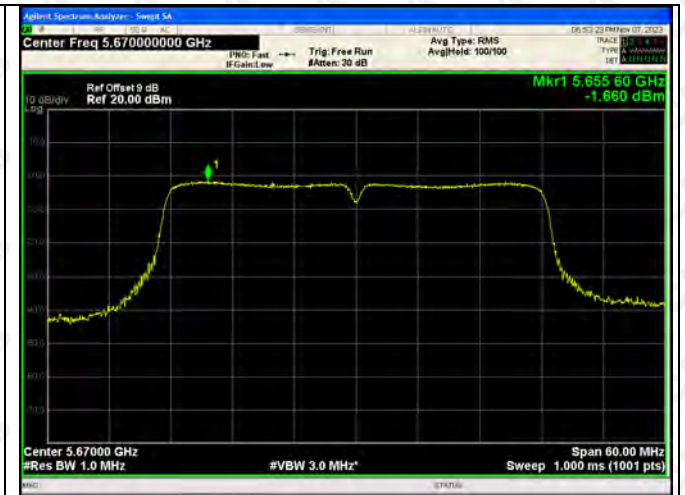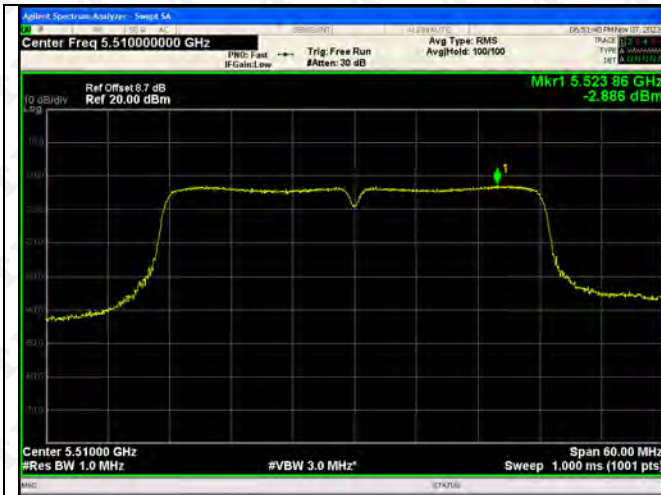

ANT2




802.11a-5500




802.11a-5580



802.11a-5700

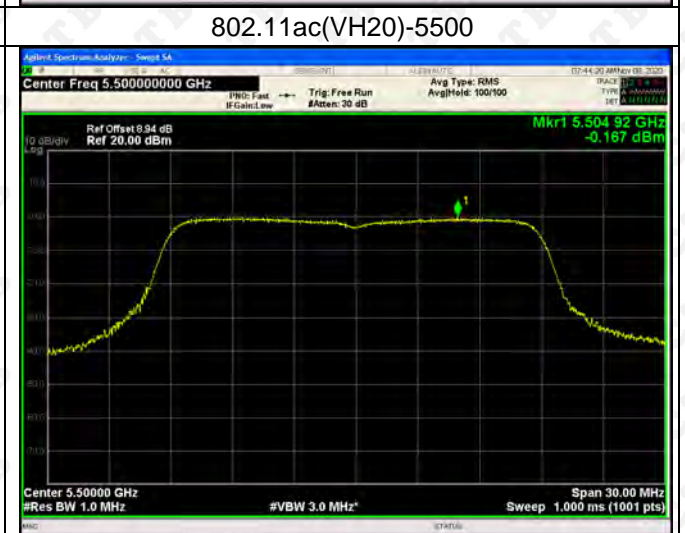

802.11ac(VH20)-5500




802.11ac(VH20)-5580




802.11ac(VH20)-5700



802.11ac(VH40)-5510

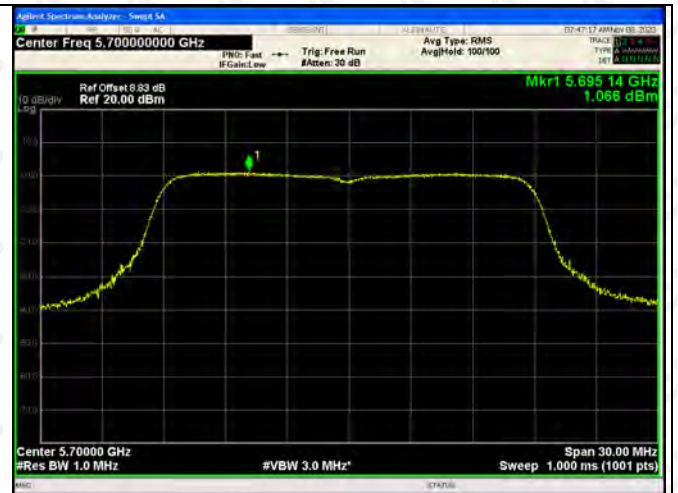

802.11ac(VH40)-5670

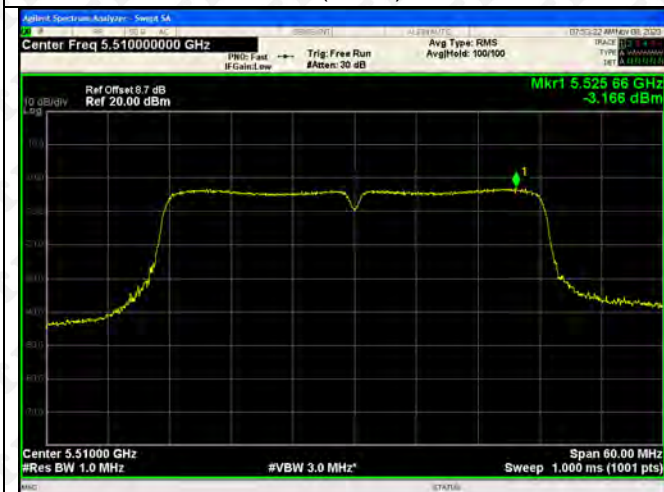

802.11ac(VH80)-5530




802.11n(HT20)-5500




802.11n(HT20)-5580




802.11n(HT20)-5700

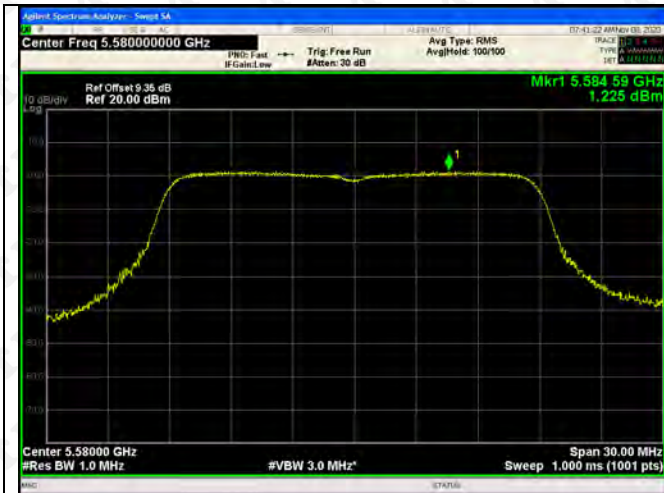


802.11n(HT40)-5510

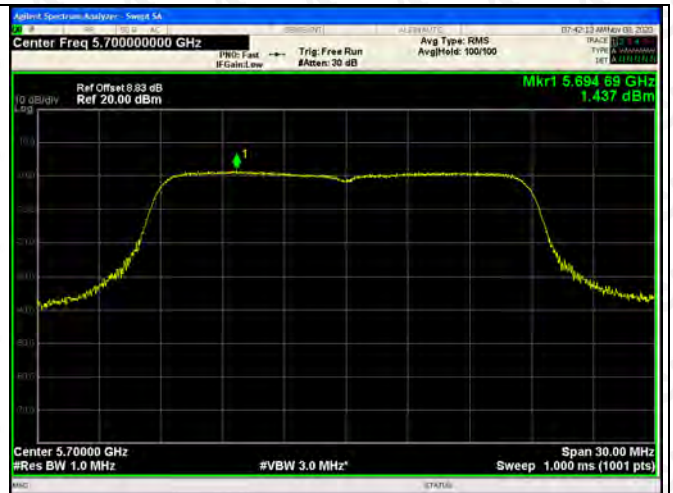


802.11n(HT40)-5670

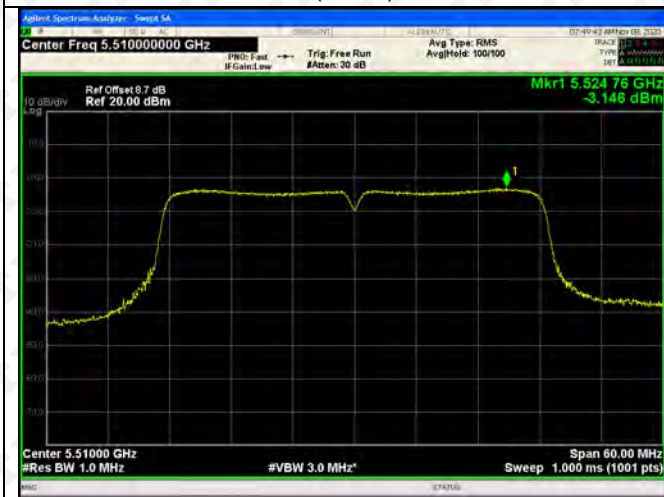


5725-5850MHz:
ANT1

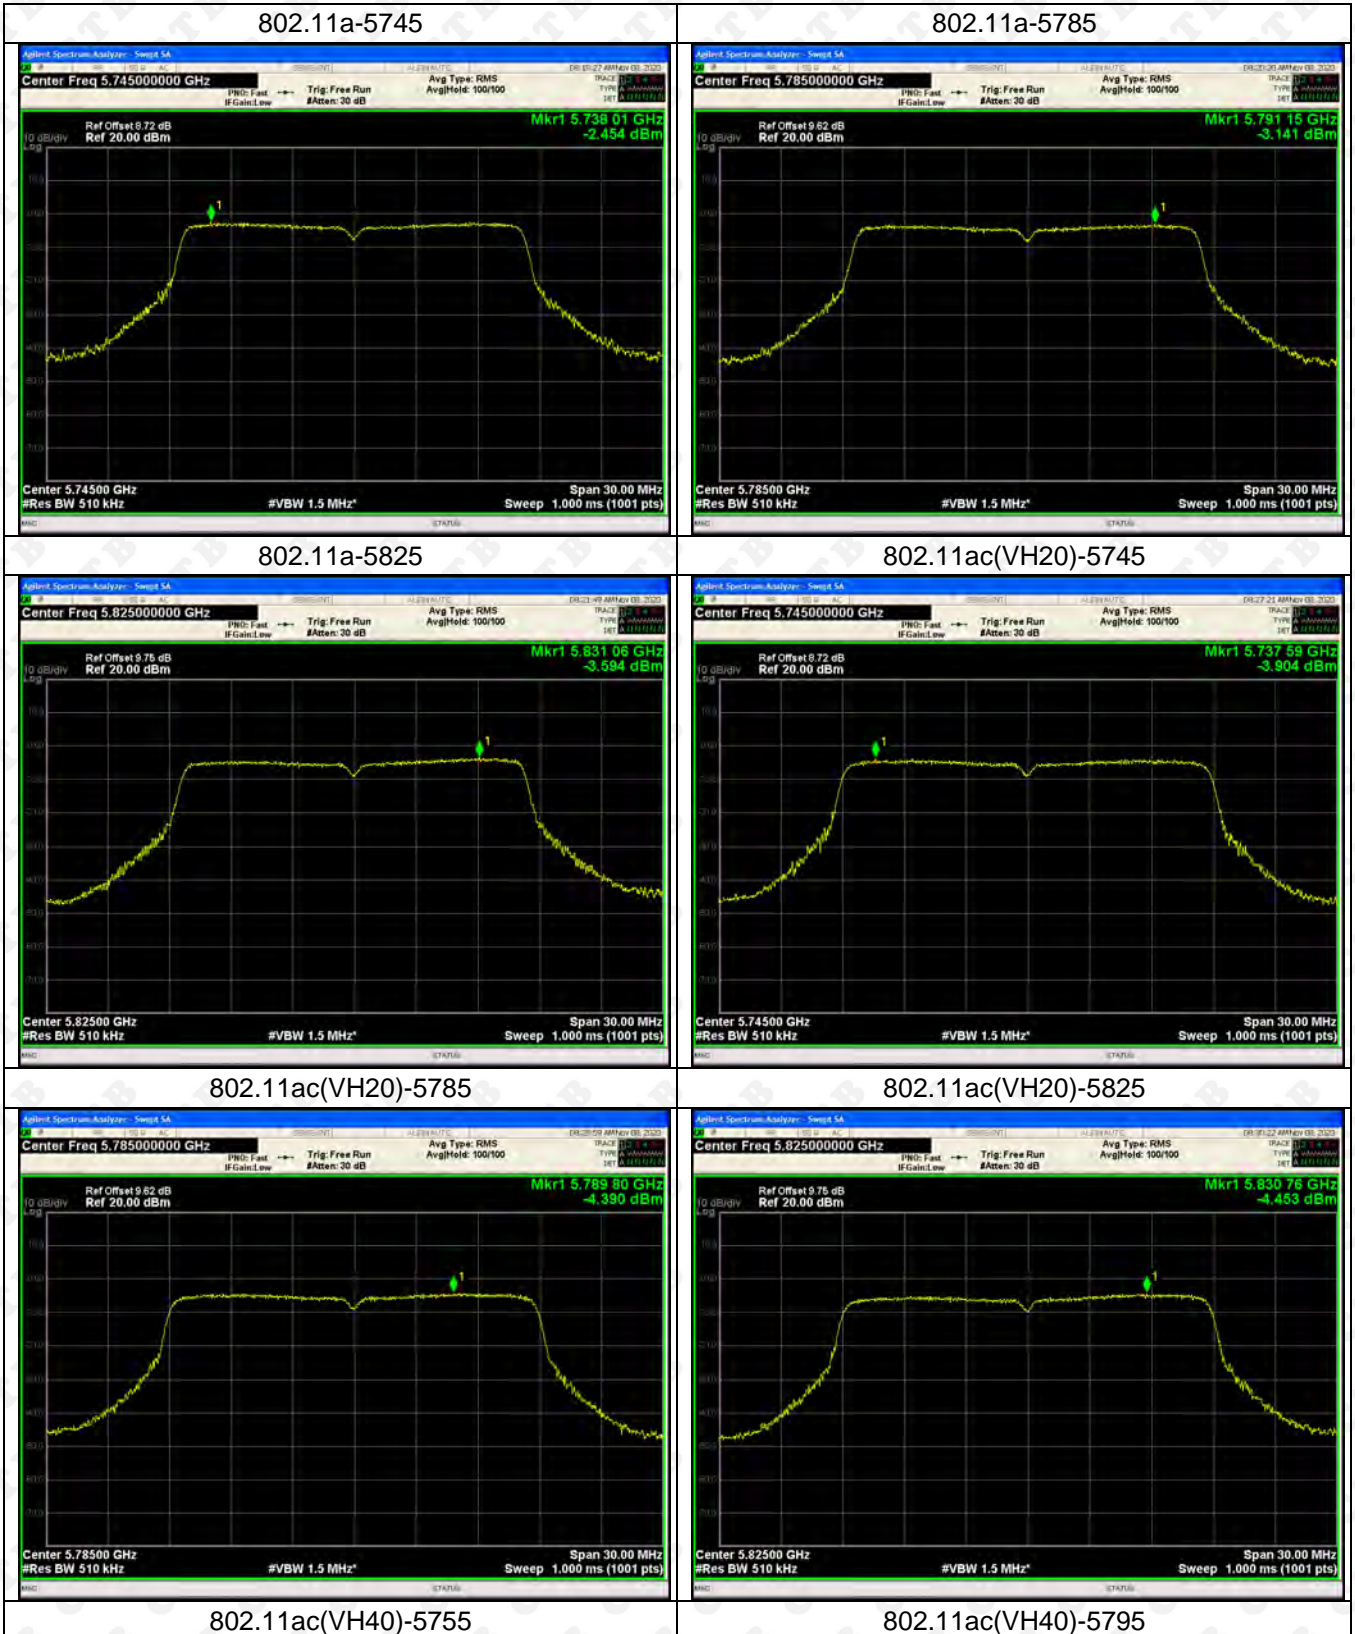


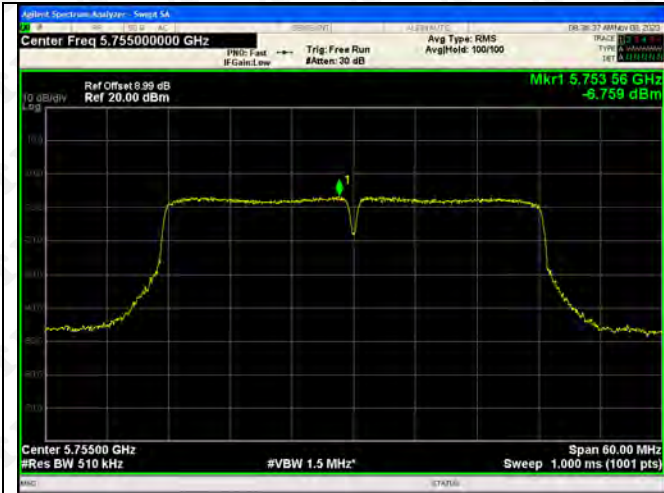

802.11ac(VH80)-5775

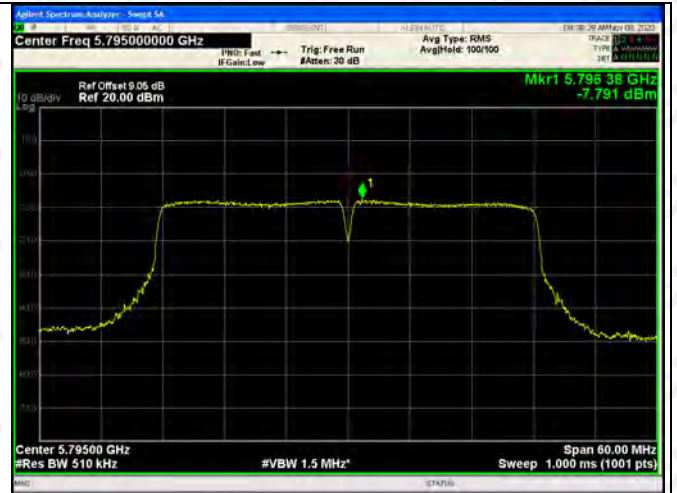

802.11n(HT20)-5745

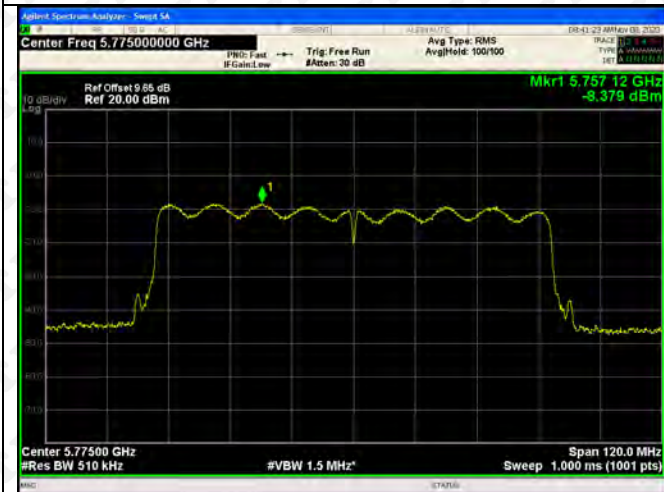

802.11n(HT20)-5785



802.11n(HT20)-5825




802.11n(HT40)-5795



802.11n(HT40)-5825



ANT2

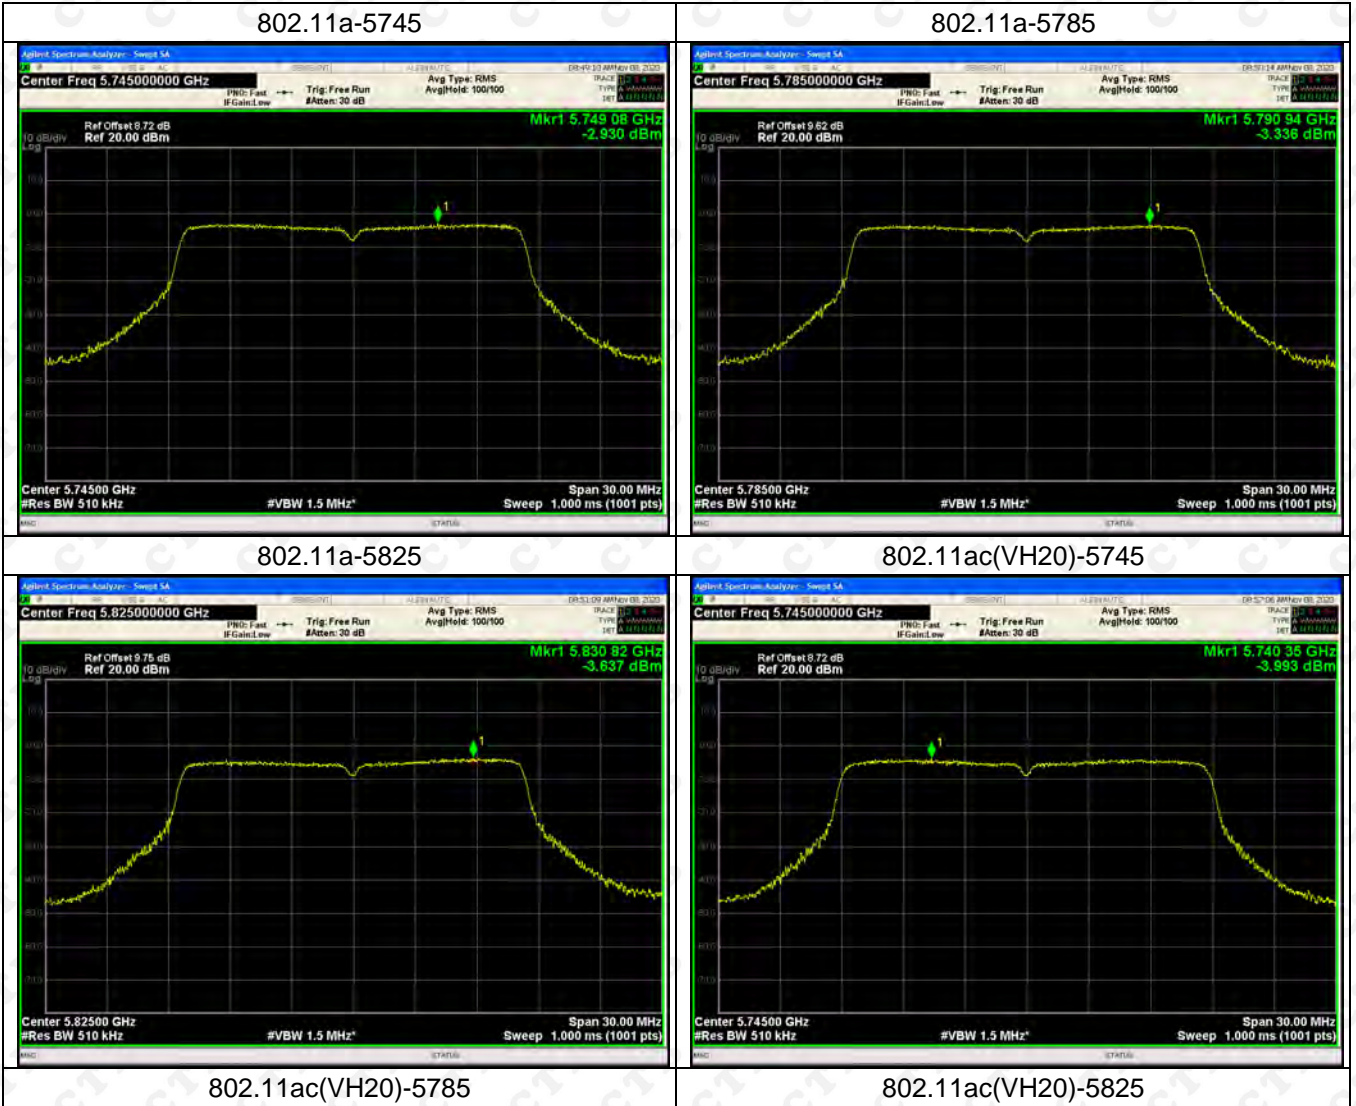




802.11ac(VH40)-5755



802.11ac(VH40)-5795



802.11ac(VH80)-5775

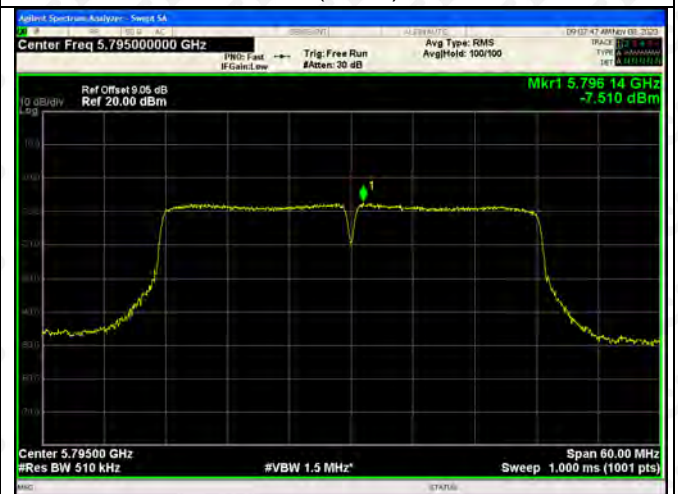

802.11n(HT20)-5745




802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5795

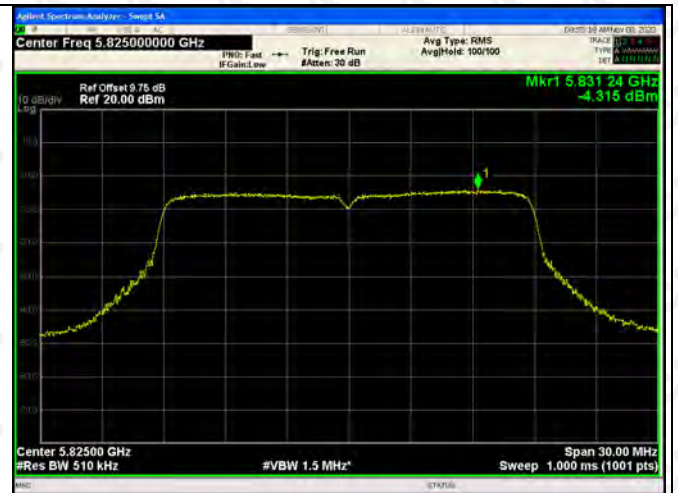


802.11n(HT40)-5825



12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

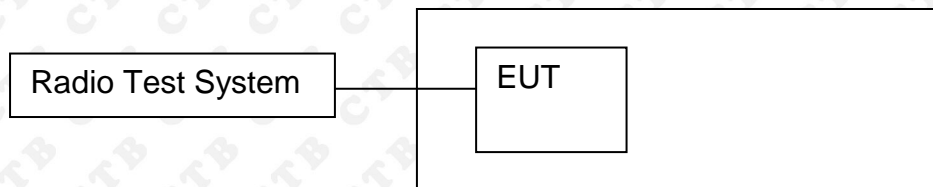

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

TX Frequency (5150-5250MHz)

ANT1

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5180MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5180.0102 | 5180 | 0.0102 | 1.9758 |
| | | V max (V) | 132 | 5180.0997 | 5180 | 0.0997 | 19.2501 |
| | | V min (V) | 108 | 5180.0467 | 5180 | 0.0467 | 9.0088 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5180MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5180.0060 | 5180 | 0.0060 | 1.1602 |
| | | T (°C) | 10 | 5180.0188 | 5180 | 0.0188 | 3.6265 |
| | | T (°C) | 20 | 5180.0367 | 5180 | 0.0367 | 7.0791 |
| | | T (°C) | 30 | 5180.0315 | 5180 | 0.0315 | 6.0882 |
| | | T (°C) | 40 | 5180.0090 | 5180 | 0.0090 | 1.7412 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5200MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5200.0508 | 5200 | 0.0508 | 9.7770 |
| | | V max (V) | 132 | 5200.0462 | 5200 | 0.0462 | 8.8810 |
| | | V min (V) | 108 | 5200.0335 | 5200 | 0.0335 | 6.4355 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5200MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5200.0210 | 5200 | 0.0210 | 4.0289 |
| | | T (°C) | 10 | 5200.0215 | 5200 | 0.0215 | 4.1262 |
| | | T (°C) | 20 | 5200.0351 | 5200 | 0.0351 | 6.7522 |
| | | T (°C) | 30 | 5200.0333 | 5200 | 0.0333 | 6.4041 |
| | | T (°C) | 40 | 5200.0331 | 5200 | 0.0331 | 6.3683 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5240MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5240.0222 | 5240 | 0.0222 | 4.2423 |
| | | V max (V) | 132 | 5240.0461 | 5240 | 0.0461 | 8.7922 |
| | | V min (V) | 108 | 5240.0388 | 5240 | 0.0388 | 7.4029 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5240MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5240.0534 | 5240 | 0.0534 | 10.1898 |
| | | T (°C) | 10 | 5240.0286 | 5240 | 0.0286 | 5.4570 |
| | | T (°C) | 20 | 5240.0175 | 5240 | 0.0175 | 3.3431 |
| | | T (°C) | 30 | 5240.0153 | 5240 | 0.0153 | 2.9131 |
| | | T (°C) | 40 | 5240.0062 | 5240 | 0.0062 | 1.1910 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

TX Frequency (5250-5350MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5260MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5260.0287 | 5260 | 0.0287 | 5.4590 |
| | | V max (V) | 132 | 5260.0301 | 5260 | 0.0301 | 5.7168 |
| | | V min (V) | 108 | 5260.0021 | 5260 | 0.0021 | 0.3943 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5260MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5260.0184 | 5260 | 0.0184 | 3.4908 |
| | | T (°C) | 10 | 5260.0329 | 5260 | 0.0329 | 6.2482 |
| | | T (°C) | 20 | 5260.0058 | 5260 | 0.0058 | 1.0953 |
| | | T (°C) | 30 | 5260.0562 | 5260 | 0.0562 | 10.6852 |
| | | T (°C) | 40 | 5260.0538 | 5260 | 0.0538 | 10.2375 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5280MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5280.0417 | 5280 | 0.0417 | 7.8991 |
| | | V max (V) | 132 | 5280.0450 | 5280 | 0.0450 | 8.5288 |
| | | V min (V) | 108 | 5280.0409 | 5280 | 0.0409 | 7.7438 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5280MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5280.0743 | 5280 | 0.0743 | 14.0766 |
| | | T (°C) | 10 | 5280.0112 | 5280 | 0.0112 | 2.1123 |
| | | T (°C) | 20 | 5280.0346 | 5280 | 0.0346 | 6.5592 |
| | | T (°C) | 30 | 5280.0548 | 5280 | 0.0548 | 10.3716 |
| | | T (°C) | 40 | 5280.0407 | 5280 | 0.0407 | 7.6991 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5320MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5320.0274 | 5320 | 0.0274 | 5.1502 |
| | | V max (V) | 132 | 5320.0061 | 5320 | 0.0061 | 1.1382 |
| | | V min (V) | 108 | 5320.0068 | 5320 | 0.0068 | 1.2798 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5320MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5320.0551 | 5320 | 0.0551 | 10.3551 |
| | | T (°C) | 10 | 5320.0175 | 5320 | 0.0175 | 3.2805 |
| | | T (°C) | 20 | 5320.0760 | 5320 | 0.0760 | 14.2836 |
| | | T (°C) | 30 | 5320.0021 | 5320 | 0.0021 | 0.4000 |
| | | T (°C) | 40 | 5320.0350 | 5320 | 0.0350 | 6.5697 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

TX Frequency (5470-5725MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5500MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5550.0107 | 5500 | 50.0107 | 9092.8544 |
| | | V max (V) | 132 | 5550.0289 | 5500 | 50.0289 | 9096.1550 |
| | | V min (V) | 108 | 5550.0403 | 5500 | 50.0403 | 9098.2302 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5500MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5500.0011 | 5500 | 0.0011 | 0.2043 |
| | | T (°C) | 10 | 5500.0295 | 5500 | 0.0295 | 5.3674 |
| | | T (°C) | 20 | 5500.0339 | 5500 | 0.0339 | 6.1590 |
| | | T (°C) | 30 | 5500.0837 | 5500 | 0.0837 | 15.2101 |
| | | T (°C) | 40 | 5500.0928 | 5500 | 0.0928 | 16.8682 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5580MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5580.0761 | 5580 | 0.0761 | 13.6306 |
| | | V max (V) | 132 | 5580.0547 | 5580 | 0.0547 | 9.8008 |
| | | V min (V) | 108 | 5580.0288 | 5580 | 0.0288 | 5.1687 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5580MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5580.0143 | 5580 | 0.0143 | 2.5684 |
| | | T (°C) | 10 | 5580.0002 | 5580 | 0.0002 | 0.0348 |
| | | T (°C) | 20 | 5580.0352 | 5580 | 0.0352 | 6.2998 |
| | | T (°C) | 30 | 5580.0839 | 5580 | 0.0839 | 15.0339 |
| | | T (°C) | 40 | 5580.0093 | 5580 | 0.0093 | 1.6682 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5700MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5700.0587 | 5700 | 0.0587 | 10.2977 |
| | | V max (V) | 132 | 5700.0897 | 5700 | 0.0897 | 15.7333 |
| | | V min (V) | 108 | 5700.0621 | 5700 | 0.0621 | 10.8969 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5700MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5700.0672 | 5700 | 0.0672 | 11.7941 |
| | | T (°C) | 10 | 5700.0878 | 5700 | 0.0878 | 15.4120 |
| | | T (°C) | 20 | 5700.0300 | 5700 | 0.0300 | 5.2612 |
| | | T (°C) | 30 | 5700.0002 | 5700 | 0.0002 | 0.0284 |
| | | T (°C) | 40 | 5700.0846 | 5700 | 0.0846 | 14.8337 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5745MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5745.0481 | 5745 | 0.0481 | 8.3782 |
| | | V max (V) | 132 | 5745.0106 | 5745 | 0.0106 | 1.8373 |
| | | V min (V) | 108 | 5745.0481 | 5745 | 0.0481 | 8.3782 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5745MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5745.0530 | 5745 | 0.0530 | 9.2302 |
| | | T (°C) | 10 | 5745.0912 | 5745 | 0.0912 | 15.8669 |
| | | T (°C) | 20 | 5745.0154 | 5745 | 0.0154 | 2.6782 |
| | | T (°C) | 30 | 5745.0499 | 5745 | 0.0499 | 8.6864 |
| | | T (°C) | 40 | 5745.0110 | 5745 | 0.0110 | 1.9117 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5785MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5785.0744 | 5785 | 0.0744 | 12.8589 |
| | | V max (V) | 132 | 5785.0223 | 5785 | 0.0223 | 3.8619 |
| | | V min (V) | 108 | 5785.0151 | 5785 | 0.0151 | 2.6083 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5785MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5785.0750 | 5785 | 0.0750 | 12.9651 |
| | | T (°C) | 10 | 5785.0653 | 5785 | 0.0653 | 11.2810 |
| | | T (°C) | 20 | 5785.0548 | 5785 | 0.0548 | 9.4656 |
| | | T (°C) | 30 | 5785.0398 | 5785 | 0.0398 | 6.8823 |
| | | T (°C) | 40 | 5785.0315 | 5785 | 0.0315 | 5.4385 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5825MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5825.0140 | 5825 | 0.0140 | 2.3975 |
| | | V max (V) | 132 | 5825.0296 | 5825 | 0.0296 | 5.0900 |
| | | V min (V) | 108 | 5825.0182 | 5825 | 0.0182 | 3.1201 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5825MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5825.0334 | 5825 | 0.0334 | 5.7296 |
| | | T (°C) | 10 | 5825.0759 | 5825 | 0.0759 | 13.0362 |
| | | T (°C) | 20 | 5825.0458 | 5825 | 0.0458 | 7.8657 |
| | | T (°C) | 30 | 5825.0393 | 5825 | 0.0393 | 6.7405 |
| | | T (°C) | 40 | 5825.0506 | 5825 | 0.0506 | 8.6847 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

ANT2:

TX Frequency (5150-5250MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5180MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5180.0308 | 5180 | 0.0308 | 5.9552 |
| | | V max (V) | 132 | 5180.0164 | 5180 | 0.0164 | 3.1657 |
| | | V min (V) | 108 | 5180.0202 | 5180 | 0.0202 | 3.9053 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5180MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5180.0251 | 5180 | 0.0251 | 4.8400 |
| | | T (°C) | 10 | 5180.0024 | 5180 | 0.0024 | 0.4550 |
| | | T (°C) | 20 | 5180.0306 | 5180 | 0.0306 | 5.9170 |
| | | T (°C) | 30 | 5180.0555 | 5180 | 0.0555 | 10.7189 |
| | | T (°C) | 40 | 5180.0846 | 5180 | 0.0846 | 16.3255 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5200MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5200.0476 | 5200 | 0.0476 | 9.1615 |
| | | V max (V) | 132 | 5200.0687 | 5200 | 0.0687 | 13.2076 |
| | | V min (V) | 108 | 5200.0540 | 5200 | 0.0540 | 10.3868 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5200MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5200.0736 | 5200 | 0.0736 | 14.1566 |
| | | T (°C) | 10 | 5200.0823 | 5200 | 0.0823 | 15.8249 |
| | | T (°C) | 20 | 5200.0932 | 5200 | 0.0932 | 17.9147 |
| | | T (°C) | 30 | 5200.0798 | 5200 | 0.0798 | 15.3470 |
| | | T (°C) | 40 | 5200.0116 | 5200 | 0.0116 | 2.2338 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5240MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5240.0456 | 5240 | 0.0456 | 8.6931 |
| | | V max (V) | 132 | 5240.0802 | 5240 | 0.0802 | 15.3056 |
| | | V min (V) | 108 | 5240.0004 | 5240 | 0.0004 | 0.0725 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5240MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5240.0513 | 5240 | 0.0513 | 9.7949 |
| | | T (°C) | 10 | 5240.0311 | 5240 | 0.0311 | 5.9288 |
| | | T (°C) | 20 | 5240.0198 | 5240 | 0.0198 | 3.7705 |
| | | T (°C) | 30 | 5240.0050 | 5240 | 0.0050 | 0.9447 |
| | | T (°C) | 40 | 5240.0864 | 5240 | 0.0864 | 16.4944 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

TX Frequency (5250-5350MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5260MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5260.0590 | 5260 | 0.0590 | 11.2189 |
| | | V max (V) | 132 | 5260.0225 | 5260 | 0.0225 | 4.2706 |
| | | V min (V) | 108 | 5260.0791 | 5260 | 0.0791 | 15.0422 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5260MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5260.0220 | 5260 | 0.0220 | 4.1815 |
| | | T (°C) | 10 | 5260.0119 | 5260 | 0.0119 | 2.2716 |
| | | T (°C) | 20 | 5260.0588 | 5260 | 0.0588 | 11.1800 |
| | | T (°C) | 30 | 5260.0912 | 5260 | 0.0912 | 17.3437 |
| | | T (°C) | 40 | 5260.0606 | 5260 | 0.0606 | 11.5146 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5280MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5280.0900 | 5280 | 0.0900 | 17.0377 |
| | | V max (V) | 132 | 5280.0003 | 5280 | 0.0003 | 0.0606 |
| | | V min (V) | 108 | 5280.0876 | 5280 | 0.0876 | 16.5988 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5280MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5280.0752 | 5280 | 0.0752 | 14.2440 |
| | | T (°C) | 10 | 5280.0235 | 5280 | 0.0235 | 4.4452 |
| | | T (°C) | 20 | 5280.0698 | 5280 | 0.0698 | 13.2283 |
| | | T (°C) | 30 | 5280.0141 | 5280 | 0.0141 | 2.6696 |
| | | T (°C) | 40 | 5280.0604 | 5280 | 0.0604 | 11.4300 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5320MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5320.0074 | 5320 | 0.0074 | 1.3902 |
| | | V max (V) | 132 | 5320.0692 | 5320 | 0.0692 | 13.0112 |
| | | V min (V) | 108 | 5320.0525 | 5320 | 0.0525 | 9.8712 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5320MHz | | | |
|-----------------|-----|--------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | -20 | 5320.0150 | 5320 | 0.0150 | 2.8127 |
| | | T (°C) | -10 | 5320.0733 | 5320 | 0.0733 | 13.7728 |
| | | T (°C) | 0 | 5320.0050 | 5320 | 0.0050 | 0.9358 |
| | | T (°C) | 10 | 5320.0832 | 5320 | 0.0832 | 15.6379 |
| | | T (°C) | 20 | 5320.0330 | 5320 | 0.0330 | 6.2083 |
| | | T (°C) | 30 | 5320.0349 | 5320 | 0.0349 | 6.5588 |
| | | T (°C) | 40 | 5320.0332 | 5320 | 0.0332 | 6.2354 |
| | | T (°C) | 50 | 5320.0760 | 5320 | 0.0760 | 14.2845 |
| | | T (°C) | 60 | 5320.0842 | 5320 | 0.0842 | 15.8180 |
| | | T (°C) | 70 | 5320.0906 | 5320 | 0.0906 | 17.0228 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

TX Frequency (5470-5725MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5500MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5500.0504 | 5500 | 0.0504 | 9.1604 |
| | | V max (V) | 132 | 5500.0121 | 5500 | 0.0121 | 2.1984 |
| | | V min (V) | 108 | 5500.0391 | 5500 | 0.0391 | 7.1108 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5500MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5500.0610 | 5500 | 0.0610 | 11.0974 |
| | | T (°C) | 10 | 5500.0486 | 5500 | 0.0486 | 8.8406 |
| | | T (°C) | 20 | 5500.0699 | 5500 | 0.0699 | 12.7080 |
| | | T (°C) | 30 | 5500.0731 | 5500 | 0.0731 | 13.2965 |
| | | T (°C) | 40 | 5500.0618 | 5500 | 0.0618 | 11.2435 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5580MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5580.0892 | 5580 | 0.0892 | 15.9819 |
| | | V max (V) | 132 | 5580.0886 | 5580 | 0.0886 | 15.8714 |
| | | V min (V) | 108 | 5580.0177 | 5580 | 0.0177 | 3.1633 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5580MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5580.0391 | 5580 | 0.0391 | 7.0056 |
| | | T (°C) | 10 | 5580.0585 | 5580 | 0.0585 | 10.4875 |
| | | T (°C) | 20 | 5580.0374 | 5580 | 0.0374 | 6.6969 |
| | | T (°C) | 30 | 5580.0923 | 5580 | 0.0923 | 16.5481 |
| | | T (°C) | 40 | 5580.0305 | 5580 | 0.0305 | 5.4718 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5700MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5700.0612 | 5700 | 0.0612 | 10.7293 |
| | | V max (V) | 132 | 5700.0322 | 5700 | 0.0322 | 5.6519 |
| | | V min (V) | 108 | 5700.0869 | 5700 | 0.0869 | 15.2369 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5700MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5700.0849 | 5700 | 0.0849 | 14.9001 |
| | | T (°C) | 10 | 5700.0059 | 5700 | 0.0059 | 1.0384 |
| | | T (°C) | 20 | 5700.0336 | 5700 | 0.0336 | 5.9033 |
| | | T (°C) | 30 | 5700.0043 | 5700 | 0.0043 | 0.7479 |
| | | T (°C) | 40 | 5700.0158 | 5700 | 0.0158 | 2.7701 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5745MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5745.0196 | 5745 | 0.0196 | 3.4151 |
| | | V max (V) | 132 | 5745.0115 | 5745 | 0.0115 | 1.9955 |
| | | V min (V) | 108 | 5745.0621 | 5745 | 0.0621 | 10.8142 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5745MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5745.0032 | 5745 | 0.0032 | 0.5510 |
| | | T (°C) | 10 | 5745.0696 | 5745 | 0.0696 | 12.1097 |
| | | T (°C) | 20 | 5745.0175 | 5745 | 0.0175 | 3.0424 |
| | | T (°C) | 30 | 5745.0352 | 5745 | 0.0352 | 6.1269 |
| | | T (°C) | 40 | 5745.0206 | 5745 | 0.0206 | 3.5867 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5785MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5785.0761 | 5785 | 0.0761 | 13.1611 |
| | | V max (V) | 132 | 5785.0333 | 5785 | 0.0333 | 5.7494 |
| | | V min (V) | 108 | 5785.0706 | 5785 | 0.0706 | 12.2007 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5785MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5785.0272 | 5785 | 0.0272 | 4.6997 |
| | | T (°C) | 10 | 5785.0721 | 5785 | 0.0721 | 12.4595 |
| | | T (°C) | 20 | 5785.0363 | 5785 | 0.0363 | 6.2822 |
| | | T (°C) | 30 | 5785.0675 | 5785 | 0.0675 | 11.6725 |
| | | T (°C) | 40 | 5785.0195 | 5785 | 0.0195 | 3.3730 |
| | | T (°C) | 50 | 5785.0004 | 5785 | 0.0004 | 0.0751 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Voltage vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5825MHz | | | |
|-----------------|----|-----------|-----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| T nom (°C) | 20 | V nom (V) | 120 | 5825.0016 | 5825 | 0.0016 | 0.2669 |
| | | V max (V) | 132 | 5825.0076 | 5825 | 0.0076 | 1.2972 |
| | | V min (V) | 108 | 5825.0765 | 5825 | 0.0765 | 13.1322 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

Temperature vs. Frequency Stability

| TEST CONDITIONS | | | | Reference Frequency: 5825MHz | | | |
|-----------------|-----|--------|----|------------------------------|------|----------------------|----------------------|
| | | | | f | fc | Max. Deviation (MHz) | Max. Deviation (ppm) |
| V nom (V) | 120 | T (°C) | 0 | 5825.0117 | 5825 | 0.0117 | 2.0061 |
| | | T (°C) | 10 | 5825.0250 | 5825 | 0.0250 | 4.2901 |
| | | T (°C) | 20 | 5825.0764 | 5825 | 0.0764 | 13.1073 |
| | | T (°C) | 30 | 5825.0715 | 5825 | 0.0715 | 12.2782 |
| | | T (°C) | 40 | 5825.0491 | 5825 | 0.0491 | 8.4248 |
| Limits | | | | ±20ppm | | | |
| Result | | | | Complies | | | |

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is

WiFi (5.2G): ANT1: 2.97dBi, ANT2: 2.71dBi

WiFi (5.3G): ANT1: 3.3dBi, ANT2: 3.07dBi


WiFi (5.6G): ANT1: 3.47dBi, ANT2: 3.15dBi

WiFi (5.8G): ANT1: 2.31dBi, ANT2: 3.18dBi.


15. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

Below 1GHz

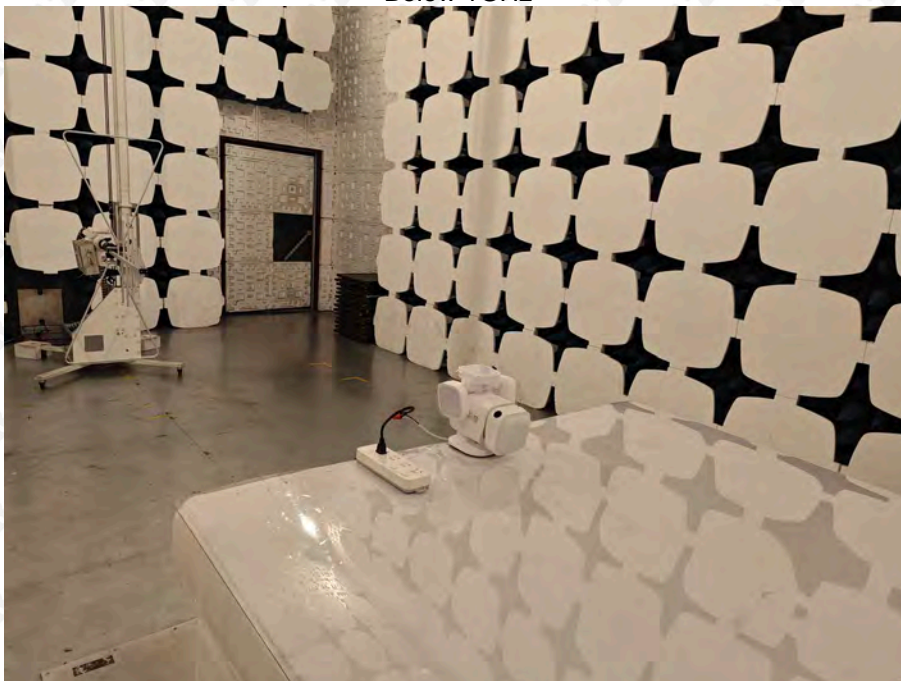

Above 1GHz

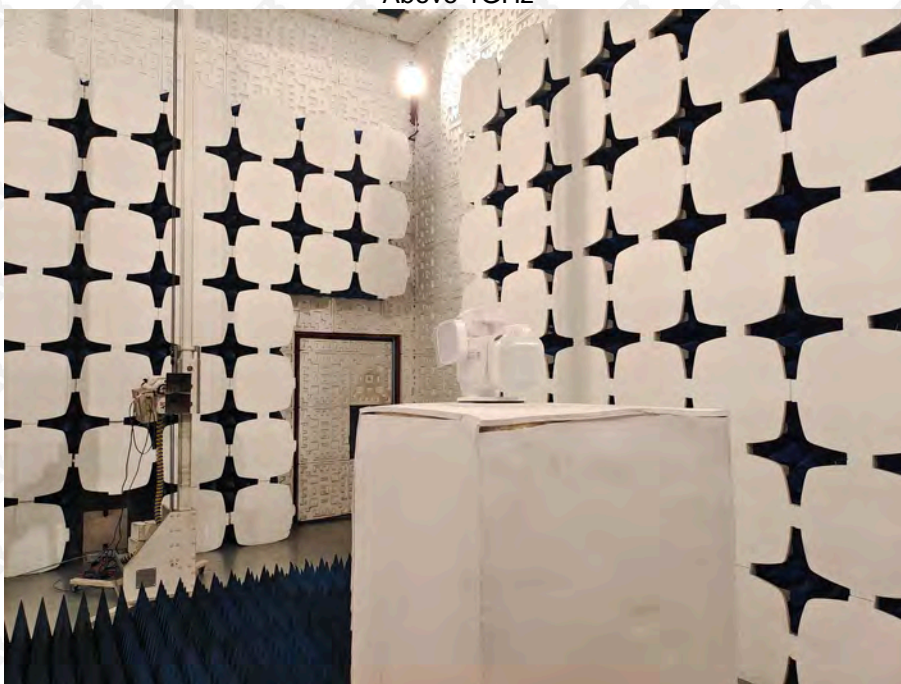

Conducted Emission



***** END OF REPORT *****