



# Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V05

Report Template Revision Date: 2021-11-03



中国认可  
国际互认  
检测  
TESTING  
CNAS L5785

## TEST REPORT

**Report No.:** CQASZ20240400678E-01  
**Applicant:** Shenzhen Inkbird Technology Co., Ltd  
**Address of Applicant:** Room 1803, Guwei Building, NO.68 Guwei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China

### Equipment Under Test (EUT):

**Product:** Smart Sprinkler Controller  
**Model No.:** HSC-400W, HSC-600W, HSC-800W, HSC-1200W, HSC-1600W, HSC-401W, HSC-601W, HSC-801W, HSC-1201W, HSC-1601W, HSC-402W, HSC-602W, HSC-802W, HSC-1202W, HSC-1602W, HSC-400WO, HSC-800WO, HSC-1200WO, HSC-1600WO, HSC-401WO, HSC-801WO, HSC-1201WO, HSC-1601WO, HSC-402WO, HSC-802WO, HSC-1202WO, HSC-1602WO, ICS-4i ICS-6i, ICS-8i, ICS-8, ICS-12, ICS-16

**Test Model No.:** HSC-400W  
**Brand Name:** N/A  
**FCC ID:** 2AYZDHSC-400W  
**Standards:** 47 CFR Part 15, Subpart C  
**Date of Receipt:** 2024-04-19  
**Date of Test:** 2024-04-19 to 2024-04-30  
**Date of Issue:** 2024-05-31  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:** Lewis Zhou  
( Lewis Zhou )

**Reviewed By:** Alex  
( Alex Wang )

**Approved By:** Jack Ai  
( Jack Ai )



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20240400678E-01	Rev.01	Initial report	2024-05-31

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

### 3 Contents

	Page
<b>1 VERSION</b> .....	<b>2</b>
<b>2 TEST SUMMARY</b> .....	<b>3</b>
<b>3 CONTENTS</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	5
4.4 TEST ENVIRONMENT AND MODE .....	8
4.5 DESCRIPTION OF SUPPORT UNITS .....	9
4.6 TEST LOCATION .....	9
4.7 TEST FACILITY .....	9
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	10
4.9 DEVIATION FROM STANDARDS .....	10
4.10 ABNORMALITIES FROM STANDARD CONDITIONS .....	10
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	10
4.12 EQUIPMENT LIST .....	11
<b>5 TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>12</b>
5.1 ANTENNA REQUIREMENT .....	12
5.2 CONDUCTED EMISSIONS .....	13
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER .....	17
<i>Test Result</i> .....	18
<i>Note:</i> .....	18
<i>When Duty cycle &gt;98%, D.C.F is not required.</i> .....	18
<i>Test Graphs</i> .....	19
5.4 6DB OCCUPIED BANDWIDTH .....	24
<i>Test Result</i> .....	25
<i>Test Graphs</i> .....	26
5.5 POWER SPECTRAL DENSITY .....	31
<i>Test Result</i> .....	32
<i>Test Graphs</i> .....	33
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	38
<i>Test Result</i> .....	39
5.6.1 <i>Test Graphs</i> .....	40
5.7 RF CONDUCTED SPURIOUS EMISSIONS .....	44
<i>Test Result</i> .....	45
<i>Test Graphs</i> .....	47
5.8 RADIATED SPURIOUS EMISSIONS .....	62
5.8.1 <i>Radiated emission below 1GHz</i> .....	65
5.8.2 <i>Transmitter emission above 1GHz</i> .....	67
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....	75
<b>6 PHOTOGRAPHS - EUT TEST SETUP</b> .....	<b>81</b>
6.1 RADIATED SPURIOUS EMISSION .....	81
6.2 CONDUCTED EMISSION .....	82
<b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b> .....	<b>83</b>

## 4 General Information

### 4.1 Client Information

Applicant:	Shenzhen Inkbird Technology Co., Ltd
Address of Applicant:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China
Manufacturer:	Shenzhen Inkbird Technology Co., Ltd
Address of Manufacturer:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China
Factory:	INKBIRD TECH.C.L.
Address of Factory:	6th Floor, Building 713, Pengji Liantang Industrial Area, NO.2 Pengxing Rd, Luohu District, Shenzhen, China

### 4.2 General Description of EUT

Product Name:	Smart Sprinkler Controller
Model No.:	HSC-400W, HSC-600W, HSC-800W, HSC-1200W, HSC-1600W, HSC-401W, HSC-601W, HSC-801W, HSC-1201W, HSC-1601W, HSC-402W, HSC-602W, HSC-802W, HSC-1202W, HSC-1602W, HSC-400WO, HSC-800WO, HSC-1200WO, HSC-1600WO, HSC-401WO, HSC-801WO, HSC-1201WO, HSC-1601WO, HSC-402WO, HSC-802WO, HSC-1202WO, HSC-1602WO, ICS-4i ICS-6i, ICS-8i, ICS-8, ICS-12, ICS-16
Test Model No.:	HSC-400W
Trade Mark:	N/A
Software Version:	V1.0
Hardware Version:	V1.0
Power Supply:	Power supply DC24V form adapter
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	<input type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input checked="" type="checkbox"/> Simultaneous TX is not supported.

### 4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps

	IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable
Test Software of EUT:	Wifi Test Tool1.7.2
Antenna Type:	PCB antenna
Antenna Gain:	2.2dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz


Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

#### 4.4 Test Environment and Mode

<b>Operating Environment:</b>	
<b>Radiated Emissions:</b>	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
<b>Conducted Emissions:</b>	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
<b>Radio conducted item test (RF Conducted test room):</b>	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
<b>Test mode:</b>	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.

**Run Software:**

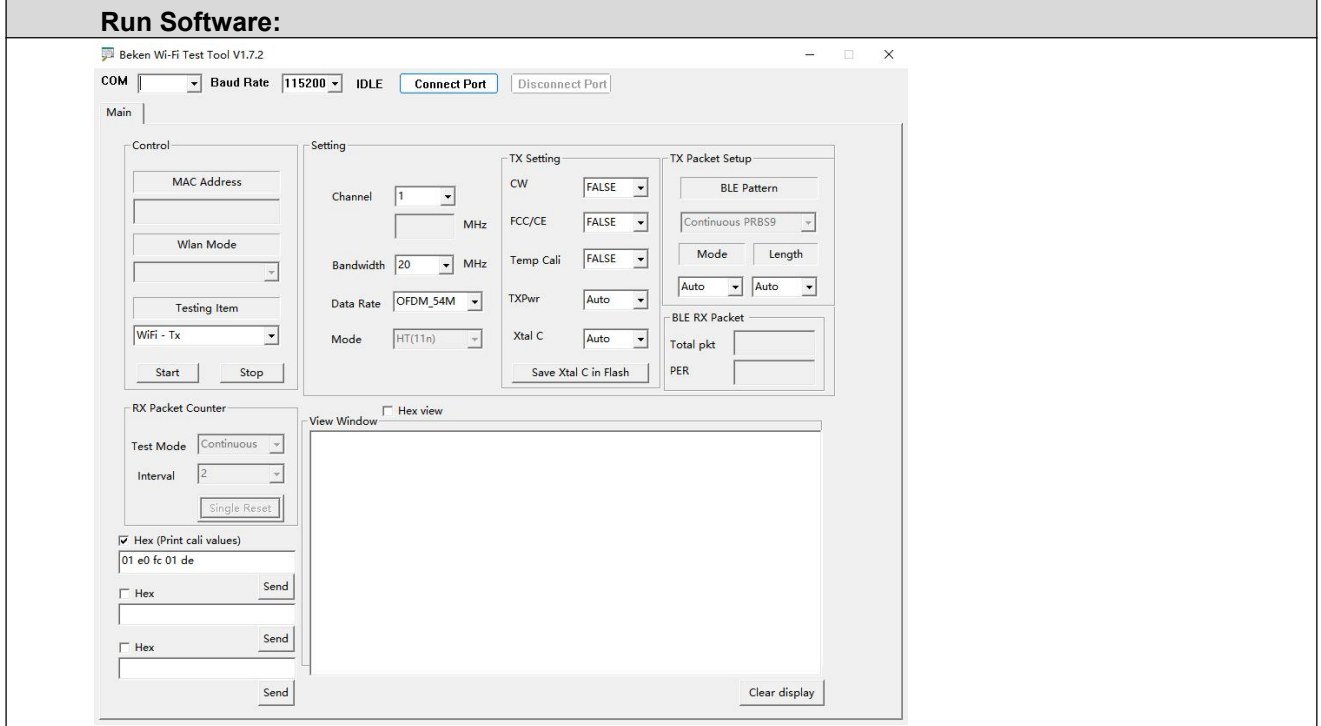

The screenshot shows the Beken Wi-Fi Test Tool V1.7.2 interface. At the top, there are fields for COM port, Baud Rate (115200), and buttons for 'Connect Port' and 'Disconnect Port'. The main area is divided into several sections: 'Control' with MAC Address, Wlan Mode, and Testing Item (set to 'WiFi - Tx'); 'Setting' with Channel (1), Bandwidth (20 MHz), Data Rate (OFDM\_54M), and Mode (HT(11n)); 'TX Setting' with CW, FCC/CE, Temp Cali, TXPwr, and Xtal C; 'TX Packet Setup' with BLE Pattern, Mode, and Length; 'RX Packet Counter' with Test Mode (Continuous) and Interval (2); and a 'View Window' for displaying test results. There are also 'Start' and 'Stop' buttons, and a 'Clear display' button at the bottom right.



## 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

## 4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.9 Deviation from Standards

None.

## 4.10 Abnormalities from Standard Conditions

None.

## 4.11 Other Information Requested by the Customer

None.

## 4.12 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2023/09/08	2024/09/07
Spectrum analyzer	R&S	FSU26	CQA-038	2023/09/08	2024/09/07
Spectrum analyzer	R&S	FSU40	CQA-075	2023/09/08	2024/09/07
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2023/09/08	2024/09/07
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2023/09/08	2024/09/07
Preamplifier	EMCI	EMC184055SE	CQA-089	2023/09/08	2024/09/07
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2023/09/08	2024/09/07
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2023/09/08	2024/09/07
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2023/09/08	2024/09/07
Antenna Connector	CQA	RFC-01	CQA-080	2023/09/08	2024/09/07
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2023/09/08	2024/09/07
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2023/09/08	2024/09/07
Power meter	R&S	NRVD	CQA-029	2023/09/08	2024/09/07
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2023/09/08	2024/09/07
EMI Test Receiver	R&S	ESR7	CQA-005	2023/09/08	2024/09/07
LISN	R&S	ENV216	CQA-003	2023/09/08	2024/09/07
Coaxial cable	CQA	N/A	CQA-C009	2023/09/08	2024/09/07
DC power	KEYSIGHT	E3631A	CQA-028	2023/09/08	2024/09/07

Test software:


	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
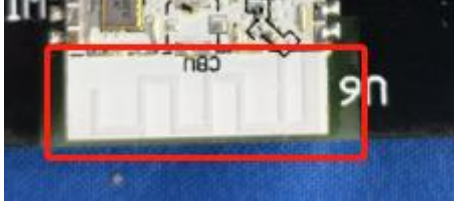
<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement:  An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:  The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>EUT Antenna:</b>	
<p>The antenna is PCB antenna.  The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment.  This is either permanently attachment or a unique coupling that satisfies the requirement.</p>	


## 5.2 Conducted Emissions

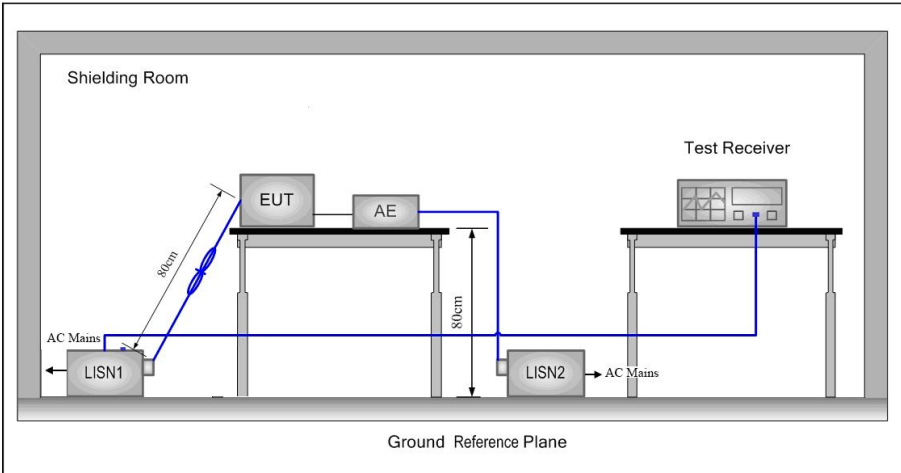Test Requirement:	47 CFR Part 15C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
	0.5-5	56	46												
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
Test Setup:															

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

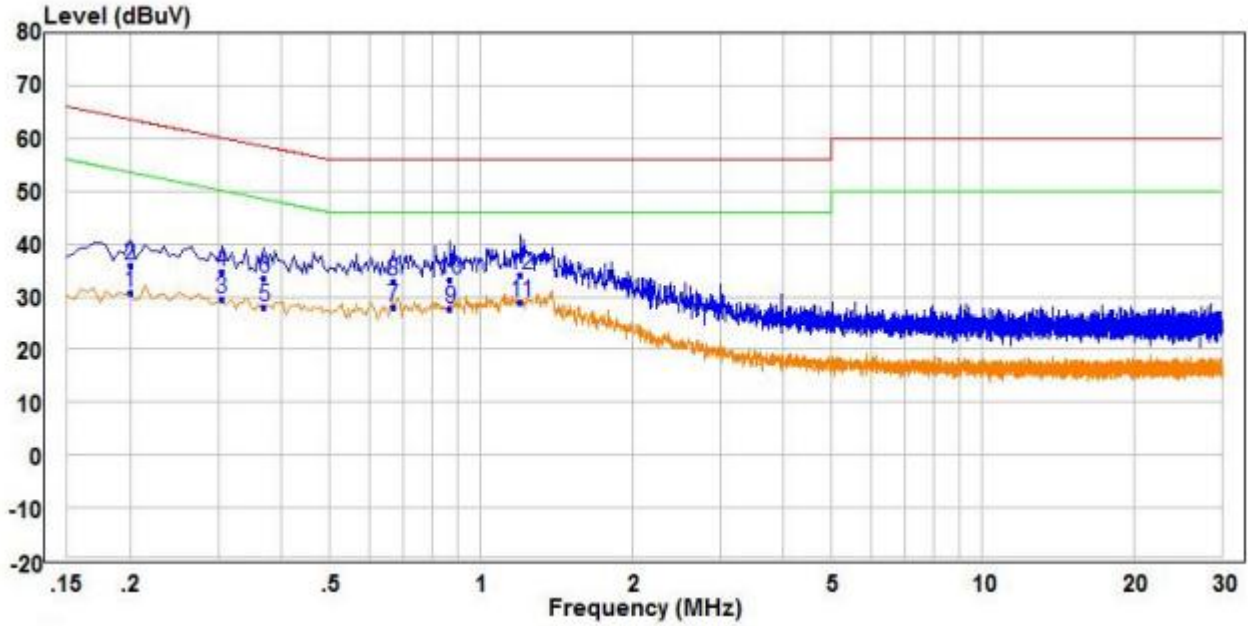


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.200	21.27	9.49	30.76	53.61	-22.85	Average	Line
2	0.200	26.55	9.49	36.04	63.61	-27.57	QP	Line
3	0.305	19.94	9.49	29.43	50.11	-20.68	Average	Line
4	0.305	25.08	9.49	34.57	60.11	-25.54	QP	Line
5	0.370	18.68	9.50	28.18	48.50	-20.32	Average	Line
6	0.370	24.15	9.50	33.65	58.50	-24.85	QP	Line
7	0.670	18.15	9.82	27.97	46.00	-18.03	Average	Line
8	0.670	23.07	9.82	32.89	56.00	-23.11	QP	Line
9	0.870	18.10	9.67	27.77	46.00	-18.23	Average	Line
10	0.870	23.46	9.67	33.13	56.00	-22.87	QP	Line
11	PP 1.200	19.35	9.53	28.88	46.00	-17.12	Average	Line
12	QP 1.200	24.65	9.53	34.18	56.00	-21.82	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.



Neutral Line:

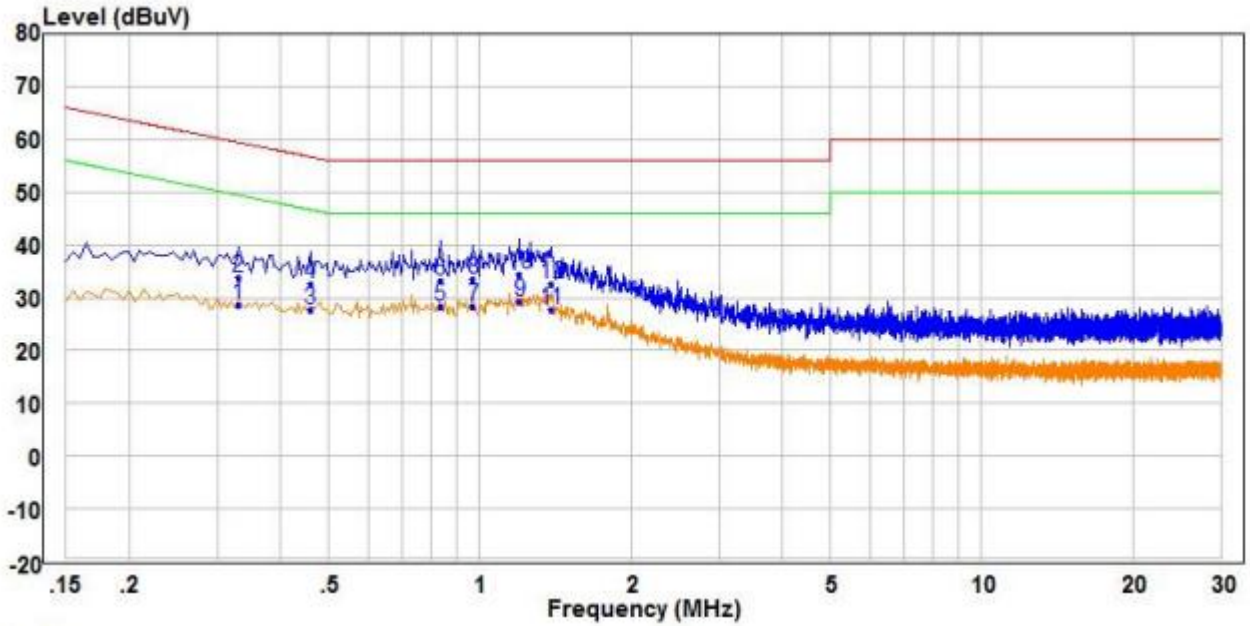


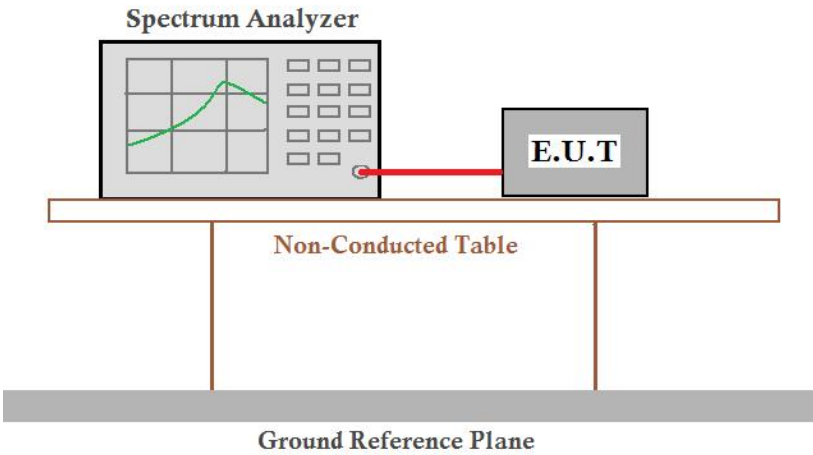
	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.330	19.20	9.52	28.72	49.45	-20.73	Average Neutral
2	0.330	24.37	9.52	33.89	59.45	-25.56	QP Neutral
3	0.460	18.13	9.66	27.79	46.69	-18.90	Average Neutral
4	0.460	23.01	9.66	32.67	56.69	-24.02	QP Neutral
5	0.835	18.46	9.81	28.27	46.00	-17.73	Average Neutral
6	0.835	23.32	9.81	33.13	56.00	-22.87	QP Neutral
7	0.970	18.60	9.72	28.32	46.00	-17.68	Average Neutral
8	0.970	23.90	9.72	33.62	56.00	-22.38	QP Neutral
9 PP	1.200	19.50	9.71	29.21	46.00	-16.79	Average Neutral
10 QP	1.200	24.56	9.71	34.27	56.00	-21.73	QP Neutral
11	1.385	18.08	9.72	27.80	46.00	-18.20	Average Neutral
12	1.385	22.81	9.72	32.53	56.00	-23.47	QP Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.



### 5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p><i>Setup for Power meter measurement method</i></p>  <p><i>Setup for Spectrum analyser measurement method</i></p> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


### Test Result


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	8.55	≤30.00	PASS
	2437	9.20	≤30.00	PASS
	2462	7.68	≤30.00	PASS
11G	2412	11.11	≤30.00	PASS
	2437	11.66	≤30.00	PASS
	2462	10.20	≤30.00	PASS
11N20SISO	2412	8.69	≤30.00	PASS
	2437	9.20	≤30.00	PASS
	2462	7.68	≤30.00	PASS
11N40SISO	2422	7.77	≤30.00	PASS
	2437	7.46	≤30.00	PASS
	2452	6.38	≤30.00	PASS

Note:

When Duty cycle >98%, D.C.F is not required.


Test Graphs

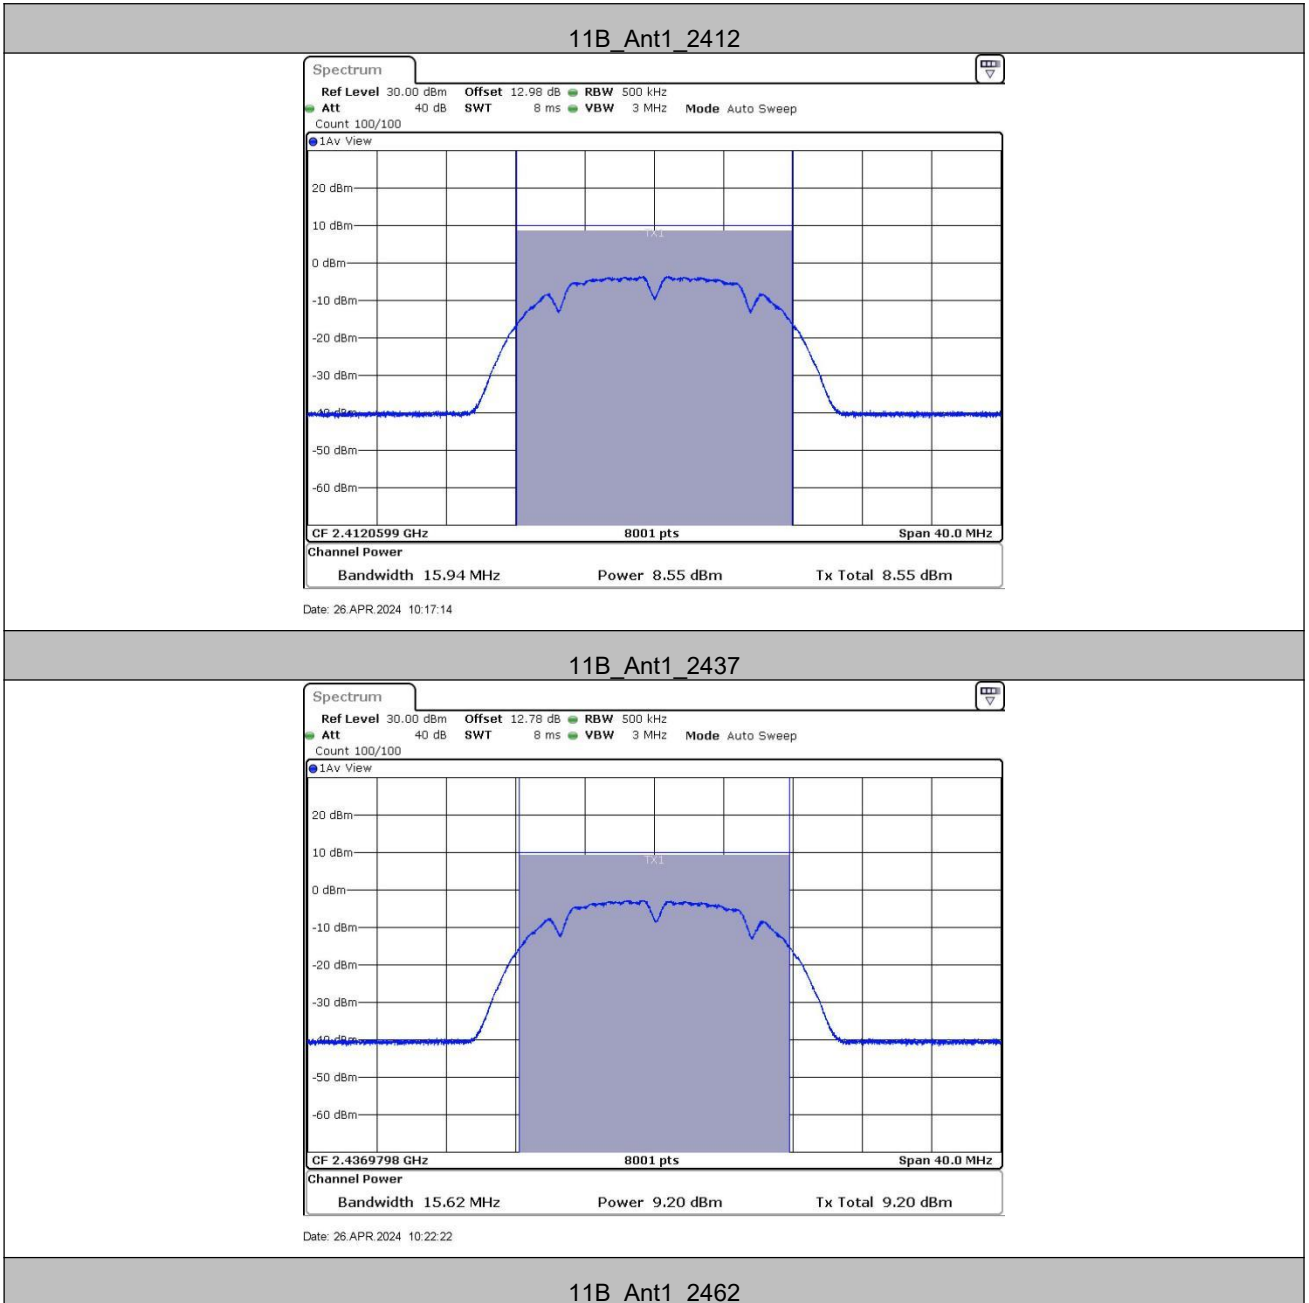

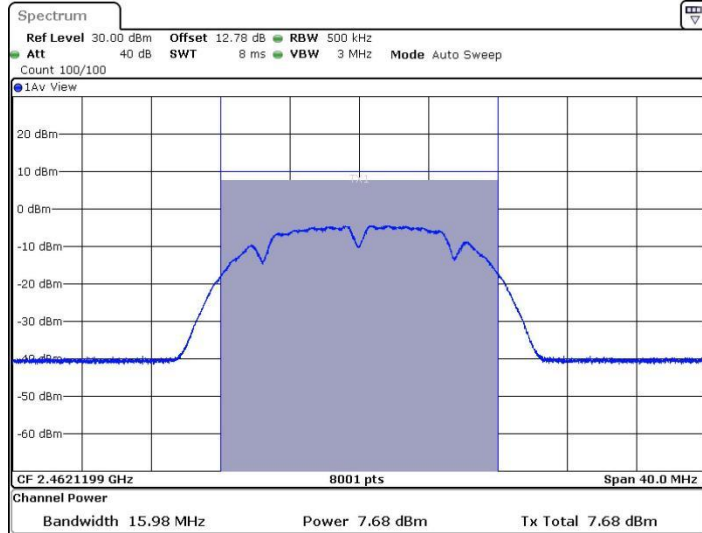


Date: 26 APR 2024 10:24:09

11G\_Ant1\_2412

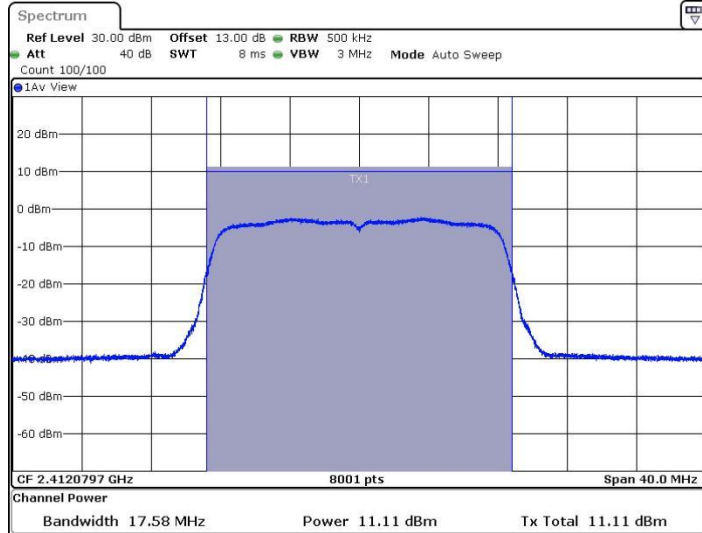


Date: 26 APR 2024 10:31:09

11G\_Ant1\_2437

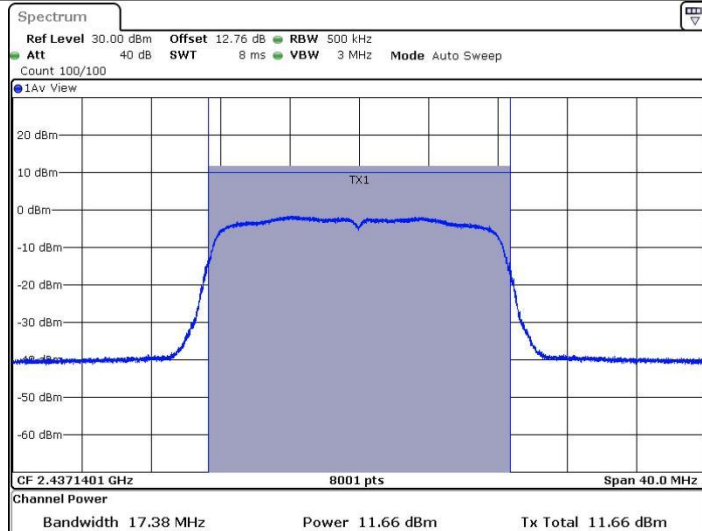


Date: 26 APR 2024 10:33:07


11G\_Ant1\_2462

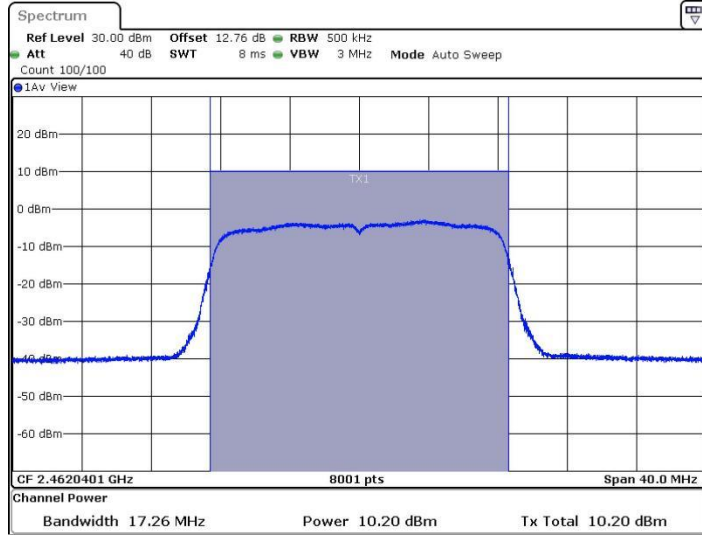

11N20SISO\_Ant1\_2412

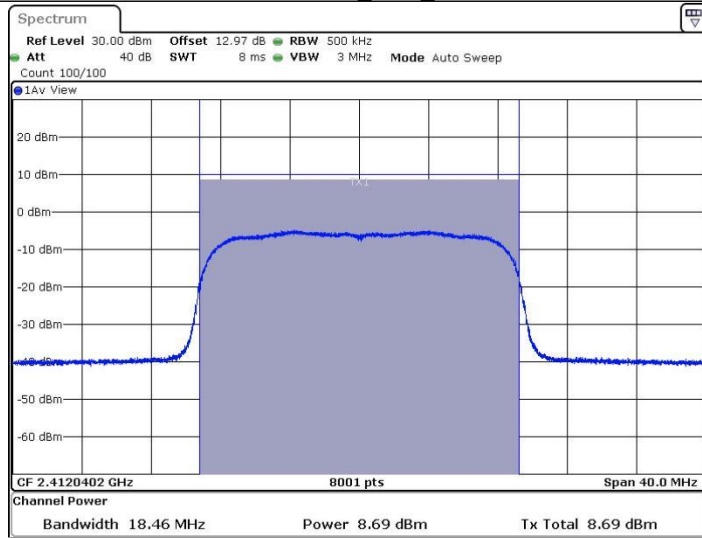


11N20SISO\_Ant1\_2437

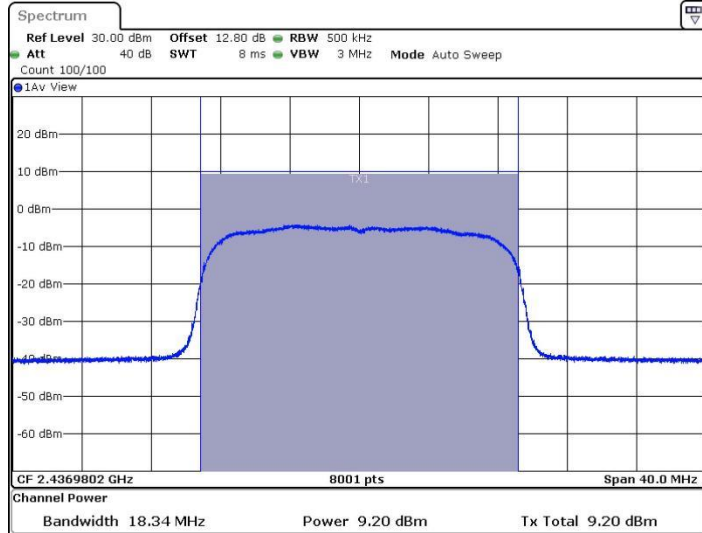


Date: 26 APR 2024 13:58:37

11N20SISO\_Ant1\_2462

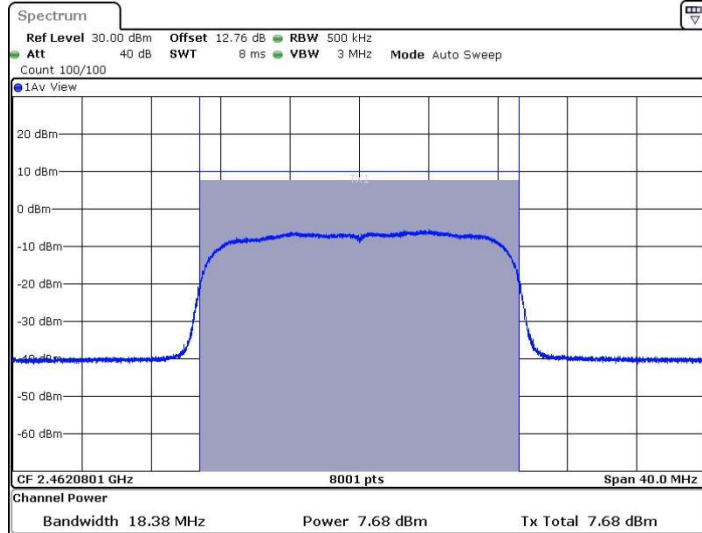


Date: 26 APR 2024 14:00:57

11N40SISO\_Ant1\_2422

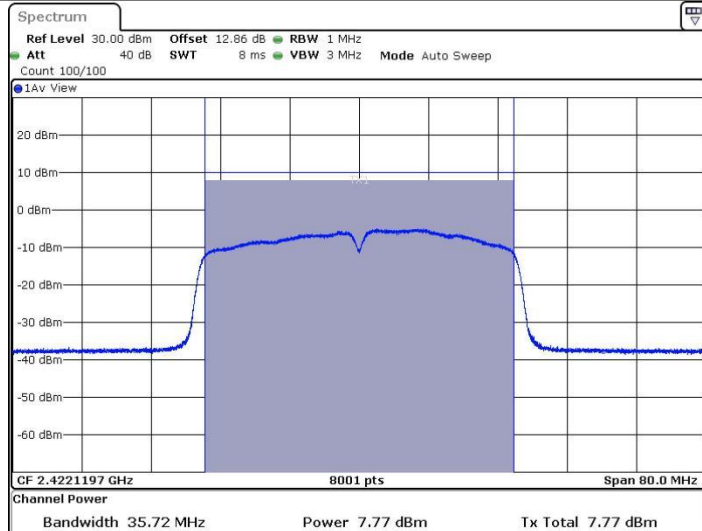


Date: 26 APR 2024 14:09:04

11N40SISO\_Ant1\_2437

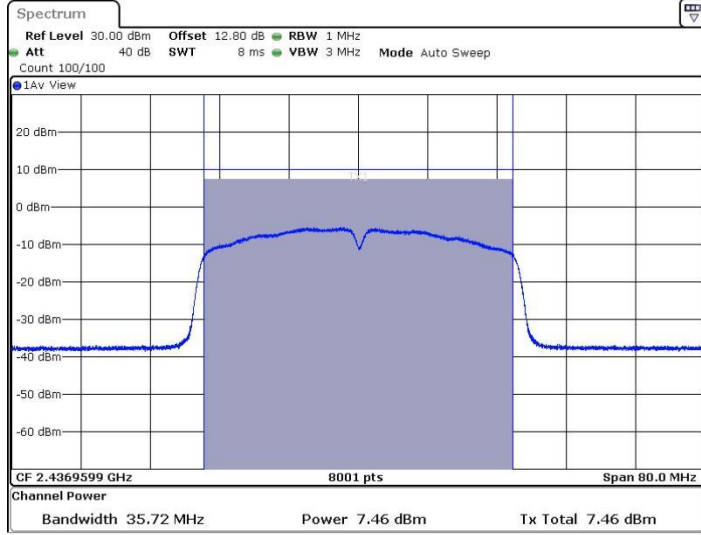


Date: 26 APR 2024 14:12:32

11N40SISO\_Ant1\_2452

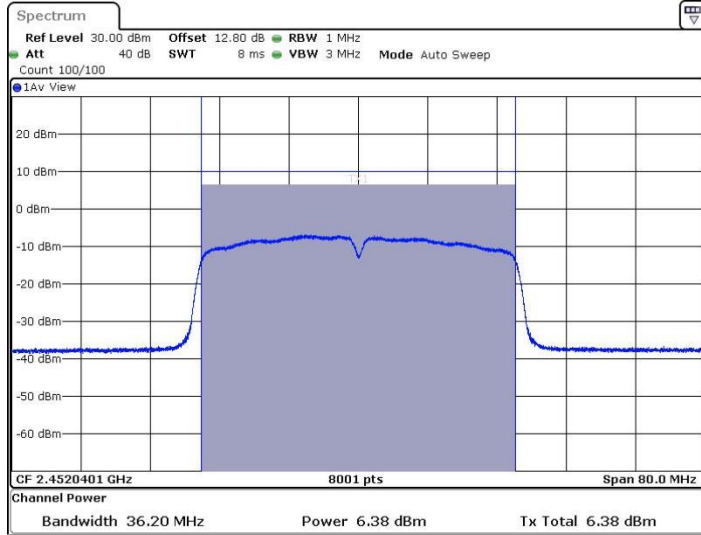

Date: 26 APR 2024 14:16:25

## 5.4 6dB Occupied Bandwidth

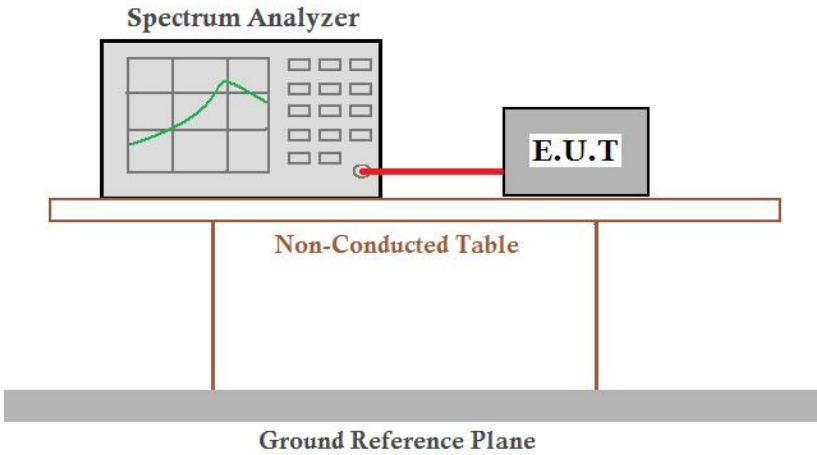
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	$\geq 500$ kHz
Test Results:	Pass




### Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.12	0.5	PASS
		2437	12.04	0.5	PASS
		2462	12.08	0.5	PASS
11G	Ant1	2412	15.80	0.5	PASS
		2437	15.36	0.5	PASS
		2462	15.92	0.5	PASS
11N20SISO	Ant1	2412	15.12	0.5	PASS
		2437	15.08	0.5	PASS
		2462	15.04	0.5	PASS
11N40SISO	Ant1	2422	33.84	0.5	PASS
		2437	30.08	0.5	PASS
		2452	35.12	0.5	PASS


Test Graphs

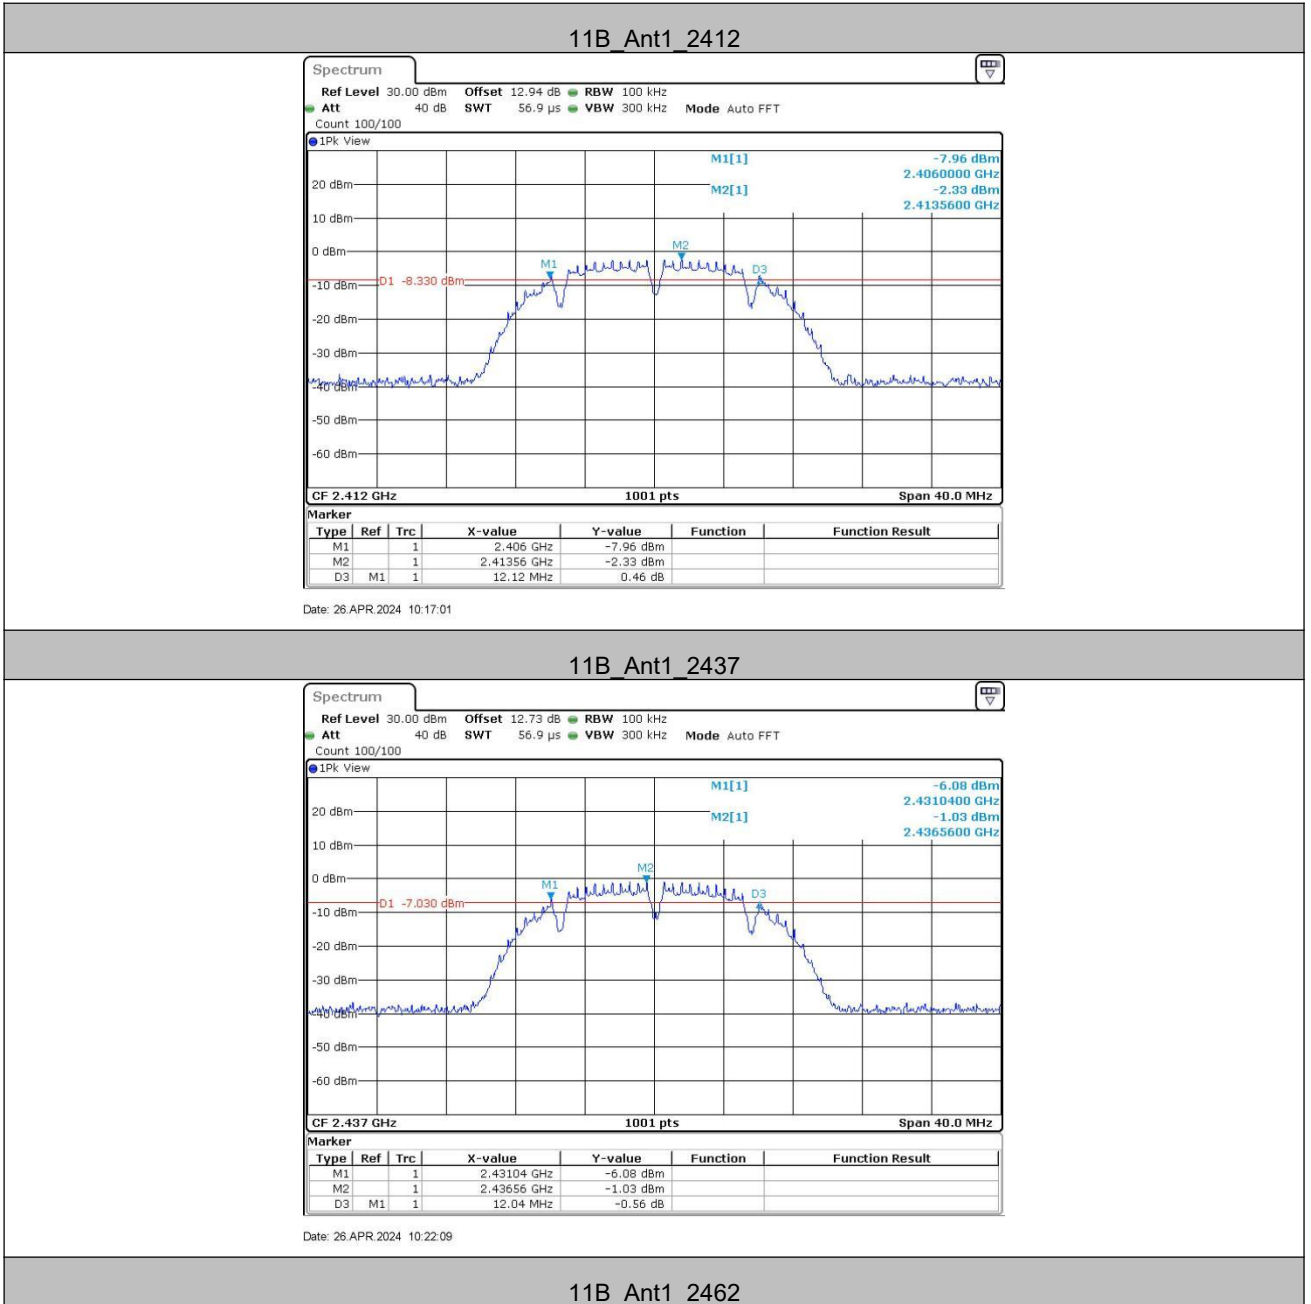

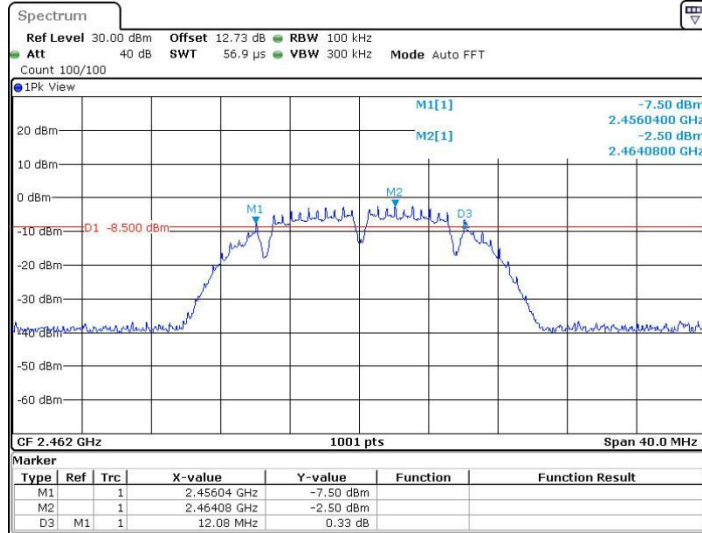


Date: 26 APR 2024 10:23:56

11G\_Ant1\_2412

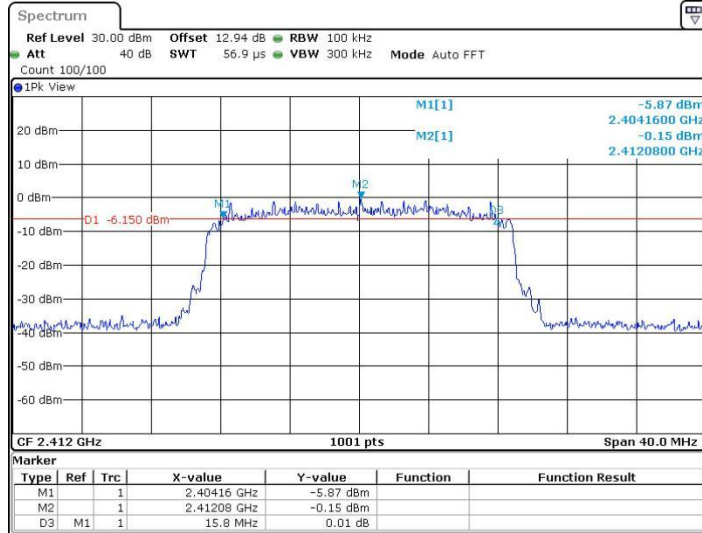


Date: 26 APR 2024 10:30:56

11G\_Ant1\_2437

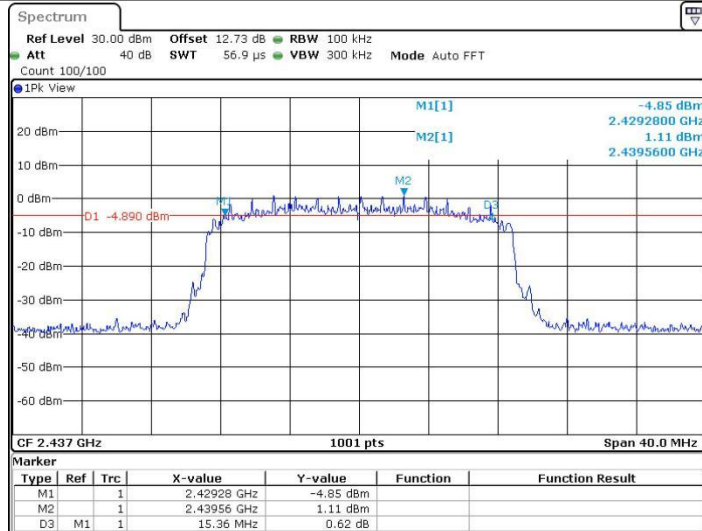


Date: 26 APR 2024 10:32:53

11G\_Ant1\_2462

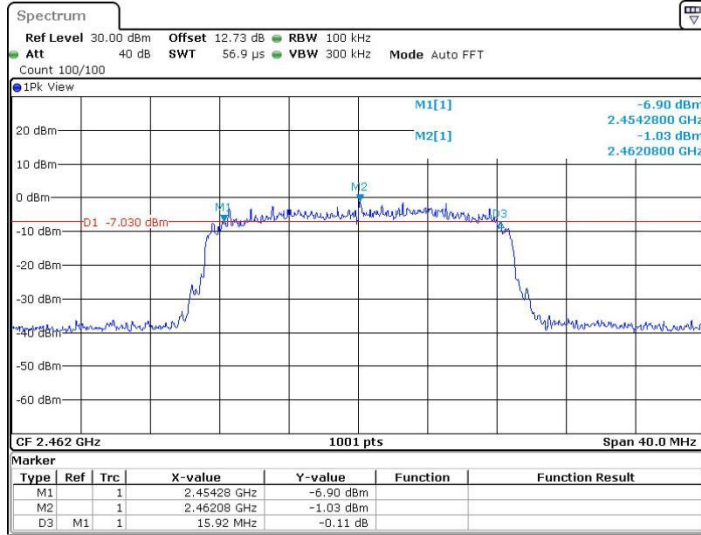


Date: 26 APR 2024 10:34:44

11N20SISO\_Ant1\_2412

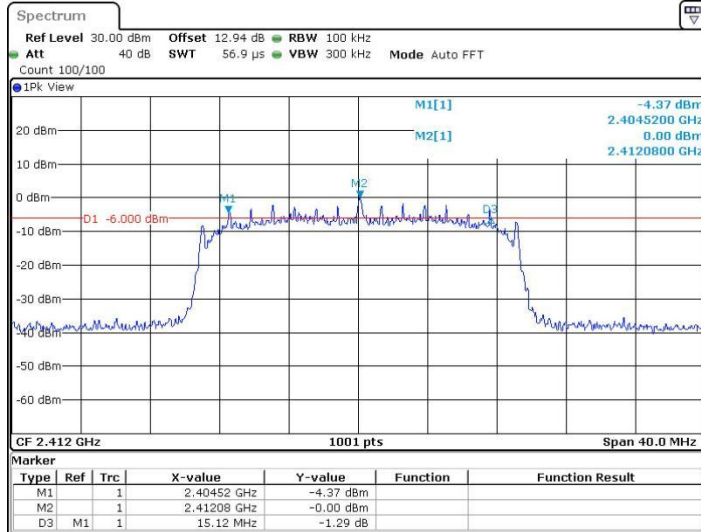


Date: 26 APR 2024 13:52:45

11N20SISO\_Ant1\_2437

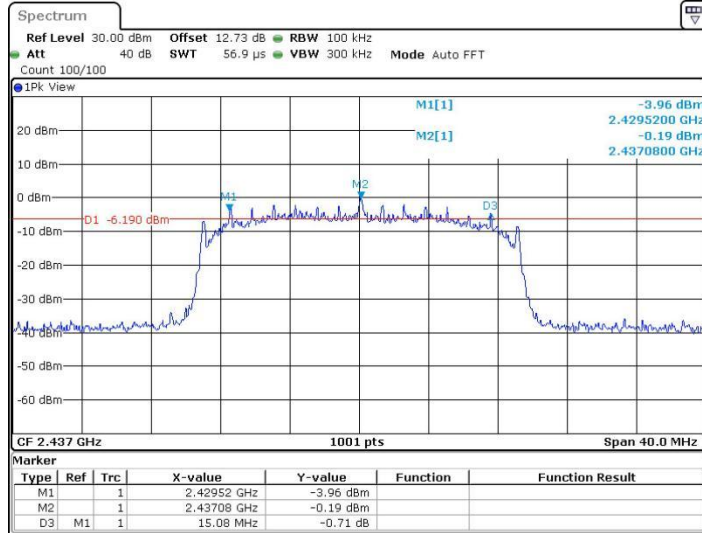


Date: 26 APR 2024 13:58:24

11N20SISO\_Ant1\_2462

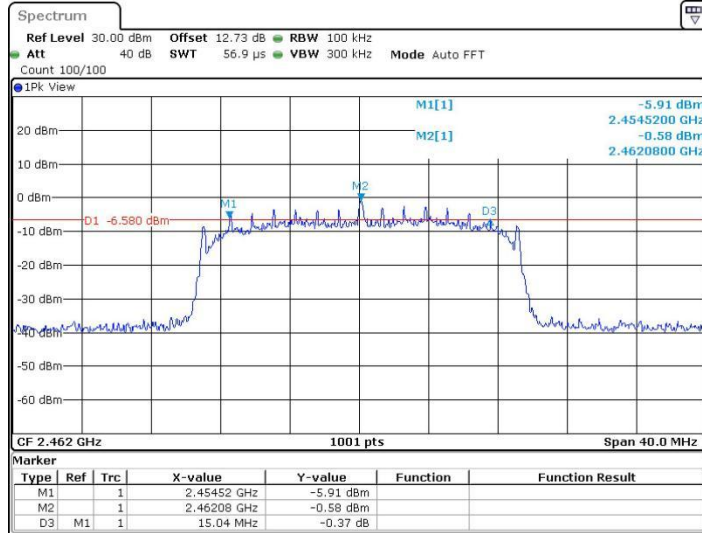


Date: 26 APR 2024 14:00:44

11N40SISO\_Ant1\_2422

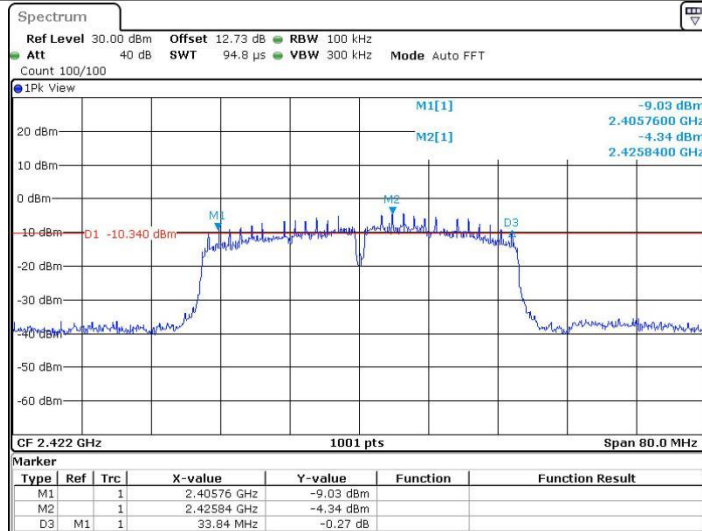


Date: 26 APR 2024 14:08:51

11N40SISO\_Ant1\_2437

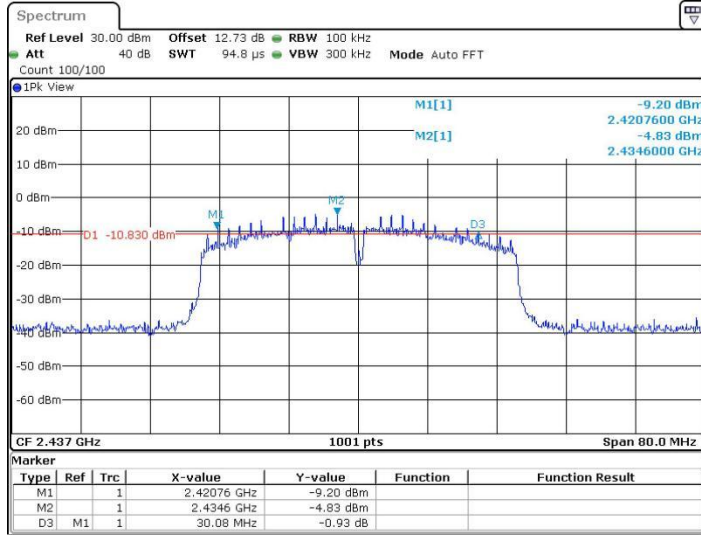


Date: 26 APR 2024 14:12:19

11N40SISO\_Ant1\_2452

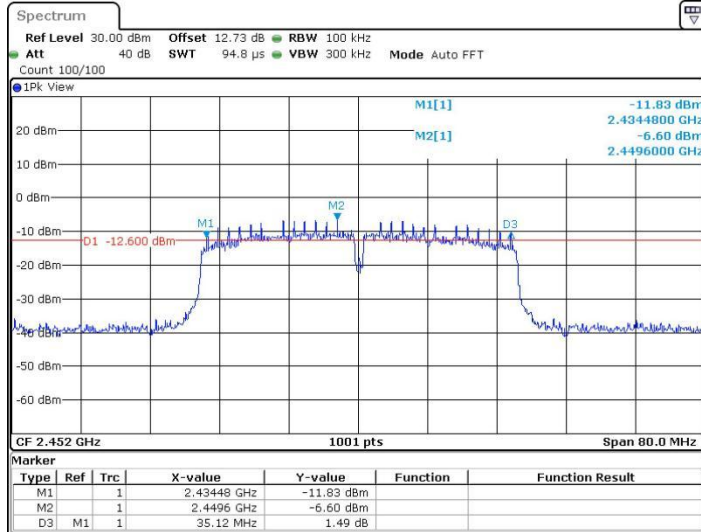

Date: 26 APR 2024 14:16:12

## 5.5 Power Spectral Density

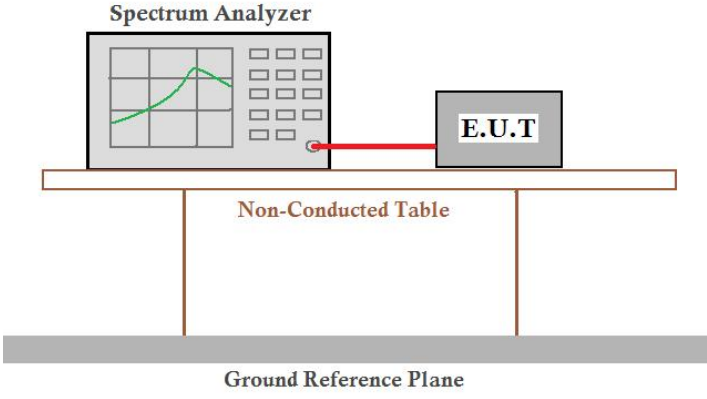Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass

### Test Result


TestMode	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-20.05	≤8.00	PASS
	2437	-18.54	≤8.00	PASS
	2462	-20.35	≤8.00	PASS
11G	2412	-16.67	≤8.00	PASS
	2437	-16.02	≤8.00	PASS
	2462	-17.36	≤8.00	PASS
11N20SISO	2412	-21.28	≤8.00	PASS
	2437	-20.5	≤8.00	PASS
	2462	-22.07	≤8.00	PASS
11N40SISO	2422	-22.75	≤8.00	PASS
	2437	-22.92	≤8.00	PASS
	2452	-24.31	≤8.00	PASS


Note:

When Duty cycle >98%, D.C.F is not required.




Test Graphs

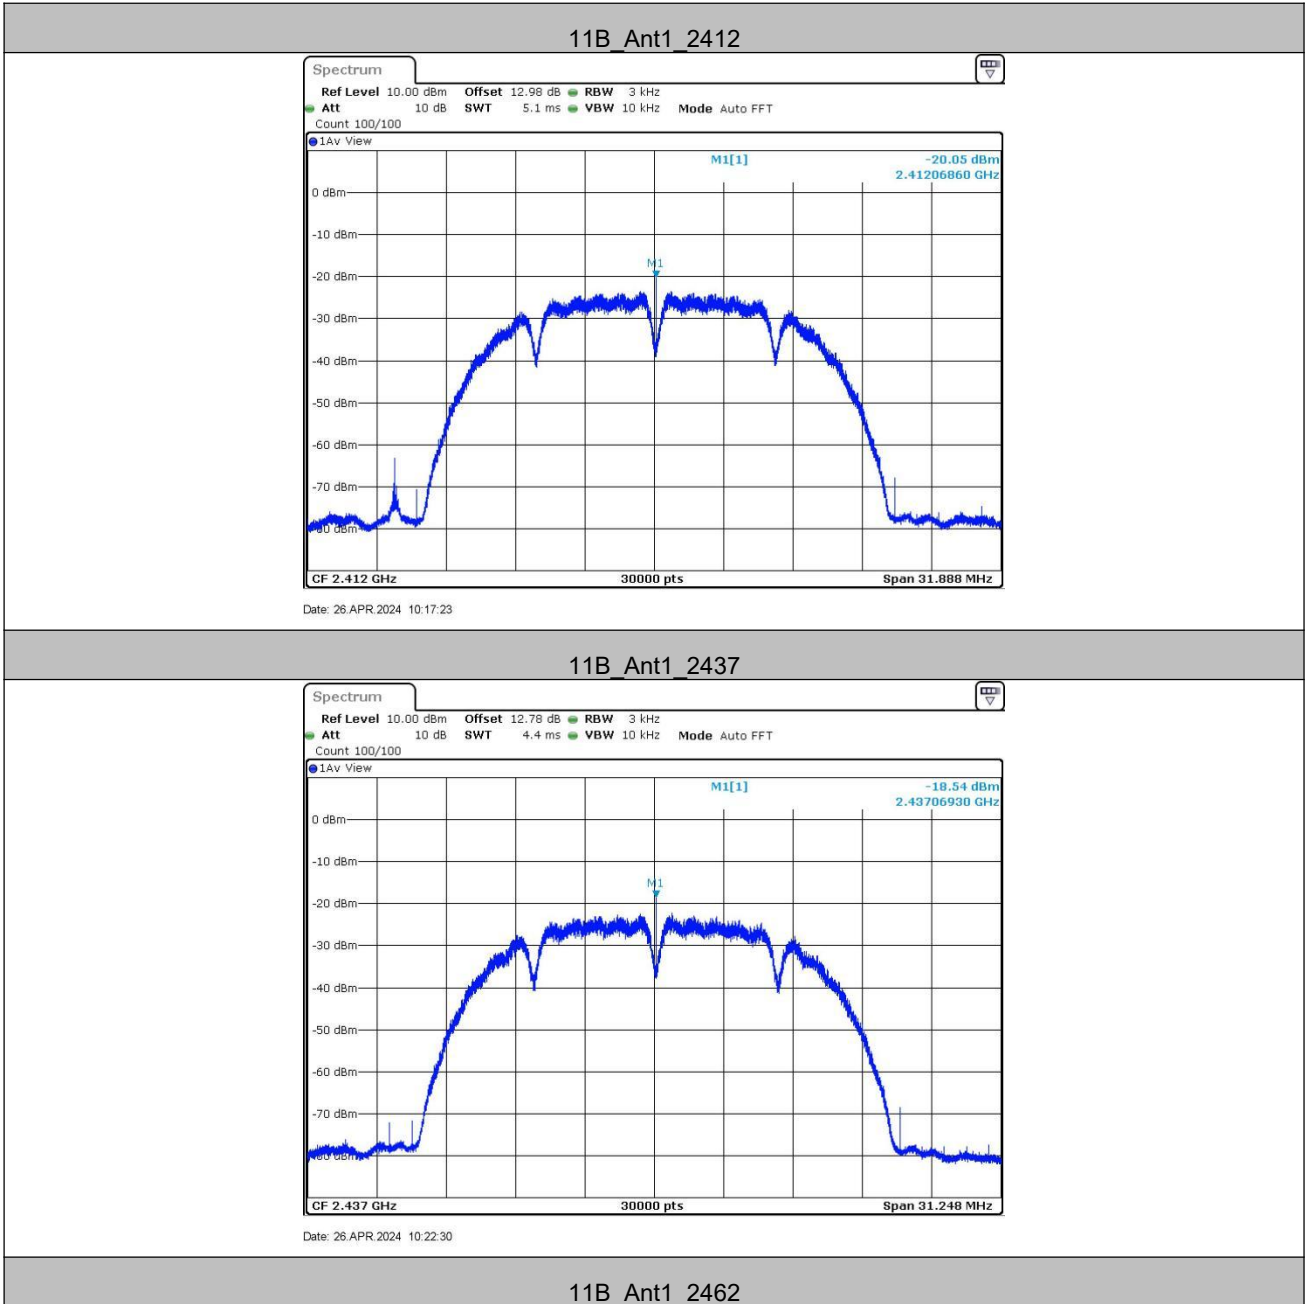

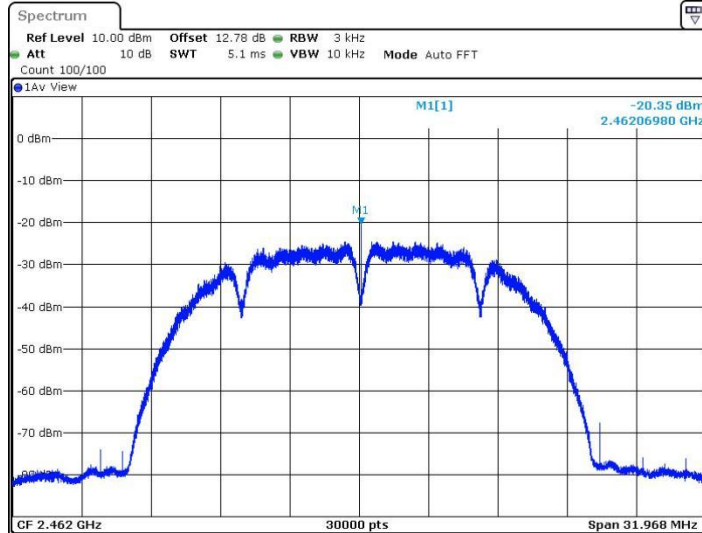


Date: 26 APR 2024 10:24:17

11G\_Ant1\_2412

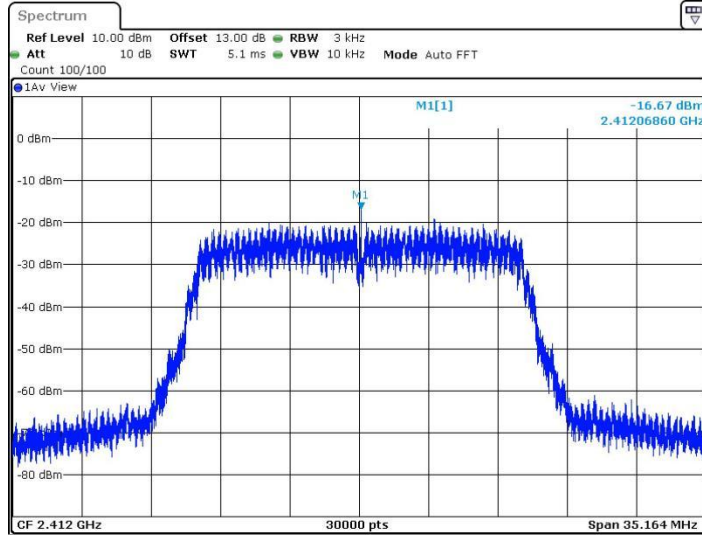


Date: 26 APR 2024 10:31:17

11G\_Ant1\_2437

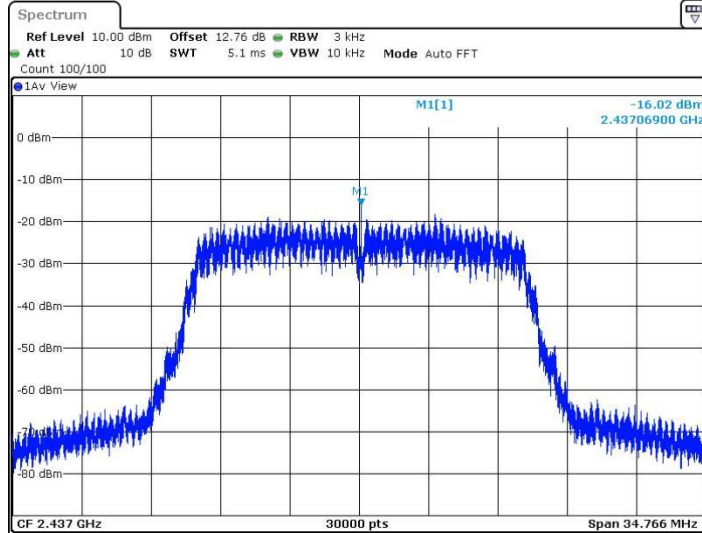


Date: 26 APR 2024 10:33:15


11G\_Ant1\_2462

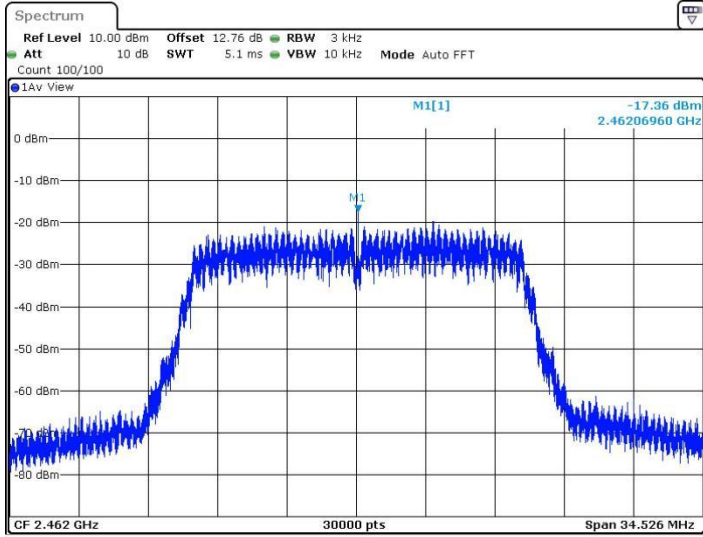

11N20SISO\_Ant1\_2412

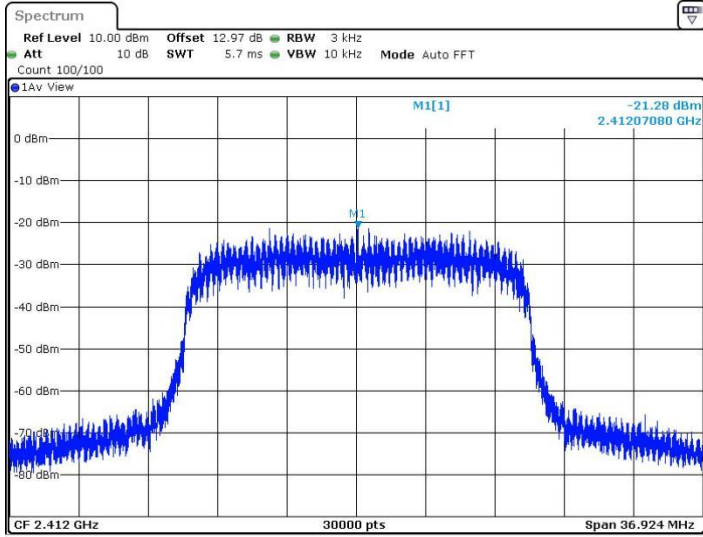


11N20SISO\_Ant1\_2437

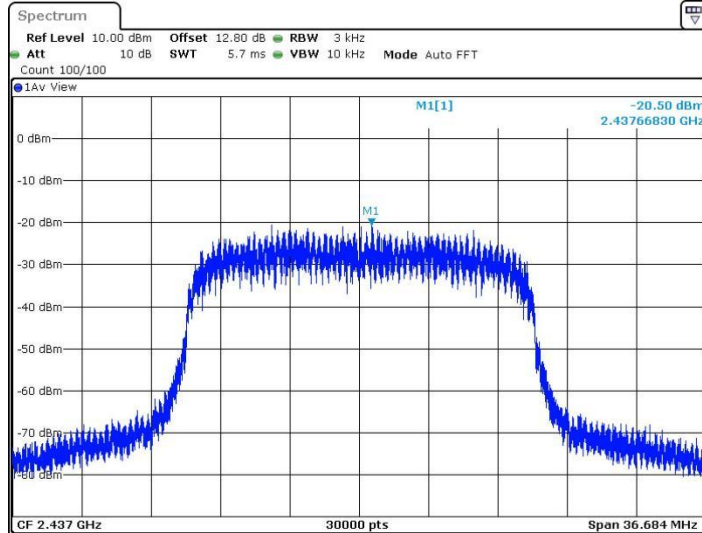


Date: 26 APR 2024 13:58:45

11N20SISO\_Ant1\_2462

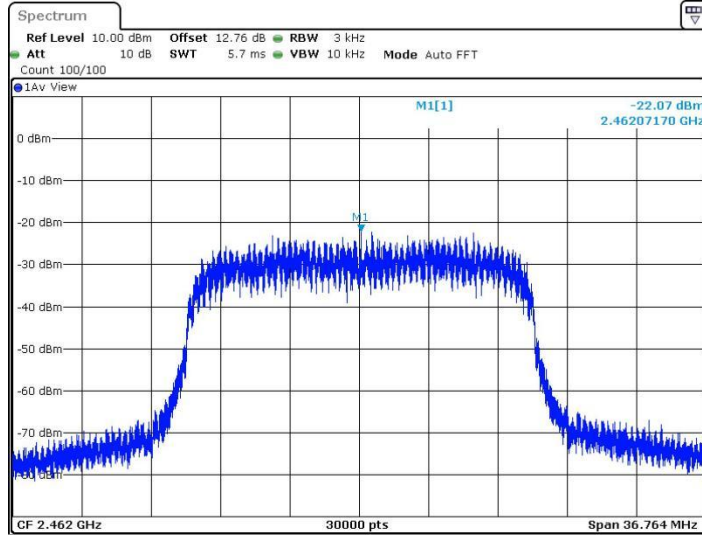


Date: 26 APR 2024 14:01:05

11N40SISO\_Ant1\_2422

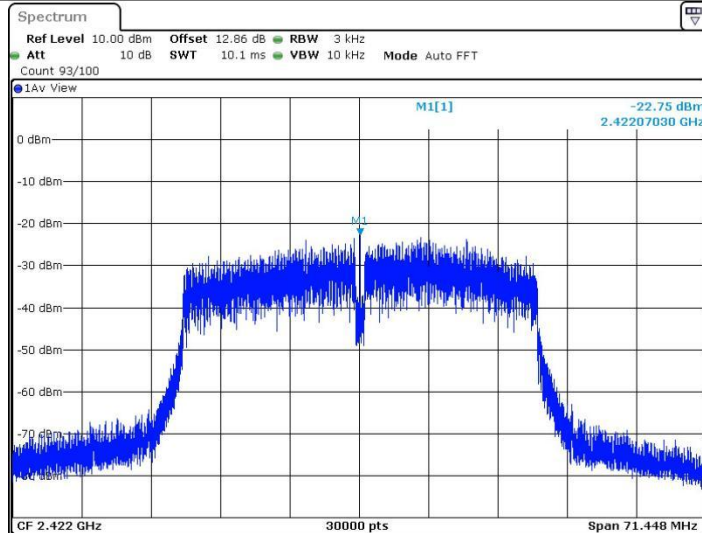


Date: 26 APR 2024 14:09:12

11N40SISO\_Ant1\_2437

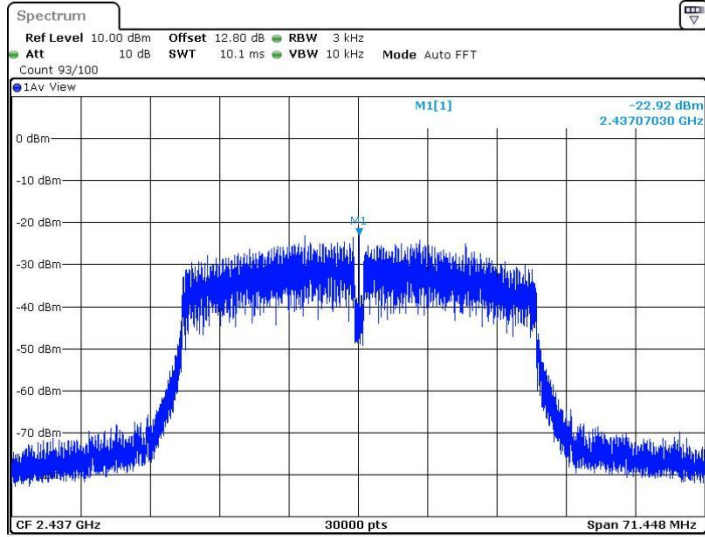


Date: 26 APR 2024 14:12:40

11N40SISO\_Ant1\_2452

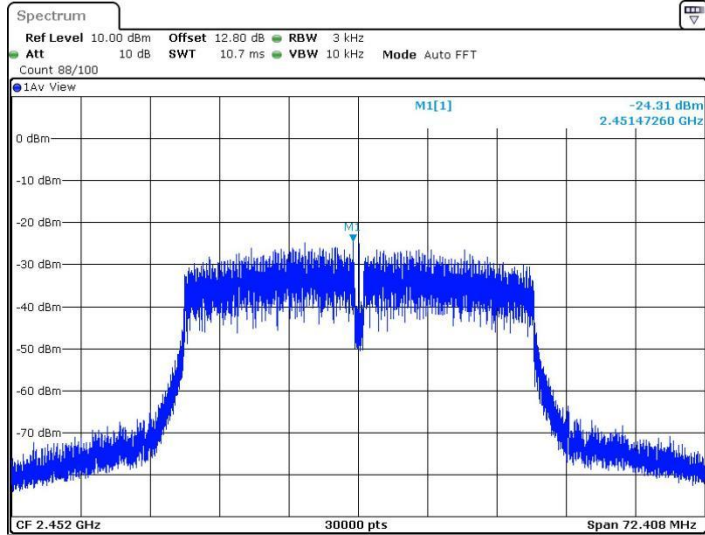

Date: 26 APR 2024 14:16:33


## 5.6 Band-edge for RF Conducted Emissions

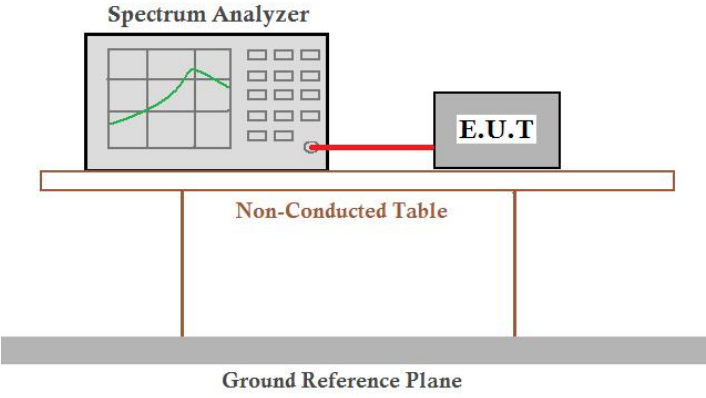Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


### Test Result

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	-1.73	-44.73	≤-31.73	PASS
	High	2462	-2.67	-44.64	≤-32.67	PASS
11G	Low	2412	0.13	-39.37	≤-29.87	PASS
	High	2462	-0.45	-44.06	≤-30.45	PASS
11N20SISO	Low	2412	-1.91	-41.86	≤-31.91	PASS
	High	2462	-2.67	-45.03	≤-32.67	PASS
11N40SISO	Low	2422	-4.37	-42.47	≤-34.37	PASS
	High	2452	-6.27	-43.07	≤-36.27	PASS

5.6.1 Test Graphs

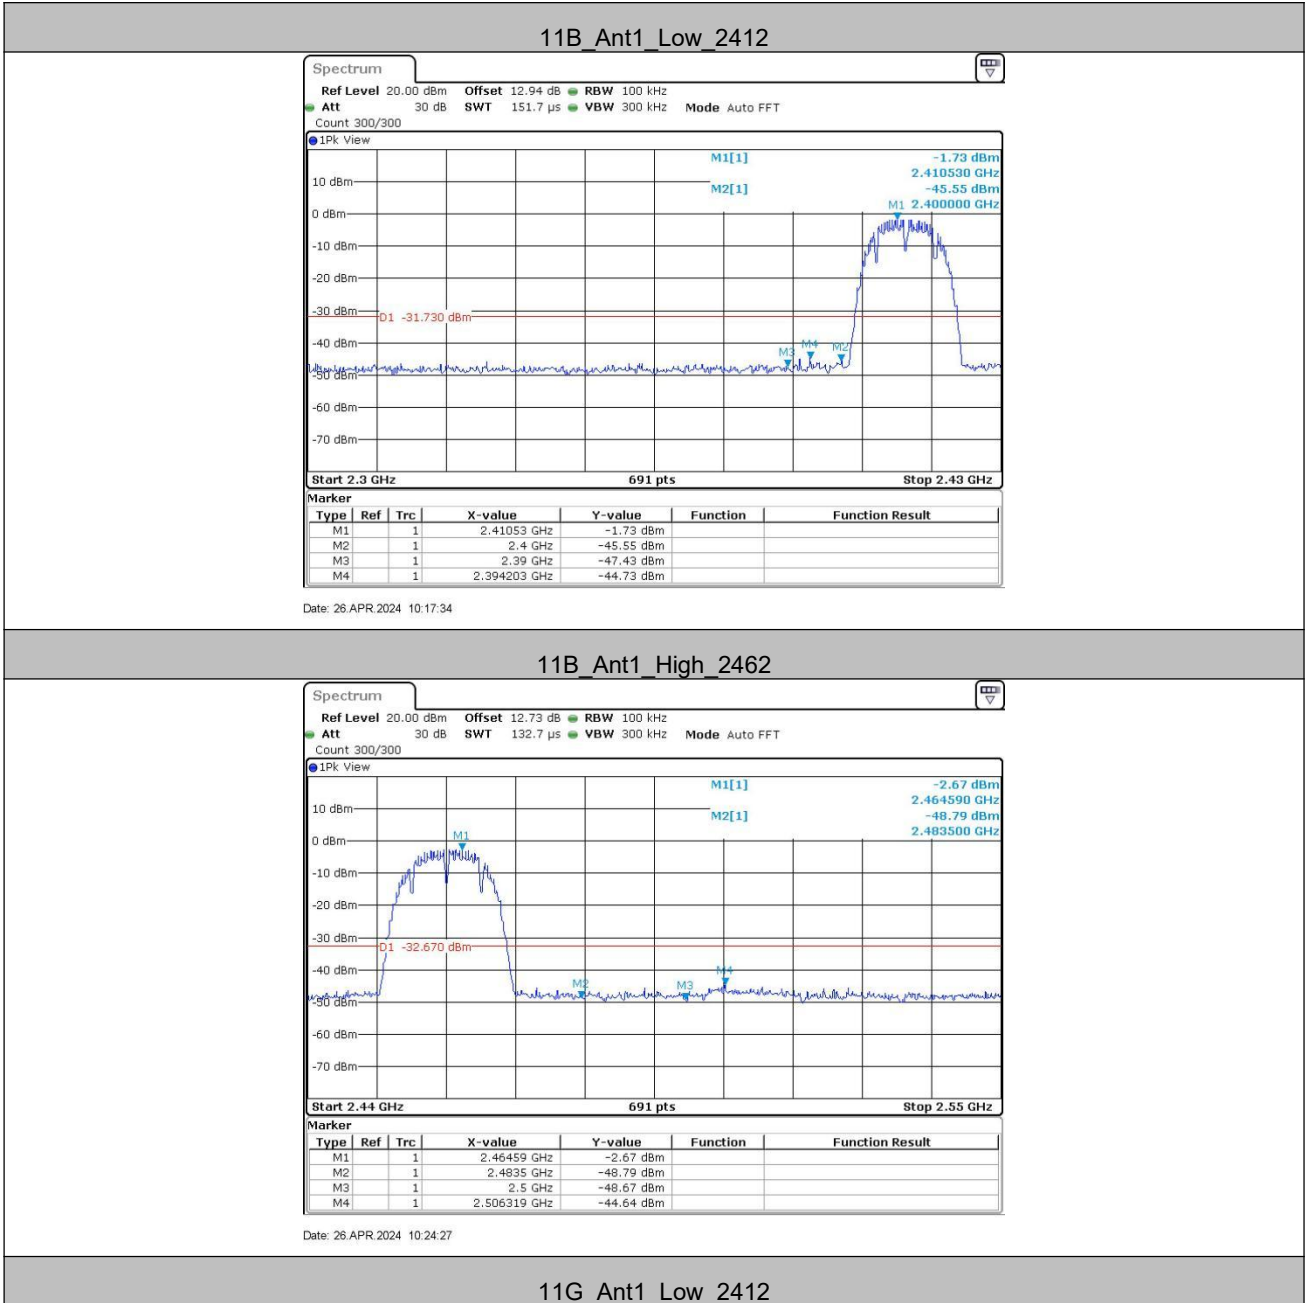




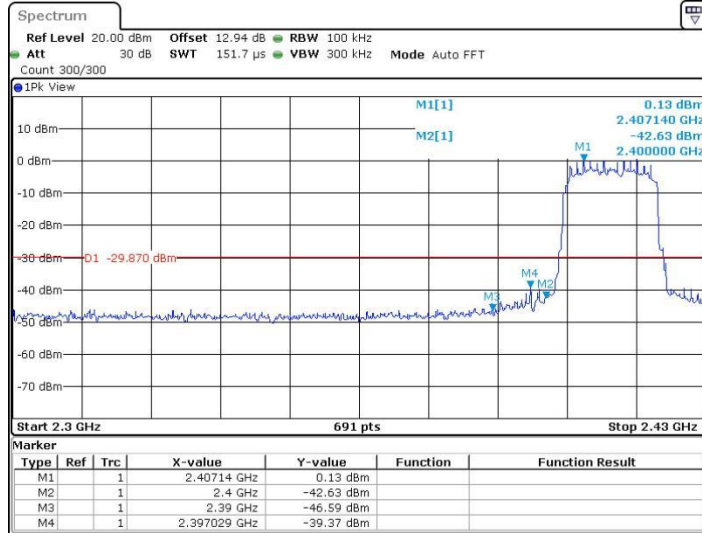


Date: 26 APR 2024 10:31:27

11G\_Ant1\_High\_2462

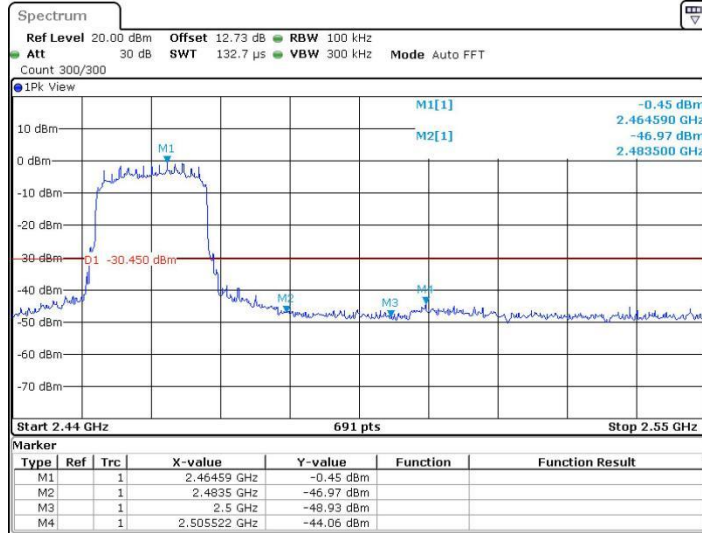


Date: 26 APR 2024 10:35:15

11N20SISO\_Ant1\_Low\_2412

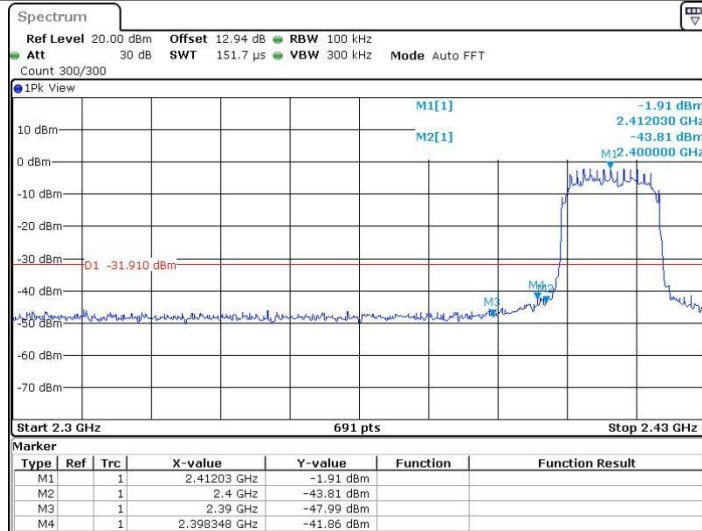


Date: 26 APR 2024 13:53:17

11N20SISO\_Ant1\_High\_2462

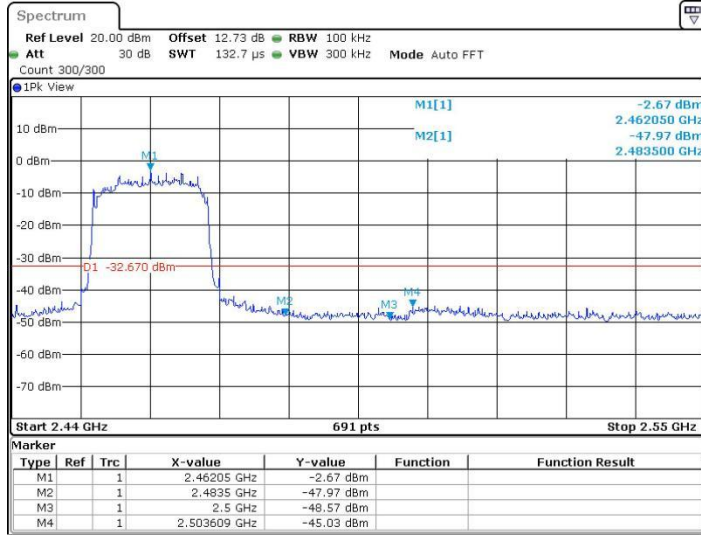


Date: 26 APR 2024 14:01:15

11N40SISO\_Ant1\_Low\_2422

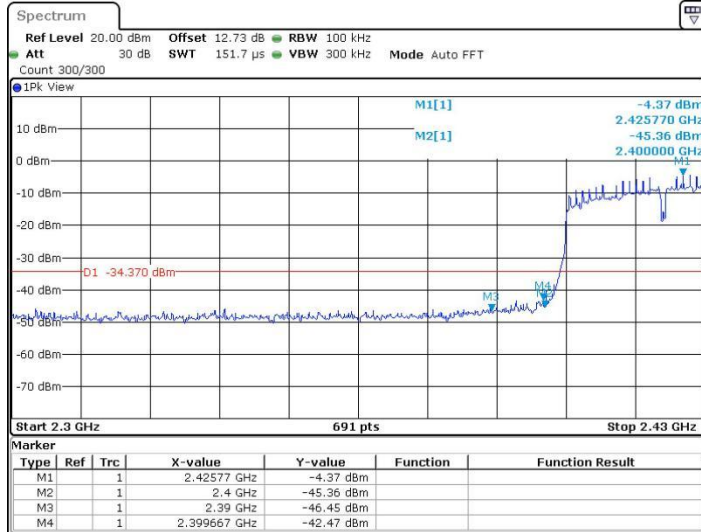


Date: 26 APR 2024 14:09:22

11N40SISO\_Ant1\_High\_2452

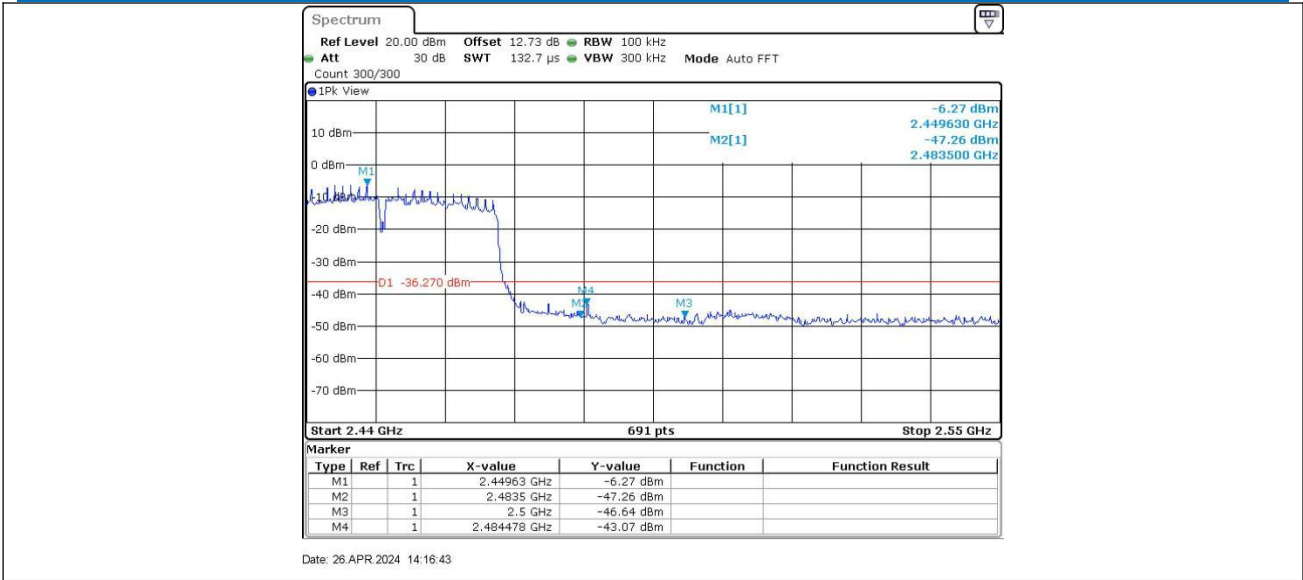

## 5.7 RF Conducted Spurious Emissions

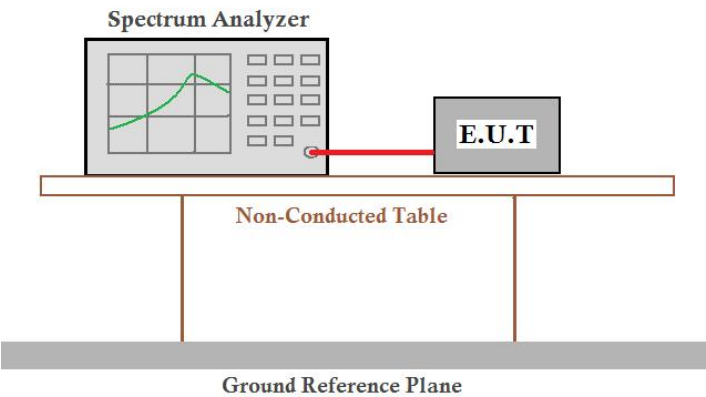Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>The diagram illustrates the test setup for RF conducted spurious emissions. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p> <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result


TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	-1.80	-1.80	---	PASS
		30~1000	-1.80	-54.03	≤-31.8	PASS
		1000~26500	-1.80	-50.4	≤-31.8	PASS
	2437	Reference	-0.72	-0.72	---	PASS
		30~1000	-0.72	-53.82	≤-30.72	PASS
		1000~26500	-0.72	-50.32	≤-30.72	PASS
	2462	Reference	-2.82	-2.82	---	PASS
		30~1000	-2.82	-54.07	≤-32.82	PASS
		1000~26500	-2.82	-50.46	≤-32.82	PASS
11G	2412	Reference	0.25	0.25	---	PASS
		30~1000	0.25	-53.63	≤-29.75	PASS
		1000~26500	0.25	-50.43	≤-29.75	PASS
	2437	Reference	0.99	0.99	---	PASS
		30~1000	0.99	-54.26	≤-29.01	PASS
		1000~26500	0.99	-51.1	≤-29.01	PASS
	2462	Reference	-0.37	-0.37	---	PASS
		30~1000	-0.37	-54.05	≤-30.37	PASS
		1000~26500	-0.37	-50.5	≤-30.37	PASS
11N20SISO	2412	Reference	-1.99	-1.99	---	PASS
		30~1000	-1.99	-53.5	≤-31.99	PASS
		1000~26500	-1.99	-51.33	≤-31.99	PASS
	2437	Reference	-1.52	-1.52	---	PASS
		30~1000	-1.52	-53.99	≤-31.52	PASS
		1000~26500	-1.52	-50.21	≤-31.52	PASS
	2462	Reference	-2.76	-2.76	---	PASS
		30~1000	-2.76	-52.95	≤-32.76	PASS
		1000~26500	-2.76	-50.23	≤-32.76	PASS
11N40SISO	2422	Reference	-4.47	-4.47	---	PASS
		30~1000	-4.47	-53.77	≤-34.47	PASS
		1000~26500	-4.47	-51.1	≤-34.47	PASS
	2437	Reference	-4.85	-4.85	---	PASS
		30~1000	-4.85	-53.91	≤-34.85	PASS
		1000~26500	-4.85	-50.78	≤-34.85	PASS
	2452	Reference	-6.62	-6.62	---	PASS

---

		30~1000	-6.62	-54.37	$\leq -36.62$	PASS
		1000~26500	-6.62	-50.28	$\leq -36.62$	PASS


Test Graphs

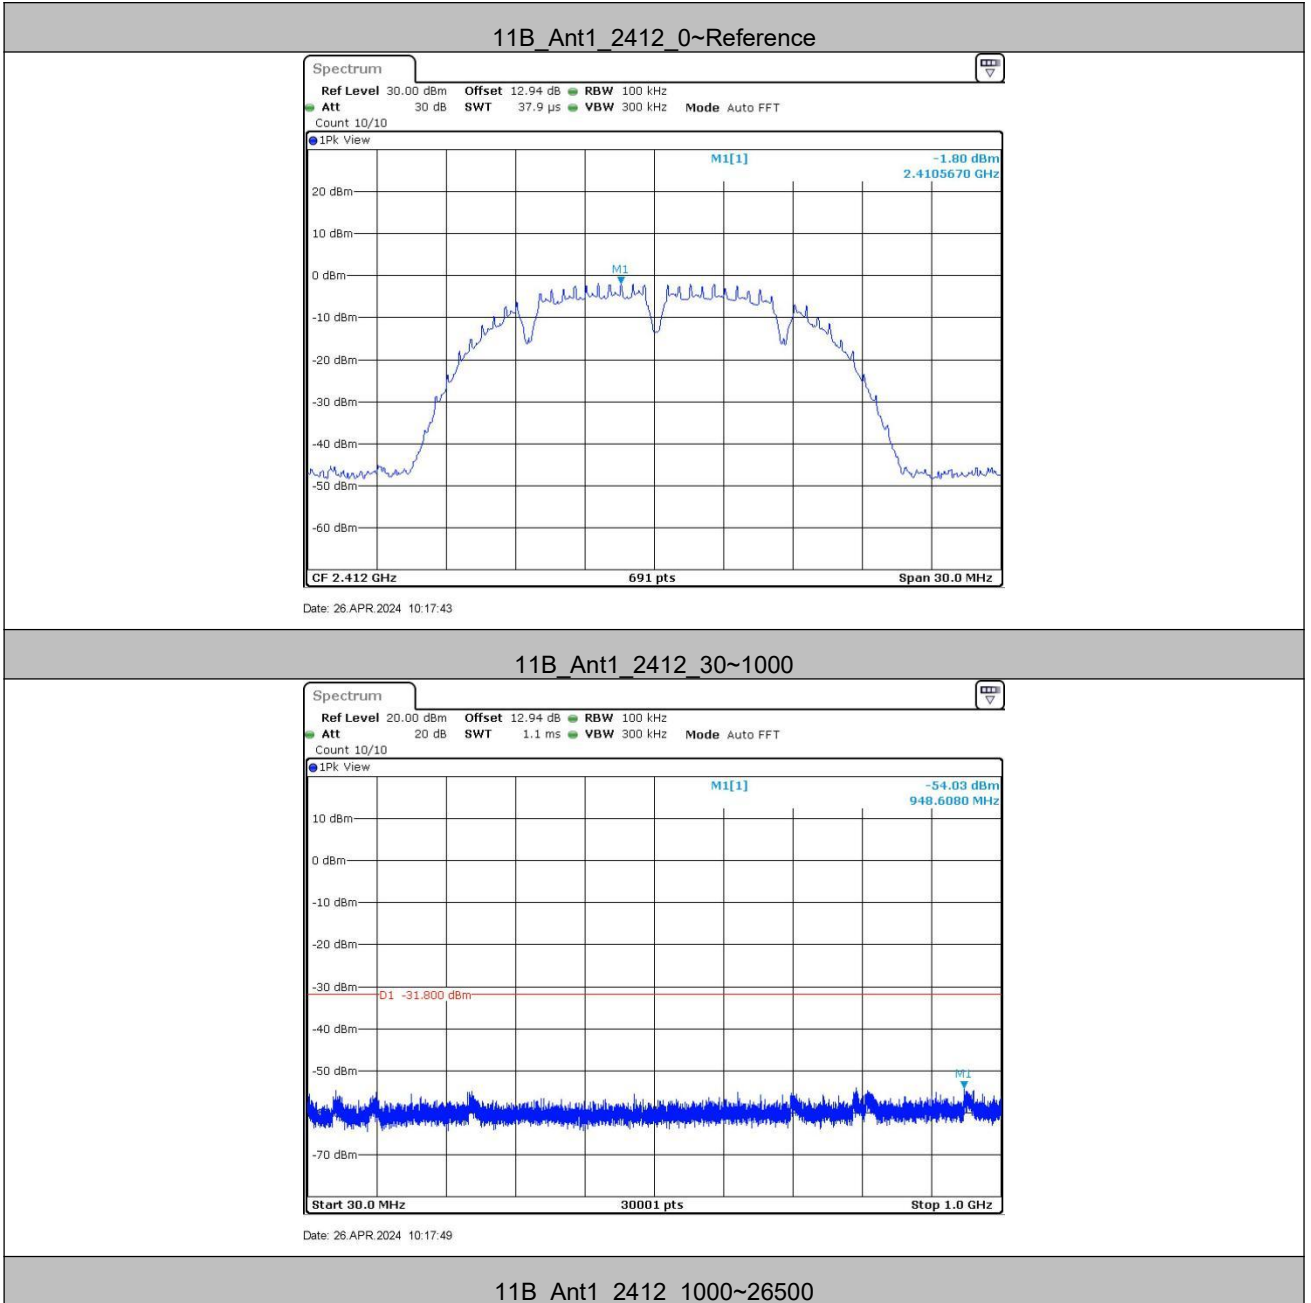

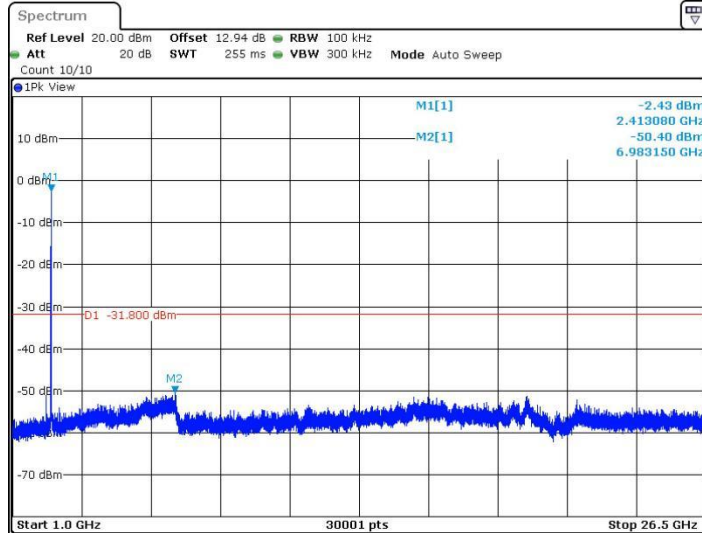


Date: 26 APR 2024 10:18:11

11B\_Ant1\_2437\_0~Reference

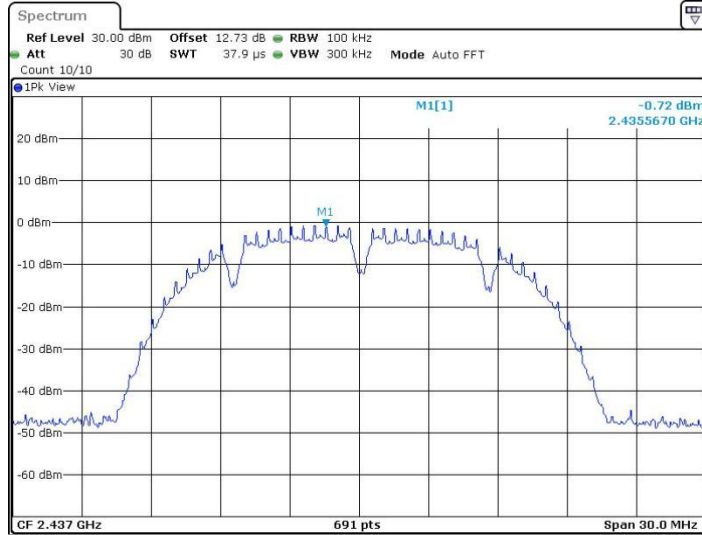

Date: 26 APR 2024 10:22:39


11B\_Ant1\_2437\_30~1000

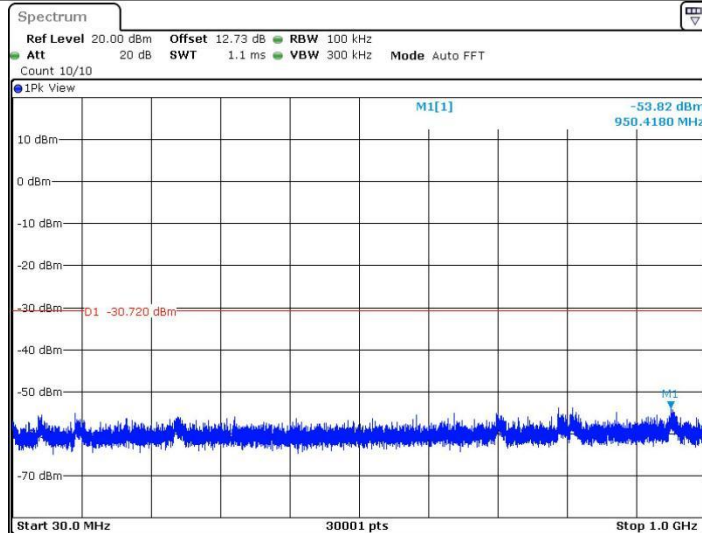

Date: 26 APR 2024 10:22:45




11B\_Ant1\_2437\_1000~26500

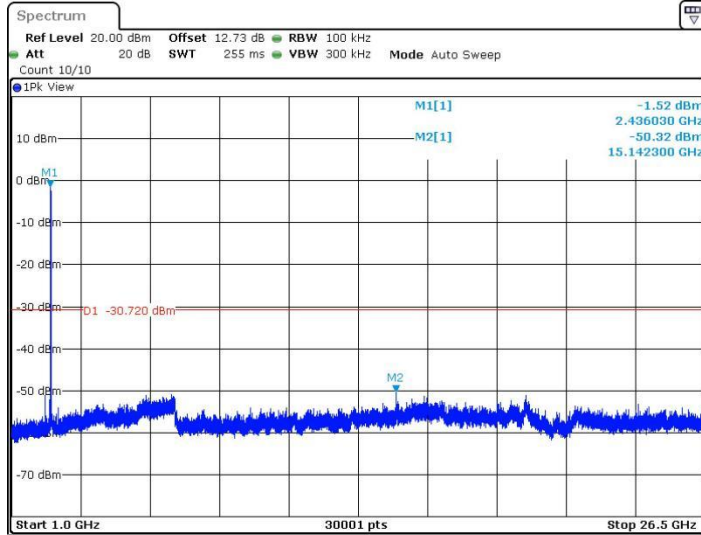


Date: 26 APR 2024 10:23:07

11B\_Ant1\_2462\_0~Reference

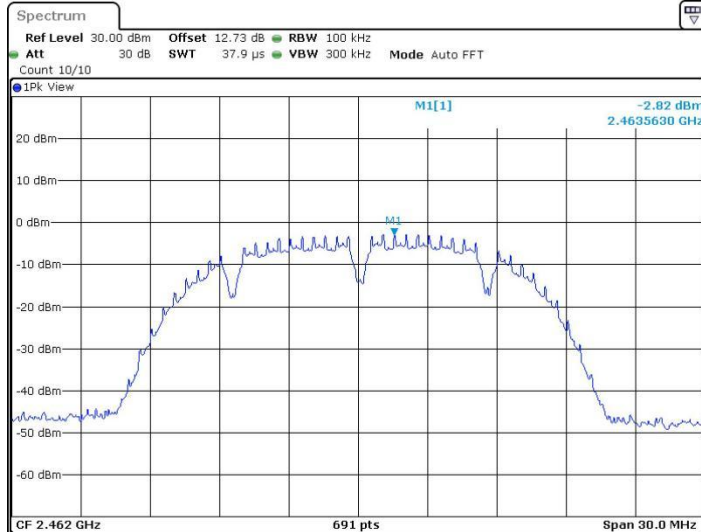


Date: 26 APR 2024 10:24:36

11B\_Ant1\_2462\_30~1000

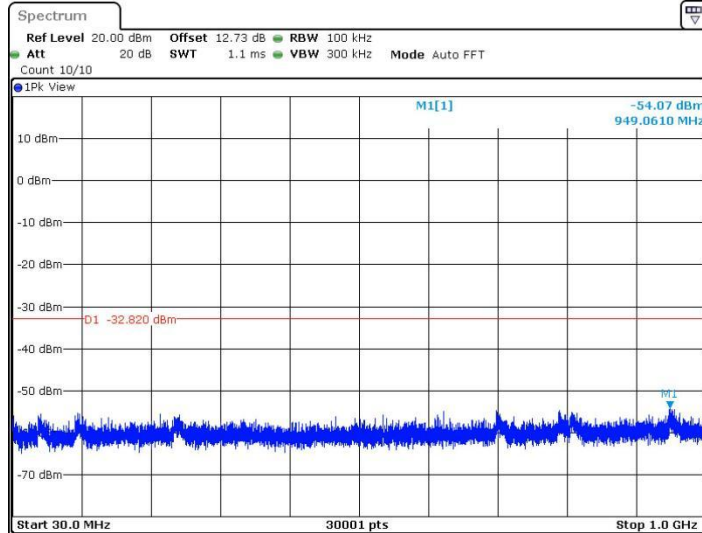


Date: 26 APR 2024 10:24:42

11B\_Ant1\_2462\_1000~26500

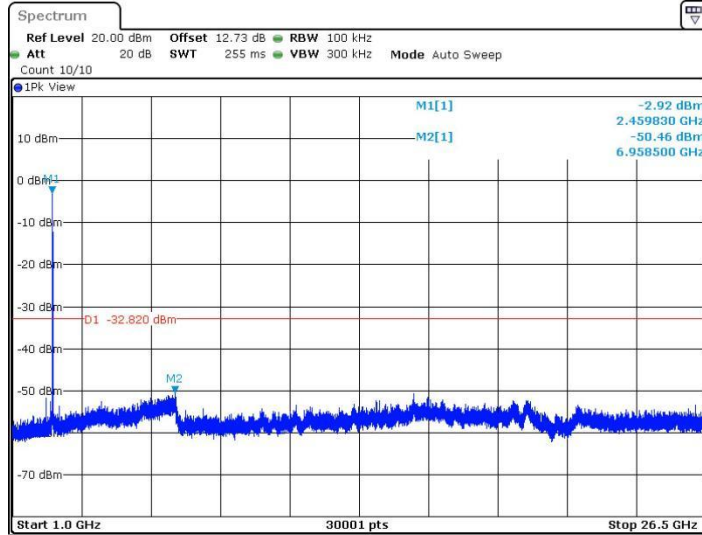


Date: 26 APR 2024 10:25:04

11G\_Ant1\_2412\_0~Reference

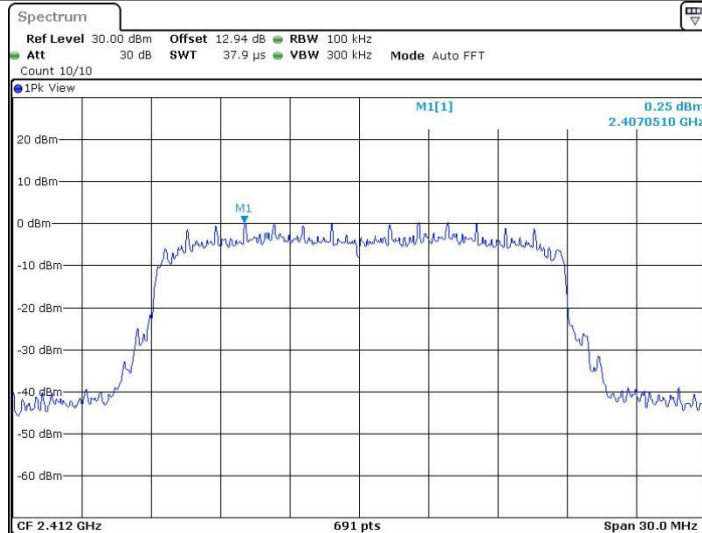


Date: 26 APR 2024 10:31:36

11G Ant1 2412\_30~1000

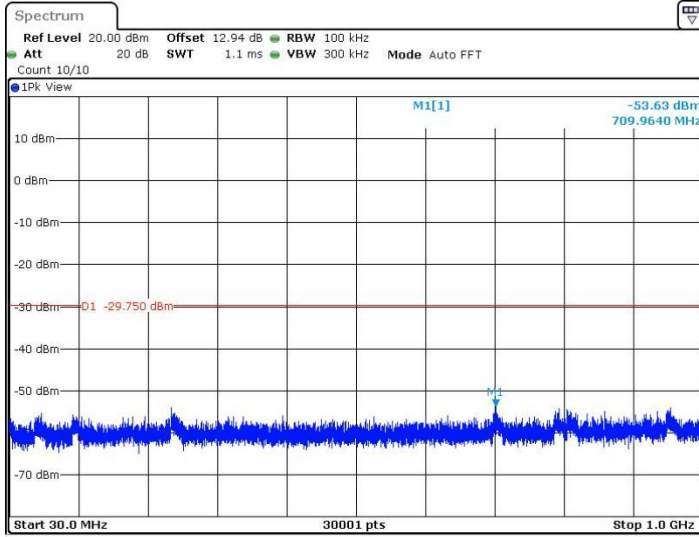


Date: 26 APR 2024 10:31:43

11G Ant1 2412\_1000~26500

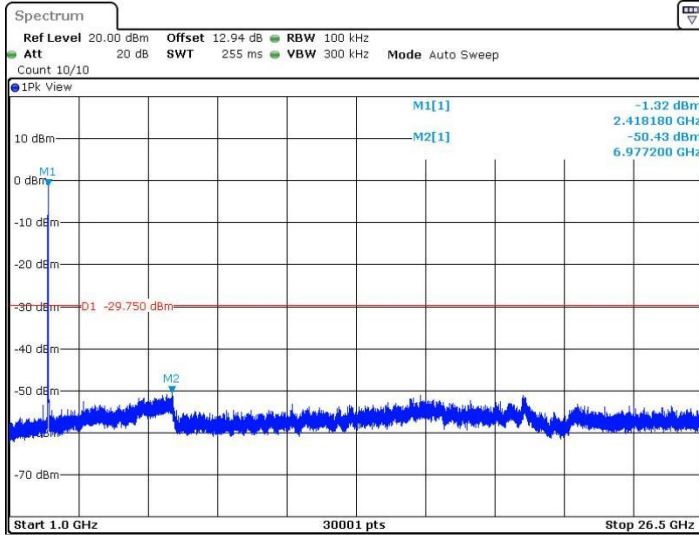


Date: 26 APR 2024 10:32:05

11G Ant1 2437\_0~Reference

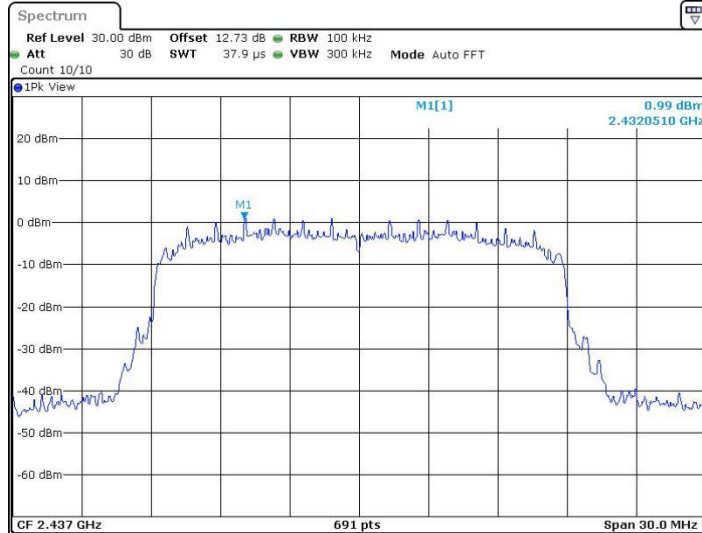


Date: 26 APR 2024 10:33:23

11G\_Ant1\_2437\_30~1000

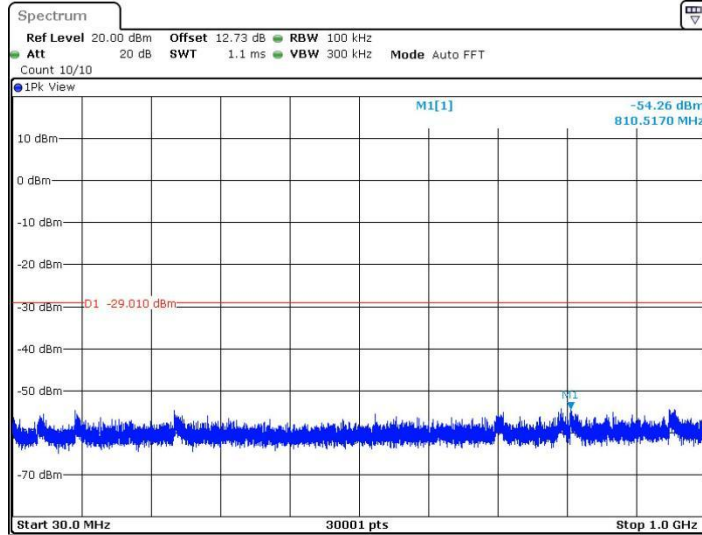


Date: 26 APR 2024 10:33:30

11G\_Ant1\_2437\_1000~26500

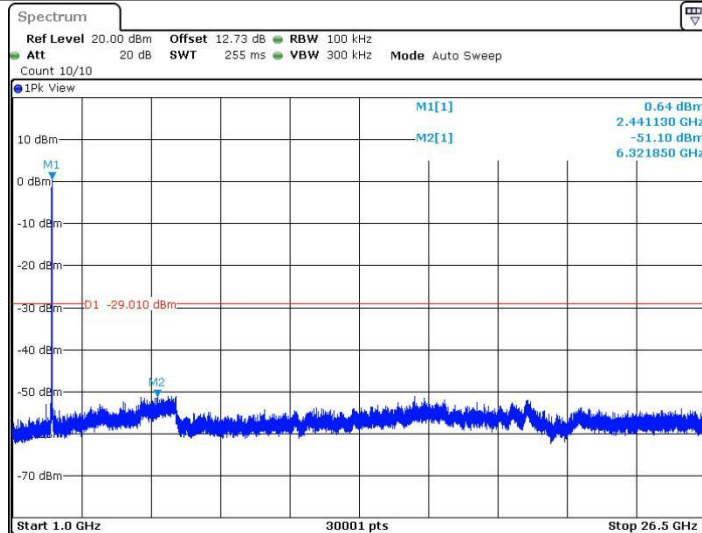


Date: 26 APR 2024 10:33:52

11G\_Ant1\_2462\_0~Reference

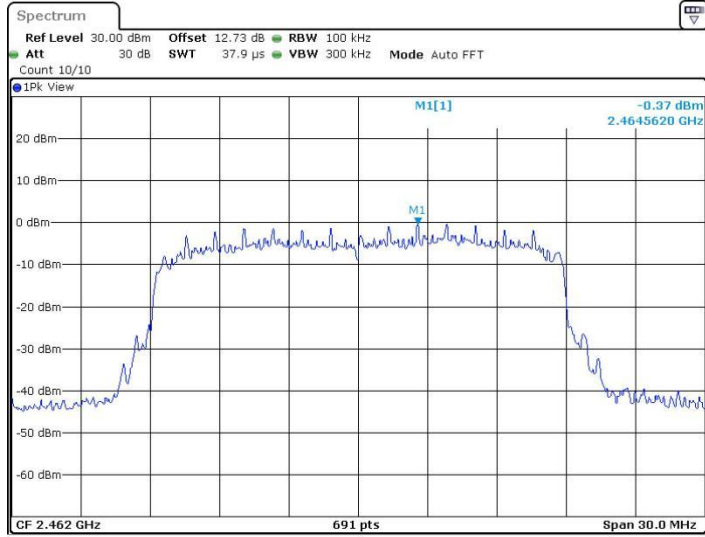


Date: 26 APR 2024 10:35:24

11G\_Ant1\_2462\_30~1000

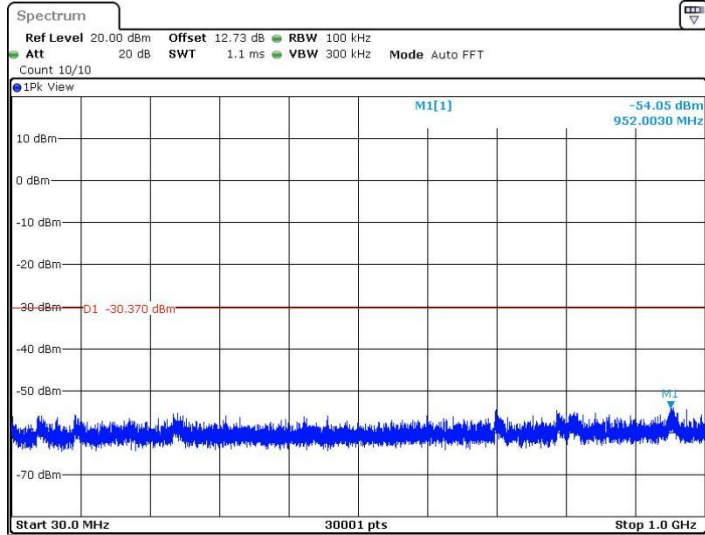


Date: 26 APR 2024 10:35:30

11G\_Ant1\_2462\_1000~26500

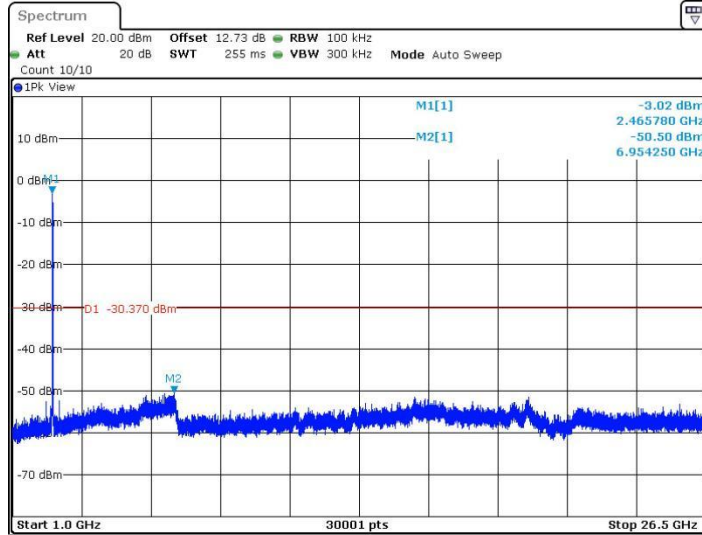


Date: 26 APR 2024 10:35:53

11N20SISO\_Ant1\_2412\_0~Reference

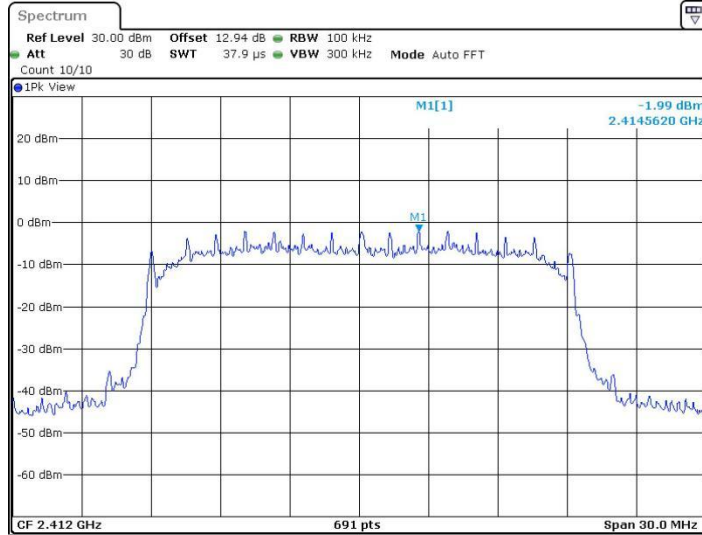


Date: 26 APR 2024 13:53:25

11N20SISO\_Ant1\_2412\_30~1000

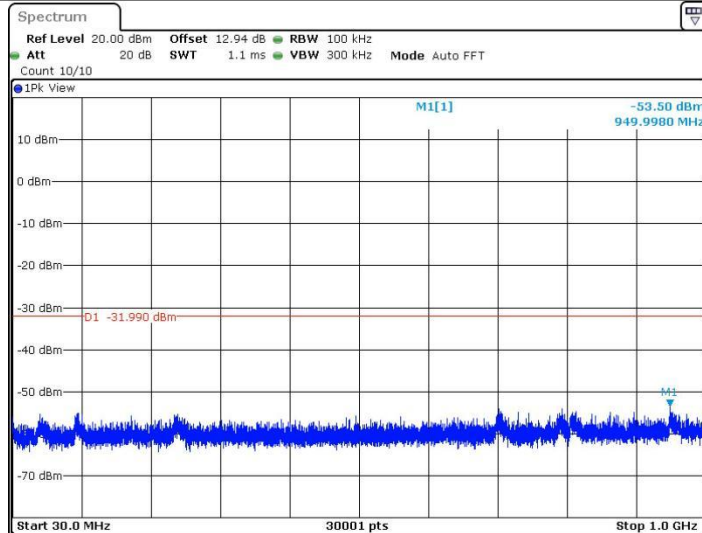


Date: 26 APR 2024 13:53:32

11N20SISO\_Ant1\_2412\_1000~26500

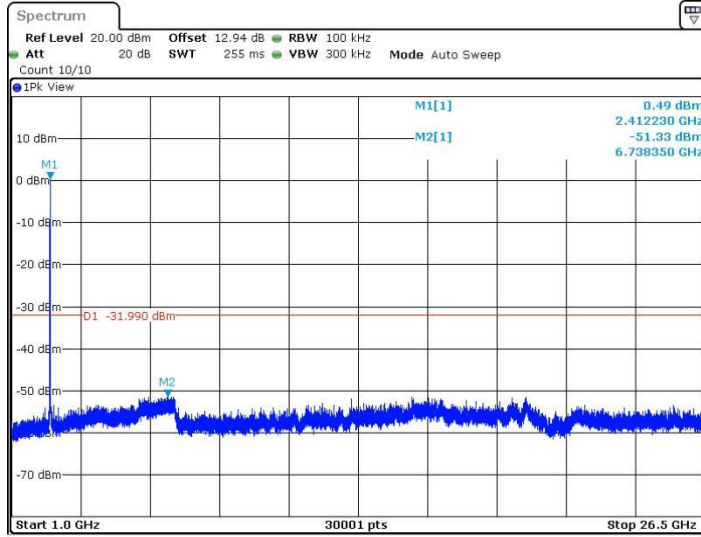

Date: 26 APR 2024 13:53:54

11N20SISO\_Ant1\_2437\_0~Reference

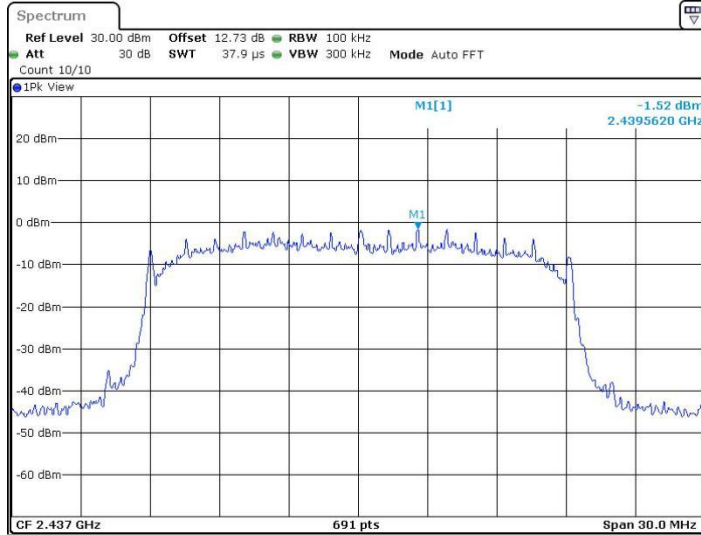

Date: 26 APR 2024 13:58:54

11N20SISO\_Ant1\_2437\_30~1000