

Shen zhen Runicc Wirless Technology Co., LTD Antenna Spec.

Customer/Project	HK/SW02	Frequency	908.42 \pm 20MHz	
RN P/N		Rev.	А	
RF. Engineer	Jiang Ning	Approval By		
Structural Engineer	Tong			
Date	2017-05-10			
Customer Confirm				
Shenzhen Runicc Wireless Technology Co., Ltd				

Customer Satisfaction Questionnaire (Please comment on the work of our R & D and PM managers in order to better serve to you)					
RF Engineer		□Quite Satisfaction	Dissatisfaction		
Structural Engineer	□Satisfaction	□Quite Satisfaction	Dissatisfaction		
PM Manager	□Satisfaction	□Quite Satisfaction	Dissatisfaction		
Note:					

www.Runicc.com

1. Antenna Diagram


The report focuses on the test status of the SW02 main antenna with respect to various electrical performance parameters. the SW02 antenna diagram and the assembly diagram are shown below.

B

Antenna Diagram

2, Antenna test Equipment


Agilent E5071C vector network analyzer is used for antenna input characteristic test; Satimo starlab 3D near-field microwave darkroom is used for antenna radiation characteristic test. And Agilent 8960 E5515 comprehensive tester is used. The OTA coordinates are as follows:

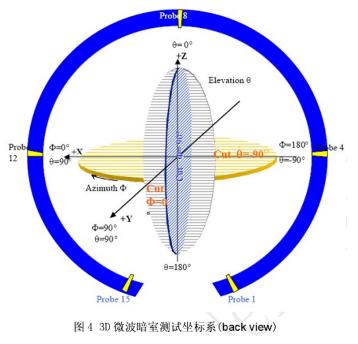

<u>www.Runicc.com</u>

3.Antenna matching circuit

The antenna is made of a single spring soldered to the main board. Antenna matching circuit no changed, as follow original main-board .

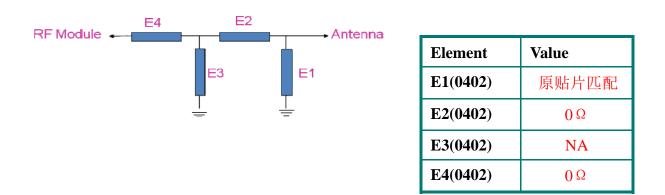

4.Electrical Characteristics


4.1 Specification

The SW02 main antenna operates in the frequency band 908.4 ± 20 MHz; resonance is generated in this band. The following table shows the test specifications for the performance of the SW02 main antenna.

Frequency Band	VSWR		
888.4MHz	1.94		
908.4MHz	1.31		
916MHz	1.57		
928.4MHz	2. 13		

www.Runicc.com

4.2 Passive S11 parameter:

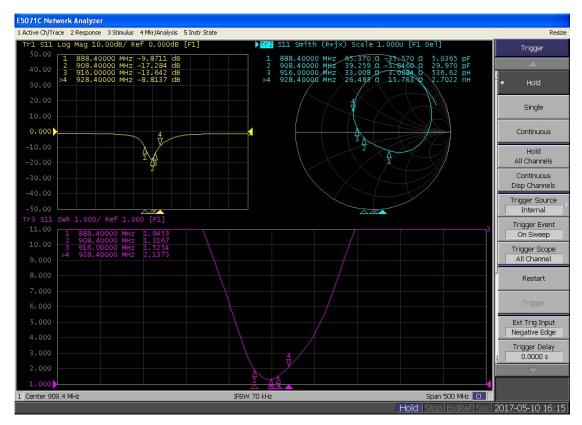


4.3 Antenna Gain&EFFIC.

chNo	Freq	TRP	PeakEIRP	MinEIRP	Directivity	Gain	Efficiency_dB	Efficiency_Pcent
1	888.4	-8.81	-4.47	-22.21	4.35	-4.47	-8.81	13.14
2	892.4	-8.19	-3.92	-22.06	4.28	-3.92	-8.19	15.15
3	896.4	-7.72	-3.70	-22.11	4.02	-3.70	-7.72	16.90
4	900.4	-7.45	-3.47	-22.40	3.98	-3.47	-7.45	18.00
5	904.4	-7.17	-2.98	-21.35	4.19	-2.98	-7.17	19.17
6	908.4	-6.99	-2.56	-21.53	4.42	-2.56	-6.99	20.02
7	912.4	-6.88	-2.27	-22.57	4.62	-2.27	-6.88	20.50
8	916.4	-6.81	-2.03	-22.82	4.78	-2.03	-6.81	20.85
9	920.4	-6.76	-1.82	-21.64	4.94	-1.82	-6.76	21.10
10	924.4	-6.82	-1.61	-20.58	5.20	-1.61	-6.82	20.81
11	928.4	-6.73	-1.27	-19.43	5.46	-1.27	-6.73	21.23

www.Runicc.com

5. Antenna Engineering Drawing

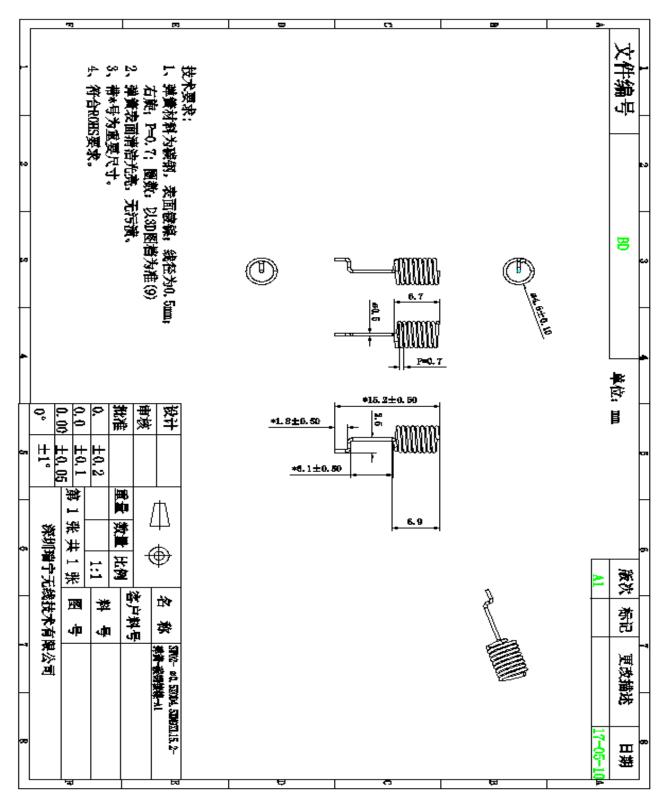

www.Runicc.com