

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

GT Technology Chongqing Limited

PROJECTOR

BP5000

FCC ID: 2AZ3IBP5000

Prepared for : GT Technology Chongqing Limited
Room 3-1, No.20 Qixin Road Yanjia Street Changshou District,
Chongqing, China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F21127
Date of Test : Apr.15~May.19, 2021
Date of Report : Jun.16, 2021

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test.....	6
2.2. Tested Supporting System Details	8
2.3. Block Diagram of connection between EUT and simulators	8
2.4. Test information	8
2.5. Test Facility	9
2.6. Measurement Uncertainty (95% confidence levels, k=2)	9
3. POWER LINE CONDUCTED EMISSION TEST.....	10
3.1. Test Equipments	10
3.2. Block Diagram of Test Setup	10
3.3. Power Line Conducted Emission Test Limits	10
3.4. Configuration of EUT on Test.....	10
3.5. Operating Condition of EUT	11
3.6. Test Procedure.....	11
3.7. Power Line Conducted Emission Test Results	11
4. RADIATED EMISSION MEASUREMENT.....	14
4.1. Test Equipment.....	14
4.2. Block Diagram of Test Setup	15
4.3. Radiated Emission Limit Standard:	16
4.4. EUT Configuration on Test.....	16
4.5. Operating Condition of EUT	16
4.6. Test Procedure.....	16
4.7. Radiated Emission Test Results	17
5. CONDUCTED SPURIOUS EMISSIONS.....	57
5.1. Test Equipment.....	57
5.2. Block Diagram of Test Setup	57
5.3. Limit	57
5.4. Test Procedure.....	57
5.5. Test result	57
6. 20 DB & 99% BANDWIDTH TEST.....	63
6.1. Test Equipment.....	63
6.2. Limit	63
6.3. Test Procedure.....	63
6.4. Test Results.....	64
7. CARRIER FREQUENCY SEPARATION TEST	66
7.1. Test Equipment.....	66
7.2. Limit	66
7.3. Test Procedure.....	66
7.4. Test Results.....	66
8. NUMBER OF HOPPING FREQUENCY TEST.....	67
8.1. Test Equipment.....	67
8.2. Limit	67
8.3. Test Procedure.....	67
8.4. Test Results.....	67

9.	DWELL TIME.....	68
9.1.	Test Equipment.....	68
9.2.	Limit	68
9.3.	Test Procedure.....	68
9.4.	Test Results.....	68
10.	MAXIMUM PEAK OUTPUT POWER TEST.....	71
10.1.	Test Equipment.....	71
10.2.	Limit	71
10.3.	Test Procedure.....	71
10.4.	Test Results.....	71
11.	BAND EDGE COMPLIANCE TEST	72
11.1.	Test Equipment.....	72
11.2.	Limit	72
11.3.	Test Produce.....	72
11.4.	Test Results.....	72
12.	ANTENNA REQUIREMENT	81
12.1.	Standard Applicable	81
12.2.	Antenna Connected Construction.....	81
13.	DEVIATION TO TEST SPECIFICATIONS	82

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT

Applicant : GT Technology Chongqing Limited
Manufacturer : GT Technology Chongqing Limited
Product : PROJECTOR
FCC ID : 2AZ3IBP5000
(A) Model No. : BP5000
(B) Test Voltage : AC 120V/60Hz

Tested for comply with:
FCC CFR47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2013

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product. And shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd..

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Apr.15~May.19, 2021 Report of date: Jun.16, 2021

Prepared by : Kayli He Reviewed by : Sunny Lu
Kayli He / Assistant Sunny Lu / Deputy Manager



Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 2013	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
20dB & 99% Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 2013	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1) ANSI C63.10 2013	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10 2013	PASS

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	GT Technology Chongqing Limited
Applicant Address	Room 3-1, No.20 Qixin Road Yanjia Street Changshou District, Chongqing, China
Manufacturer	GT Technology Chongqing Limited
Manufacturer Address	Room 3-1, No.20 Qixin Road Yanjia Street Changshou District, Chongqing, China
Factory	Wistron InfoComm (Zhongshan) Corporation Linhai Branch
Factory Address	No.23, Wugui Road, Tsuihang New District, Zhongshan, Guangdong, P.R.China
Product	PROJECTOR
Model No.	BP5000
FCC ID	2AZ3IBP5000
Power Cable	Unshielded, Detachable, 1.2m
Remoter	Model No.: N/A
Sample Type	Prototype production
Date of Receipt	Apr.12, 2021
Date of Test	Apr.15~May.19, 2021
Remark: This report only for BDR+EDR.	


Product Feature & Specification			
Product	PROJECTOR		
Model No.	BP5000		
Power Source	☒ Commercial Power	AC 100 ~ 240V	
	☐ External Power Source	DC V	
	☐ Lithium battery	DC V, mAh	
	☐ UM battery	DC V	
Bluetooth			
Specification	☒ BDR	☒ EDR	☒ BLE
Frequency Range	2402-2480MHz		
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK		
Data Rate	1Mbps, 2Mbps, 3Mbps		
Quantity of Channels	79/40		
Channel Separation	1MHz/2MHz		
2.4GHz Wi-Fi			
Support Modes	802.11b/g/n20/n40		
Frequency Range	2412-2462MHz		
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK		
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps		
Channel Separation	5MHz		
5GHz Wi-Fi			
Support Modes	802.11a/n20/n40		
Frequency Range	5180-5240MHz, 5745-5825MHz		
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM		
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps;		
Channel Separation	5MHz		

Antenna System	
Type of Antenna	FPC Antenna
Antenna Peak Gain	Bluetooth Peak Gain: 3.3dBi DTS/DSS Band (2400-2483.5MHz) Peak Gain: ANT1: 2.3dBi; ANT2: 2.9dBi. U-NII-1 Band(5150-5250MHz) Peak Gain: ANT1: 2.8dBi; ANT2: 2.8dBi. U-NII-3 Band (5725-5850MHz) Peak Gain: ANT1: 3.7dBi; ANT2: 3.1dBi.

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	DELL	PP09S	N/A
		Power Cord: Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m(Bond one ferrite core)			

2.3. Block Diagram of connection between EUT and simulators



(EUT: PROJECTOR)

2.4. Test information

A special software was used to control EUT work in continuous TX mode (GFSK, $\pi/4$ DQPSK, 8-DPSK Modulation)

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
Tx Mode 8-DPSK modulation	3	Low :CH 0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480
Note: $\pi/4$ DQPSK modulation is same type modulation with 8-DPSK, and according exploratory test, 8-DPSK will have worse emissions, so the final test were only performed with GFSK and 8-DPSK modulation.			

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Accredited by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Mar.31, 2022

: Certificated by FCC, USA
Designation No.: CN5022
Valid Date: Mar.31, 2022

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2022

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.2dB(30~200MHz, Polarization: H)
	3.6dB(30~200MHz, Polarization: V)
	3.4dB(200M~1GHz, Polarization: H)
	3.4dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	4.6dB(1~6GHz, Distance: 3m)
	4.6dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test	3.7dB(30MHz~1000MHz)
	3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	1.9%
Uncertainty for test site temperature and humidity	0.6°C
	3%

Note: EMI uncertainty is evaluated by CISPR16-4-2.

The value of measurement uncertainty of EMI is less than U_{CISPR} .

The value is not calculated in the test results.


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	5 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.07,21	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Oct.11,20	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	Apr.06,21	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.06,21	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.06,21	1 Year
7.	RF Cable	EMCI	EMCCFD300-B M-NM-2000	190422	Apr.08,21	1 Year
8.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

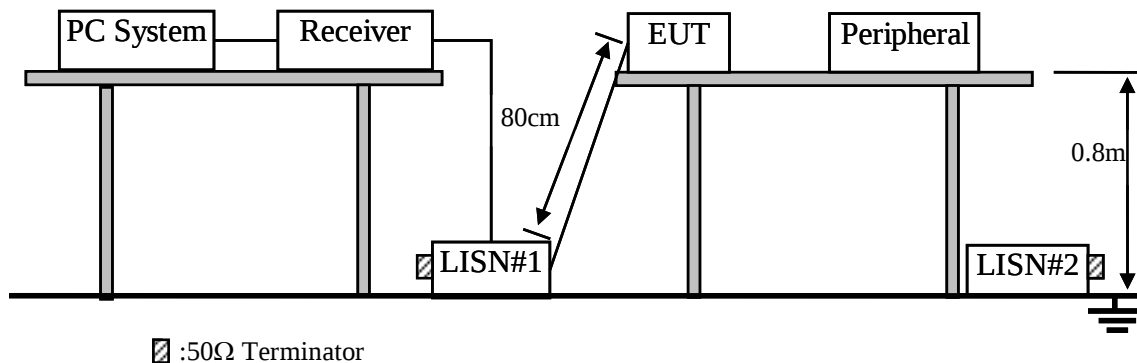

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. PROJECTOR (EUT)

Model Number : BP5000

Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipments.
- 3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

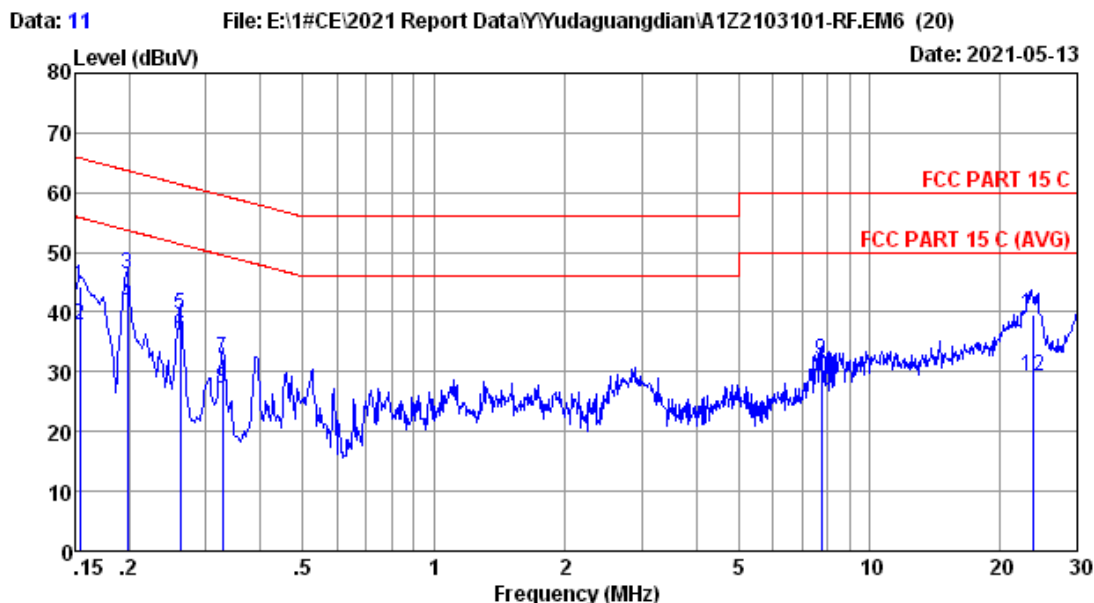


Site no :1# Conduction
 Dis./Lisn :2020 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :24.5°C/53%
 EUT :
 Power Rating :AC 120V/60Hz
 Test Mode :BT3.0 Tx

Data No :11
 LISN phase:
 Engineer :Lynn

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.70	0.01	34.60	44.31	65.78	21.47	QP
2	0.154	9.70	0.01	28.20	37.91	55.78	17.87	Average
3	0.198	9.70	0.01	36.70	46.41	63.69	17.28	QP
4	0.198	9.70	0.01	31.70	41.41	53.69	12.28	Average
5	0.262	9.70	0.01	29.70	39.41	61.37	21.96	QP
6	0.262	9.70	0.01	26.40	36.11	51.37	15.26	Average
7	0.327	9.70	0.01	22.38	32.09	59.53	27.44	QP
8	0.327	9.70	0.01	17.38	27.09	49.53	22.44	Average
9	7.769	9.73	0.05	22.04	31.82	60.00	28.18	QP
10	7.769	9.73	0.05	17.04	26.82	50.00	23.18	Average
11	23.686	9.90	0.11	29.50	39.51	60.00	20.49	QP
12	23.686	9.90	0.11	19.30	29.31	50.00	20.69	Average

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

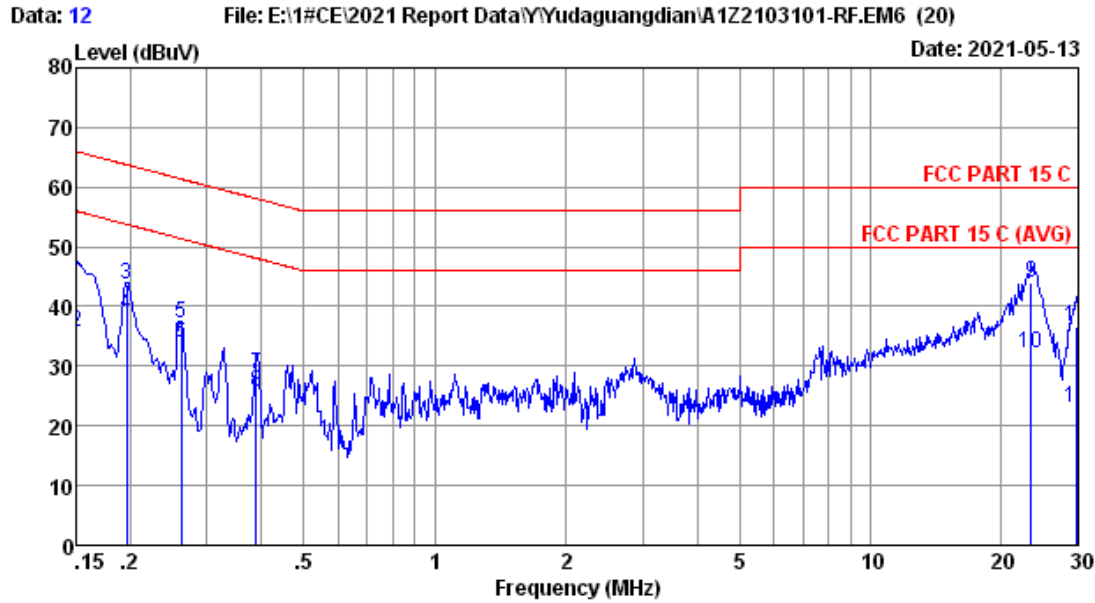

Site no :1# Conduction
 Dis./Lisn :2020 ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :24.5°C/53%
 EUT :
 Power Rating :AC 120V/60Hz
 Test Mode :BT3.0 Tx

Data No :12
 LISN phase:
 Engineer :Lynn

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.70	0.01	34.80	44.51	66.00	21.49	QP
2	0.150	9.70	0.01	25.90	35.61	56.00	20.39	Average
3	0.196	9.70	0.01	34.10	43.81	63.79	19.98	QP
4	0.196	9.70	0.01	29.10	38.81	53.79	14.98	Average
5	0.262	9.70	0.01	27.60	37.31	61.37	24.06	QP
6	0.262	9.70	0.01	24.20	33.91	51.37	17.46	Average
7	0.389	9.70	0.01	19.03	28.74	58.08	29.34	QP
8	0.389	9.70	0.01	16.03	25.74	48.08	22.34	Average
9	23.418	9.90	0.11	34.10	44.11	60.00	15.89	QP
10	23.418	9.90	0.11	22.20	32.21	50.00	17.79	Average
11	29.618	9.90	0.12	26.50	36.52	60.00	23.48	QP
12	29.618	9.90	0.12	13.00	23.02	50.00	26.98	Average

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(NSA)	AUDIX	N/A	N/A	May.02,21	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.07,21	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.07,21	1 Year
5.	Amplifier	HP	8447D	2648A04738	Apr.08,21	1 Year
6.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	710	Oct.19,20	1 Year
7.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Oct.11,20	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.07,21	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


Frequency range: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(Svswr)	AUDIX	N/A	N/A	Apr.14,21	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.07,21	1 Year
4.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Jul.30,20	1 Year
5.	Horn Antenna	ETC	3116	00060089	Dec.09,20	1 Year
6.	Amplifier	Agilent	83017A	MY53270084	Oct.11,20	1 Year
7.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.07,21	1 Year
8.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

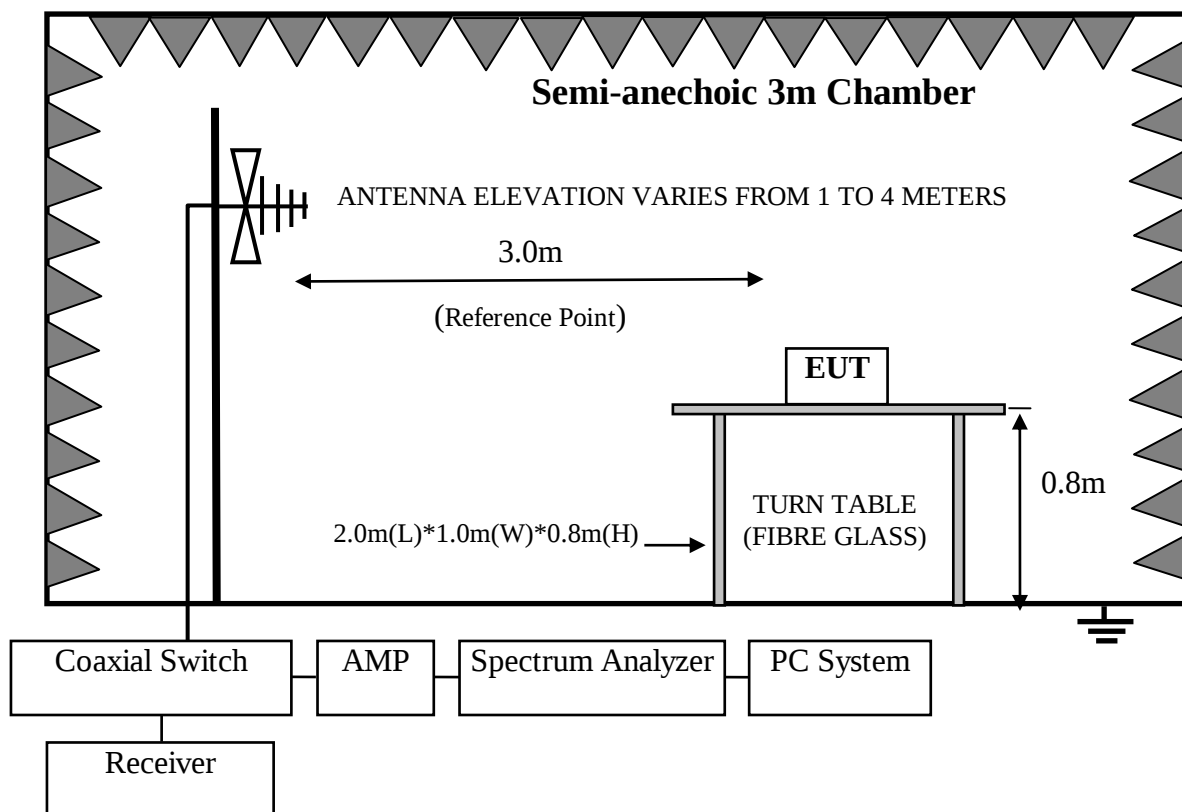

For frequency range 1GHz-25GHz

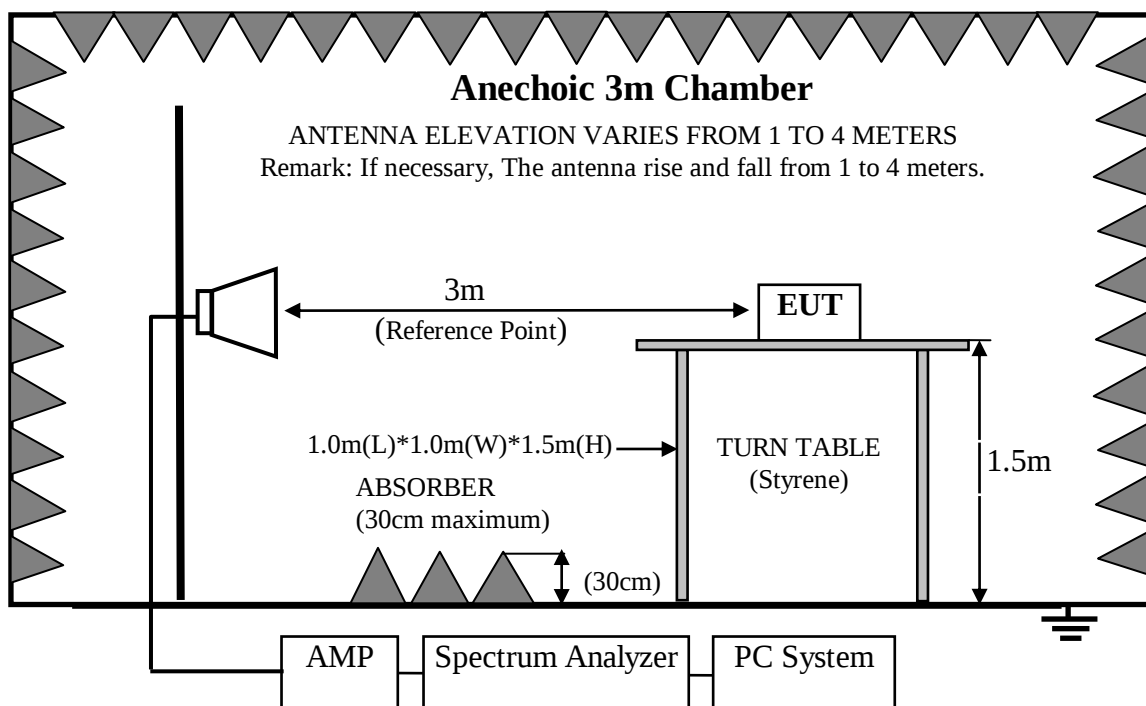

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. PROJECTOR (EUT)

Model Number : BP5000
Serial Number : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results



PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.


Note 1: The duty cycle factor for calculate average level is -13.835dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle factor = $20\log(\text{Dwell time}/100\text{ms}) = -13.835\text{dB}$

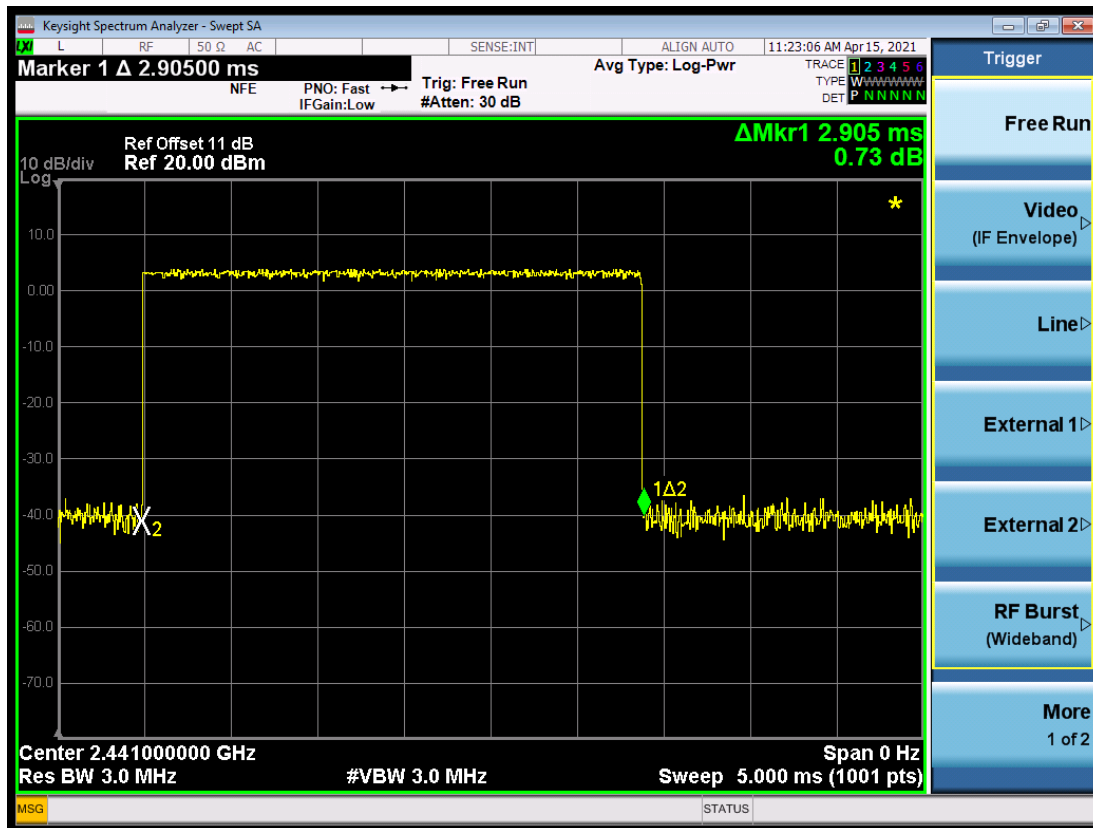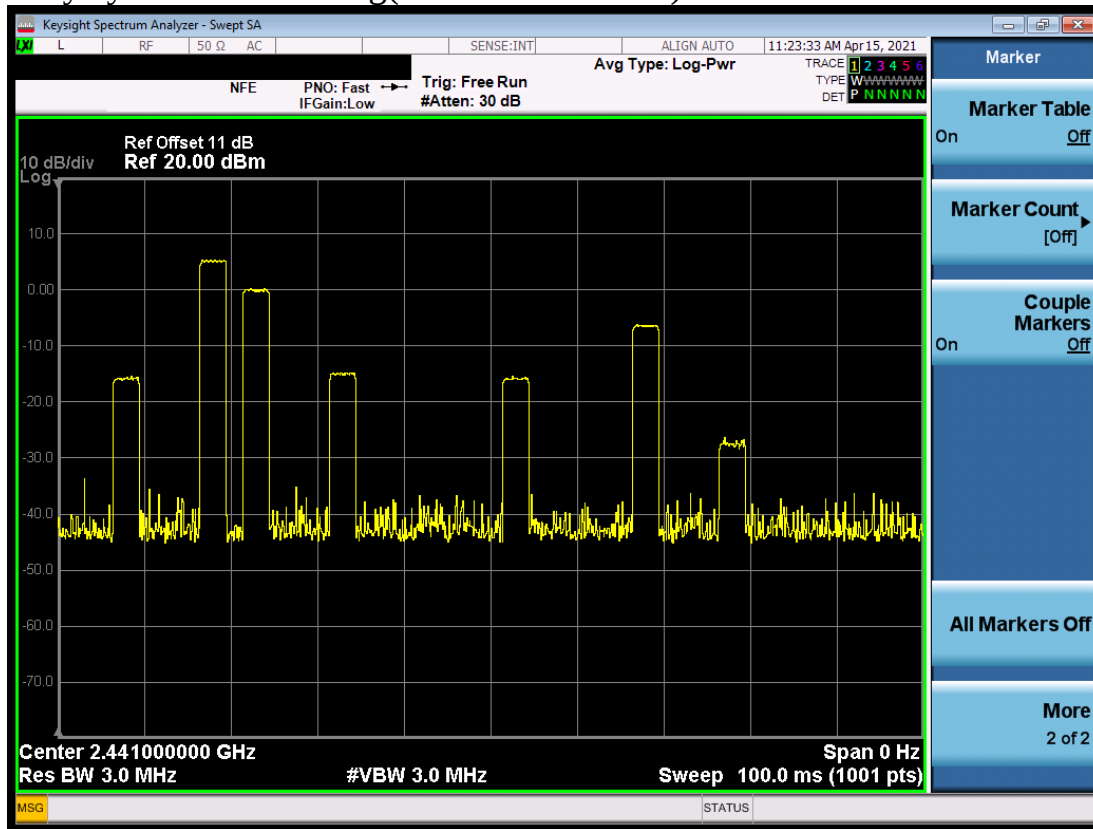


Frequency: 30MHz~1GHz

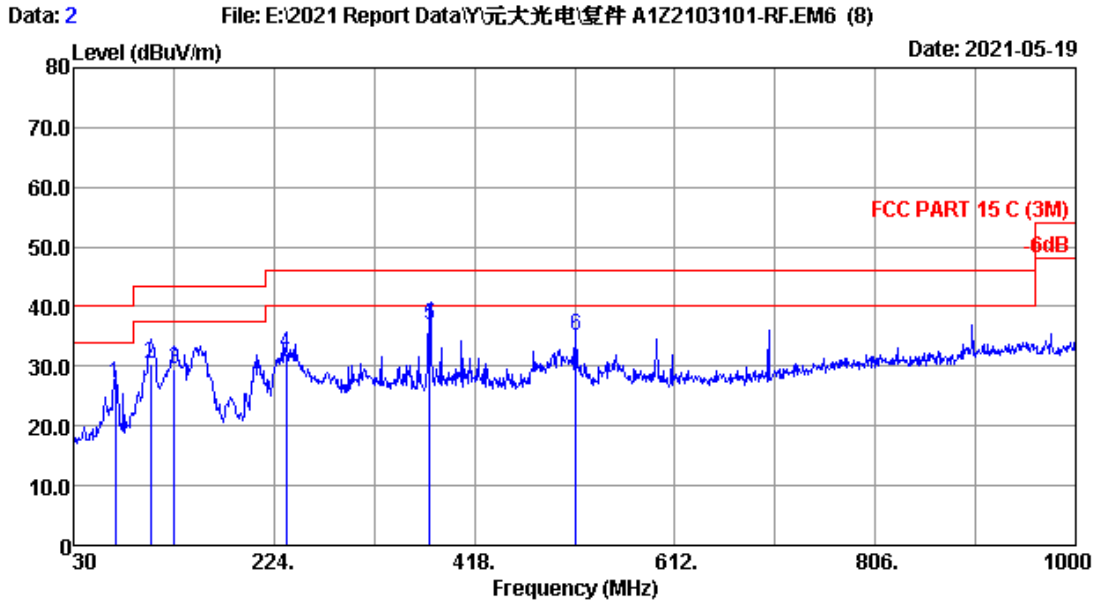

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2020 VULB9168-710 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.6°C/54% Engineer : Hognrn
 EUT :
 Power rating : AC 120V/60Hz
 Test Mode : BT3.0 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.740	17.20	0.81	9.26	27.27	40.00	12.73	QP
2	104.690	15.70	1.04	13.80	30.54	43.50	12.96	QP
3	127.970	17.40	1.14	10.96	29.50	43.50	14.00	QP
4	235.640	16.90	1.53	13.67	32.10	46.00	13.90	QP
5	374.995	20.80	1.96	14.20	36.96	46.00	9.04	QP
6	515.970	23.58	2.38	9.08	35.04	46.00	10.96	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

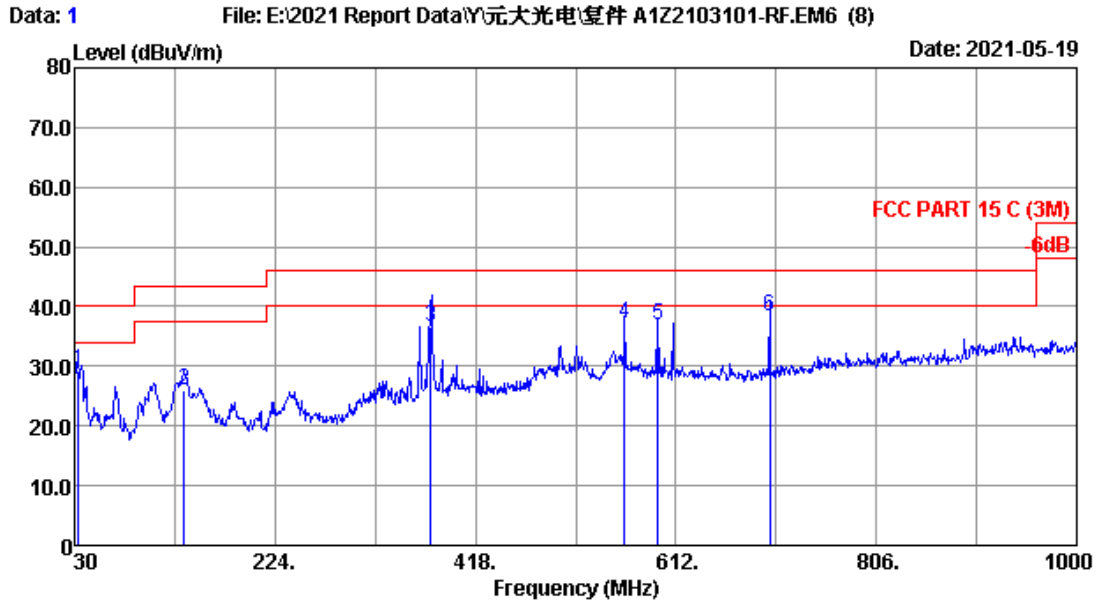


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2020 VULB9168-710 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.6°C/54% Engineer : Hognrn
 EUT :
 Power rating : AC 120V/60Hz
 Test Mode : BT3.0 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	33.880	18.40	0.65	10.24	29.29	40.00	10.71	QP
2	135.730	18.40	1.17	6.53	26.10	43.50	17.40	QP
3	375.000	20.80	1.96	13.90	36.66	46.00	9.34	QP
4	562.530	24.25	2.48	10.54	37.27	46.00	8.73	QP
5	594.540	25.00	2.56	9.34	36.90	46.00	9.10	QP
6	703.120	26.56	2.81	8.90	38.27	46.00	7.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

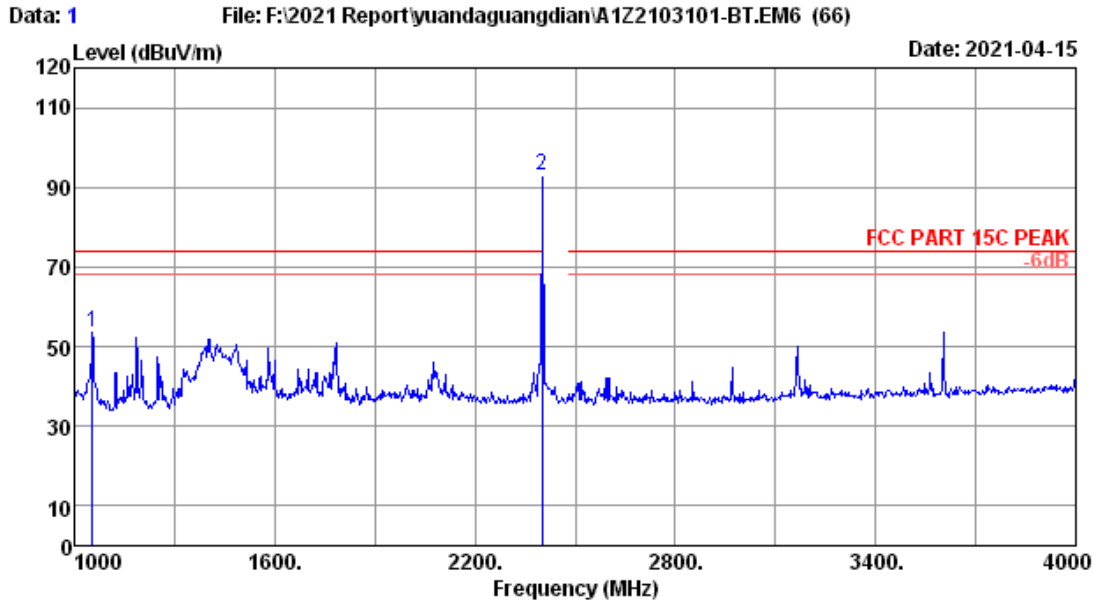

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	66.00	37.13	53.60	74.00	20.40	Peak
2	2402.00	28.01	0.92	100.18	35.94	93.17	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

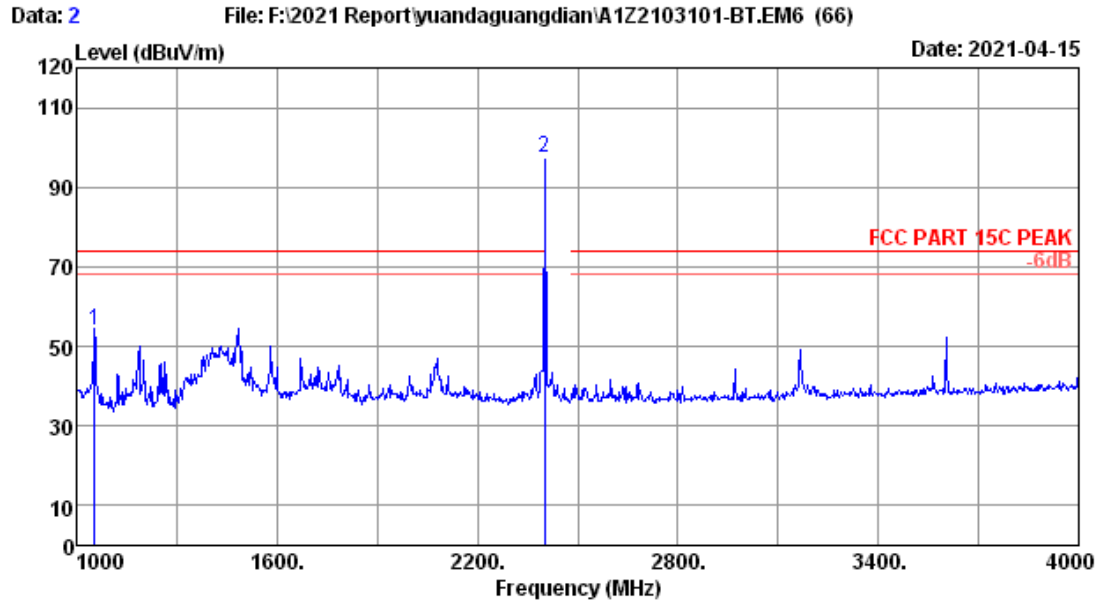


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	66.30	37.13	53.90	74.00	20.10	Peak
2	2402.00	28.01	0.92	104.26	35.94	97.25	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

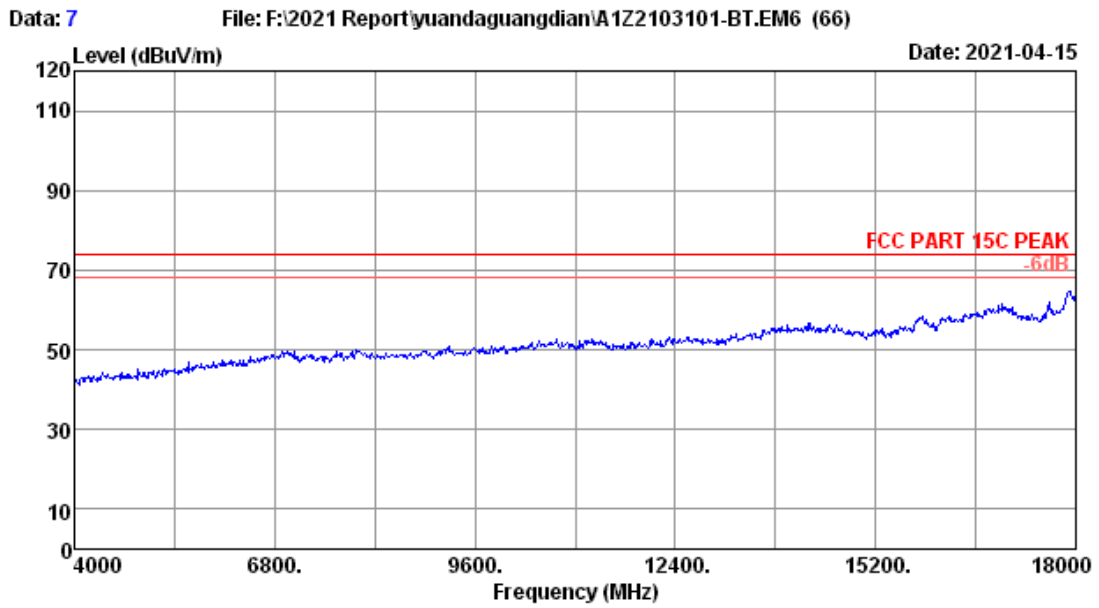

Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 GFSK 2402MHz Tx		

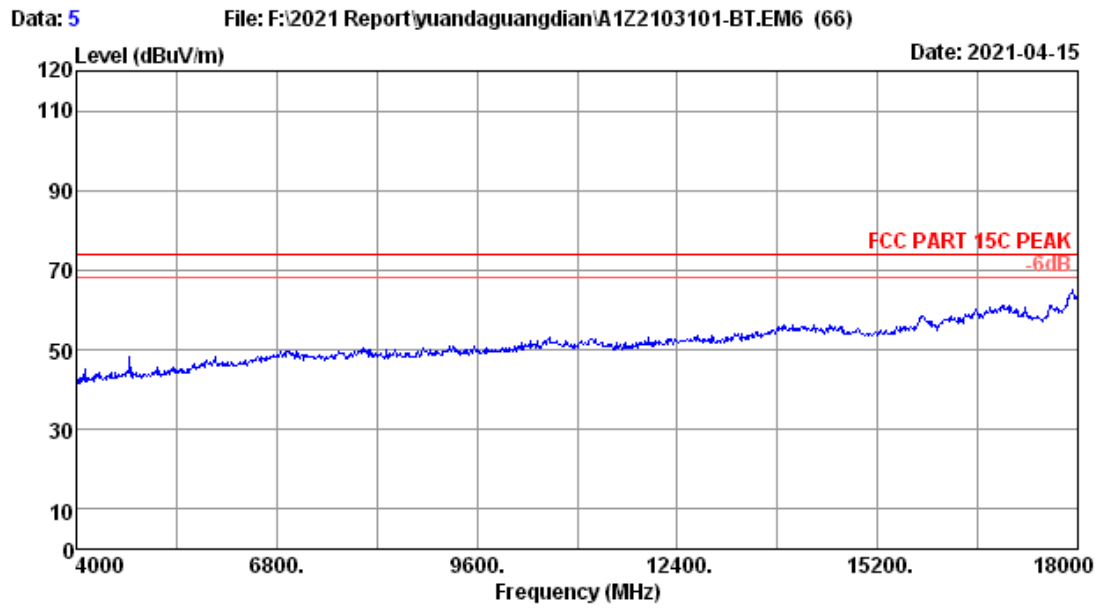


Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 GFSK 2402MHz Tx		

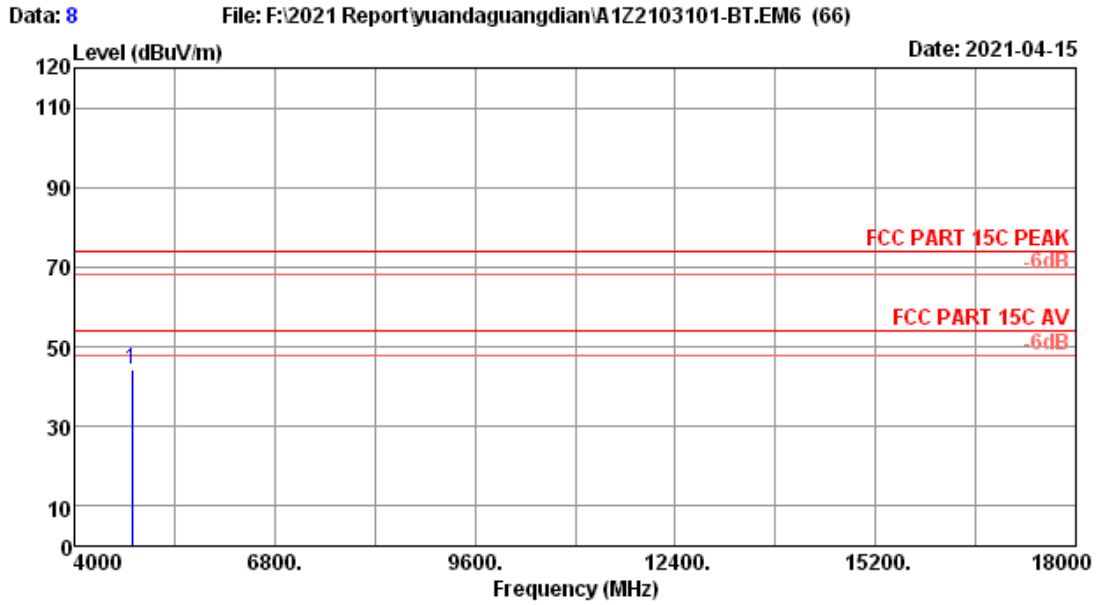

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	32.61	1.38	45.48	35.18	44.29	74.00	29.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

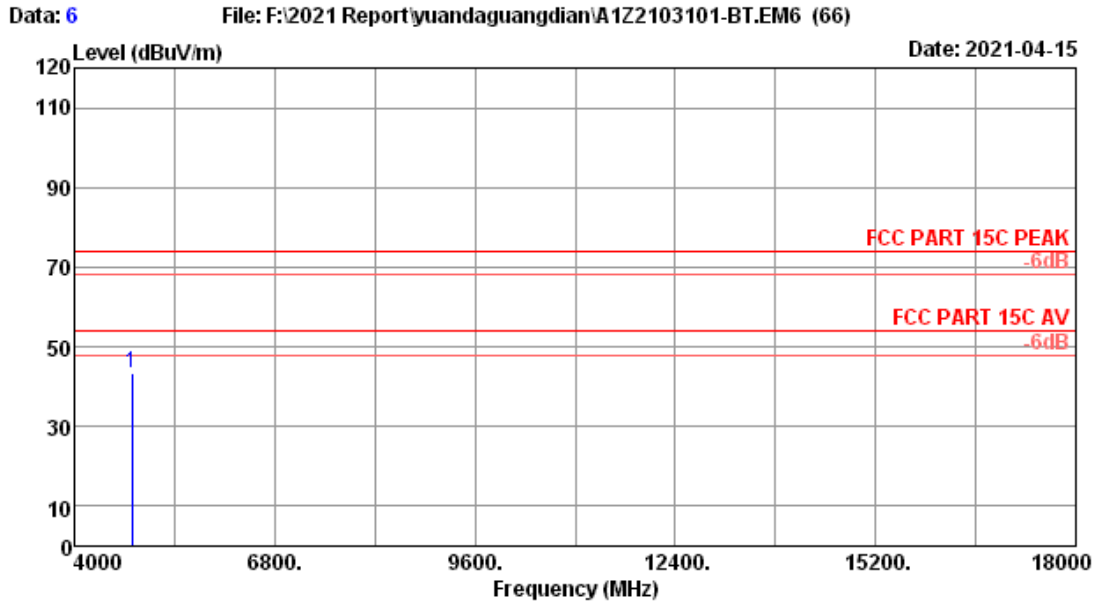

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	32.61	1.38	44.46	35.18	43.27	74.00	30.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

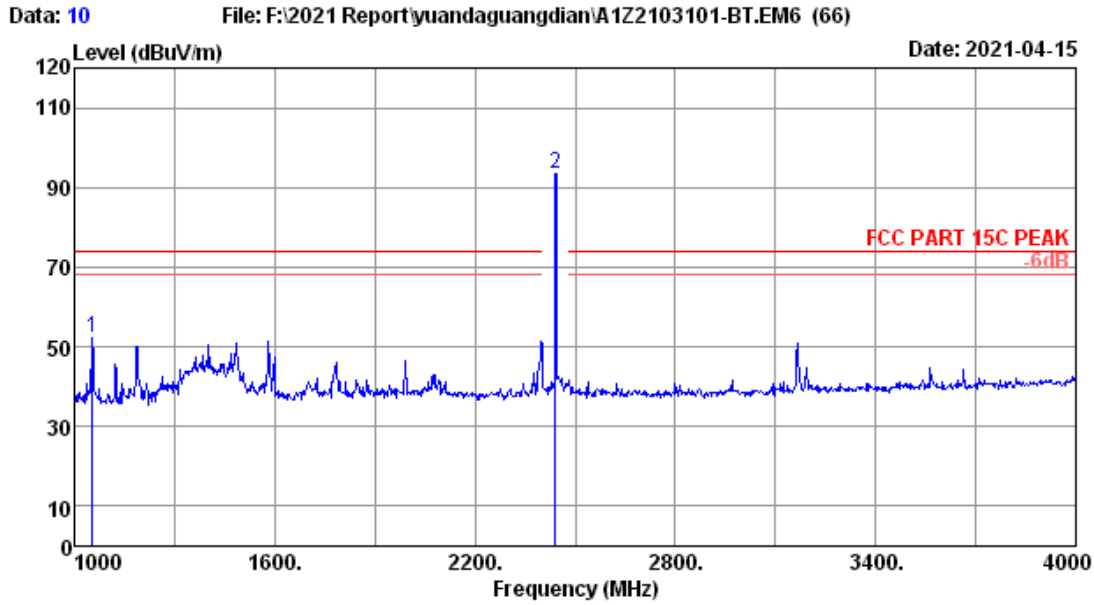

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	64.59	37.13	52.19	74.00	21.81	Peak
2	2441.00	28.11	0.93	100.52	35.95	93.61	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

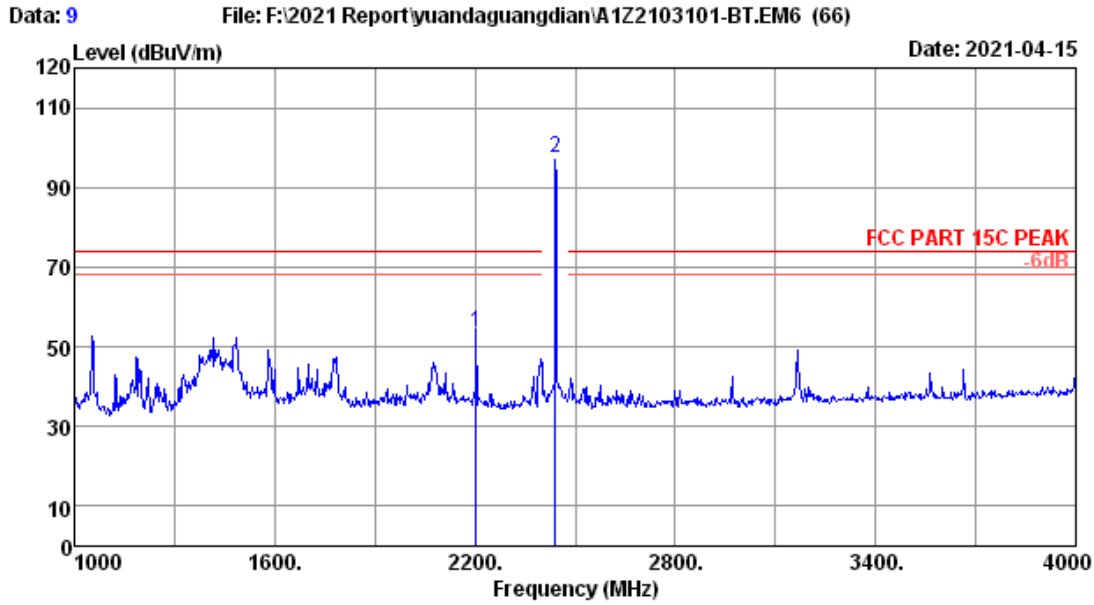


Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2203.00	27.67	0.86	61.06	35.92	53.67	74.00	20.33	Peak
2	2441.00	28.11	0.93	104.46	35.95	97.55	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

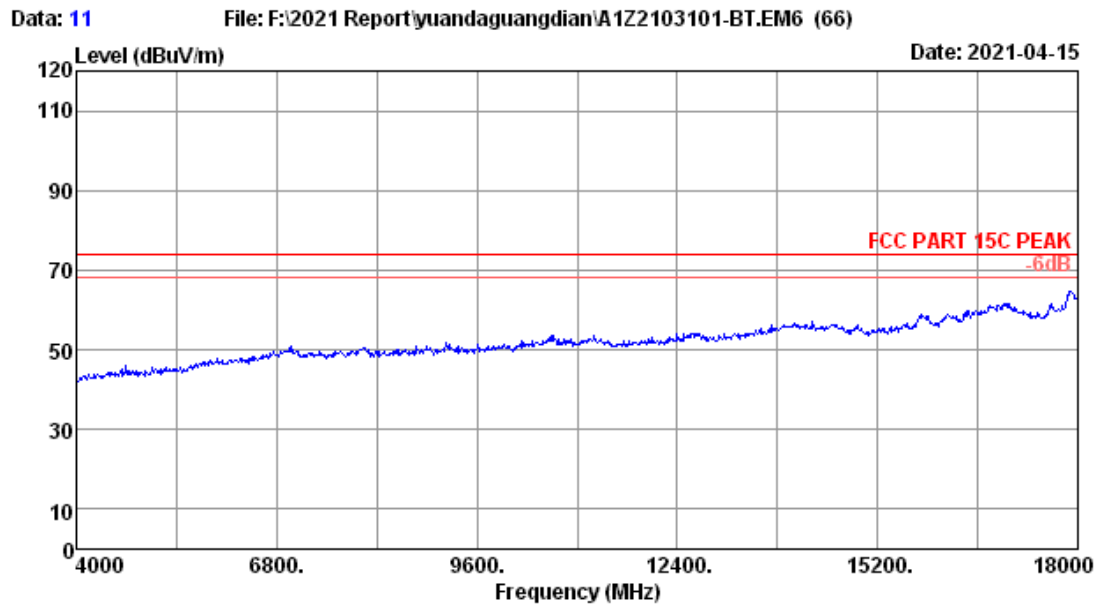

Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 GFSK 2441MHz Tx		

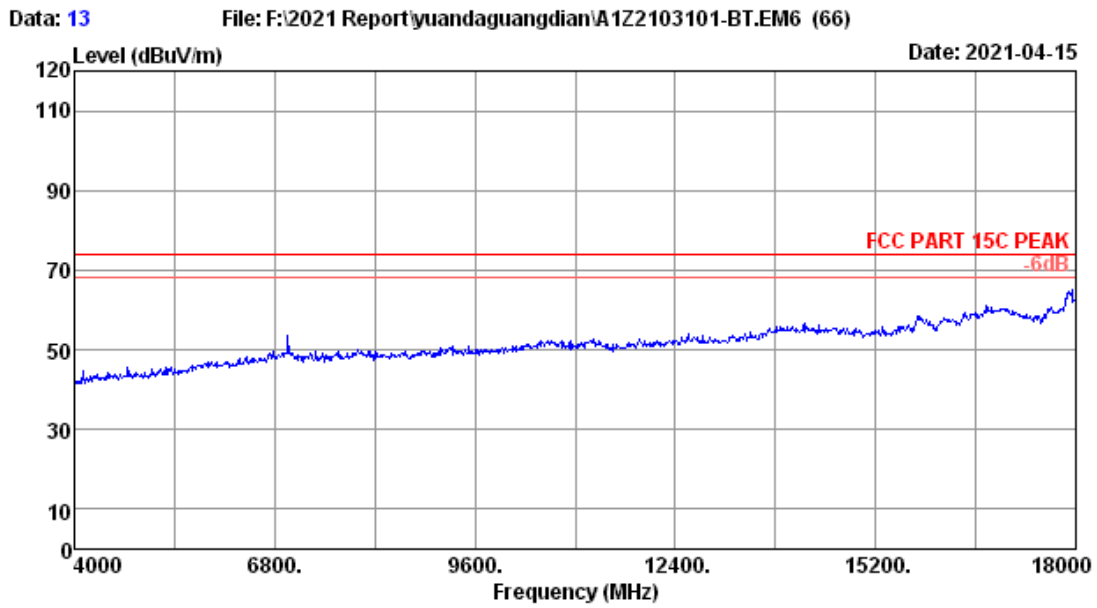


Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 GFSK 2441MHz Tx		

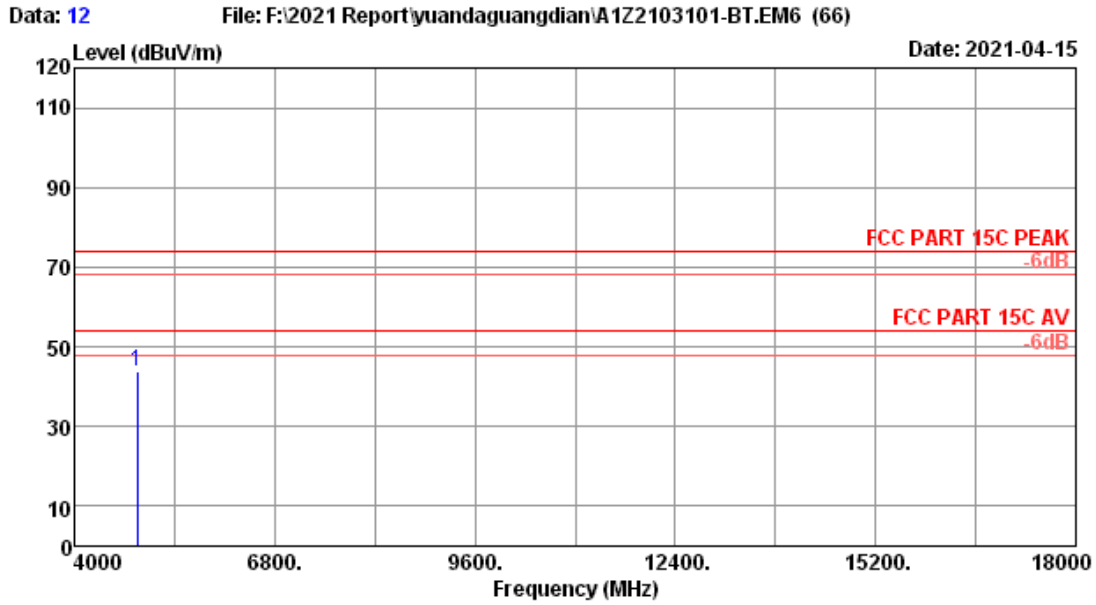

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	32.68	1.39	44.91	35.15	43.83	74.00	30.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

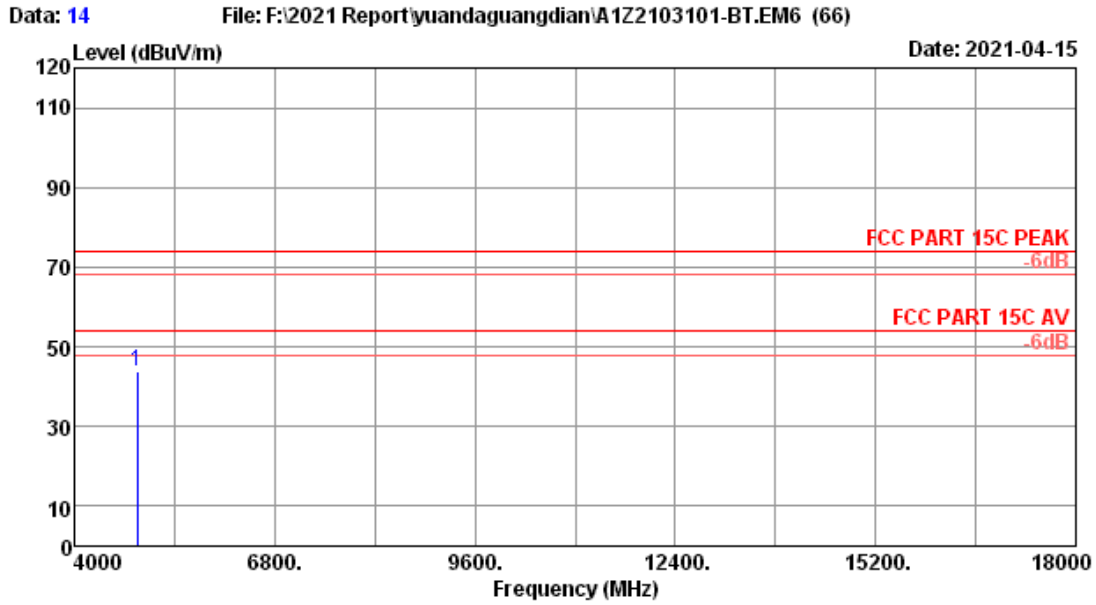

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	32.68	1.39	44.74	35.15	43.66	74.00	30.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

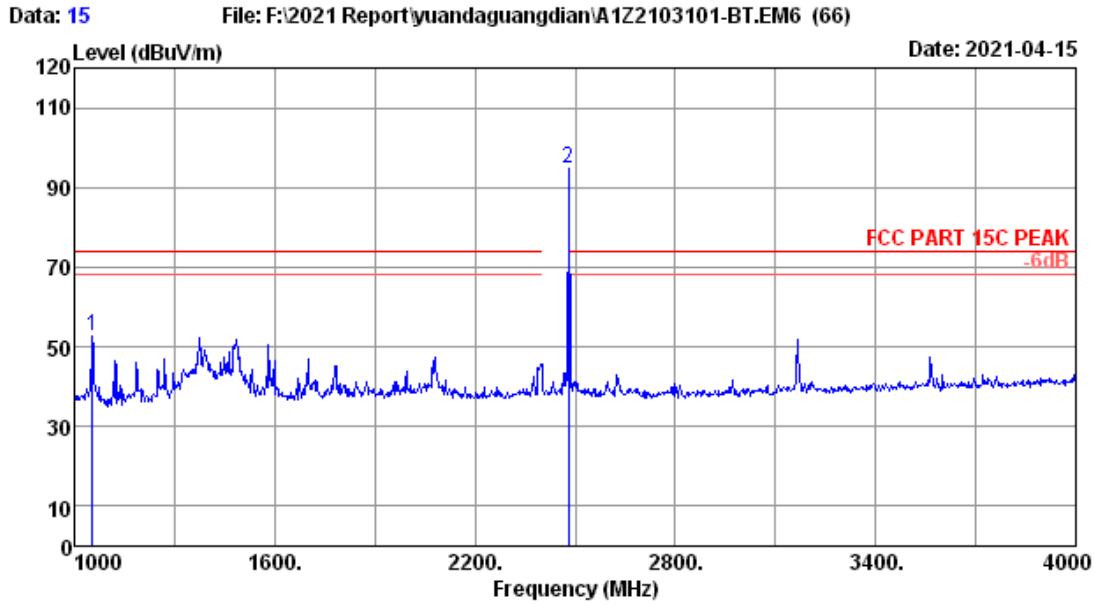

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	65.15	37.13	52.75	74.00	21.25	Peak
2	2480.00	28.17	0.94	101.50	35.95	94.66	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

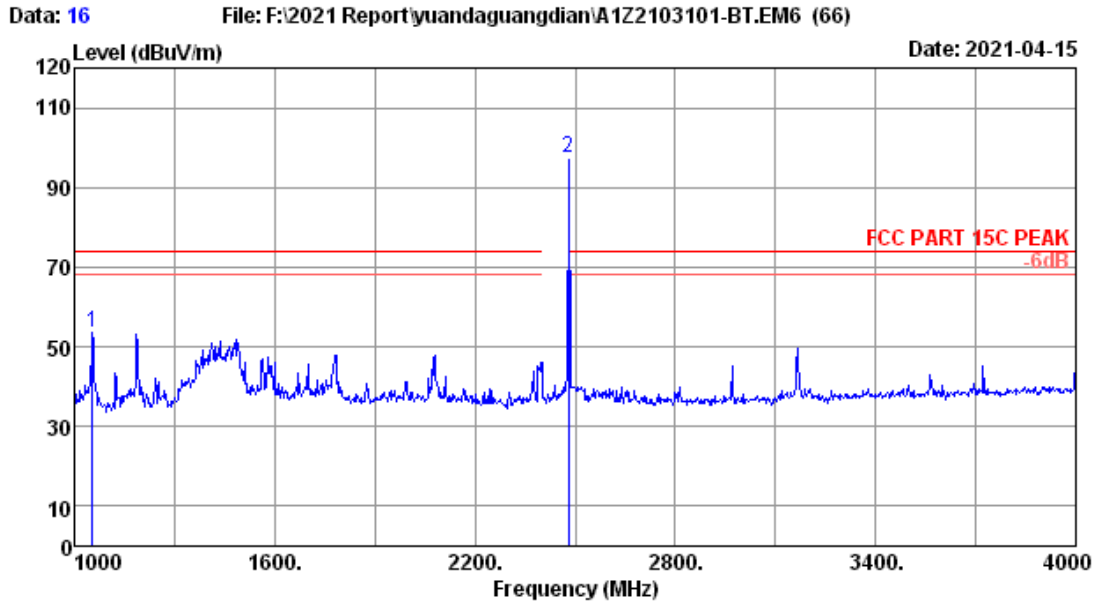


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	66.14	37.13	53.74	74.00	20.26	Peak
2	2480.00	28.17	0.94	104.36	35.95	97.52	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

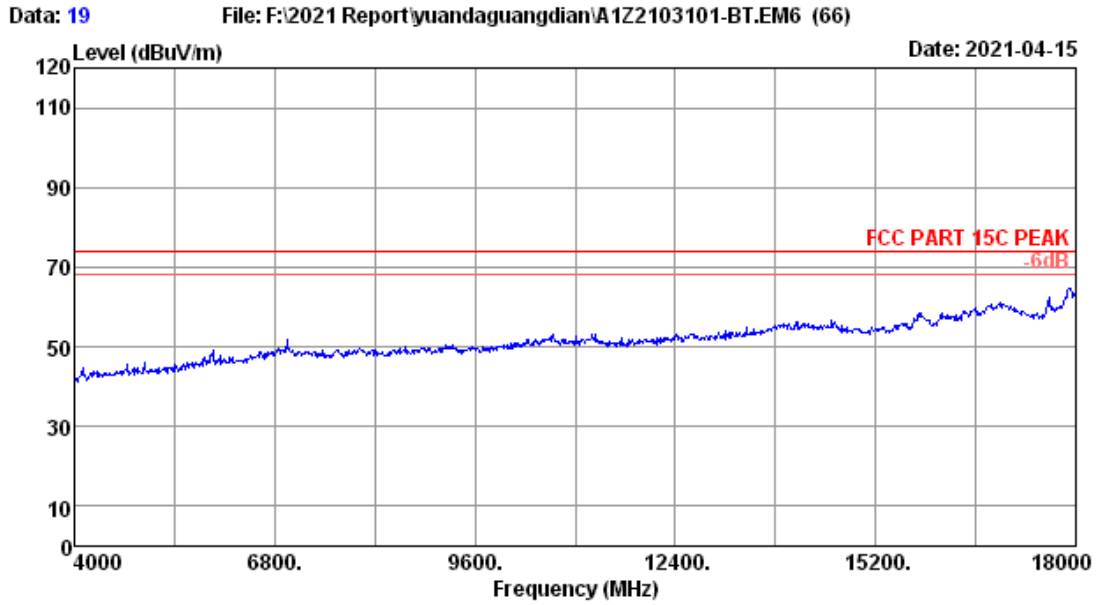

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 GFSK 2480MHz Tx		

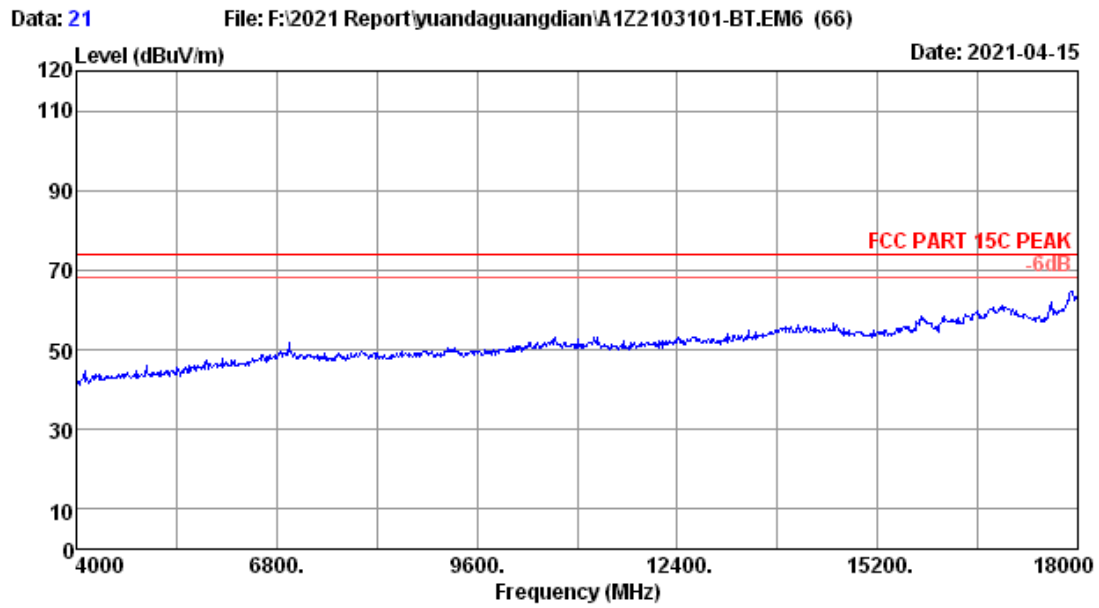


Site no.	: 3m Chamber	Data no.	: 21
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 GFSK 2480MHz Tx		

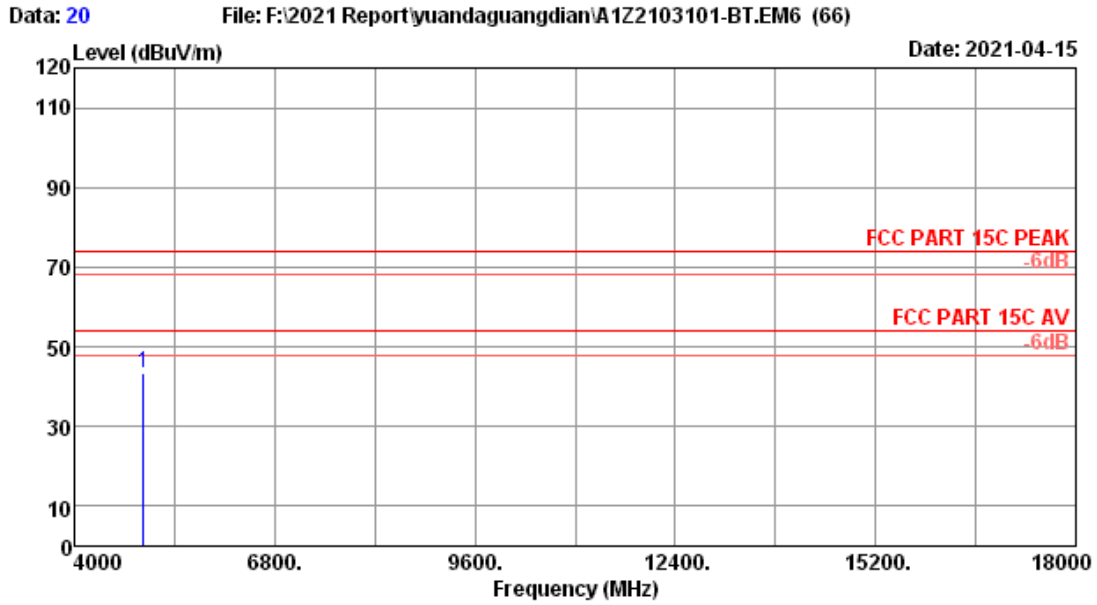

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	32.77	1.39	44.52	35.12	43.56	74.00	30.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

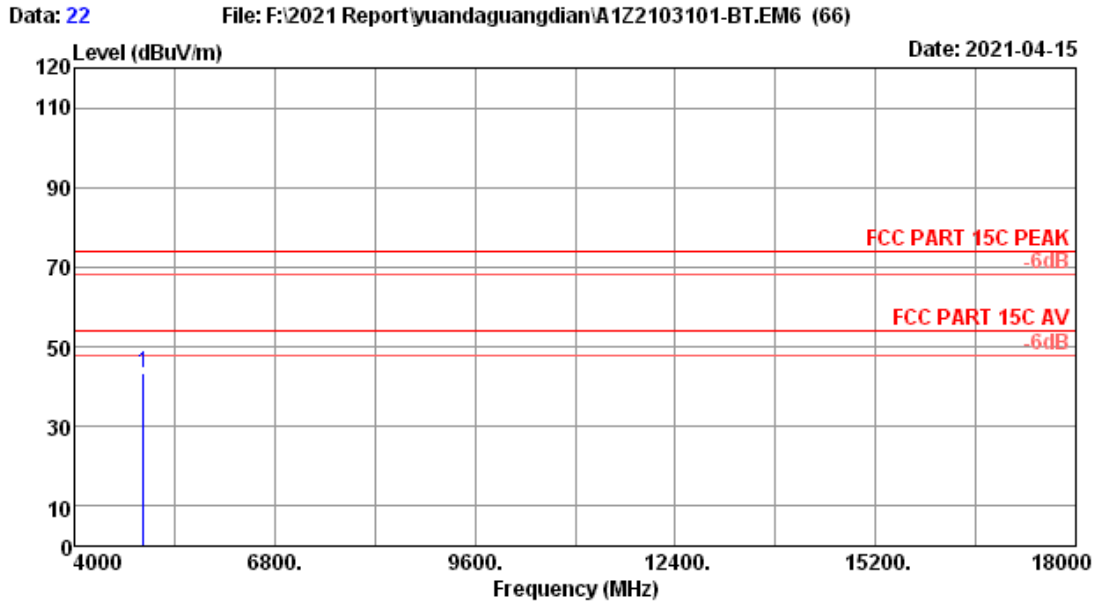

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 GFSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	32.77	1.39	44.48	35.12	43.52	74.00	30.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

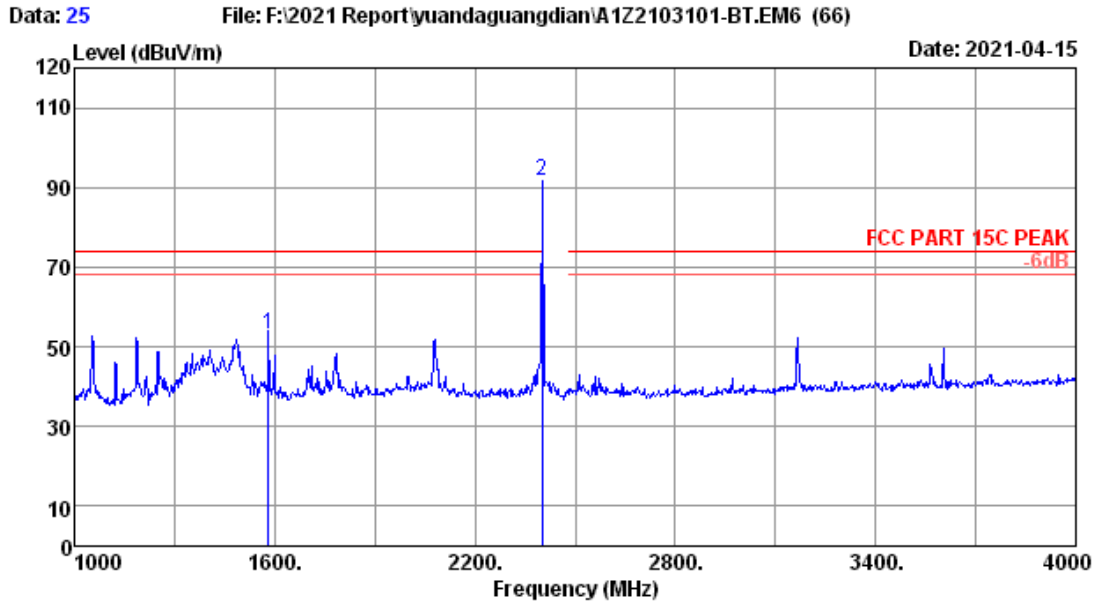

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1582.00	25.55	0.72	63.25	36.43	53.09	74.00	20.91	Peak
2	2402.00	28.01	0.92	98.45	35.94	91.44	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

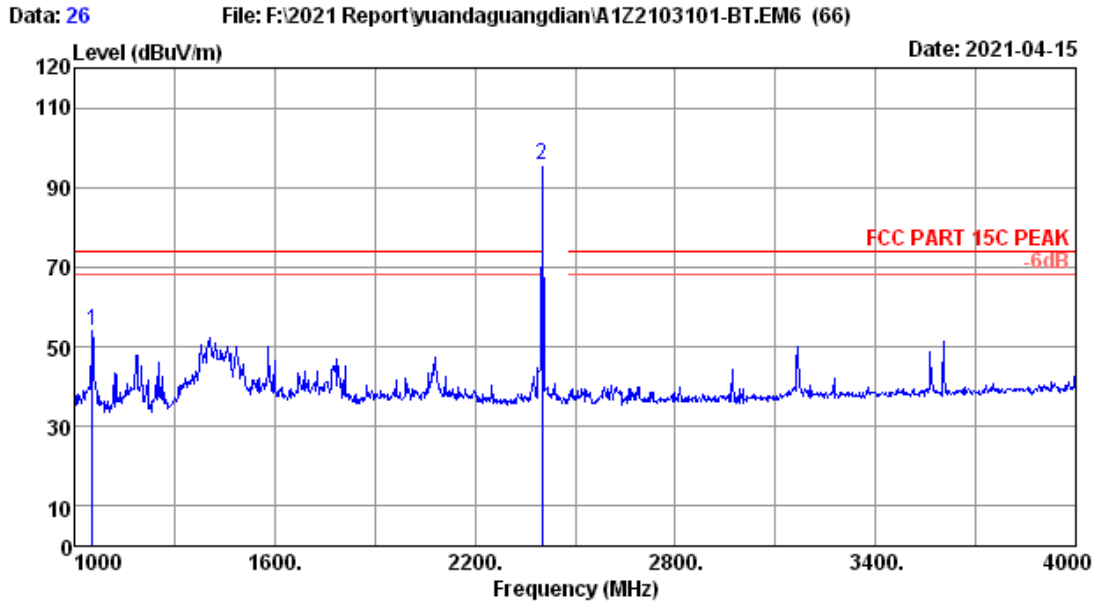


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	66.36	37.13	53.96	74.00	20.04	Peak
2	2402.00	28.01	0.92	102.56	35.94	95.55	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

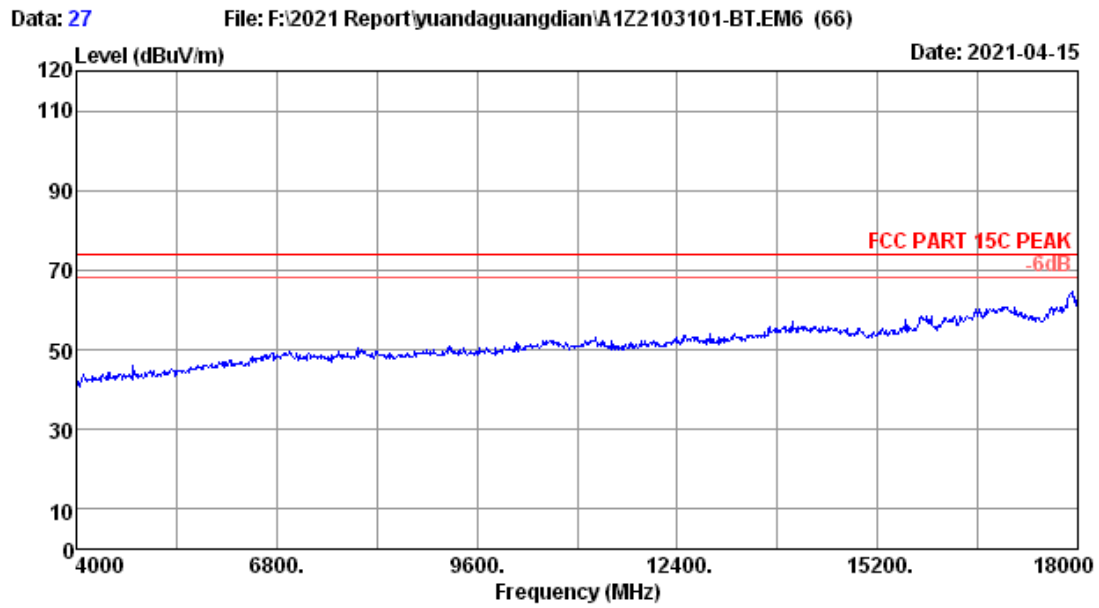

Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 8DPSK 2402MHz Tx		

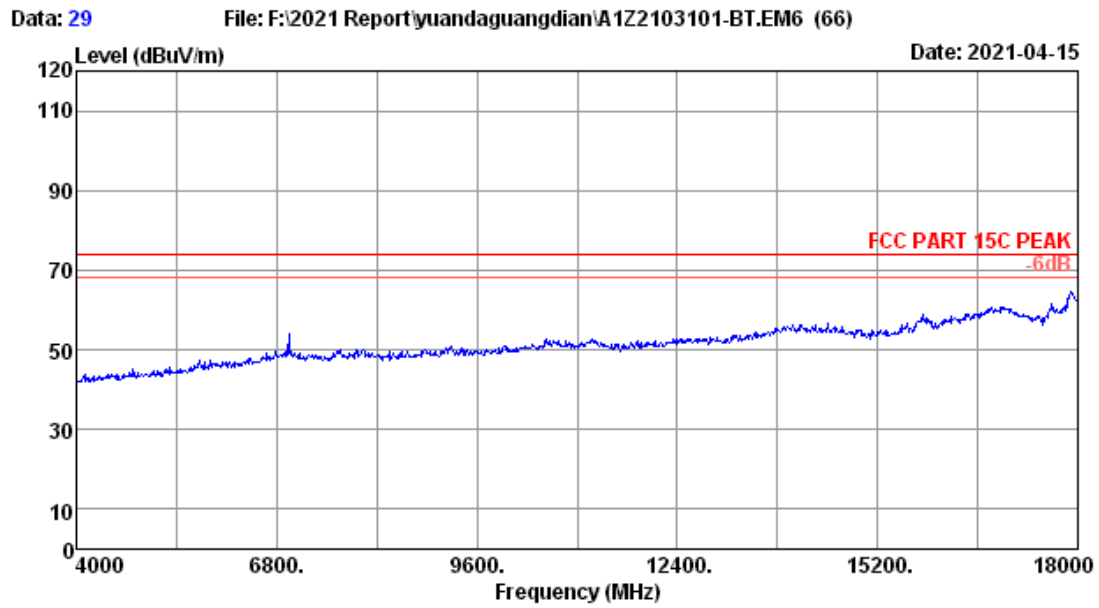


Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 8DPSK 2402MHz Tx		

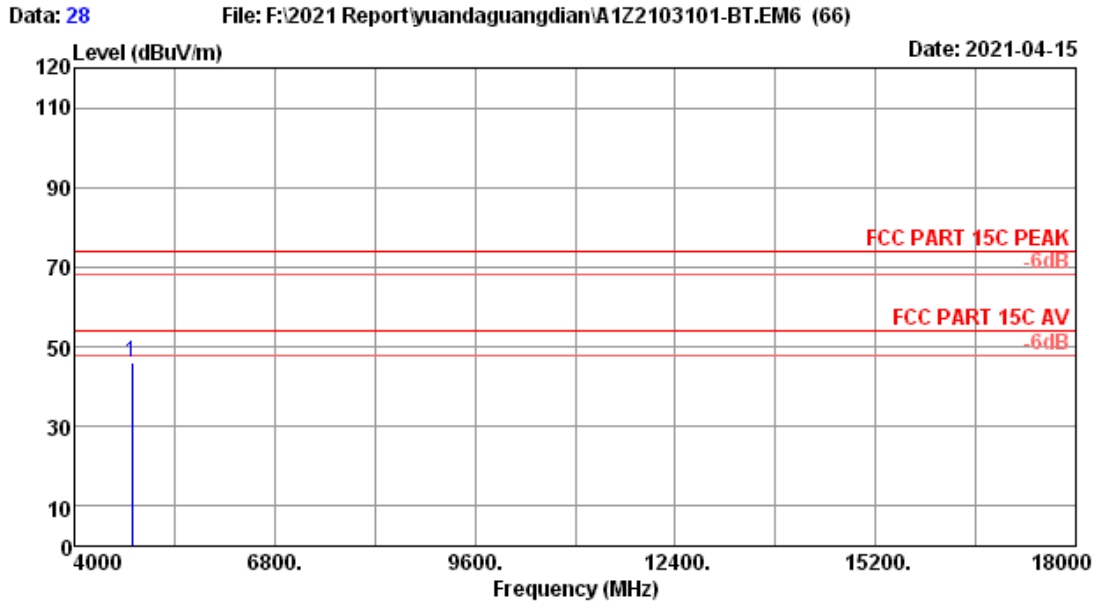

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	32.61	1.38	47.39	35.18	46.20	74.00	27.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

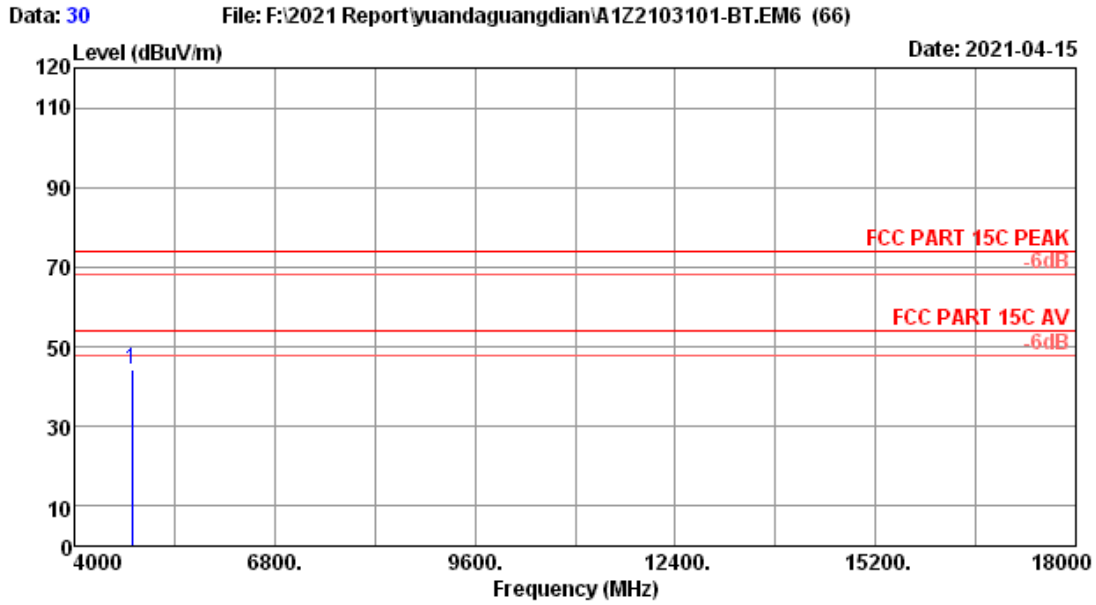

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2402MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	32.61	1.38	45.30	35.18	44.11	74.00	29.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

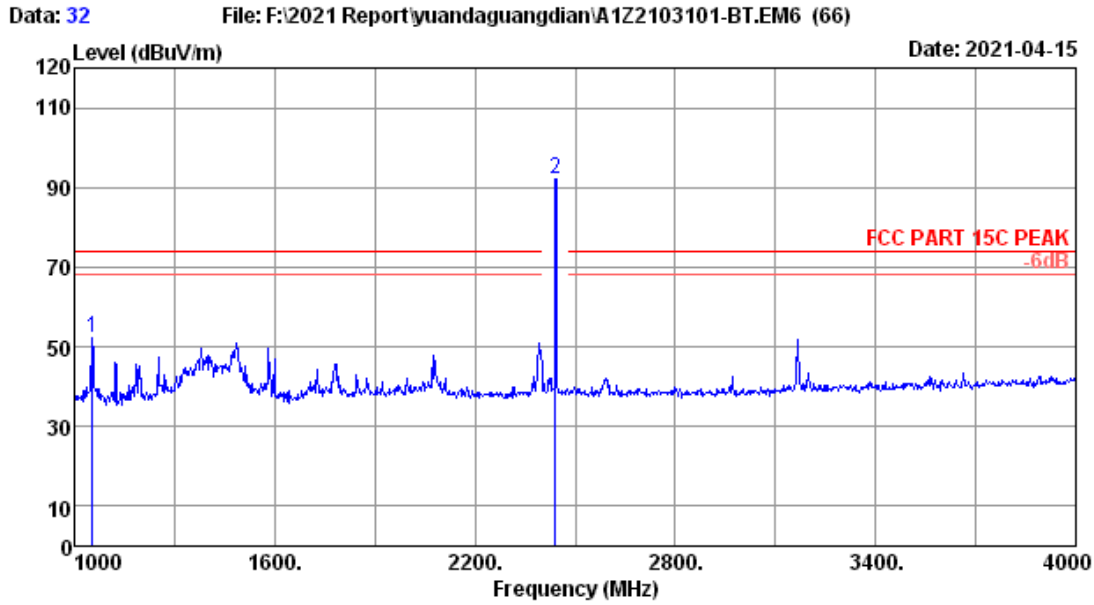

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	64.73	37.13	52.33	74.00	21.67	Peak
2	2441.00	28.11	0.93	98.82	35.95	91.91	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

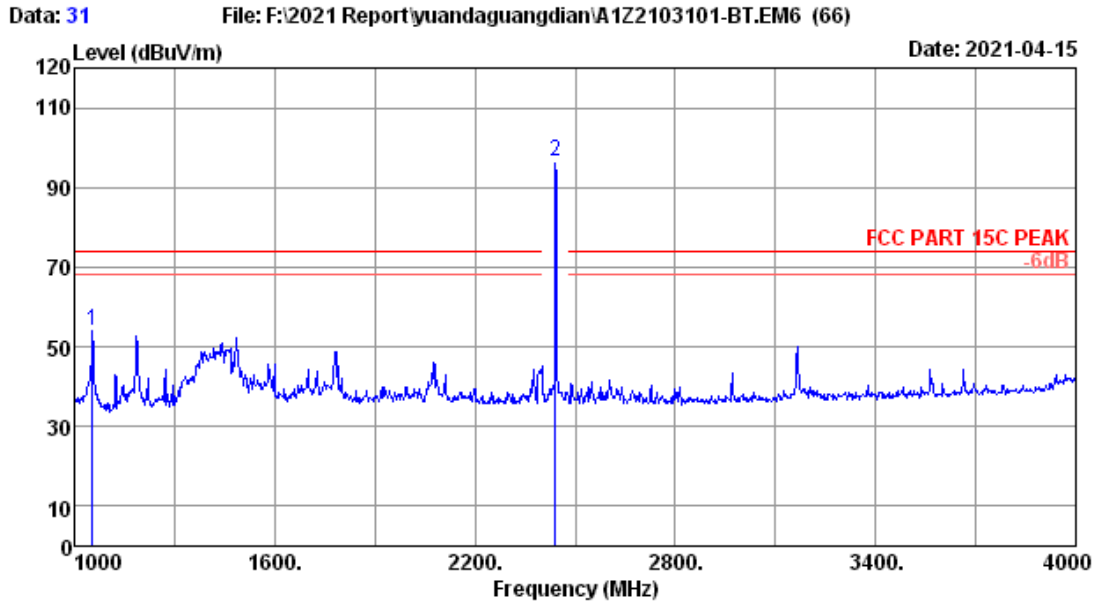


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	66.21	37.13	53.81	74.00	20.19	Peak
2	2441.00	28.11	0.93	103.24	35.95	96.33	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

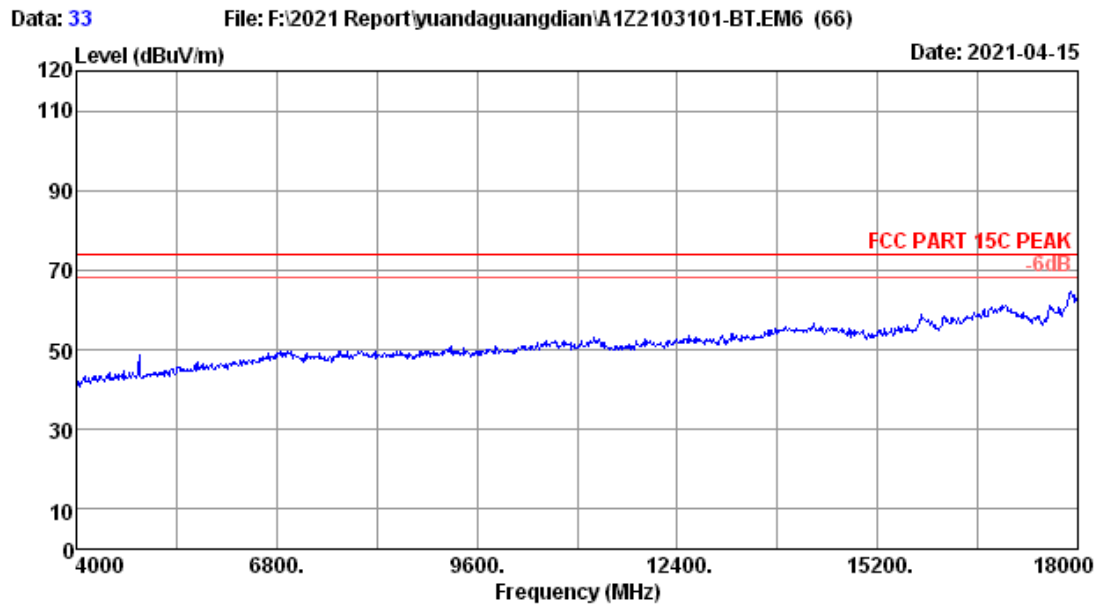

Site no.	: 3m Chamber	Data no.	: 33
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 8DPSK 2441MHz Tx		

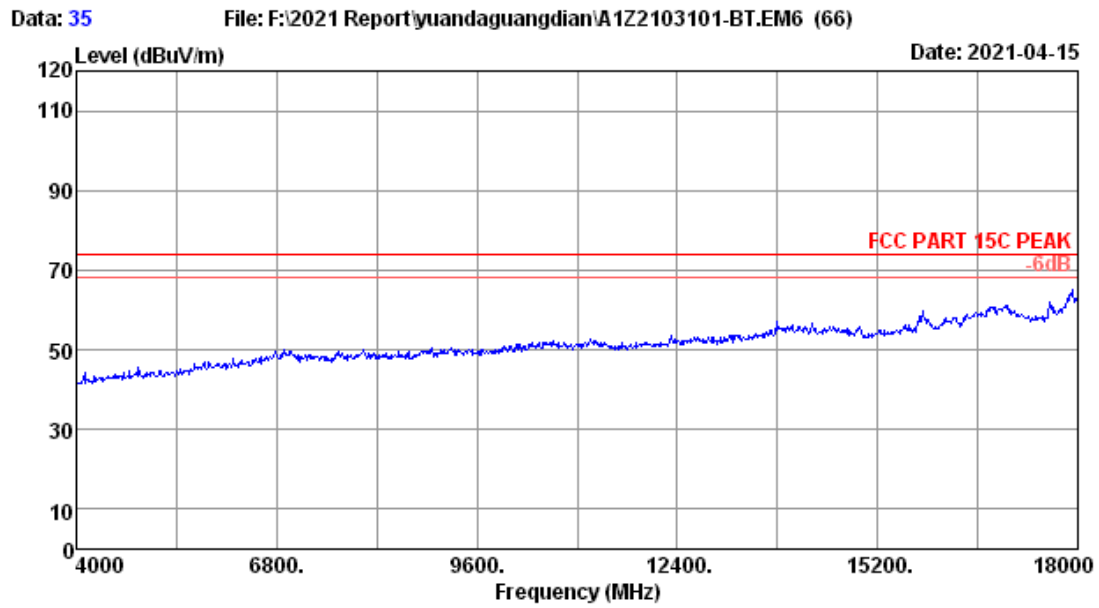


Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 8DPSK 2441MHz Tx		

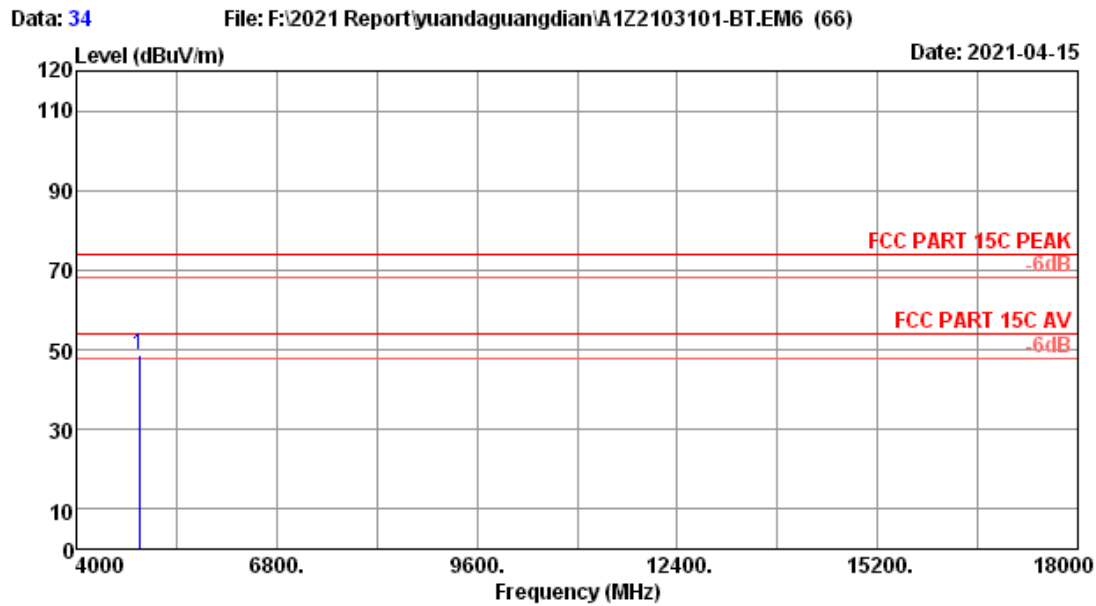

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	32.68	1.39	49.78	35.15	48.70	74.00	25.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

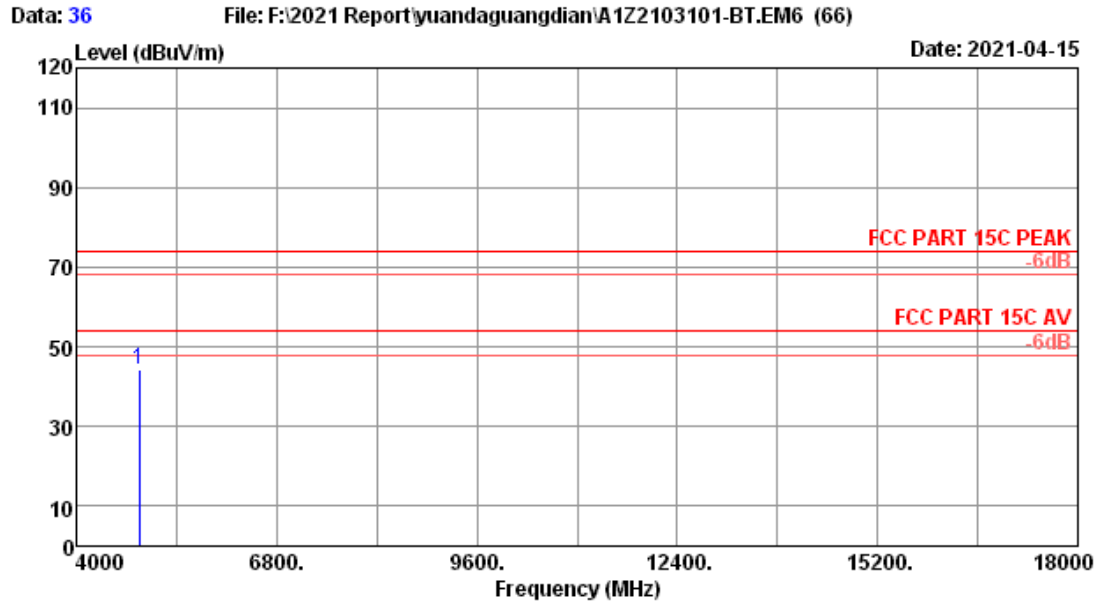

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2441MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	32.68	1.39	45.55	35.15	44.47	74.00	29.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

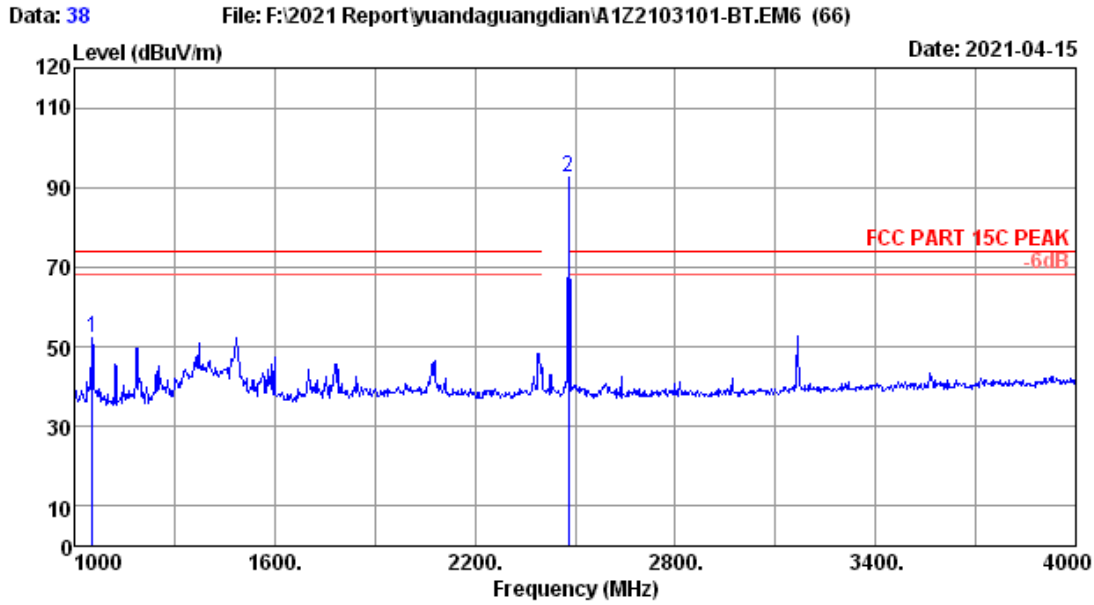

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	64.78	37.13	52.38	74.00	21.62	Peak
2	2480.00	28.17	0.94	99.23	35.95	92.39	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

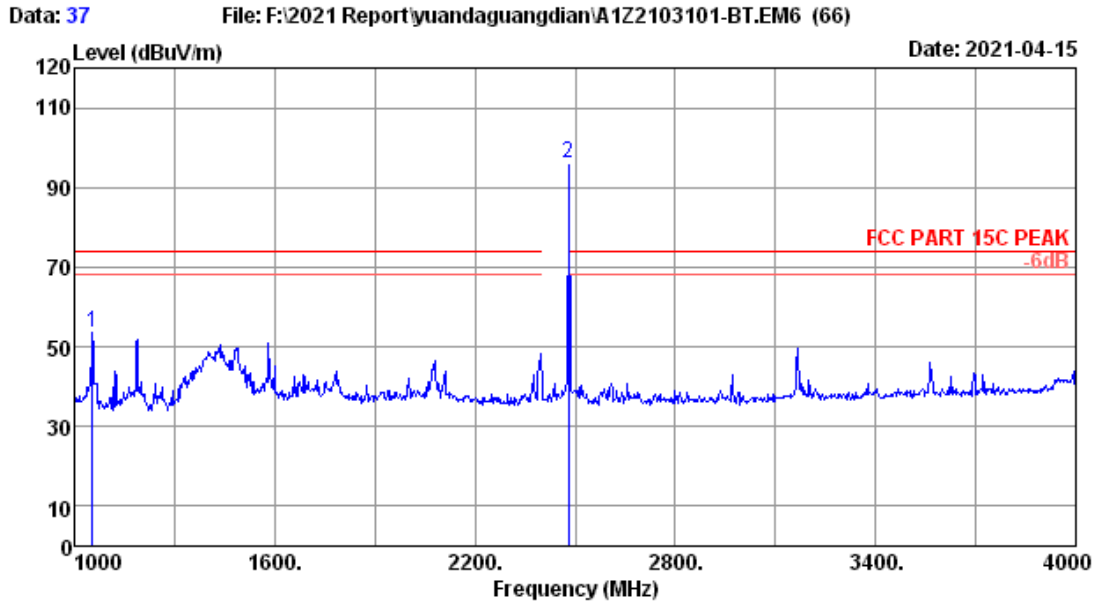


Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1054.00	24.12	0.61	65.86	37.13	53.46	74.00	20.54	Peak
2	2480.00	28.17	0.94	102.73	35.95	95.89	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

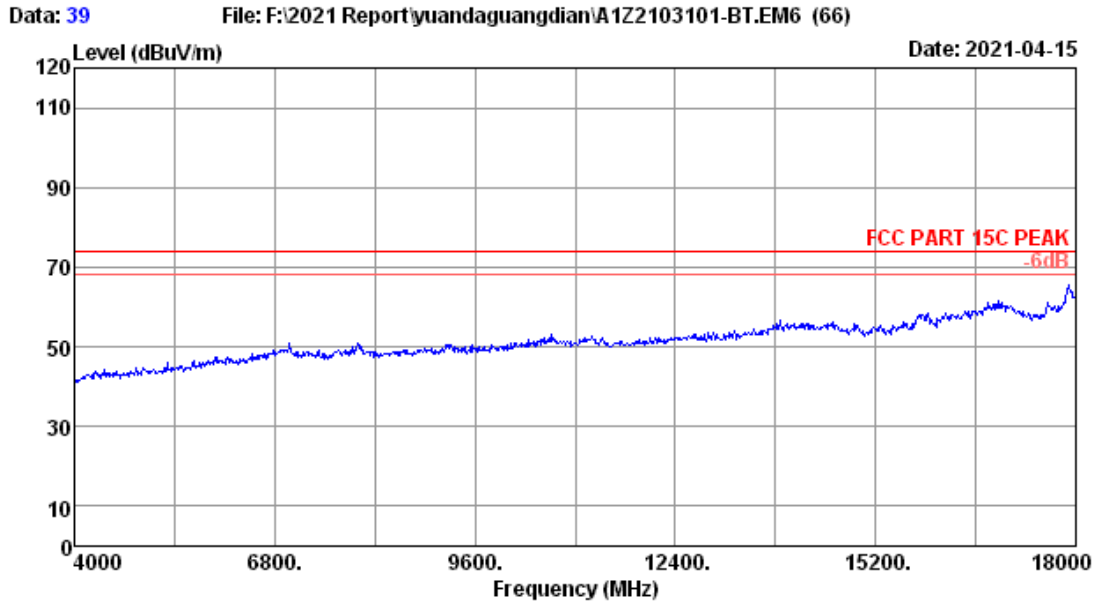

Site no.	: 3m Chamber	Data no.	: 39
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 8DPSK 2480MHz Tx		

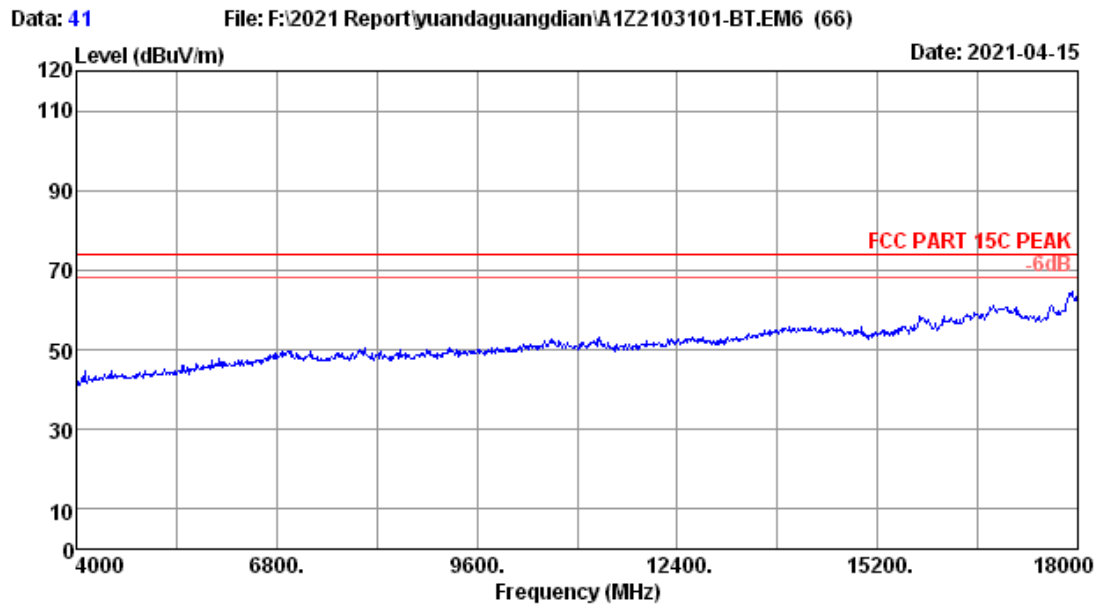


Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2020 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Lynn
Test Mode	: BT3.0 8DPSK 2480MHz Tx		

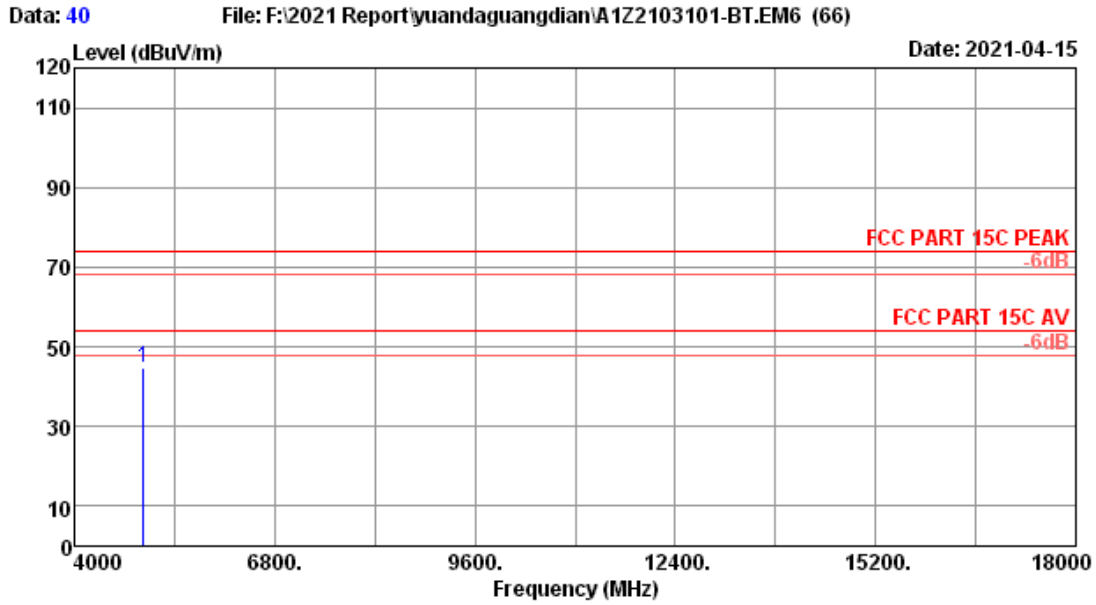

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	32.77	1.39	45.73	35.12	44.77	74.00	29.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

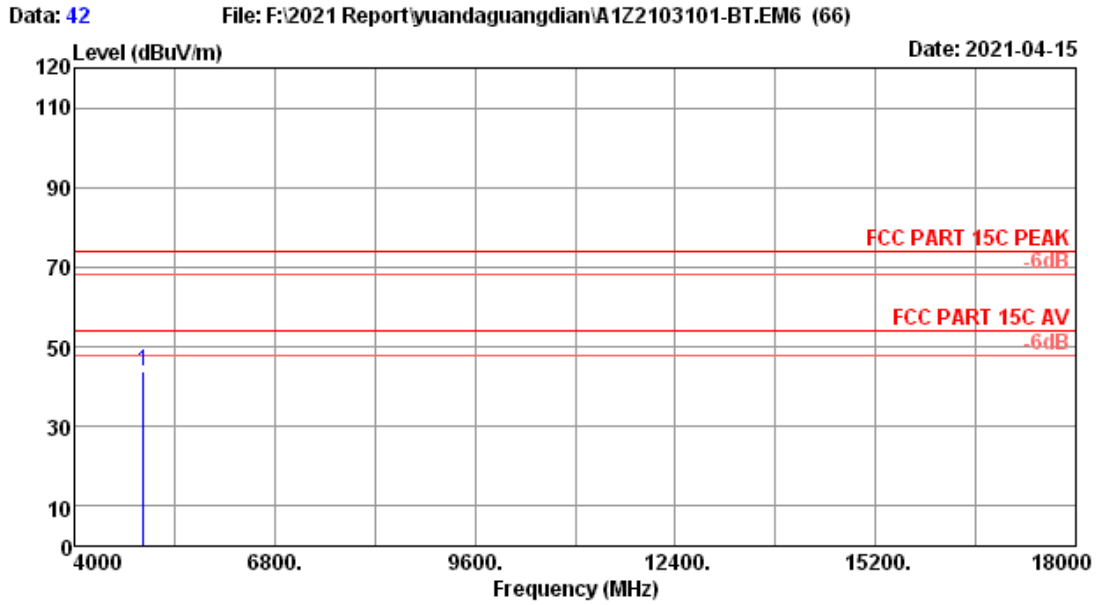

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Lynn
 Test Mode : BT3.0 8DPSK 2480MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	32.77	1.39	44.71	35.12	43.75	74.00	30.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.07,21	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.12,20	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.07,21	1 Year

5.2. Block Diagram of Test Setup



5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.4. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.8:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

5.5. Test result


PASS (The testing data was attached in the next pages.)

EUT: PROJECTOR		
M/N: BP5000		
Test date: 2021-04-15	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature: 22.8±0.6 °C


Hopping off

FSK


2402MHz(30MHz – 1GHz)

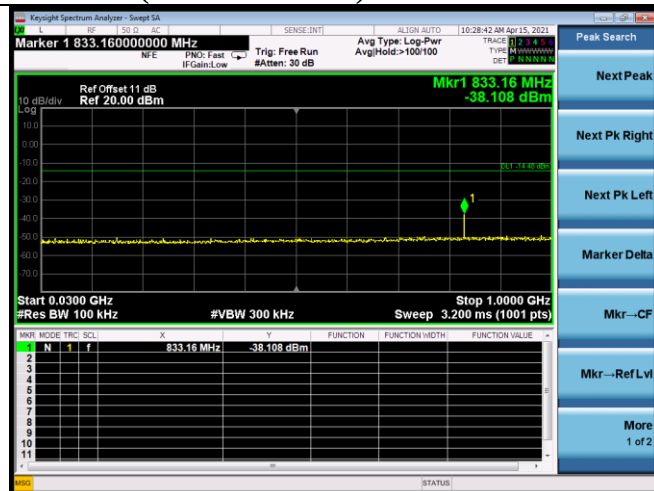


2402MHz(10GHz – 26GHz)

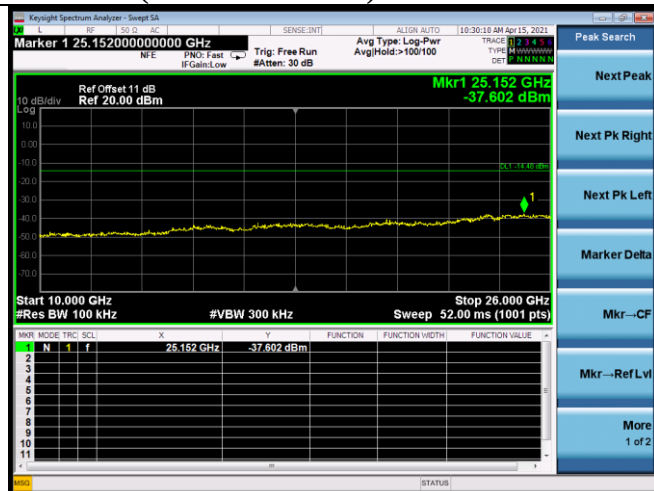


2402MHz(1GHz – 10GHz)

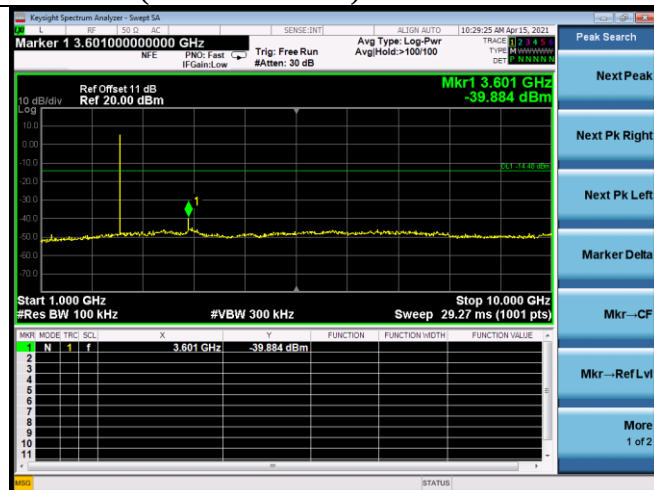


2441(30MHz – 1GHz)

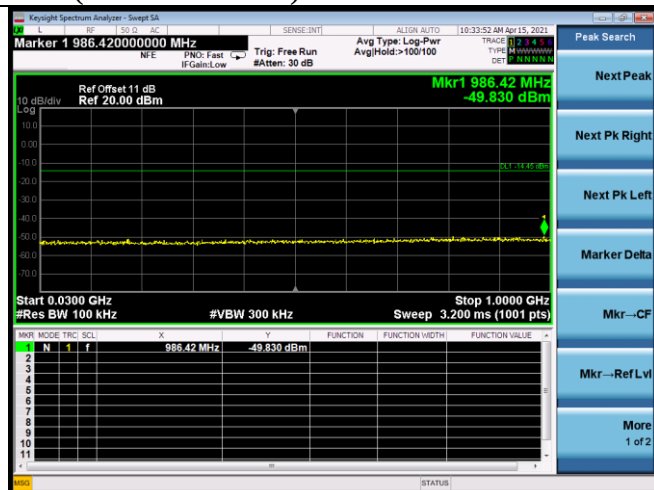


2402MHz(2.3GHz – 2.4GHz)

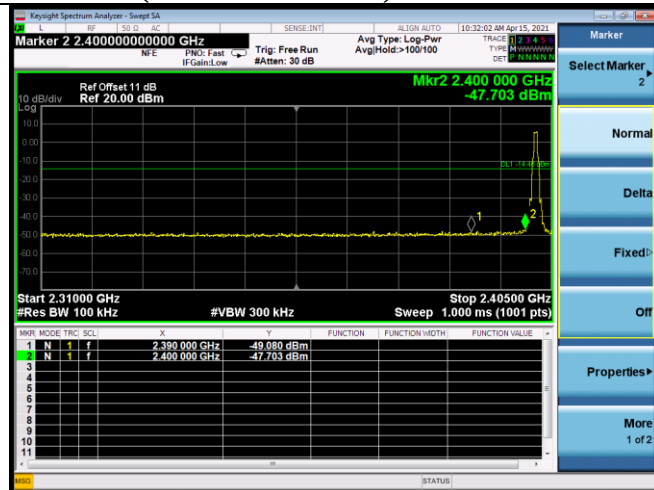


2441(1GHz – 10GHz)

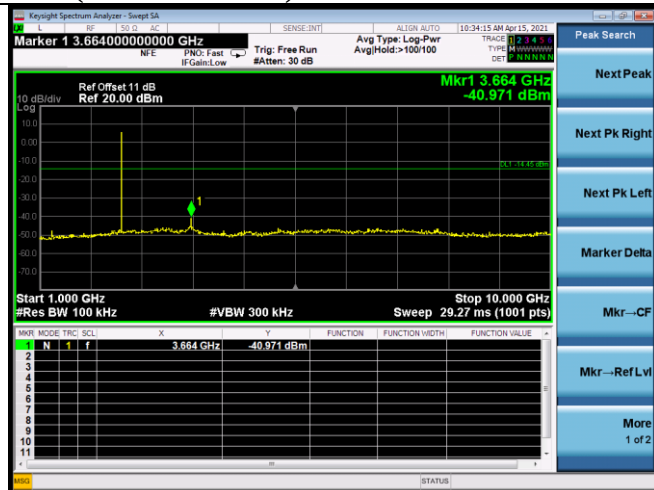


2441(10GHz – 26GHz)

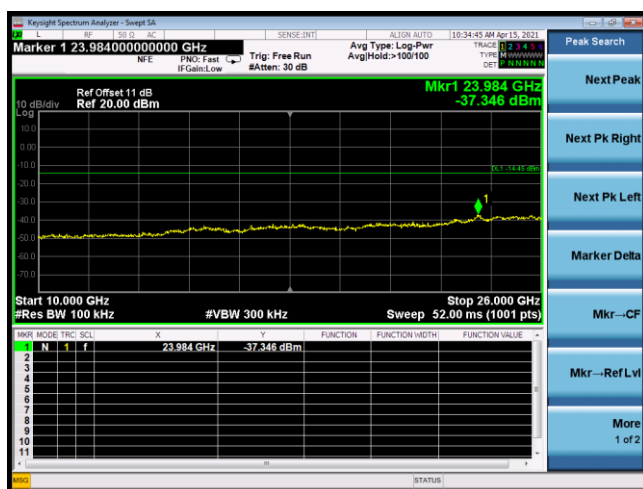


2480MHz(2.4GHz – 2.5GHz)

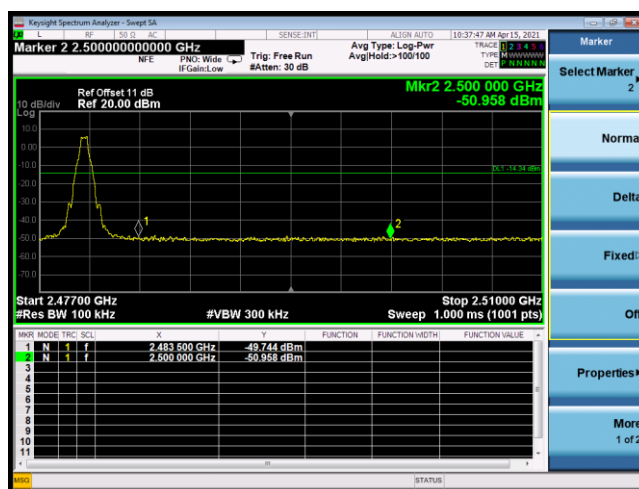

2480MHz(30MHz – 1GHz)

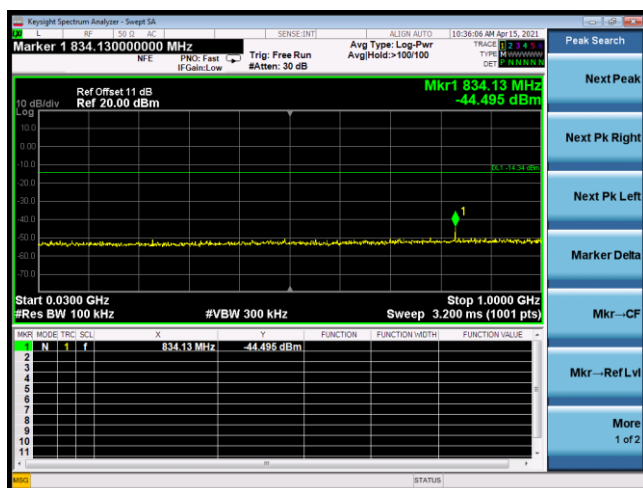


2480MHz(10GHz – 26GHz)

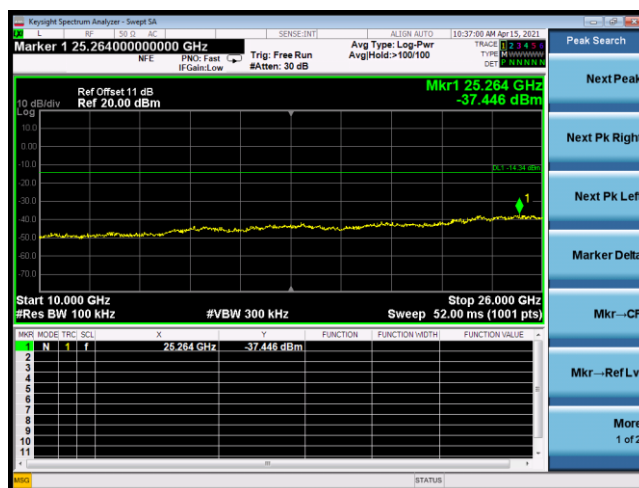


8-DPSK


2480MHz(1GHz – 10GHz)

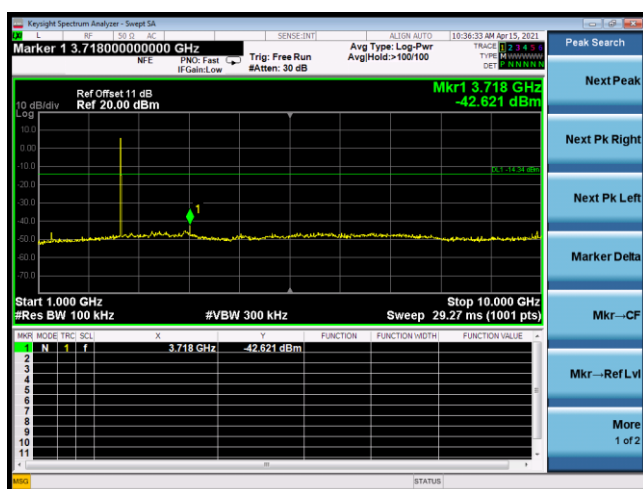


2402MHz(30MHz – 1GHz)

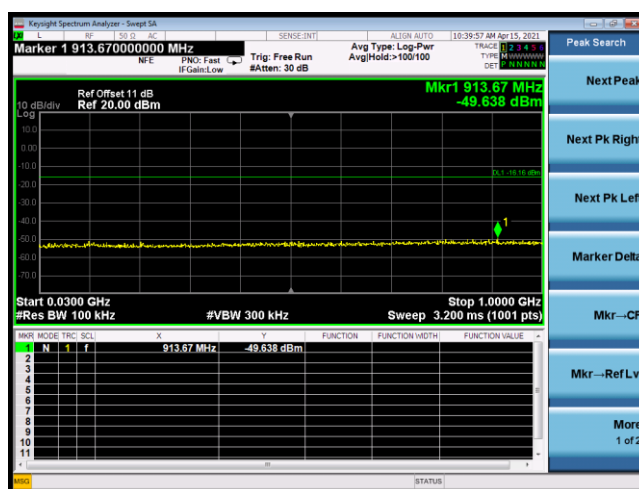


2402MHz(1GHz – 10GHz)

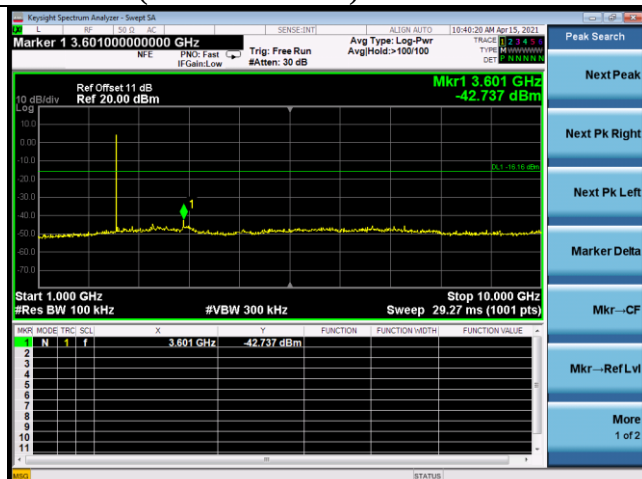


2441MHz (30MHz – 1GHz)

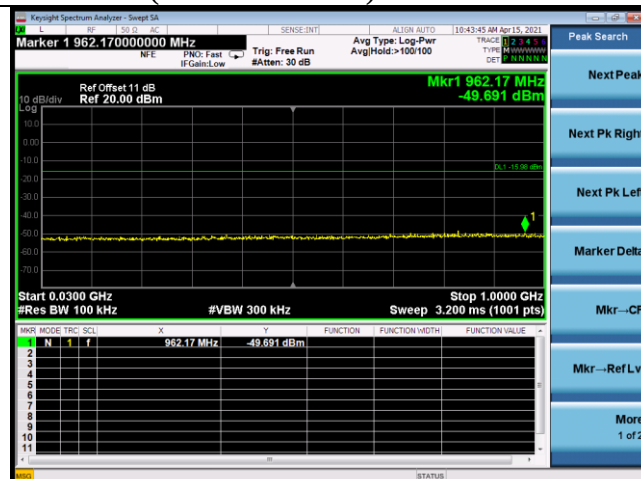


2402MHz(2.3GHz – 2.4GHz)

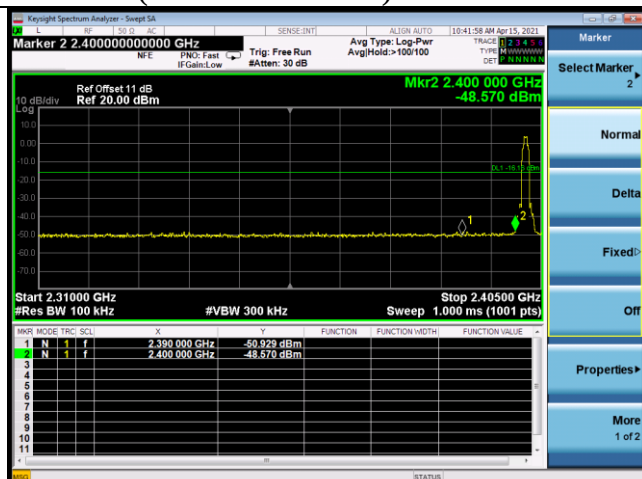


2441MHz(1GHz – 10GHz)

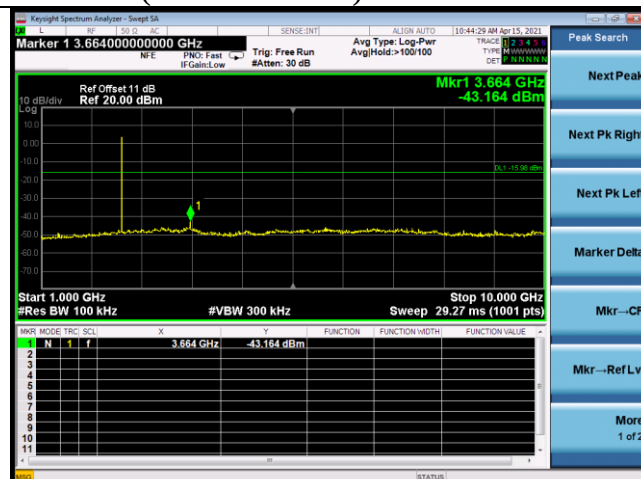


2402MHz(10GHz – 26GHz)

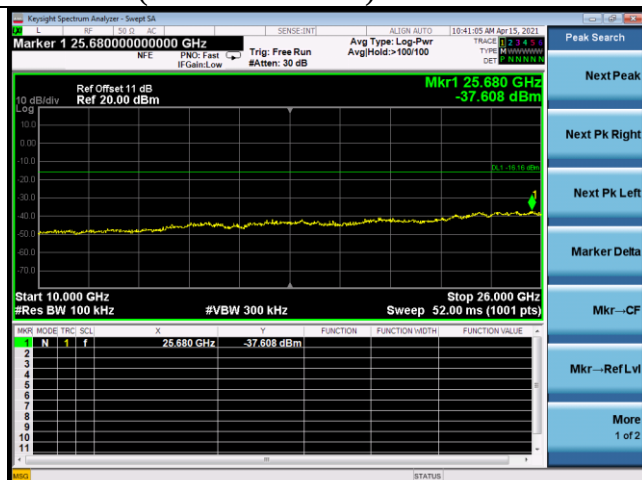


2441MHz(10GHz – 26GHz)

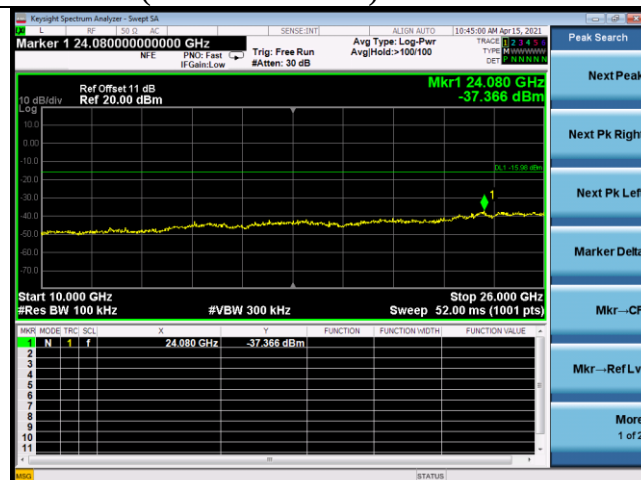

2480MHz(30MHz – 1GHz)

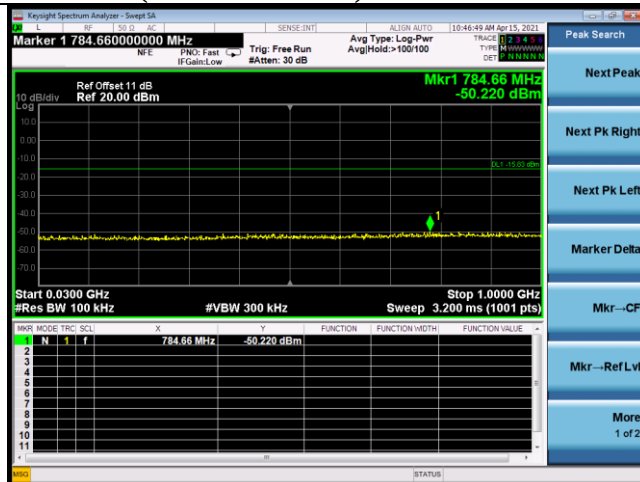


2480MHz(10GHz – 26GHz)

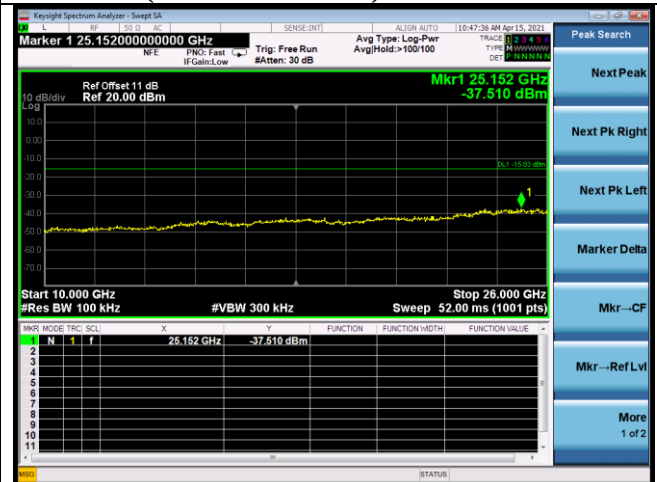


Hopping on


2480MHz(1GHz – 10GHz)

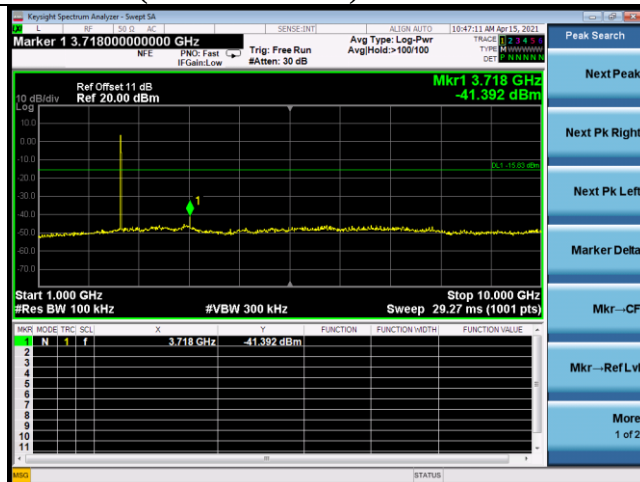


GFSK(2.3GHz – 2.4GHz)

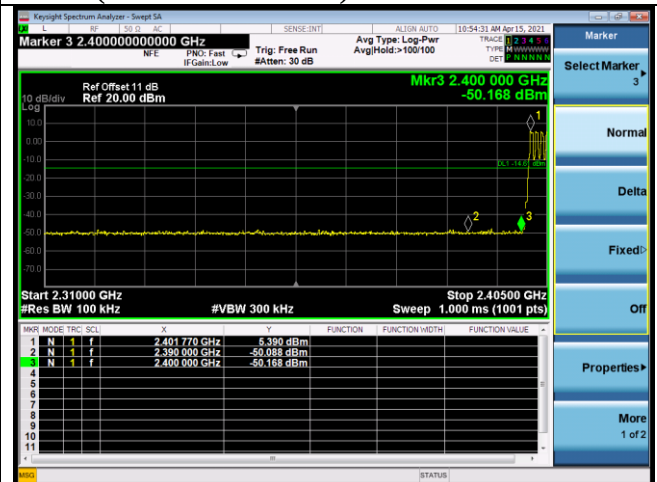


2480MHz(2.4GHz – 2.5GHz)

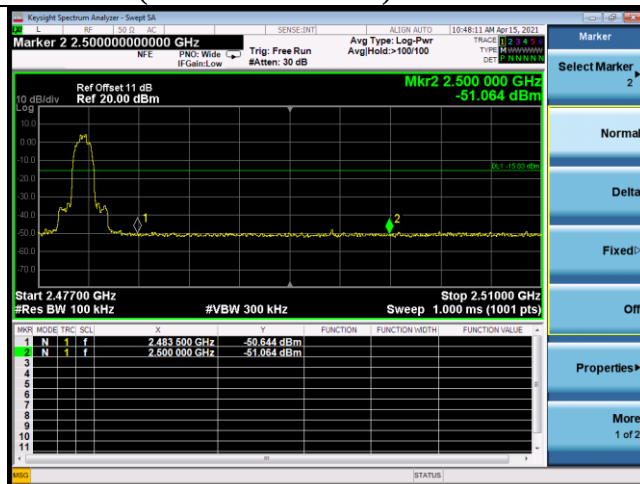


(2.4GHz – 2.5GHz)

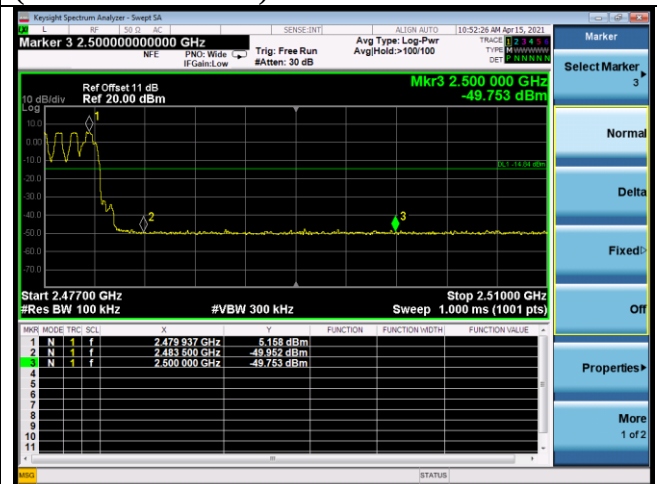

8-DPSK(2.3GHz – 2.4GHz)

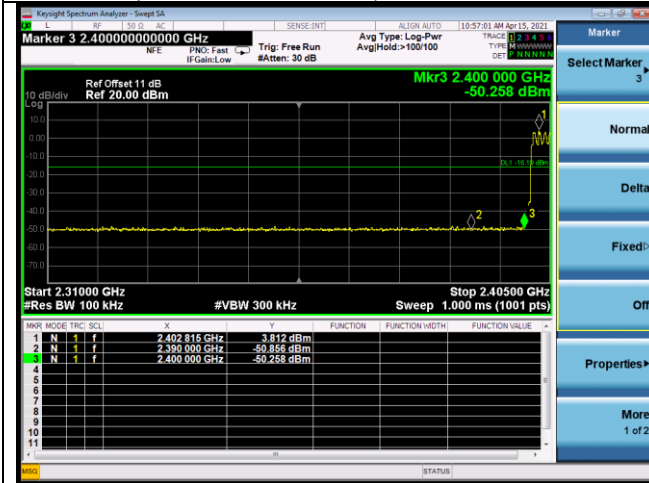

(2.4GHz – 2.5GHz)

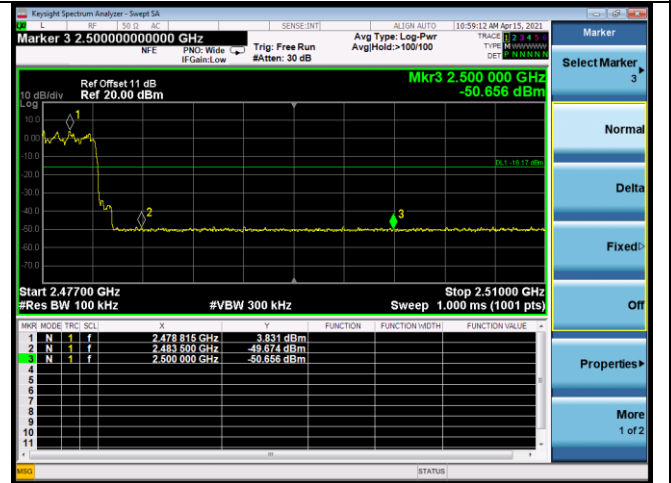

6. 20 DB & 99% BANDWIDTH TEST

6.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.07,21	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.12,20	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.07,21	1 Year

6.2.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3.Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.7:

1. Connect the antenna port of the EUT to the spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel with test software.
3. Setting of SA is following as: RBW: 30kHz / VBW: 100kHz
Sweep Mode: Continuous sweep
Detect mode: Positive peak
Trace mode: Max hold.
4. Use the occupied bandwidth function of the SA measure the 20dB bandwidth directly.

6.4.Test Results


EUT: PROJECTOR		
M/N: BP5000		
Test date: 2021-04-15	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature:22.8±0.6 °C

Test Mode	Frequency (MHz)	20dB bandwidth (kHz)	Limit (kHz)
GFSK	2402	1030	N/A
	2441	969.9	N/A
	2480	1030	N/A
8-DPSK	2402	1301	N/A
	2441	1293	N/A
	2480	1310	N/A
Conclusion : PASS			

Test Mode	Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)
GFSK	2402	900.46	N/A
	2441	890.81	N/A
	2480	890.74	N/A
8-DPSK	2402	11771	N/A
	2441	11753	N/A
	2480	11875	N/A
Conclusion : PASS			


GFSK

2402MHz

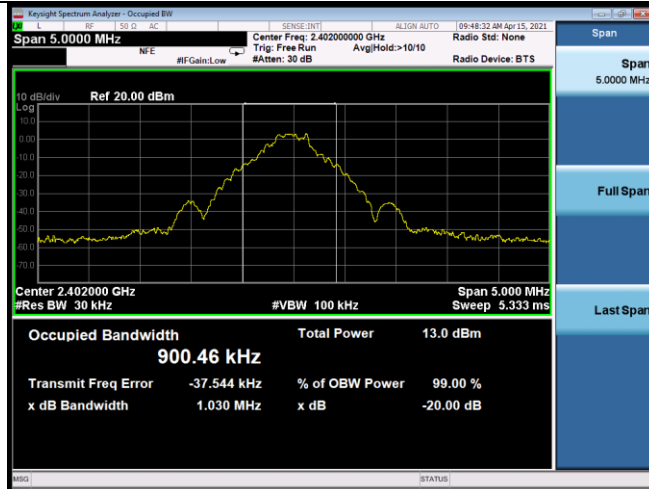


8-DPSK


2402MHz

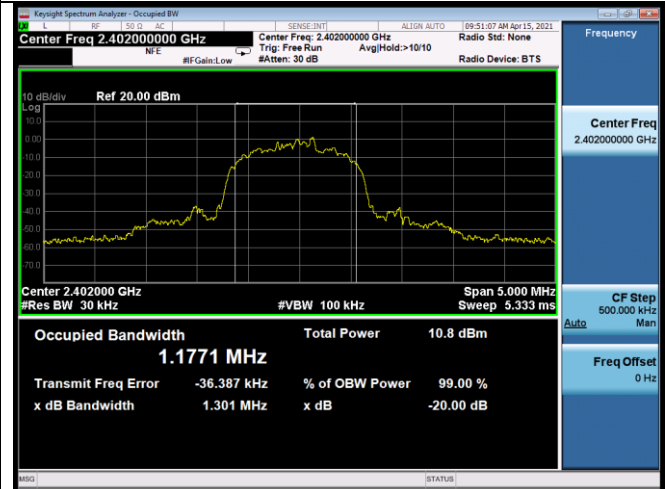


2441MHz

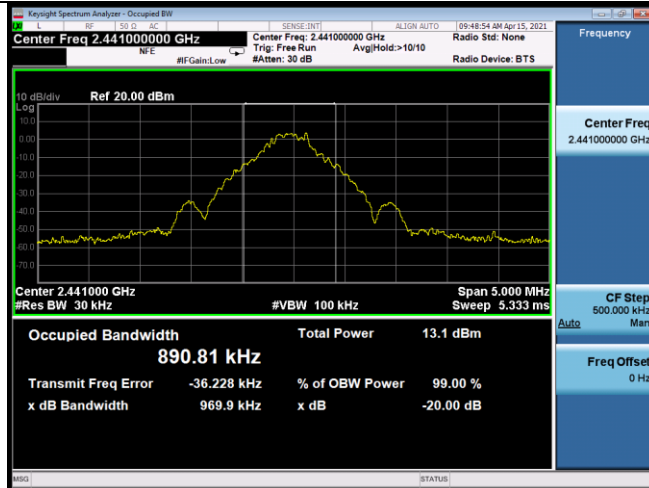

2441MHz

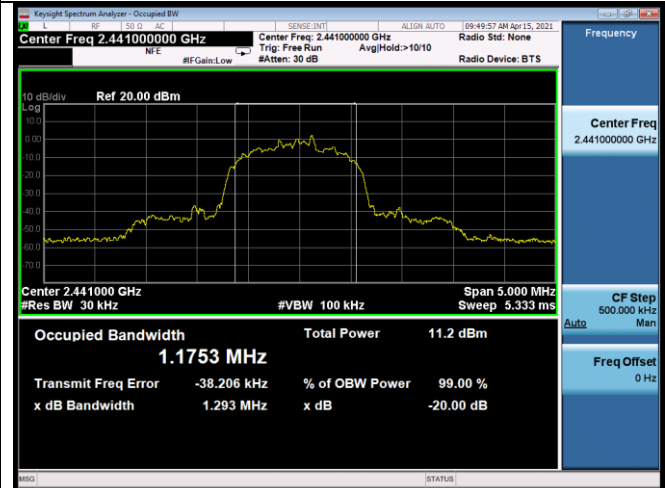

2480MHz

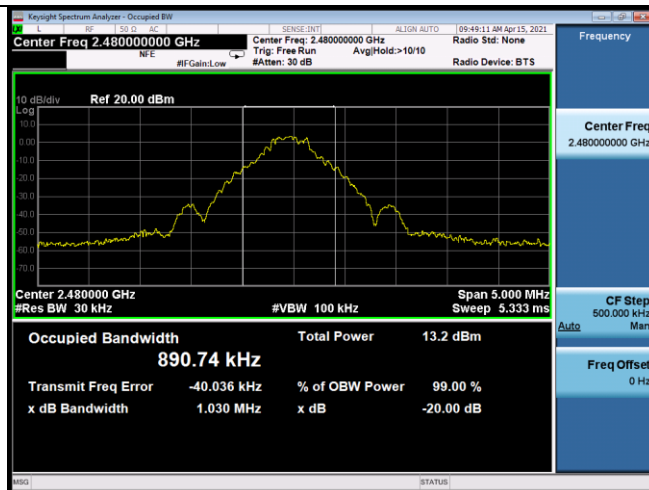

2480MHz



7. CARRIER FREQUENCY SEPARATION TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.07,21	1 Year
2.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.07,21	1 Year

7.2. Limit

Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.


7.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.2:

1. Connect the antenna port of the EUT to the Spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel.
3. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz.Span: 3MHz
4. Use the mark Delta function of the SA measure out the channel separation.

7.4. Test Results.

EUT: PROJECTOR			
M/N: BP5000			
Test date: 2021-04-17		Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn		Test site: RF site	Temperature: 22.8±0.6 °C
Test Mode	Channel separation	Limit(kHz)	Conclusion
GFSK	1.0MHz	686.67	PASS
8-DPSK	1.0MHz	873.33	PASS

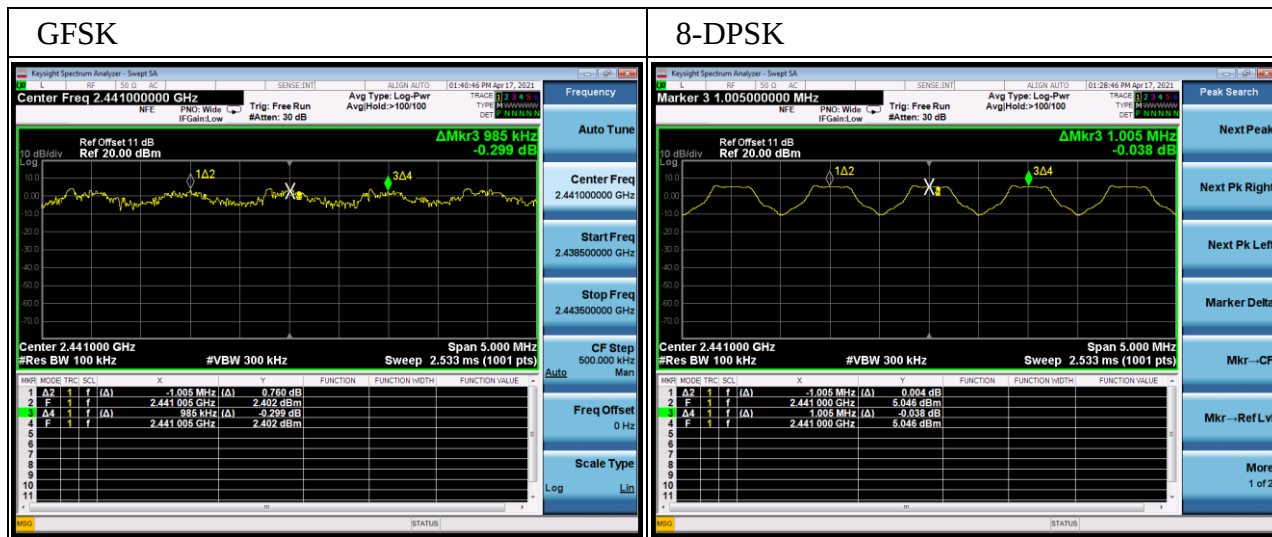

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.07,21	1 Year
2.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.07,21	1 Year

8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

8.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.3:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz ,
Start frequency: 2390MHz
Stop frequency: 2483.5MHz


And waiting for the hopping trace until stability, count out the number of the hopping.

8.4. Test Results


EUT: PROJECTOR		
M/N: BP5000		
Test date: 2021-04-15	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature: 22.8±0.6 °C

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	>=15	PASS
8-DPSK	79	>=15	PASS

GFSK

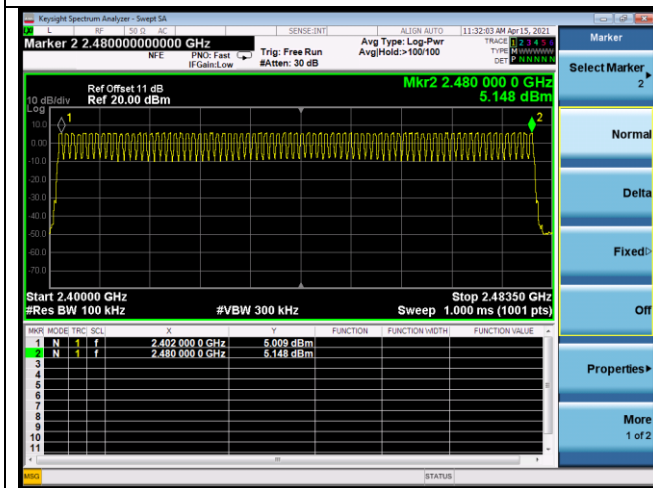

8-DPSK

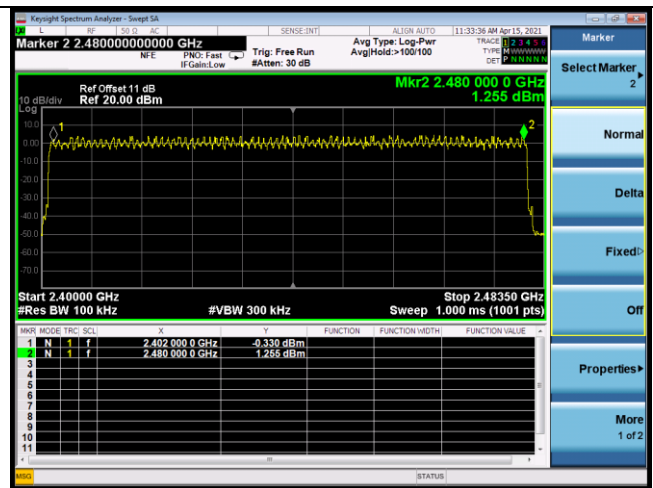

9. DWELL TIME

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.07,21	1 Year
2.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.07,21	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.4:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:
RBW: 100kHz / VBW: 300kHz
Sweep Mode: Single
Detect mode: Positive peak
Trace mode: Auto
Span: 0Hz
Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time
Dwell time=Hopping number per second*0.4*channel number*Pulse bandwidth per hopping.

9.4. Test Results

EUT: PROJECTOR		
M/N: BP5000		
Test date: 2021-04-15	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature: 22.8±0.6 °C

Mode		dwell time	Limit	Conclusion
GFSK	DH1	26 hops/5s*0.4*79channels* 0.399 ms =65.564ms	≤400ms	PASS
	DH3	21 hops/5s*0.4*79channels* 1.659 ms =220.182ms	≤400ms	PASS
	DH5	13 hops/5s*0.4*79channels* 2.920 ms =239.907ms	≤400ms	PASS
8-DPSK	3-DH1	24 hops/5s*0.4*79channels* 0.408 ms =61.885ms	≤400ms	PASS
	3-DH3	26 hops/5s*0.4*79channels* 1.656 ms =272.114ms	≤400ms	PASS
	3-DH5	15 hops/5s*0.4*79channels* 2.915 ms =276.342ms	≤400ms	PASS

Note: All the lower levels were signaled from receiver and should not be considered in here.