
FCC Test Report

Report No: WD-RF-R-230400-C0

Product Name : Reader
Model Name : DR20
FCC ID : 2AZ3JDR20
Applicant : Rhombus Systems, Inc.
Received Date : Nov. 17, 2023
Tested Date : Dec. 18, 2023 ~ Dec. 25, 2023
Applicable Standard : 47 CFR FCC Part 15, Subpart C (Section 15.225)
ANSI C63.10 : 2013



Wendell Industrial Co., Ltd
Wendell EMC & RF Laboratory

Caution:

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.


This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

Test Report

Issued Date: December 25, 2023

Project No.: 23Q110607

Product Name	Reader
Trade Name	rhombus
Brand Trademark	 rhombus
Model Name	DR20
FCC ID	2AZ3JDR20
Applicant	Rhombus Systems, Inc.
Manufacturer	Rhombus Systems, Inc.
EUT Rated Voltage	DC 8V ~ 28V
EUT Test Voltage	DC 28V
EUT Supports Radios Application	Bluetooth BR/EDR/LE NFC 13.56M
Applicable Standard	47 CFR FCC Part 15, Subpart C (Section 15.225) ANSI C63.10 : 2013
Test Result	Complied

Documented :




(Specialist / Emma Lu)

Technical Engineer :



(Section Manager / Jack Chang)

Approved :



(Project Manager / Gary Wu)

Table of Contents

Document Revision History	4
Summary of Test Result	5
1 Generation Information	6
1.1 Applicant	6
1.2 Manufacturer	6
1.3 Description of Equipment under Test	6
1.4 Configuration of Tested System	9
1.5 EUT Exercise Software	9
1.6 Tested System Details	9
1.7 Test Facility	10
1.8 Measurement Uncertainty	11
1.9 List of Test Equipment	12
2 Test Result	16
2.1 Antenna Requirement	16
2.1.1 Applicable Standard	16
2.1.2 Antenna Connected Construction	16
2.2 20dB Spectrum Bandwidth Measurement	17
2.2.1 Limit	17
2.2.2 Test Setup	17
2.2.3 Test Procedure	17
2.2.4 Test Result	18
2.3 Frequency Stability Measurement	19
2.3.1 Limit	19
2.3.2 Test Setup	19
2.3.3 Test Procedure	19
2.3.4 Test Result	20
2.4 Field Strength of Fundamental Emissions Measurement	22
2.4.1 Limit	22
2.4.2 Test Setup	23
2.4.3 Test Procedure	23
2.4.4 Test Result	24
2.5 Radiated Emissions Measurement	26
2.5.1 Limit	26
2.5.2 Test Setup	26
2.5.3 Test Procedure	27
2.5.4 Test Result	28
2.6 AC Conducted Emissions Measurement	34
2.6.1 Limit	34
2.6.2 Test Setup	34
2.6.3 Test Procedure	35
2.6.4 Test Result	36
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

Document Revision History

Report No.	Issue date	Description
WD-RF-R-230280-C0	September 14, 2023	Initial report
WD-RF-R-230400-C0	December 25, 2023	<p>This is to request a Class II permissive change for FCC ID: 2AZ3JDR20, originally granted on 10/26/2023.</p> <p>The modification is concerned with following:</p> <ol style="list-style-type: none"> 1. Adding new PCB board, change non-RF related layout. 2. The power layouts are moved to the shielding case, away from the antenna. 3. Replace component for L3. 4. Back cover adding heat sink. <p>Therefore only radiated emission below 1G has been evaluated for this C2PC. Adding internal photographs for new PCB.</p>

Summary of Test Result

Ref. Std. Clause	Test Items	Result
15.203	Antenna Requirement	Pass
15.215(c)	20dB Spectrum Bandwidth	Pass
15.225(e)	Frequency Stability	Pass
15.225 (a)(b)(c)	Field Strength of Fundamental Emissions	Pass
15.225(d)	Radiated Spurious Emissions	Pass
15.207	AC Conducted Emission	Pass

1 Generation Information

1.1 Applicant

Rhombus Systems, Inc.
1920 20th St, Sacramento, CA 95811

1.2 Manufacturer

Rhombus Systems, Inc.
1920 20th St, Sacramento, CA 95811

1.3 Description of Equipment under Test

Product Name	Reader
Model No.	DR20
FCC ID	2AZ3JDR20
Frequency Range	13.56 MHz
Type of Modulation	ASK
Antenna Information	Refer to the table "Antenna List"
EUT Supports Radios Application	Bluetooth BR/EDR/LE NFC 13.56M
EUT Rated Voltage	DC 8V ~ 28V
EUT Test Voltage	DC 28V

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	INPAQ Technology Co	RFNFC363005IMFB301	PCB Antenna	N/A

Channel List

Channel	Frequency (MHz)
01	13.56

Test Frequencies in each operating band

Frequency range over which the device operates in each operating band (Note 1)	Number of test frequencies required	Location of test frequencies inside the operating frequency range (Note 1,2)
≤ 1 MHz	1	near centre
> 1 MHz and ≤ 10 MHz	2	1 near high end, 1 near low end
> 10 MHz	3	1 near high end, 1 near centre, and 1 near low end

Note 1: The frequency range over which the device operates in a given operating band is the difference between the highest and lowest frequencies on which the device can be tuned within that given operating band. The frequency range can be smaller than or equal to the operating band, but cannot be greater than the operating band.

Note 2: In the third column of table 1, “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

Firmware / Software Version

1	Product Name	Reader
2	Model No.	DR20
3	Test SW Version	Putty_Ver.0.63
4	RF power setting in TEST SW	<input checked="" type="checkbox"/> RF power setting was not able to alter during testing. <input type="checkbox"/> RF power setting was able to alter during testing. (See the following table)

Parameters of test software setting

Type of Modulation	Channel	Frequency (MHz)	Set Value
ASK	01	13.56	Default

The EUT has been pre-tested under the following test modes, and test mode D was the worst case for final test.

The EUT has the following different codes. After laboratory evaluation, the worst mode must be found by pre-test results of radiation 30M-1GHz.

Pretest Mode

Mode A : NFC-A_106k
Mode B : NFC-A_106k
Mode C : NFC-F_212k
Mode D : NFC-F_424k

Test Mode


Mode 1 : Transmit RFID

Note:

1. This device is a Reader with a built-in Bluetooth and NFC transceiver.
2. These tests were performed on a sample of equipment to demonstrate compliance with 47 CFR FCC Part 15, Subpart C (Section 15.225).
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the X axis worst case is shown in the report.

1.4 Configuration of Tested System

Radiation

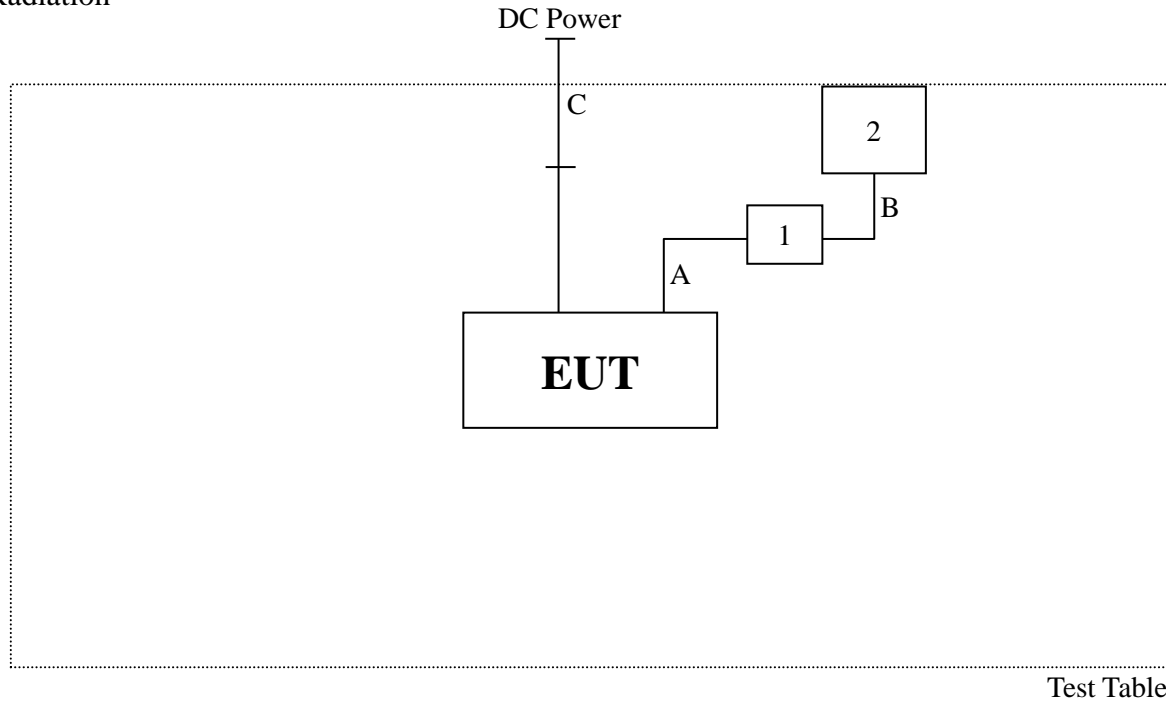

1.5 EUT Exercise Software

1. Setup the EUT as shown in Section 1.4
2. Turn on the power of all equipment.
3. Using tag to trigger RFID continuous transmission.
4. Verify that the EUT works properly.

1.6 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Fixture	Dynacolor	DR test BD	N/A	N/A
2	Notebook PC	acer	N16Q1	NXVF4TA023742254147600	N/A

No.	Signal Cable Type	Signal cable Description
A	Data Cable	Non-shielded, Non-Core, 0.17m
B	USB Cable	Shielded, 1Core, 1.85m
C	DC Power Cable	Non-shielded, Non-Core, 2.5m

1.7 Test Facility

Items	Required (IEC 60068-1)
Temperature (°C)	15-35
Humidity (% RH)	25-75
Barometric pressure (mbar)	860-1060

Description: Accredited by TAF
Accredited Number: 2965

Issued by: Wendell Industrial Co., Ltd

Lab Address: 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan R.O.C

Test Lab: Wendell EMC & RF Laboratory

Test Location: No. 119, Wugong 3rd Rd., Wugu Dist.,
New Taipei City 248, Taiwan (R.O.C.)

Designation Number: TW0025

Test Firm Registration Number: 665221

1.8 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Condition	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	± 2.64 dB
Radiated Emission	0.009 ~ 30 MHz	± 3.7 dB
	30 ~ 1000 MHz	± 3.9 dB
	1000 ~ 18000 MHz	± 4.5 dB
	18000 ~ 40000 MHz	± 4.3 dB
RF Power, Conducted	Conducted Measuring	± 0.75 dB
Occupied Bandwidth	Conducted Measuring	± 2.4 %
Power Density	Conducted Measuring	± 1.2 dB
Duty Cycle and Dwell Time	Conducted Measuring	± 0.9 %
Conducted Unwanted Emission Strength	Conducted Measuring	± 1.4 dB
DC Power Supply	--	± 2.0 %
Temperature	--	± 0.55 °C
Humidity	--	± 3.1 %

Note: Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

1.9 List of Test Equipment

For Conducted measurements / W08-Conducted Measurement

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ Spectrum analyzer	Keysight	N9010A	SG50420005	2023/08/08	2024/08/07
Wideband Peak Power Meter	Anritsu	ML2495A	1733007	2023/09/07	2024/09/06
Pulse Power Sensor + Precision Adaptor	Anritsu	MA2411B	1726022	2023/09/07	2024/09/06
✓ Temperature Chamber	TAICHY	MHK-225LK	1061121	2023/04/24	2024/04/23
Wireless Connectivity Tester	R&S	CMW270	101307	2023/05/29	2024/05/28
Attenuator	MVE	MVE2211-10	CT-9-056	2022/08/10	2024/08/09
Attenuator	MVE	MVE2211-20	CT-9-057	2022/08/10	2024/08/09
Attenuator	MVE	MVE2211-30	CT-9-058	2022/08/10	2024/08/09
Power Divider	MVE	MVE8546	170826003	2022/08/10	2024/08/09
Power Splitter	MVE	MVE8547	170302047	2022/08/11	2024/08/10
DC Power Supply	GW INSTEK	GPC-3060D	GER817636	2023/08/11	2024/08/10

Remark:

1. The equipments are calibrated every one year.
2. The Attenuator/ Divider/ Splitter are calibrated every two year.
3. The test instruments marked with “✓” are used to measure the final test results.

For AC Conduction measurements / W08-CE

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
EMI Test Receiver	R&S	ESR3	102309	2023/06/19	2024/06/18
2-Line V-Network LISN	R&S	ENV216	101185	2023/06/16	2024/06/15
LISN	SCHWARZBECK	NSLK 8127RC	05028	2023/06/16	2024/06/15
Transient Limiter	EM Electronics Corporation	EM-7600	857	2023/06/17	2024/06/16
50ohm Cable	EMCI	EMCCFD300-BM-BM- 5000	170612	2023/06/17	2024/06/16
50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2023/06/16	2024/06/15

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “√” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

For Radiated measurements / W08-996-2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Receiver	Keysight	N9038A	MY51210173	2023/08/18	2024/08/17
✓	Spectrum Analyzer	Keysight	N9010A	MY52220228	2023/08/18	2024/08/17
✓	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	00033	2023/05/08	2024/05/07
✓	TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 20E03	2023/07/31	2024/07/30
	Horn Antenna	Schwarzbeck	BBHA 9120D	01767	2023/08/17	2024/08/16
	Horn Antenna	Schwarzbeck	BBHA 9170	703	2023/08/21	2024/08/20
✓	Pre-Amplifier	EMEC	EMC330	060774	2023/08/22	2024/08/21
	Pre-Amplifier	EMEC	EM01G18G	060648	2023/08/22	2024/08/21
	Pre-Amplifier	JPT	JPA0118-55-303K	1910001800055003	2023/08/22	2024/08/21
	Pre-Amplifier	EMCI	EMC184045SE	980515	2023/08/22	2024/08/21
✓	Cable	EMEC	EM-CB400	105060103	2023/08/22	2024/08/21
✓	Cable	EMEC	EM-CB400	105060102	2023/08/22	2024/08/21
✓	Cable	EMEC	EM-CB400	105060101	2023/08/22	2024/08/21
	RF Cable	HUBER+SUHNER	SF102	MY2752/2	2023/08/22	2024/08/21
	RF Cable	MVE	280280.LL266.1200	B60028C	2023/08/22	2024/08/21
	RF Cable	EMCI	EMC102-KM-KM-600	190646	2023/08/22	2024/08/21
	RF Cable	MVE	140140.LL404.700	B90014C	2023/08/22	2024/08/21
	RF Cable	MVE	140140.LL404.300	B90006C	2023/08/22	2024/08/21
	RF Filter	EMEC	BRF-2400-2500	002	2022/08/17	2024/08/16
	RF Filter	EMEC	BRF-5150-5350	104	2022/08/17	2024/08/16
	RF Filter	EMEC	BRF-5470-5725	092	2022/08/17	2024/08/16
	RF Filter	EMEC	BRF-5725-5875	091	2022/08/17	2024/08/16
	RF Filter	EMEC	HPF-2800	002	2022/08/17	2024/08/16
	RF Filter	EMEC	HPF-5850	059	2022/08/17	2024/08/16
	SMA Notch Filter	MVE	MFN-902.928.S1	190604001	2022/08/17	2024/08/16

Remark:

1. The equipments are calibrated every one year.
2. The Filter calibrated every two year.
3. The test instruments marked with “✓” are used to measure the final test results.
4. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

2 Test Result

2.1 Antenna Requirement

2.1.1 Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2.1.2 Antenna Connected Construction

Non-standard antenna connector is used.

2.2 20dB Spectrum Bandwidth Measurement

2.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band 13.553~13.567MHz.

2.2.2 Test Setup




2.2.3 Test Procedure

Refer to ANSI C63.10 : 2013 clause 6.9

2.2.4 Test Result

Operating Frequency Band : 13.553~13.567 MHz

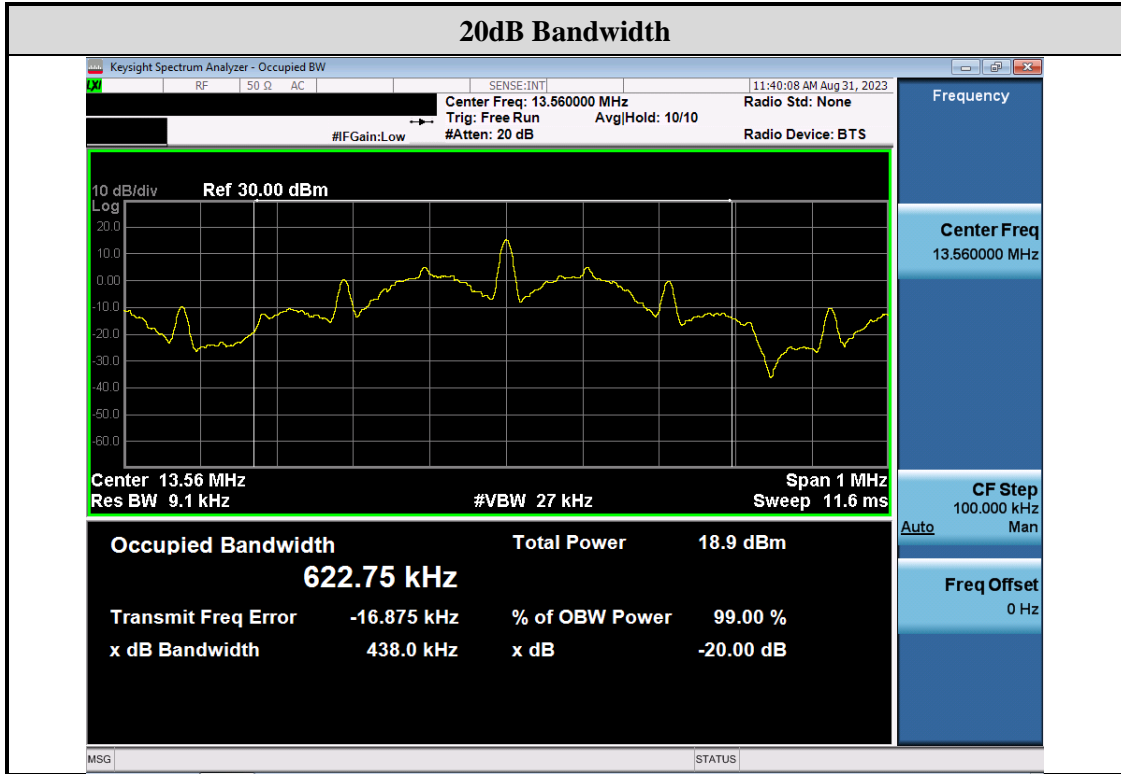


2.3 Frequency Stability Measurement

2.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (100ppm) of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C .

2.3.2 Test Setup

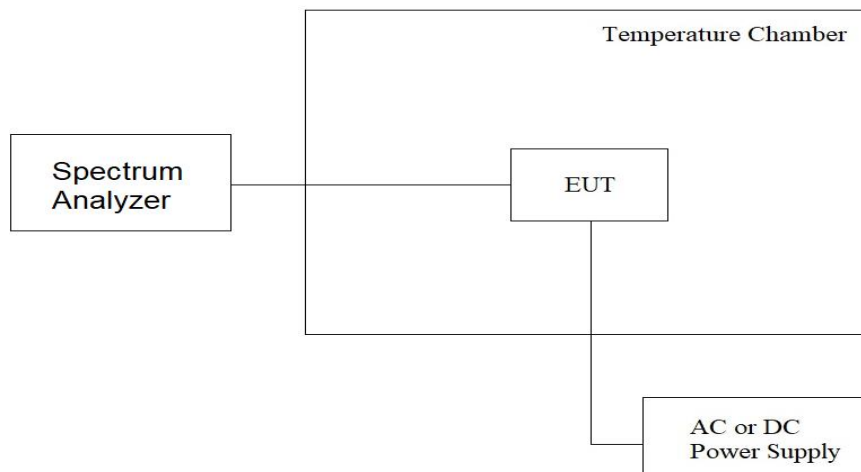

2.3.3 Test Procedure

1. Set the spectrum analyzer span to view the entire emissions bandwidth.
2. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
3. Extreme temperature rule is $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

2.3.4 Test Result

Temperature (°C)	Voltage	Observe Time	Frequency	Delta Frequency (Hz)	Delta Frequency (%)	Limit (%)	Result
20	Normal	start	13.559900	-100	-0.0007	±0.01%	Pass
		2 min	13.559510	-490	-0.0036	±0.01%	Pass
		5 min	13.560020	20	0.0001	±0.01%	Pass
		10 min	13.559919	-81	-0.0006	±0.01%	Pass
20	High(+15%)	start	13.560180	180	0.0013	±0.01%	Pass
		2 min	13.559860	-140	-0.0010	±0.01%	Pass
		5 min	13.559100	-900	-0.0066	±0.01%	Pass
		10 min	13.560070	70	0.0005	±0.01%	Pass
20	Low(-15%)	start	13.559920	-80	-0.0006	±0.01%	Pass
		2 min	13.560810	810	0.0060	±0.01%	Pass
		5 min	13.560230	230	0.0017	±0.01%	Pass
		10 min	13.559400	-600	-0.0044	±0.01%	Pass
50	Normal	start	13.560800	800	0.0059	±0.01%	Pass
		2 min	13.559190	-810	-0.0060	±0.01%	Pass
		5 min	13.559940	-60	-0.0004	±0.01%	Pass
		10 min	13.560240	240	0.0018	±0.01%	Pass
40	Normal	start	13.559520	-480	-0.0035	±0.01%	Pass
		2 min	13.560740	740	0.0055	±0.01%	Pass
		5 min	13.559490	-510	-0.0038	±0.01%	Pass
		10 min	13.560340	340	0.0025	±0.01%	Pass
30	Normal	Start	13.559800	-200	-0.0015	±0.01%	Pass
		2 min	13.559850	-150	-0.0011	±0.01%	Pass
		5 min	13.560760	760	0.0056	±0.01%	Pass
		10 min	13.560720	720	0.0053	±0.01%	Pass
10	Normal	Start	13.559020	-980	-0.0072	±0.01%	Pass
		2 min	13.559850	-150	-0.0011	±0.01%	Pass
		5 min	13.560380	380	0.0028	±0.01%	Pass
		10 min	13.559190	-810	-0.0060	±0.01%	Pass
0	Normal	start	13.559340	-660	-0.0049	±0.01%	Pass
		2 min	13.560980	980	0.0072	±0.01%	Pass
		5 min	13.559510	-490	-0.0036	±0.01%	Pass
		10 min	13.560930	930	0.0069	±0.01%	Pass

-10	Normal	start	13.560510	510	0.0038	±0.01%	Pass
		2 min	13.559050	-950	-0.0070	±0.01%	Pass
		5 min	13.559070	-930	-0.0069	±0.01%	Pass
		10 min	13.559000	-1000	-0.0074	±0.01%	Pass
-20	Normal	star	13.560350	350	0.0026	±0.01%	Pass
		2 min	13.559160	-840	-0.0062	±0.01%	Pass
		5 min	13.560960	960	0.0071	±0.01%	Pass
		10 min	13.559770	-230	-0.0017	±0.01%	Pass

2.4 Field Strength of Fundamental Emissions Measurement

2.4.1 Limit

Rules and specifications	FCC Part 15 Subpart C Paragraph 15.225 Limits		
Freq. of Emission (MHz)	Field Strength ($\mu\text{V/m}$) at 30m	Field Strength ($\text{dB}\mu\text{V/m}$) at 30m	Field Strength ($\text{dB}\mu\text{V/m}$) at 3m
13.553~13.567	15848	84.0	124.0
13.410 – 13.553 and 13.567 – 13.710	334	50.5	90.5
13.110 – 13.410 and 13.710 – 14.010	106	40.5	80.5
Outside of the 13.110 – 14.010	See 15.209 Limits		

Remark:


1. Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an quasi-peak detector.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remark:

1. Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
2. In the Above Table, the tighter limit applies at the band edges.
3. The emission limit in this paragraph is based on a measurement frequency below 1GHz instrumentation employing a quasi-peak detector.

2.4.2 Test Setup

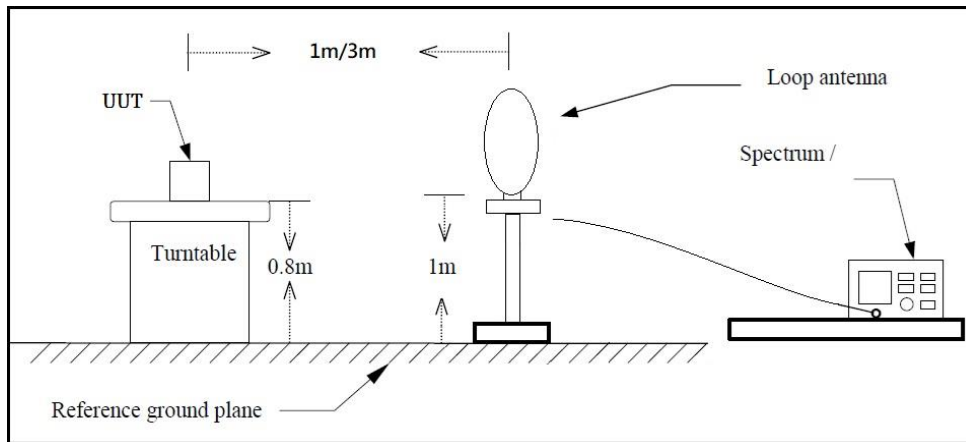


2.4.3 Test Procedure

1. For Fundamental emissions, use the receiver to measure QP reading.
2. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
4. Compliance with the spectrum mask is tested with RBW = 9kHz.

2.4.4 Test Result

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/08/31
Test Frequency :	13.56 MHz	Temperature :	23.1 °C
Polarization :	Horizontal ; X axis	Relative Humidity :	56.2 %

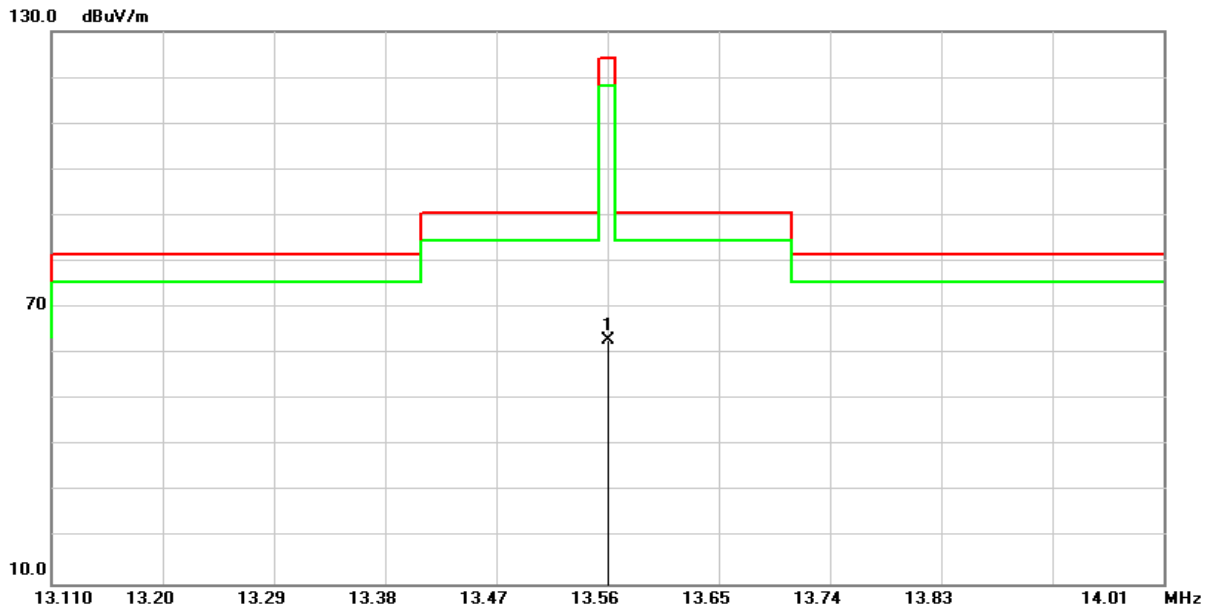


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.5600	41.73	21.29	63.02	124.00	-60.98	peak

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/08/31
Test Frequency :	13.56 MHz	Temperature :	23.1 °C
Polarization :	Vertical ; X axis	Relative Humidity :	56.2 %

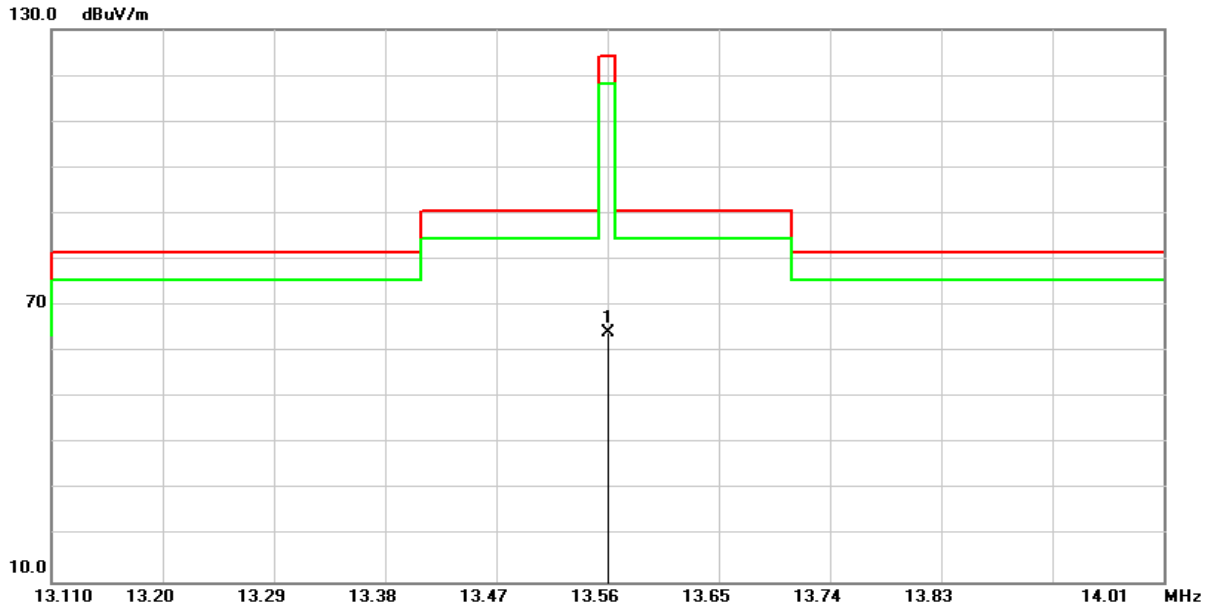

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.5600	42.95	21.29	64.24	124.00	-59.76	peak

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value


2.5 Radiated Emissions Measurement

2.5.1 Limit


The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in Section 15.209. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209

2.5.2 Test Setup

Below 30MHz

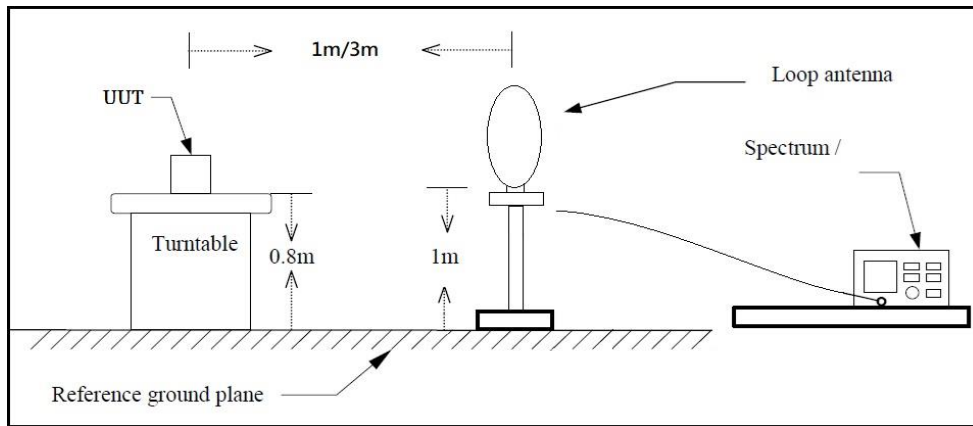

Above 30MHz

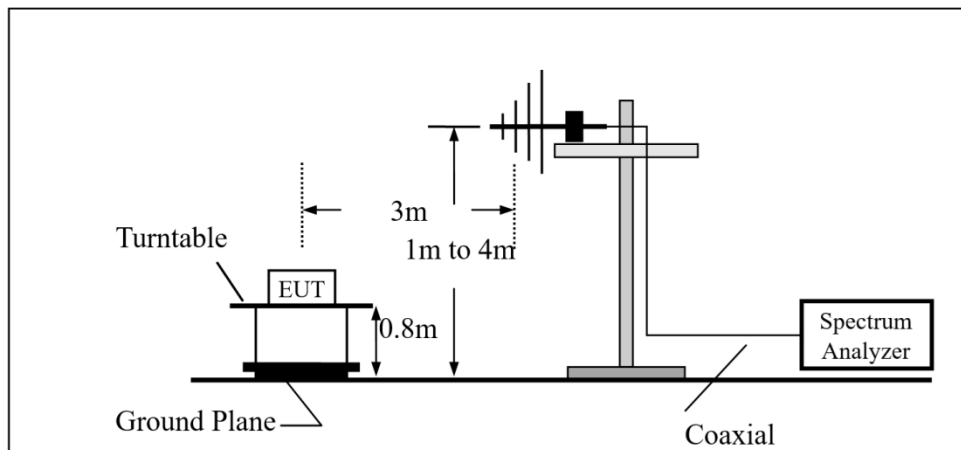

2.5.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 for compliance to FCC 47CFR 15.225 requirements.

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


For Radiated emission Above 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

2.5.4 Test Result

Below 30 MHz Data

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/08/31
Test Frequency :	13.56 MHz	Temperature :	23.1 °C
Polarization :	Horizontal ; X axis	Relative Humidity :	56.2 %

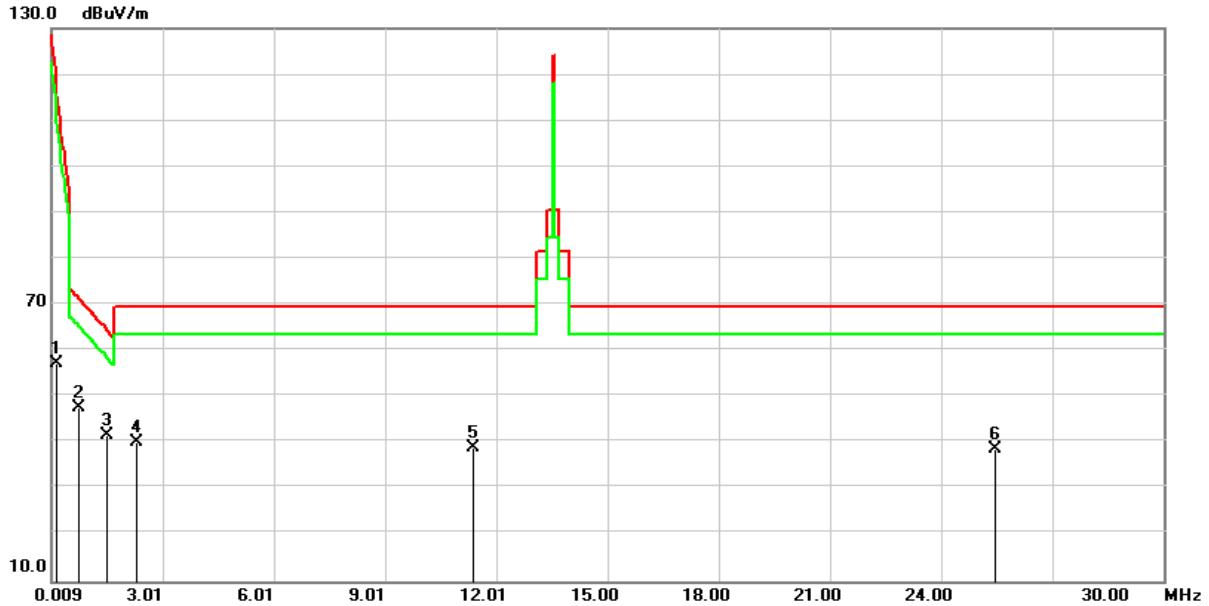


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1330	38.24	18.99	57.23	105.13	-47.90	AVG
2	0.7470	28.29	19.37	47.66	70.14	-22.48	QP
3	1.4932	22.43	19.30	41.73	64.12	-22.39	QP
4	2.2694	20.96	19.25	40.21	69.54	-29.33	QP
5	11.3736	17.42	21.45	38.87	69.54	-30.67	QP
6	25.4330	15.76	22.92	38.68	69.54	-30.86	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/08/31
Test Frequency :	13.56 MHz	Temperature :	23.1 °C
Polarization :	Vertical ; X axis	Relative Humidity :	56.2 %

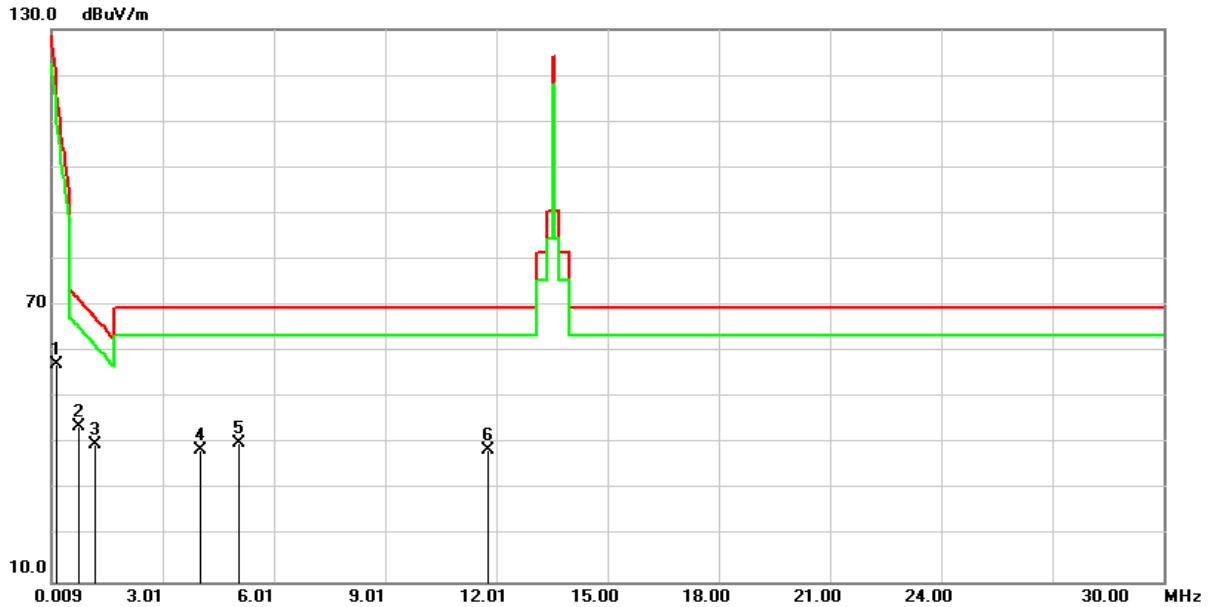


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1327	38.24	18.99	57.23	105.15	-47.92	AVG
2	0.7470	24.38	19.37	43.75	70.14	-26.39	QP
3	1.1650	20.47	19.32	39.79	66.28	-26.49	QP
4	4.0305	19.00	19.54	38.54	69.54	-31.00	QP
5	5.0752	20.45	19.77	40.22	69.54	-29.32	QP
6	11.7910	17.24	21.50	38.74	69.54	-30.80	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit

Above 30MHz Data (Original PCB)

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/08/31
Test Frequency :	13.56 MHz	Temperature :	23.1 °C
Polarization :	Horizontal	Relative Humidity :	56.2 %

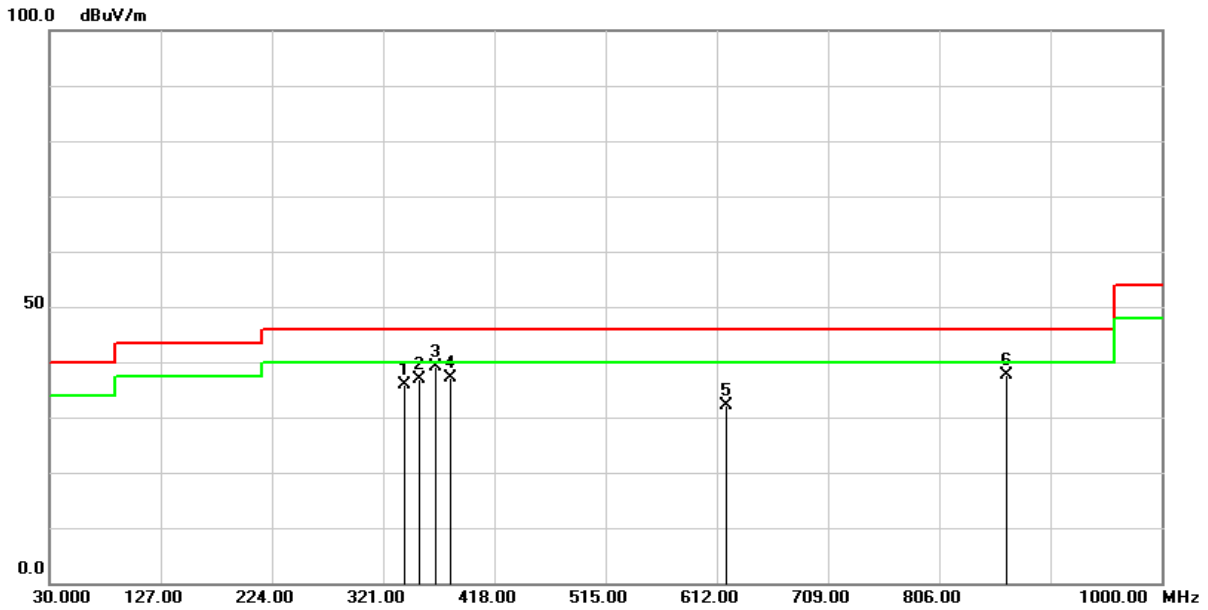


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	339.4300	44.82	-8.99	35.83	46.00	-10.17	QP
2	353.0100	45.88	-8.92	36.96	46.00	-9.04	QP
3	366.5900	47.58	-8.44	39.14	46.00	-6.86	QP
4	379.2000	44.85	-7.79	37.06	46.00	-8.94	QP
5	619.7600	33.64	-1.62	32.02	46.00	-13.98	QP
6	864.2000	34.98	2.57	37.55	46.00	-8.45	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value –Limit Value
- (4) The other emission levels were very low against the limit

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/08/31
Test Frequency :	13.56 MHz	Temperature :	23.1 °C
Polarization :	Vertical	Relative Humidity :	56.2 %

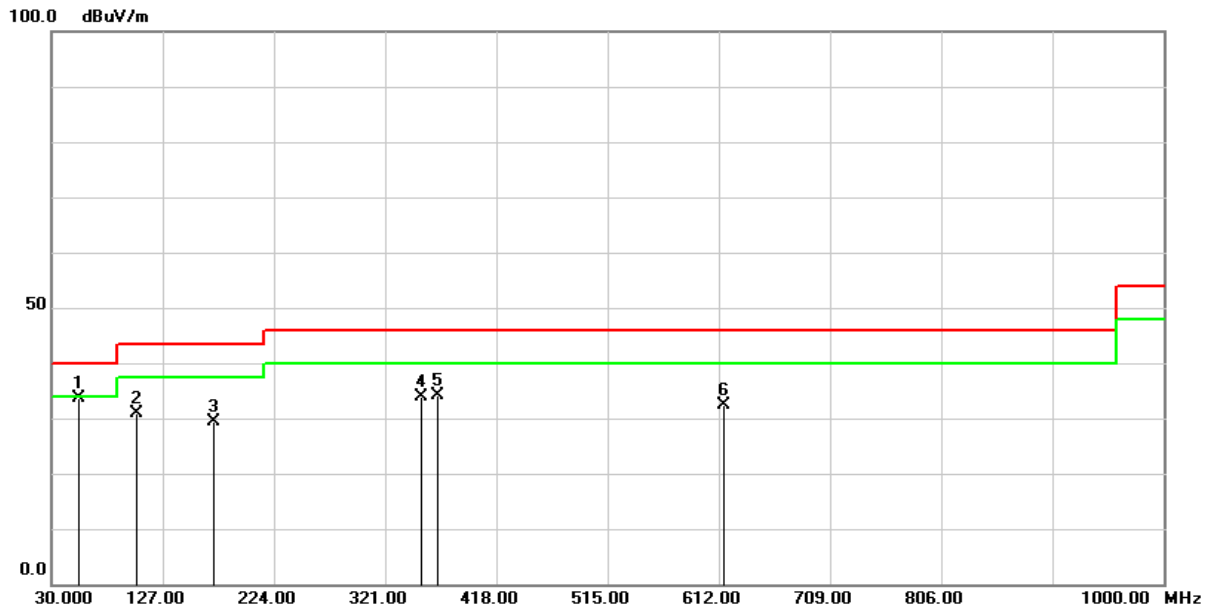


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.2600	44.23	-10.54	33.69	40.00	-6.31	QP
2	104.6900	45.79	-14.81	30.98	43.50	-12.52	QP
3	171.6200	41.04	-11.61	29.43	43.50	-14.07	QP
4	353.0100	42.92	-8.92	34.00	46.00	-12.00	QP
5	366.5900	42.48	-8.44	34.04	46.00	-11.96	QP
6	615.9700	33.90	-1.64	32.26	46.00	-13.74	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit

Above 30MHz Data (New PCB)

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/12/23
Test Frequency :	13.56 MHz	Temperature :	22.1 °C
Polarization :	Horizontal	Relative Humidity :	42.7 %

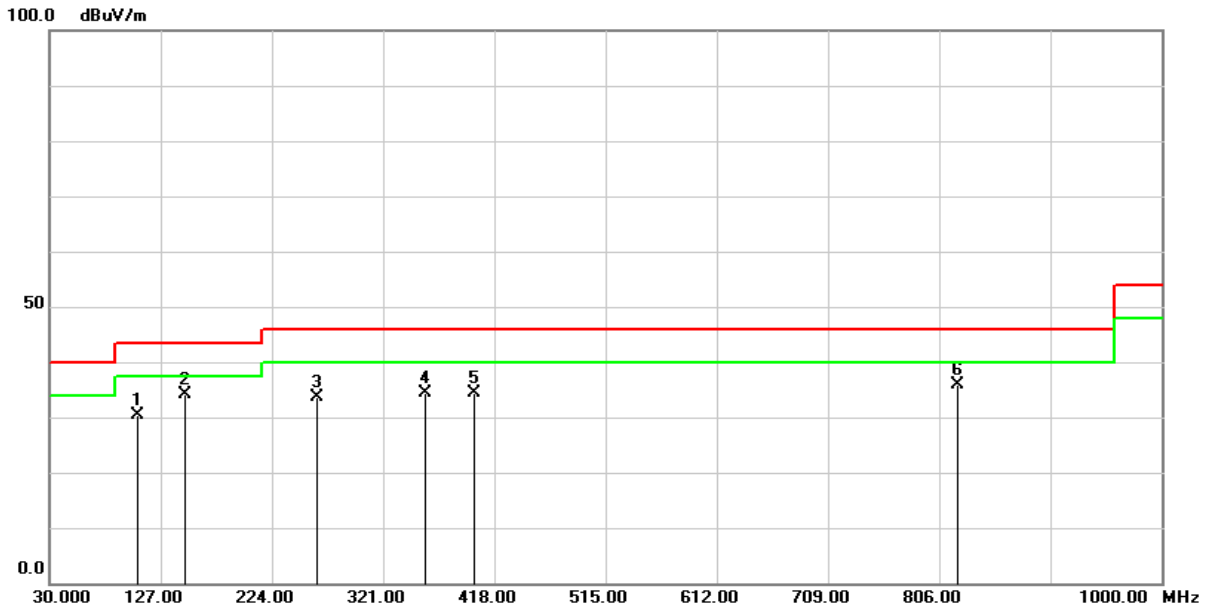


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	106.6300	44.96	-14.60	30.36	43.50	-13.14	QP
2	148.3400	45.25	-11.19	34.06	43.50	-9.44	QP
3	263.7700	45.15	-11.49	33.66	46.00	-12.34	QP
4	357.8600	43.20	-8.83	34.37	46.00	-11.63	QP
5	400.5400	41.63	-7.22	34.41	46.00	-11.59	QP
6	822.7350	33.91	2.06	35.97	46.00	-10.03	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value –Limit Value
- (4) The other emission levels were very low against the limit

Test Mode :	Mode 1 : Transmit RFID	Test Date :	2023/12/23
Test Frequency :	13.56 MHz	Temperature :	22.1 °C
Polarization :	Vertical	Relative Humidity :	42.7 %

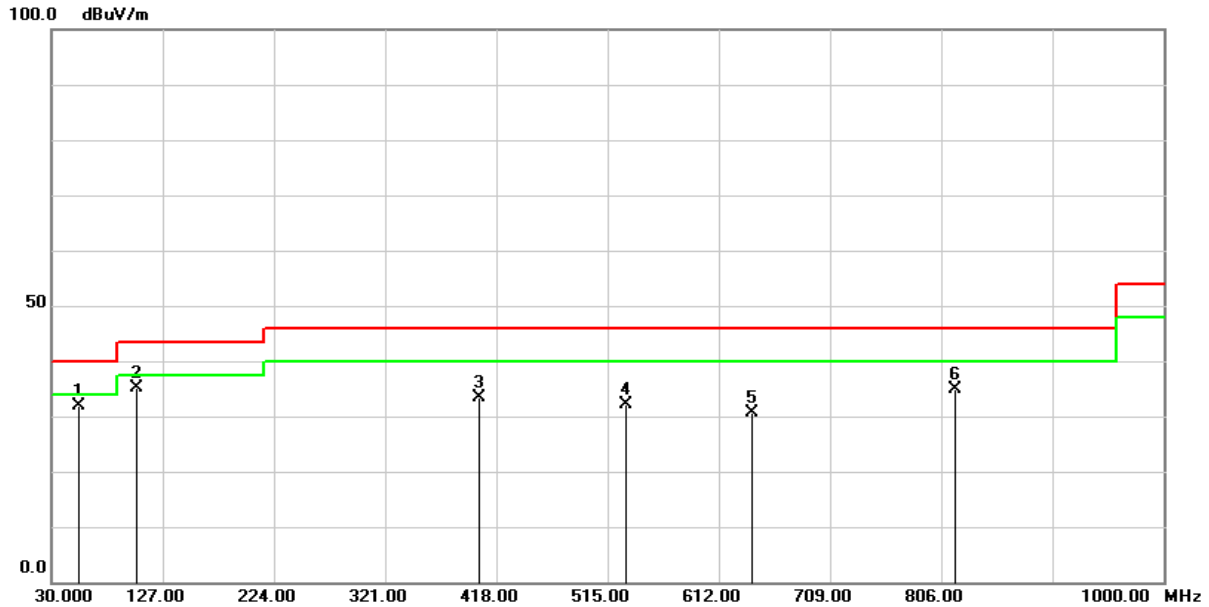

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.2500	42.40	-10.53	31.87	40.00	-8.13	QP
2	104.6900	49.86	-14.81	35.05	43.50	-8.45	QP
3	402.4800	40.55	-7.13	33.42	46.00	-12.58	QP
4	530.5200	36.22	-4.01	32.21	46.00	-13.79	QP
5	641.0450	32.01	-1.30	30.71	46.00	-15.29	QP
6	817.6400	32.79	1.97	34.76	46.00	-11.24	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit


2.6 AC Conducted Emissions Measurement

2.6.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.6.2 Test Setup

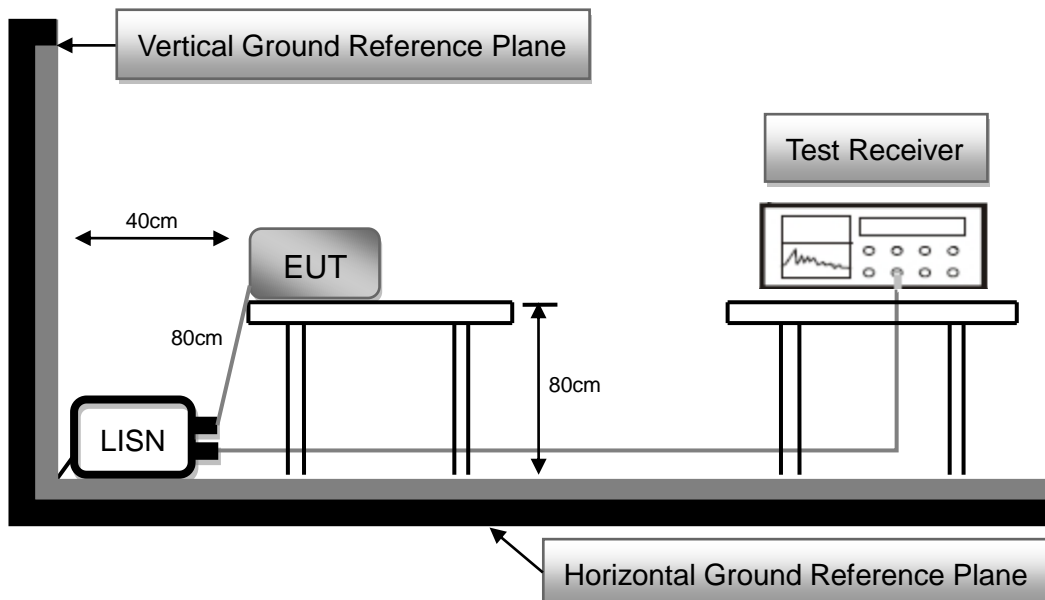

2.6.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The Test Data of the worst case was recorded.

Note: For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna.

2.6.4 Test Result

Owing to the DC operation of EUT, this test item is not performed.

--- END ---