



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. :	CQASZ20210500727E-01
Applicant:	Shenzhen Shengtai smart Innovation Technology Co. Ltd
Address of Applicant:	Room 1005, Jia An Da Building, NO. 110, Hua Fan Road, Tong Sheng community, Da Lang Street, Long Hua district, Shen Zhen city.
Equipment Under Test (EUT):	
Product:	SMART EAR STICK
All Model No.:	WS1, WS2, WS3, WS5, WS6, WS7, WS8, WS9, WS10, AS1, AS2, AS3, AS5, AS6, AS7, AS8, AS9, AS10, VS1, VS2, VS3, VS5, VS6, VS7, VS8, VS9, VS10, HS1, HS2, HS3, HS5, HS6, HS7, HS8, MS1, MS2, MS3, MS5, MS6, MS7, MS8, T1-1, T1-2, T2-1, T2-2, T3-1, T3-2, T6-2, T8-2, T9-2, A1, A2, A3, A5, A6, V1, V2, V3, V5, V6, W1, W2, W3, W5, W6, H1, H2, H3, H5, H6, M1, M2, M3, M5, M6
Test Model No.:	WS1
Brand Name:	
FCC ID:	2AZ4D-WS1
Standards:	47 CFR Part 15, Subpart C
Date of Test:	2021-05-21 to 2021-06-03
Date of Issue:	2021-06-03
Test Result :	PASS*
Tested By:	<u>Lewis Zhou</u> (Lewis Zhou)
Reviewed By:	<u>Jun Li</u> (Jun Li)
Approved By:	<u>Sheek Luo</u> (Sheek Luo)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1. Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210500727E-01	Rev.01	Initial report	2021-06-03

Remark:

1. The tested sample(s) and the sample information are provided by the client.
2. According to the declaration from the applicant, the standby battery models in this report were identical, only difference with being the of the power supply parameter.
3. Considering to the difference, pre-scan were performed on the standby battery in this report to find the items which can be influential to the result in the original test report for fully retest.
Therefore in standby battery Radiated Emissions and Conducted Emissions were retested on model 1#、2# 3# and shown the data in this report, other tests please refer to original battery.

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

3 Contents

	Page
COVER PAGE.....	1
1. VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST ENVIRONMENT AND MODE.....	8
4.4 DESCRIPTION OF SUPPORT UNITS.....	9
4.5 TEST LOCATION.....	9
4.6 TEST FACILITY.....	9
4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	10
4.8 DEVIATION FROM STANDARDS.....	10
4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
4.11 EQUIPMENT LIST.....	11
5 TEST RESULTS AND MEASUREMENT DATA.....	12
5.1 ANTENNA REQUIREMENT.....	12
5.2 CONDUCTED EMISSIONS.....	13
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER.....	23
5.4 6dB OCCUPY BANDWIDTH.....	25
5.5 POWER SPECTRAL DENSITY.....	37
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	45
5.7 RF CONDUCTED SPURIOUS EMISSIONS.....	50
5.8 RADIATED SPURIOUS EMISSIONS.....	69
5.8.1 Radiated emission below 1GHz.....	72
5.8.2 Transmitter emission above 1GHz.....	80
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	86
6 PHOTOGRAPHS - EUT TEST SETUP.....	91
6.1 RADIATED SPURIOUS EMISSION.....	91
6.2 CONDUCTED EMISSION.....	92
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	93

4 General Information

4.1 Client Information

Applicant:	Shenzhen Shengtai smart Innovation Technology Co. Ltd
Address of Applicant:	Room 1005, Jia An Da Building, NO. 110, Hua Fan Road, Tong Sheng community, Da Lang Street, Long Hua district, Shen Zhen city.
Manufacturer:	Shenzhen Shine Tech Intel Co., Ltd
Address of Manufacturer:	New District of Longhua, Dalang Street, Shenzhen Lianjian Industrial Park 6 6th Floor
Factory:	Shenzhen Shine Tech Intel Co., Ltd
Address of Factory:	New District of Longhua, Dalang Street, Shenzhen Lianjian Industrial Park 6 6th Floor

4.2 General Description of EUT

Product Name:	SMART EAR STICK
Model No.:	WS1, WS2, WS3, WS5, WS6, WS7, WS8, WS9, WS10, AS1, AS2, AS3, AS5, AS6, AS7, AS8, AS9, AS10, VS1, VS2, VS3, VS5, VS6, VS7, VS8, VS9, VS10, HS1, HS2, HS3, HS5, HS6, HS7, HS8, MS1, MS2, MS3, MS5, MS6, MS7, MS8, T1-1, T1-2, T2-1, T2-2, T3-1, T3-2, T6-2, T8-2, T9-2, A1, A2, A3, A5, A6, V1, V2, V3, V5, V6, W1, W2, W3, W5, W6, H1, H2, H3, H5, H6, M1, M2, M3, M5, M6
Test Model No.:	WS1
Trade Mark:	
Hardware version:	V1
Software version:	1.1.10
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location
Test Software of EUT:	FCCEOT with (send) V1.1
Antenna Type:	FPC antenna
Antenna Gain:	-1.67dBi
Power Supply:	lithium battery: 3.7V 271mAh AC/DC Adapter: 5V 2A

Note:

All model: WS1, WS2, WS3, WS5, WS6, WS7, WS8, WS9, WS10, AS1, AS2, AS3, AS5, AS6, AS7, AS8, AS9, AS10, VS1, VS2, VS3, VS5, VS6, VS7, VS8, VS9, VS10, HS1, HS2, HS3, HS5, HS6, HS7, HS8, MS1, MS2, MS3, MS5, MS6, MS7, MS8, T1-1, T1-2, T2-1, T2-2, T3-1, T3-2, T6-2, T8-2, T9-2, A1, A2, A3, A5, A6, V1, V2, V3, V5, V6, W1, W2, W3, W5, W6, H1, H2, H3, H5, H6, M1, M2, M3, M5, M6

Only the model WS1, was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:


For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.3 Test Environment and Mode

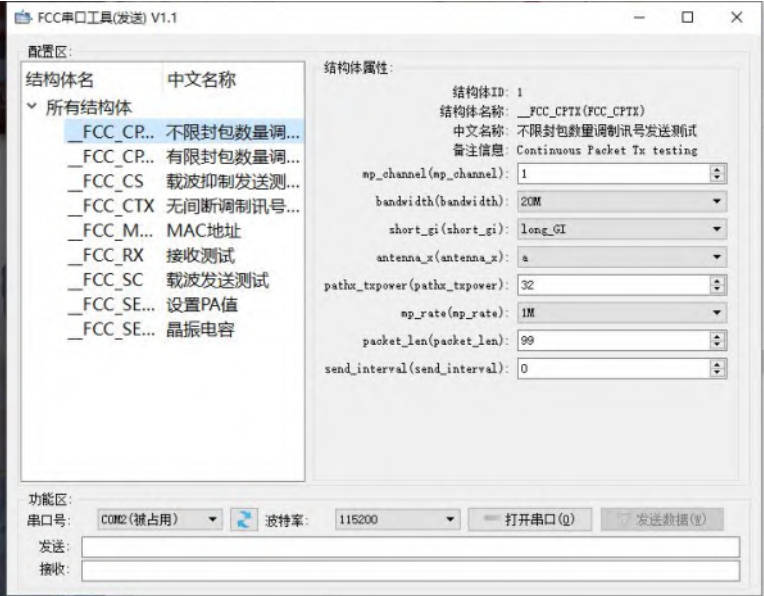Operating Environment:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.
Run Software:	
	

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	/

4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	$\pm 5.12\text{dB}$	(1)
2	Radiated Emission (Above 1GHz)	$\pm 4.60\text{dB}$	(1)
3	Conducted Disturbance (0.15~30MHz)	$\pm 3.34\text{dB}$	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer


None.

4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/9/26	2021/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/28	2021/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/9/26	2021/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/11/2	2021/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2019/10/28	2021/10/27
Bilog Antenna	R&S	HL562	CQA-011	2020/9/26	2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2020/9/26	2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/26	2021/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/9/26	2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/9/26	2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/26	2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26	2021/9/25
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2020/9/26	2021/9/25
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2020/9/26	2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/26	2021/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/9/26	2021/9/25
LISN	R&S	ENV216	CQA-003	2020/11/5	2021/11/4
Coaxial cable	CQA	N/A	CQA-C009	2020/9/26	2021/9/25

5 Test results and Measurement Data

5.1 Antenna Requirement

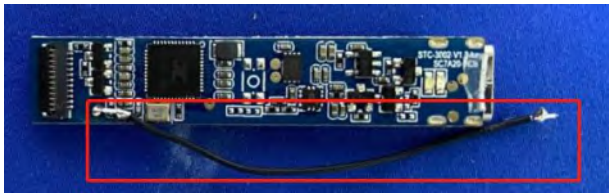Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC antenna. The best case gain of the antenna is -1.67dBi.	


5.2 Conducted Emissions

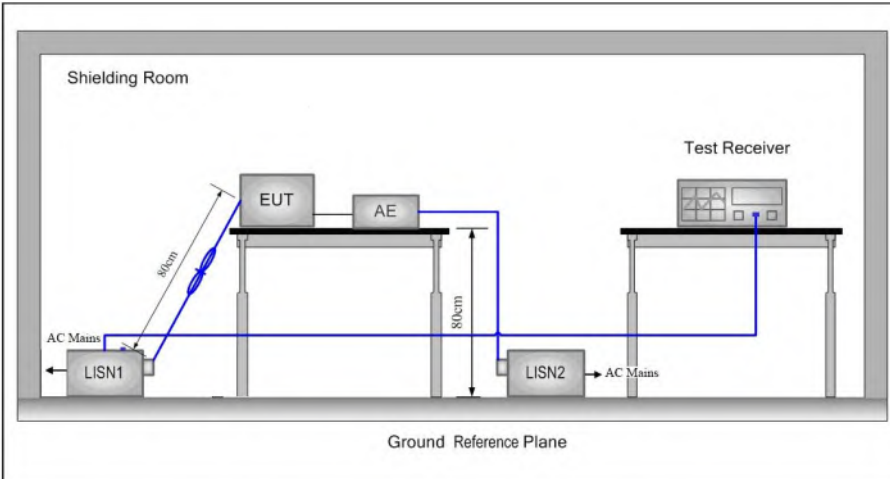Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data: Original battery

Live Line:

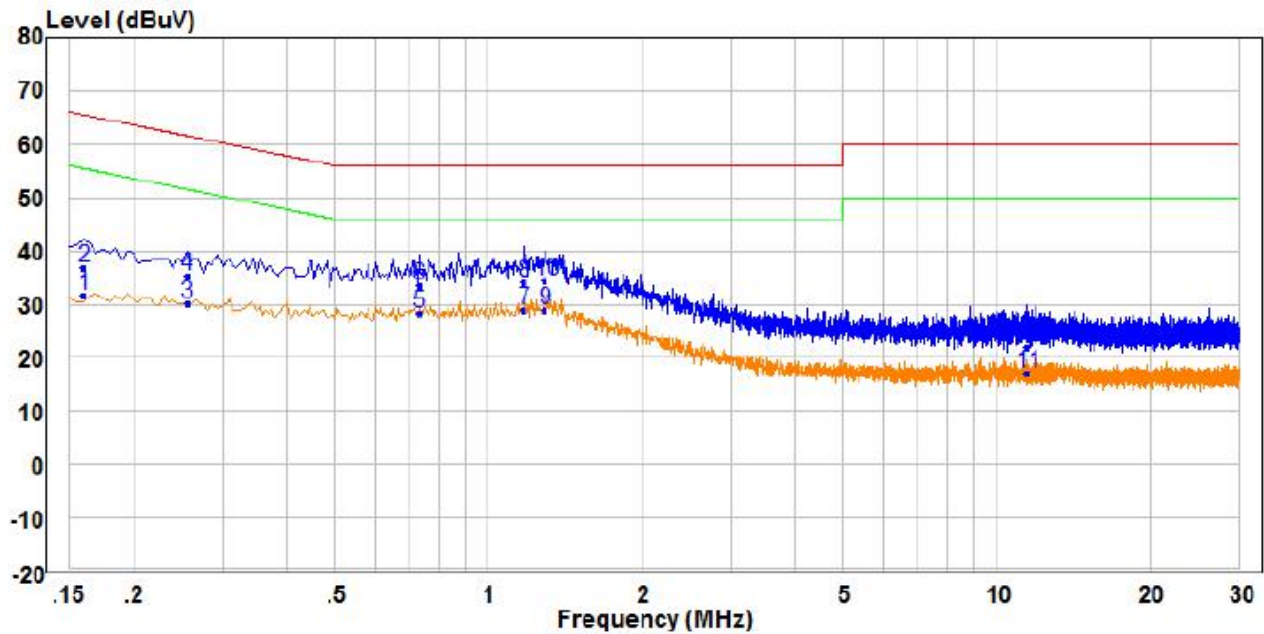


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	22.27	9.49	31.76	55.46	-23.70	Average	Line
2	0.160	27.41	9.49	36.90	65.46	-28.56	QP	Line
3	0.255	20.82	9.49	30.31	51.59	-21.28	Average	Line
4	0.255	25.83	9.49	35.32	61.59	-26.27	QP	Line
5	0.730	18.61	9.83	28.44	46.00	-17.56	Average	Line
6	0.730	23.53	9.83	33.36	56.00	-22.64	QP	Line
7 PP	1.175	19.54	9.53	29.07	46.00	-16.93	Average	Line
8	1.175	24.62	9.53	34.15	56.00	-21.85	QP	Line
9	1.295	19.49	9.52	29.01	46.00	-16.99	Average	Line
10 QP	1.295	24.77	9.52	34.29	56.00	-21.71	QP	Line
11	11.510	7.23	9.84	17.07	50.00	-32.93	Average	Line
12	11.510	12.13	9.84	21.97	60.00	-38.03	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

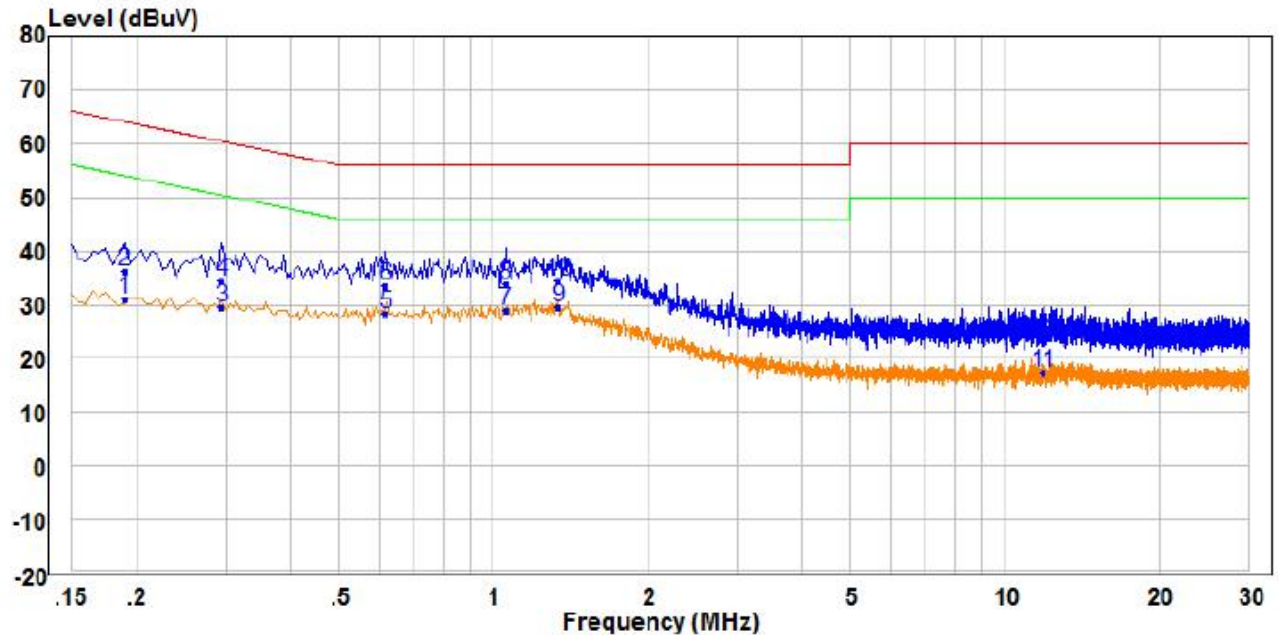


	Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.190	21.61	9.48	31.09	54.04	-22.95	Average	Neutral
2	0.190	26.89	9.48	36.37	64.04	-27.67	QP	Neutral
3	0.295	19.94	9.48	29.42	50.38	-20.96	Average	Neutral
4	0.295	25.03	9.48	34.51	60.38	-25.87	QP	Neutral
5	0.615	18.65	9.73	28.38	46.00	-17.62	Average	Neutral
6	0.615	23.63	9.73	33.36	56.00	-22.64	QP	Neutral
7	1.055	19.19	9.72	28.91	46.00	-17.09	Average	Neutral
8	1.055	24.07	9.72	33.79	56.00	-22.21	QP	Neutral
9 PP	1.340	19.78	9.72	29.50	46.00	-16.50	Average	Neutral
10 QP	1.340	24.75	9.72	34.47	56.00	-21.53	QP	Neutral
11	11.900	7.43	9.94	17.37	50.00	-32.63	Average	Neutral
12	11.900	13.06	9.94	23.00	60.00	-37.00	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Standby battery1#:

Live Line:

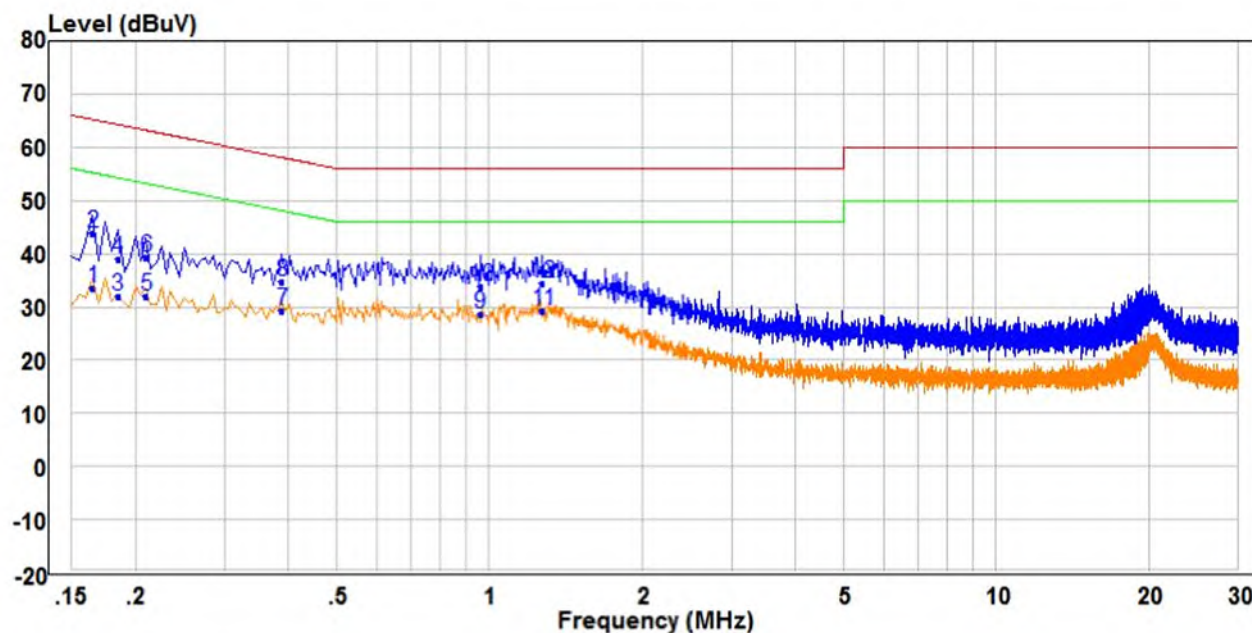


	Freq	Read		Limit	Over		
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	0.165	24.07	9.49	33.56	55.21	-21.65	Average
2 QP	0.165	34.43	9.49	43.92	65.21	-21.29	QP
3	0.185	22.63	9.49	32.12	54.26	-22.14	Average
4	0.185	29.54	9.49	39.03	64.26	-25.23	QP
5	0.210	22.40	9.49	31.89	53.21	-21.32	Average
6	0.210	29.70	9.49	39.19	63.21	-24.02	QP
7	0.390	19.82	9.51	29.33	48.06	-18.73	Average
8	0.390	25.12	9.51	34.63	58.06	-23.43	QP
9	0.960	19.13	9.58	28.71	46.00	-17.29	Average
10	0.960	24.19	9.58	33.77	56.00	-22.23	QP
11 PP	1.275	19.63	9.52	29.15	46.00	-16.85	Average
12	1.275	24.80	9.52	34.32	56.00	-21.68	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

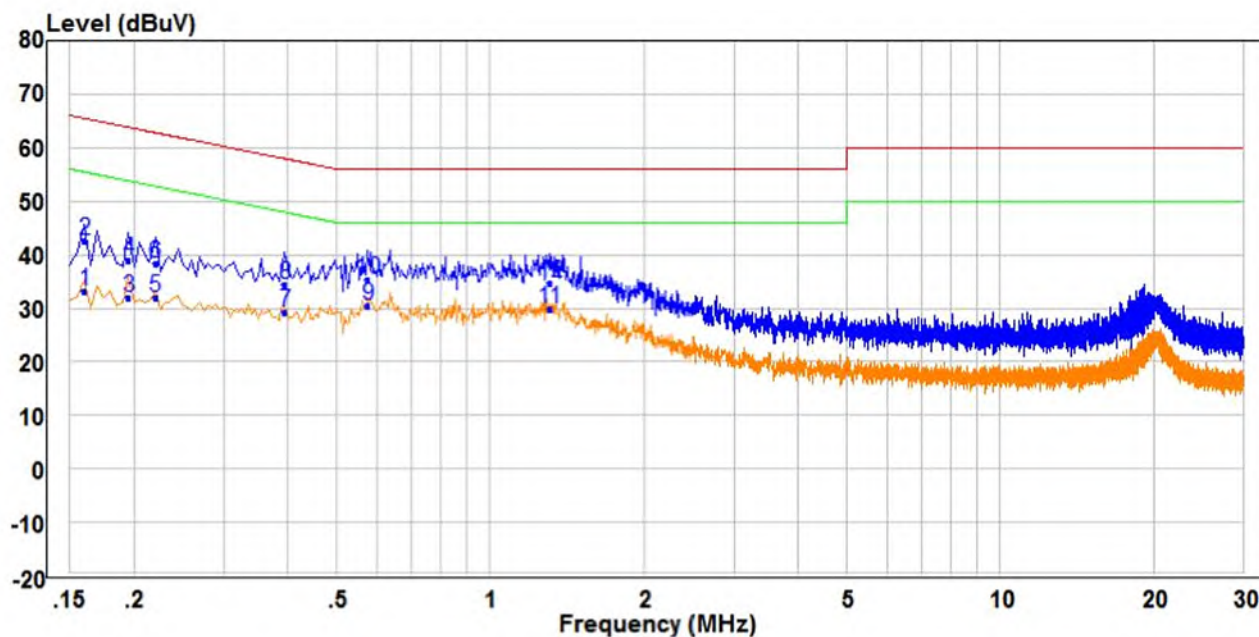


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	23.74	9.48	33.22	55.46	-22.24	Average	Neutral
2	0.160	33.14	9.48	42.62	65.46	-22.84	QP	Neutral
3	0.195	22.44	9.48	31.92	53.82	-21.90	Average	Neutral
4	0.195	29.64	9.48	39.12	63.82	-24.70	QP	Neutral
5	0.220	22.39	9.48	31.87	52.82	-20.95	Average	Neutral
6	0.220	28.91	9.48	38.39	62.82	-24.43	QP	Neutral
7	0.395	19.76	9.54	29.30	47.96	-18.66	Average	Neutral
8	0.395	24.94	9.54	34.48	57.96	-23.48	QP	Neutral
9 PP	0.575	20.67	9.69	30.36	46.00	-15.64	Average	Neutral
10 QP	0.575	25.66	9.69	35.35	56.00	-20.65	QP	Neutral
11	1.305	20.04	9.72	29.76	46.00	-16.24	Average	Neutral
12	1.305	25.07	9.72	34.79	56.00	-21.21	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Standby battery2#:

Live Line:

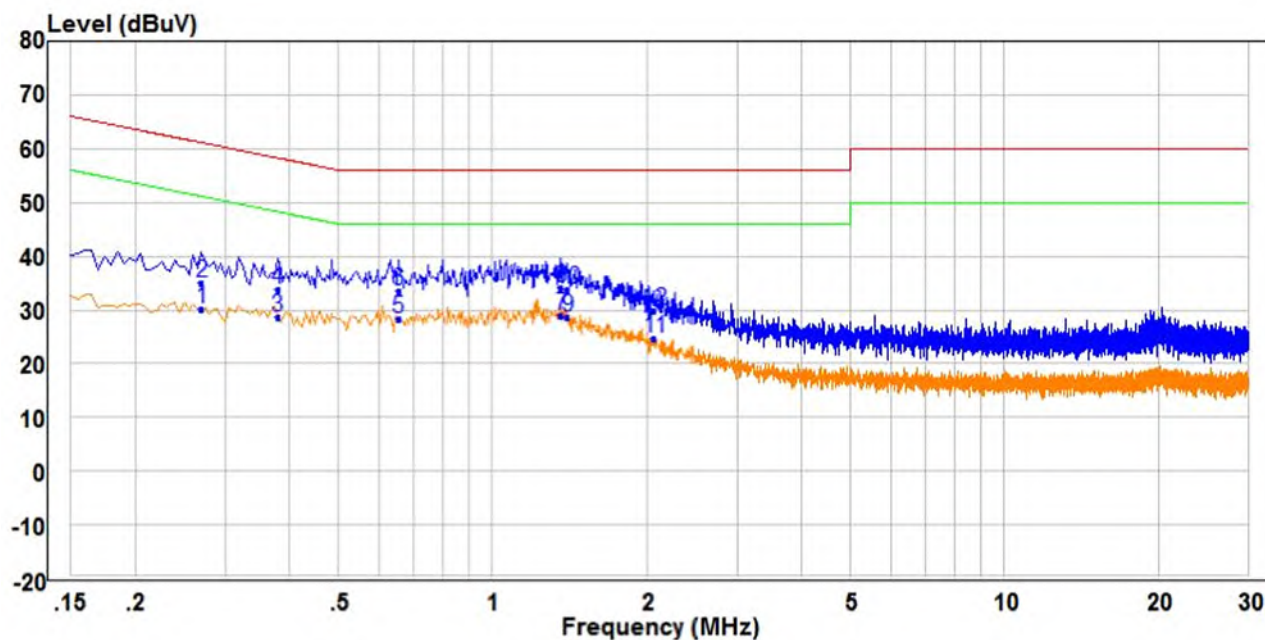


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.270	20.55	9.49	30.04	51.12	-21.08	Average	Line
2	0.270	25.69	9.49	35.18	61.12	-25.94	QP	Line
3	0.380	19.26	9.50	28.76	48.28	-19.52	Average	Line
4	0.380	24.40	9.50	33.90	58.28	-24.38	QP	Line
5	0.655	18.45	9.80	28.25	46.00	-17.75	Average	Line
6	0.655	23.61	9.80	33.41	56.00	-22.59	QP	Line
7 PP	1.360	19.39	9.53	28.92	46.00	-17.08	Average	Line
8 QP	1.360	24.67	9.53	34.20	56.00	-21.80	QP	Line
9	1.400	19.16	9.53	28.69	46.00	-17.31	Average	Line
10	1.400	24.19	9.53	33.72	56.00	-22.28	QP	Line
11	2.070	15.23	9.53	24.76	46.00	-21.24	Average	Line
12	2.070	20.20	9.53	29.73	56.00	-26.27	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

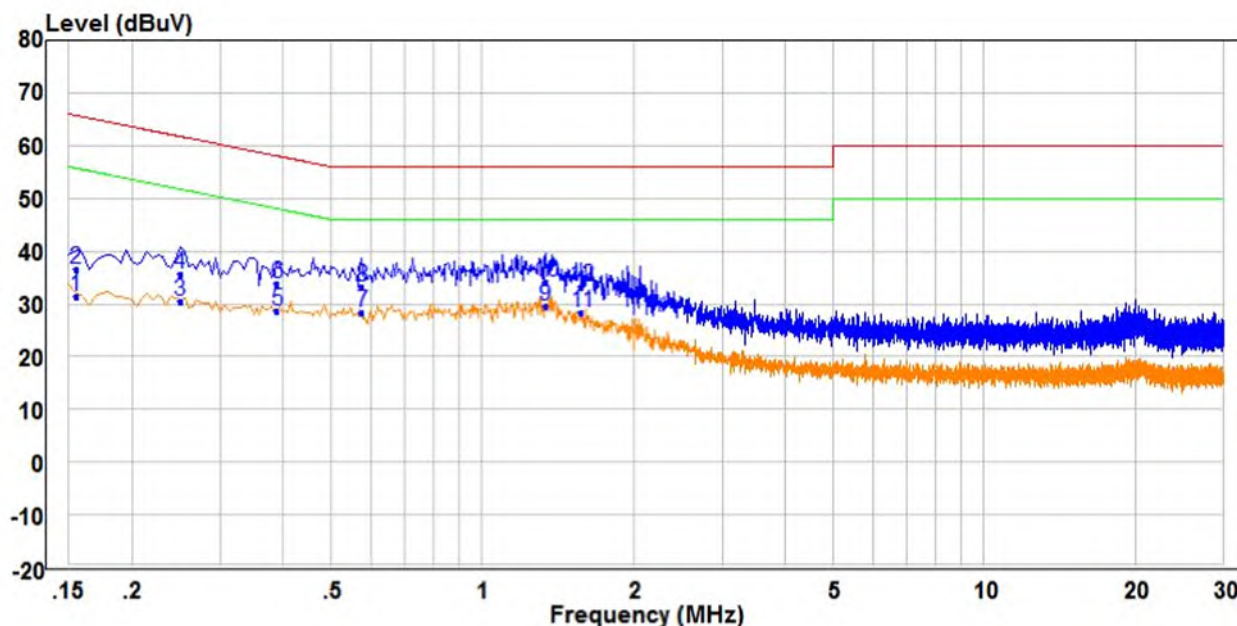


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.155	21.77	9.48	31.25	55.73	-24.48	Average	Neutral
2	0.155	27.08	9.48	36.56	65.73	-29.17	QP	Neutral
3	0.250	21.00	9.48	30.48	51.76	-21.28	Average	Neutral
4	0.250	26.10	9.48	35.58	61.76	-26.18	QP	Neutral
5	0.390	18.99	9.54	28.53	48.06	-19.53	Average	Neutral
6	0.390	24.18	9.54	33.72	58.06	-24.34	QP	Neutral
7	0.575	18.66	9.69	28.35	46.00	-17.65	Average	Neutral
8	0.575	23.65	9.69	33.34	56.00	-22.66	QP	Neutral
9 PP	1.335	19.74	9.72	29.46	46.00	-16.54	Average	Neutral
10 QP	1.335	24.53	9.72	34.25	56.00	-21.75	QP	Neutral
11	1.575	18.66	9.72	28.38	46.00	-17.62	Average	Neutral
12	1.575	23.38	9.72	33.10	56.00	-22.90	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Standby battery3#:

Live Line:

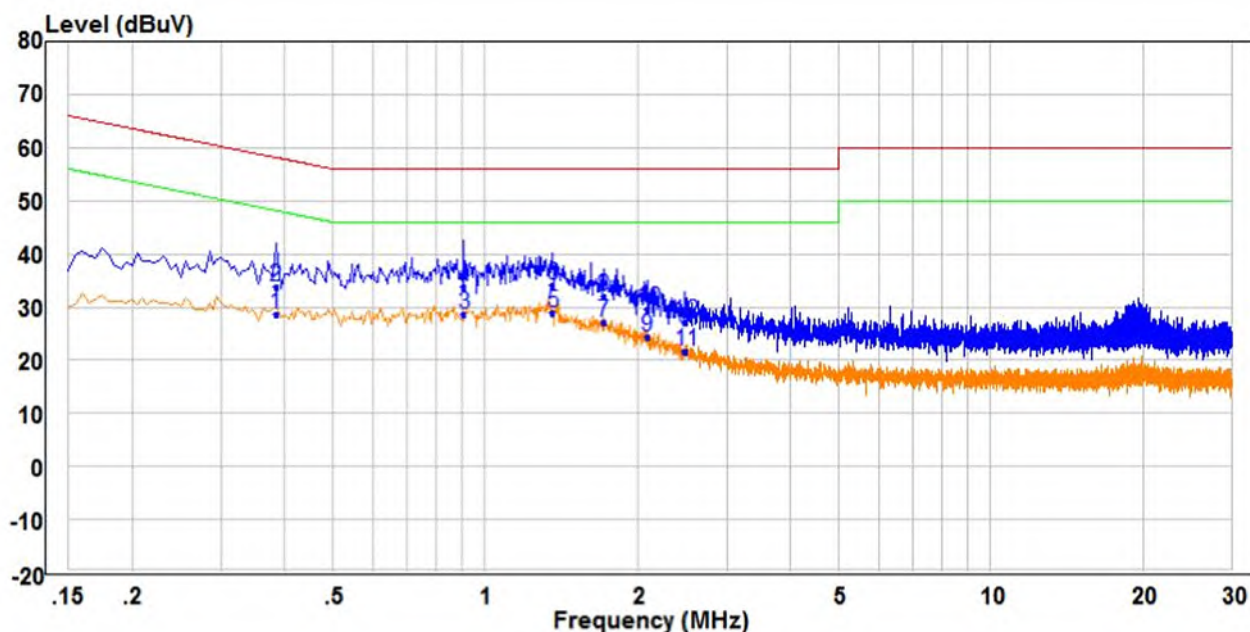


	Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.385	19.07	9.50	28.57	48.17	-19.60	Average	Line
2	0.385	24.30	9.50	33.80	58.17	-24.37	QP	Line
3	0.910	19.08	9.63	28.71	46.00	-17.29	Average	Line
4	0.910	24.16	9.63	33.79	56.00	-22.21	QP	Line
5 PP	1.360	19.34	9.53	28.87	46.00	-17.13	Average	Line
6 QP	1.360	24.48	9.53	34.01	56.00	-21.99	QP	Line
7	1.715	17.52	9.53	27.05	46.00	-18.95	Average	Line
8	1.715	22.34	9.53	31.87	56.00	-24.13	QP	Line
9	2.090	14.91	9.53	24.44	46.00	-21.56	Average	Line
10	2.090	20.01	9.53	29.54	56.00	-26.46	QP	Line
11	2.490	12.10	9.56	21.66	46.00	-24.34	Average	Line
12	2.490	17.49	9.56	27.05	56.00	-28.95	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

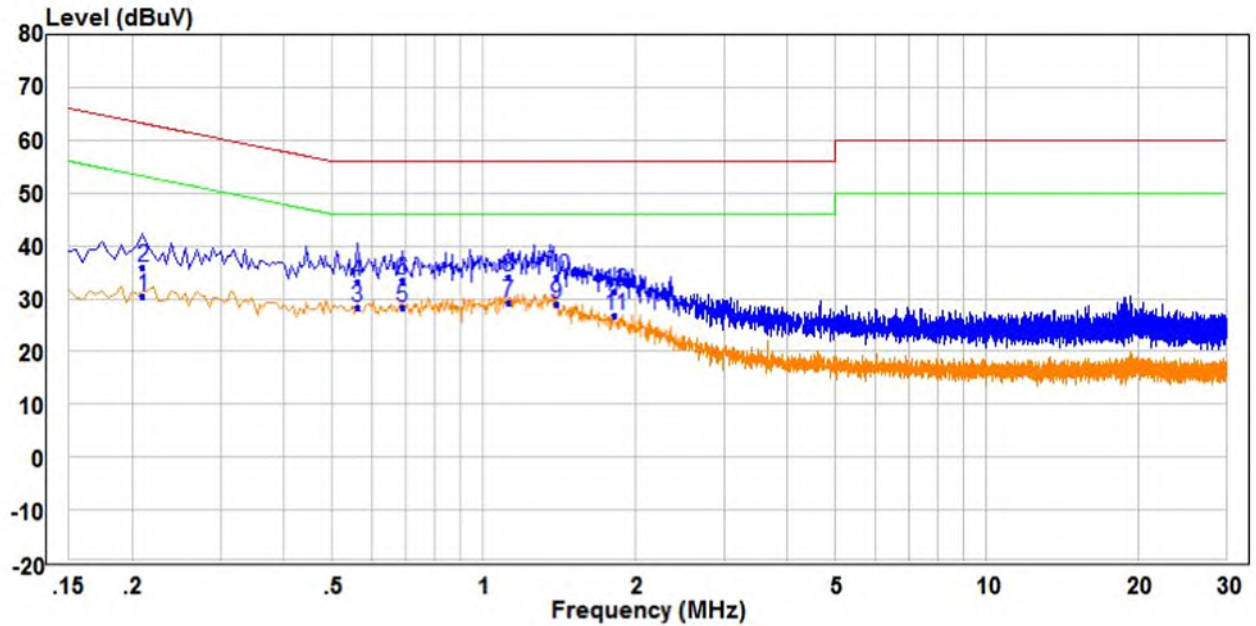


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.210	21.10	9.48	30.58	53.21	-22.63	Average	Neutral
2	0.210	26.48	9.48	35.96	63.21	-27.25	QP	Neutral
3	0.560	18.77	9.66	28.43	46.00	-17.57	Average	Neutral
4	0.560	23.53	9.66	33.19	56.00	-22.81	QP	Neutral
5	0.690	18.60	9.82	28.42	46.00	-17.58	Average	Neutral
6	0.690	23.60	9.82	33.42	56.00	-22.58	QP	Neutral
7 PP	1.120	19.39	9.72	29.11	46.00	-16.89	Average	Neutral
8 QP	1.120	24.46	9.72	34.18	56.00	-21.82	QP	Neutral
9	1.395	19.22	9.72	28.94	46.00	-17.06	Average	Neutral
10	1.395	24.34	9.72	34.06	56.00	-21.94	QP	Neutral
11	1.825	17.03	9.72	26.75	46.00	-19.25	Average	Neutral
12	1.825	21.75	9.72	31.47	56.00	-24.53	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ;
Limit:	30dBm
Test Results:	Pass

Measurement Data

802.11b mode				
Test channel	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	2.47	-0.91	30.00	Pass
Middle	2.71	-0.72	30.00	Pass
Highest	2.36	-0.52	30.00	Pass
802.11g mode				
Test channel	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	4.84	-3.14	30.00	Pass
Middle	4.73	-2.22	30.00	Pass
Highest	6.13	-1.9	30.00	Pass
802.11n(HT20)mode				
Test channel	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	5.27	-3.59	30.00	Pass
Middle	6.37	-1.93	30.00	Pass
Highest	6.21	-2.57	30.00	Pass
Remark:				
1. Average Output Power was for reference only				
2. Average Output Power had added duty cycle factor				


5.4 6dB Occupy Bandwidth

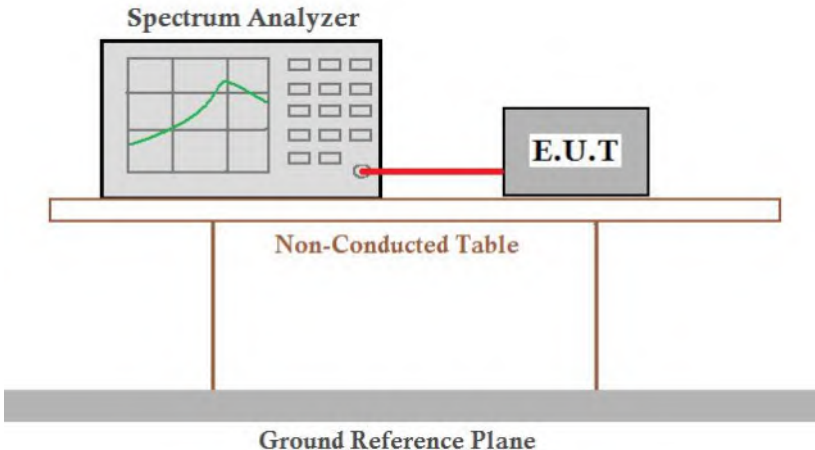Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ;
Limit:	≥ 500 kHz
Test Results:	Pass


Measurement Data

802.11b mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	12.160	14.640	≥500	Pass
Middle	12.120	14.600	≥500	Pass
Highest	12.080	14.560	≥500	Pass
802.11g mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	16.400	17.040	≥500	Pass
Middle	16.400	17.040	≥500	Pass
Highest	16.440	17.040	≥500	Pass
802.11n(HT20) mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	17.640	18.040	≥500	Pass
Middle	17.600	18.040	≥500	Pass
Highest	17.400	18.040	≥500	Pass
Remark:				
1. 99% OBW was for reference only				

Test plot as follows:

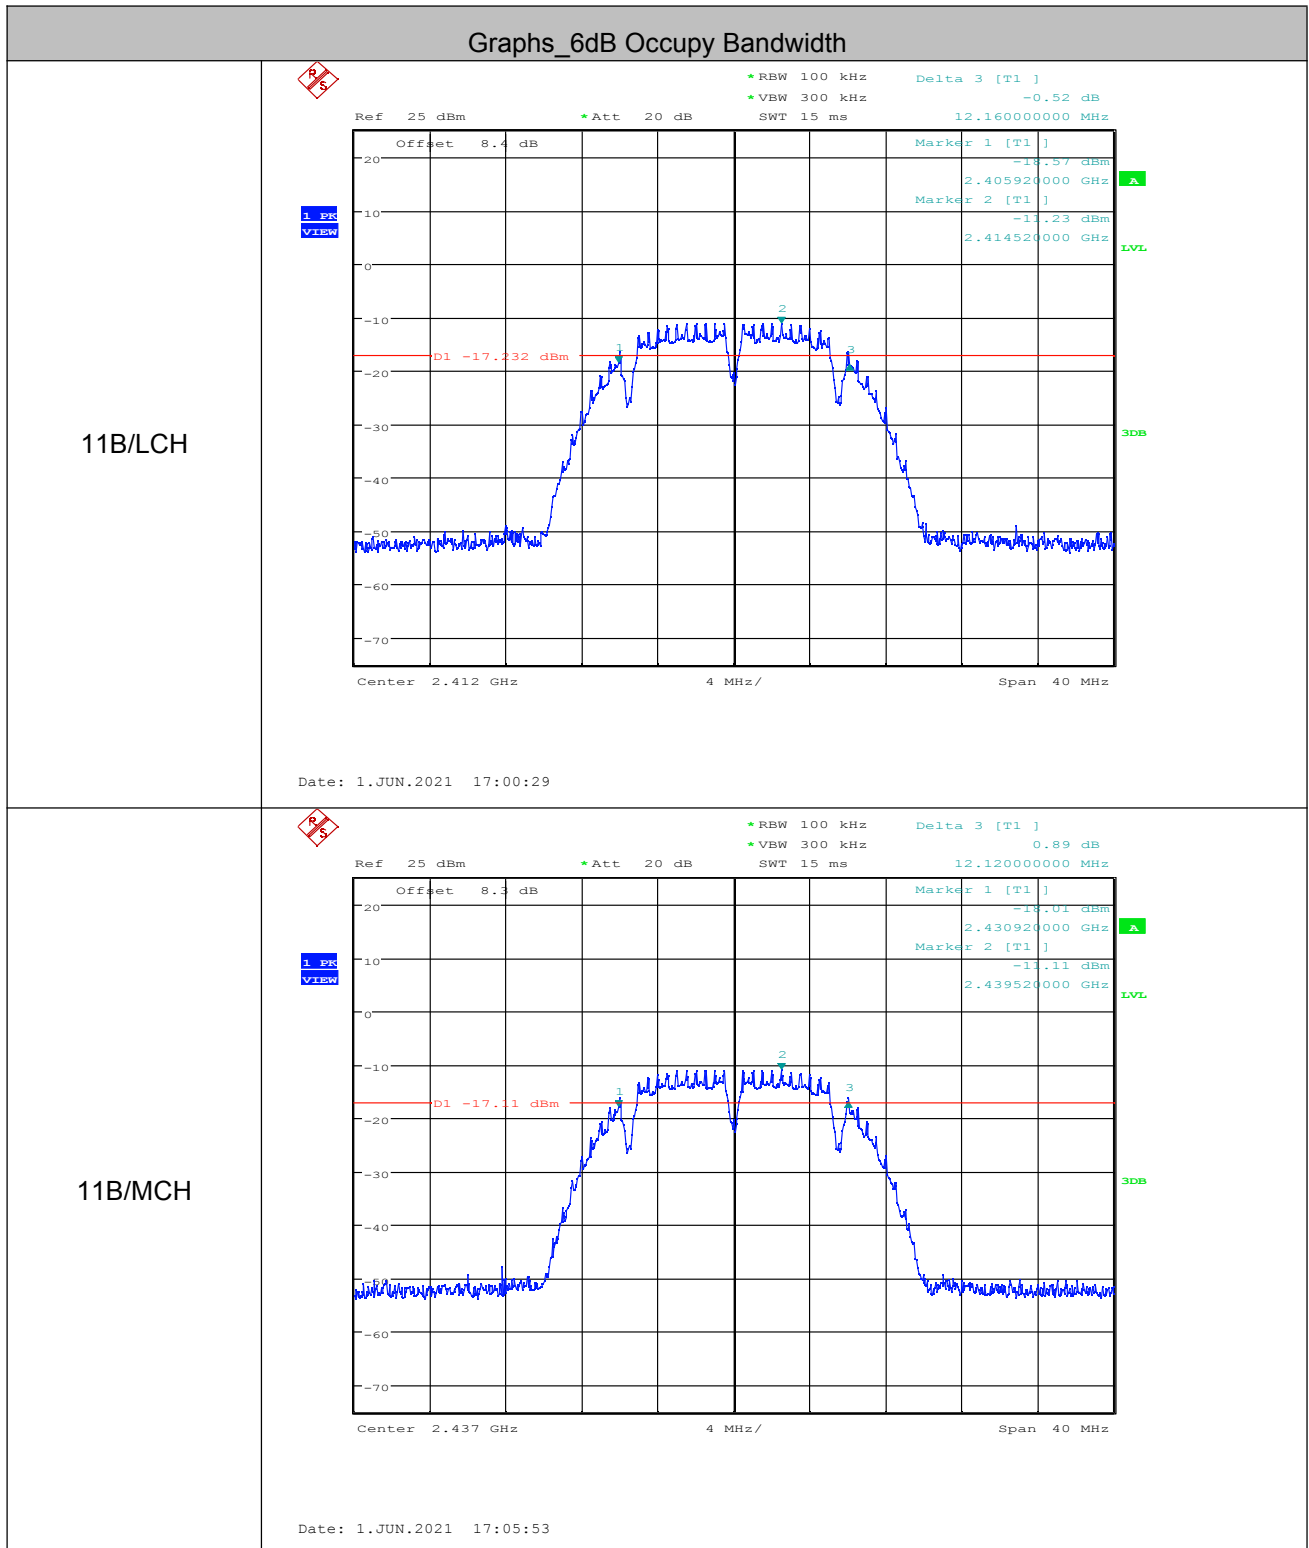


11B/HCH

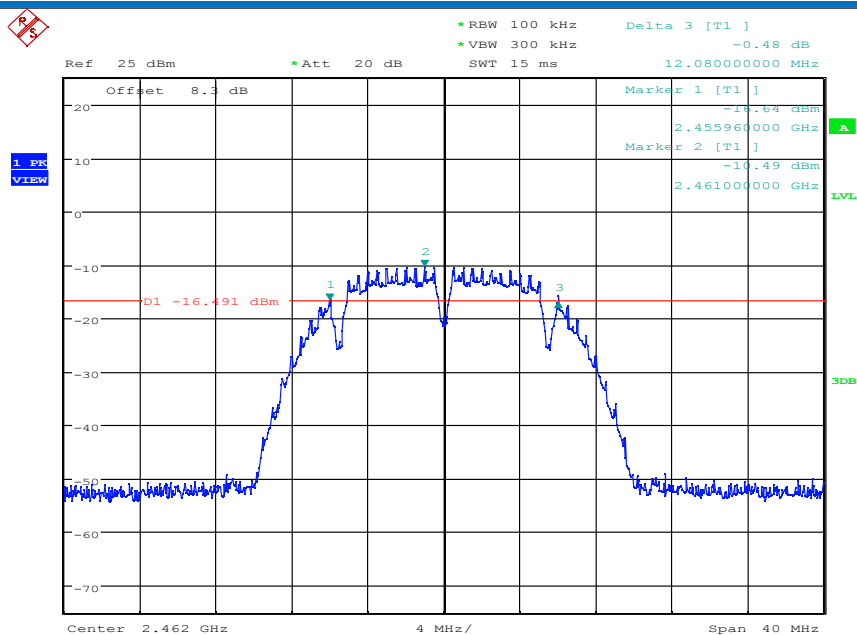


Date: 1.JUN.2021 17:20:13

11G/LCH

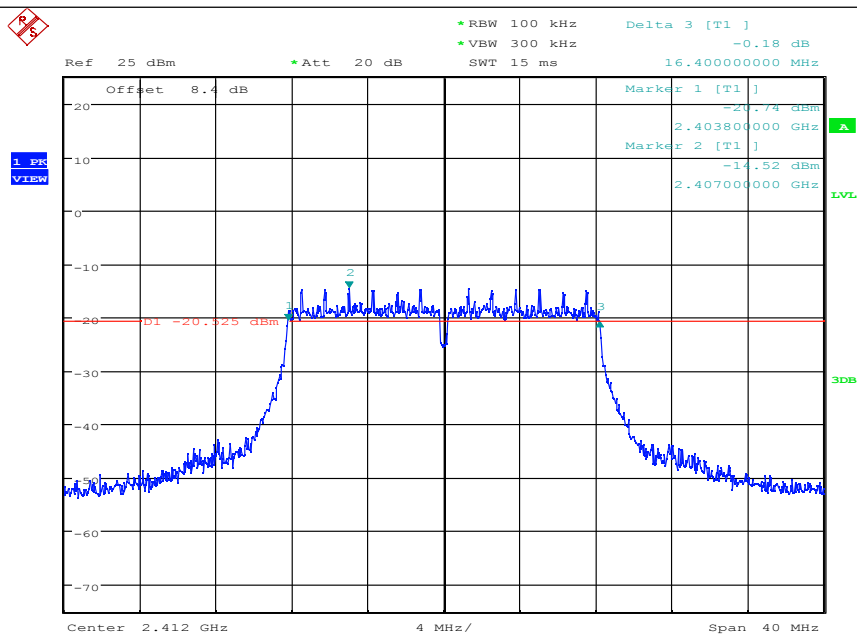


Date: 1.JUN.2021 17:25:12

11G/MCH

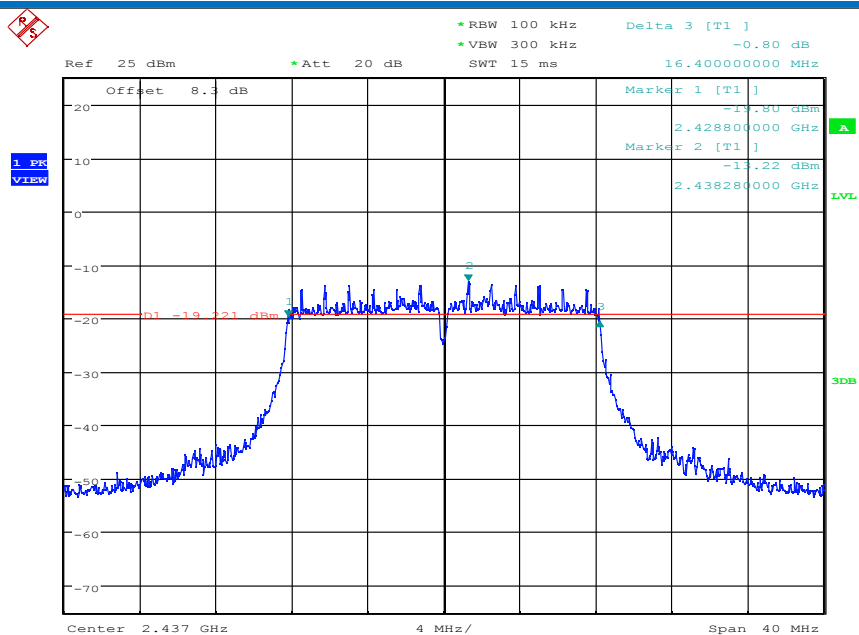


Date: 1.JUN.2021 17:30:15

11G/HCH

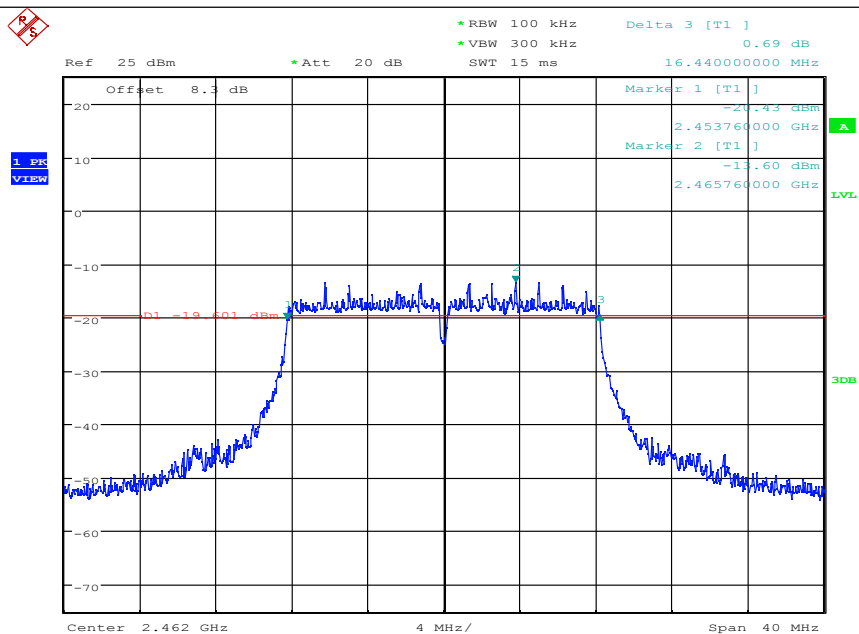


Date: 1.JUN.2021 17:34:41

11N20SISO/LCH

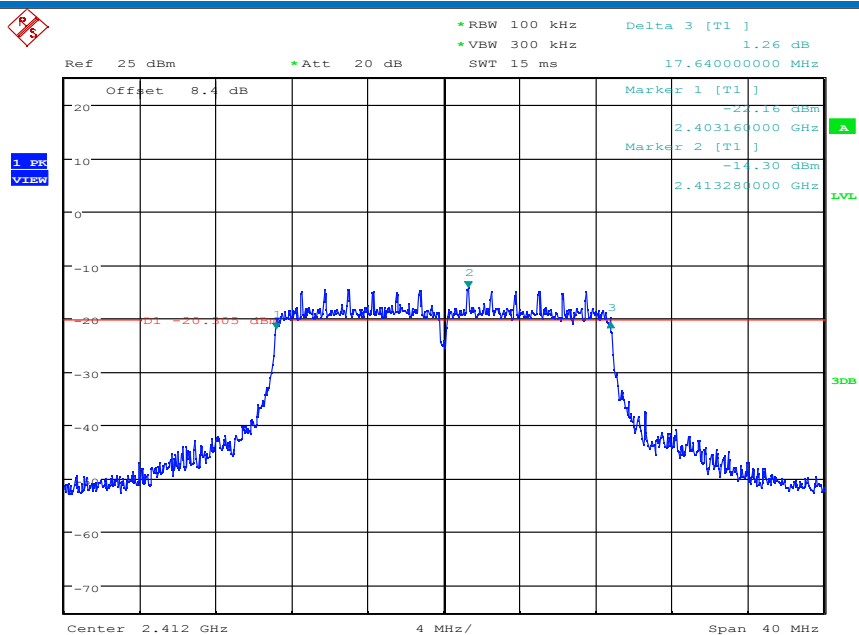


Date: 1.JUN.2021 17:42:18

11N20SISO/MCH

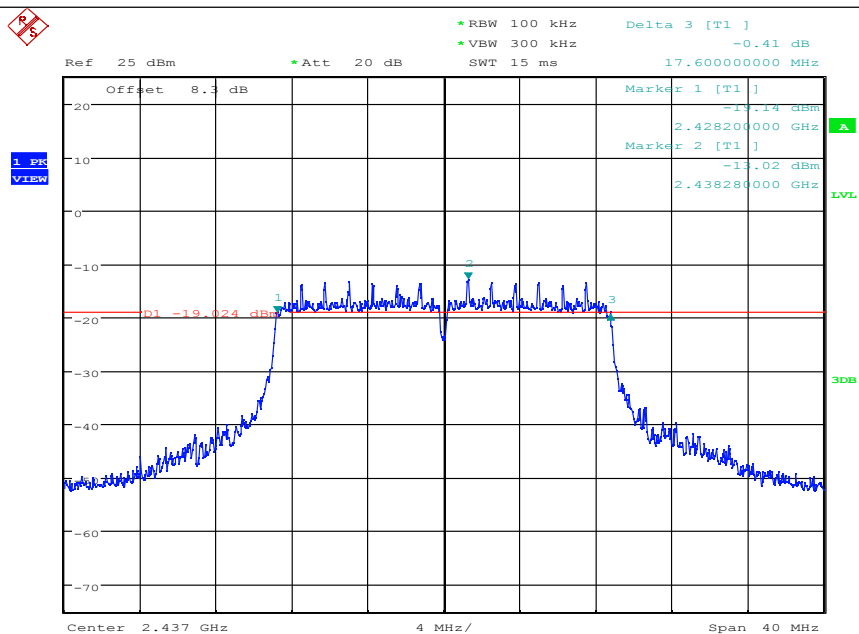

Date: 1.JUN.2021 17:50:33


11N20SISO/HCH

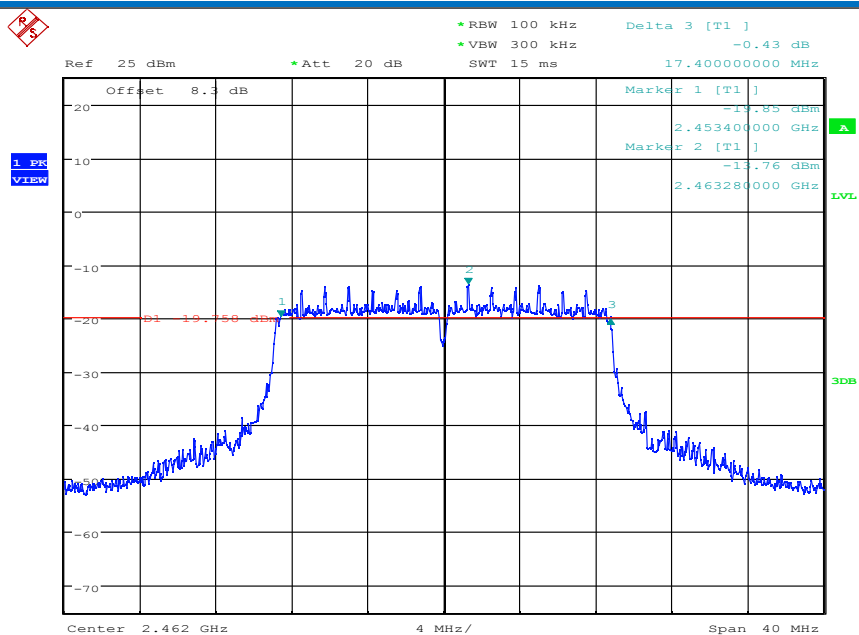

Date: 1.JUN.2021 17:59:15


Graphs_99% OBW

11B/LCH

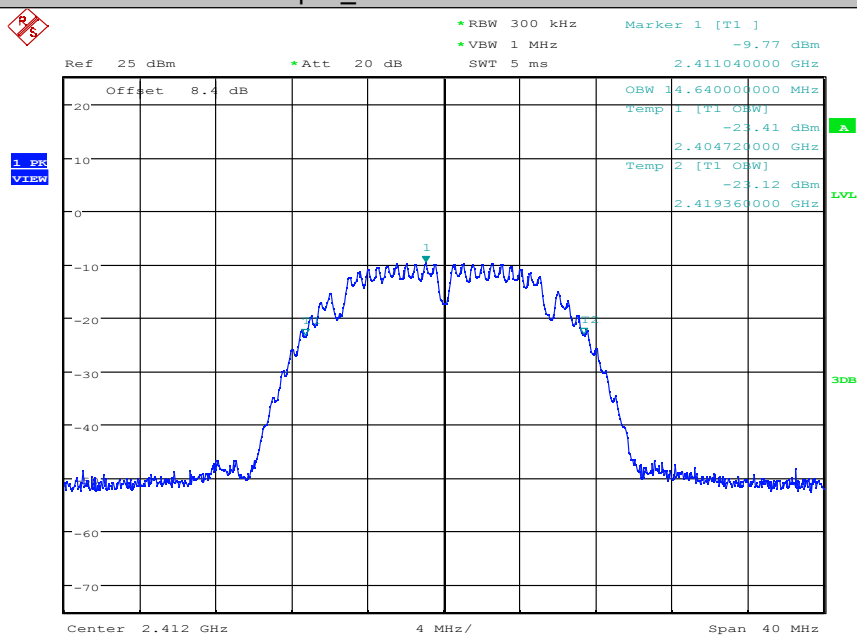


Date: 1.JUN.2021 17:00:54

11B/MCH

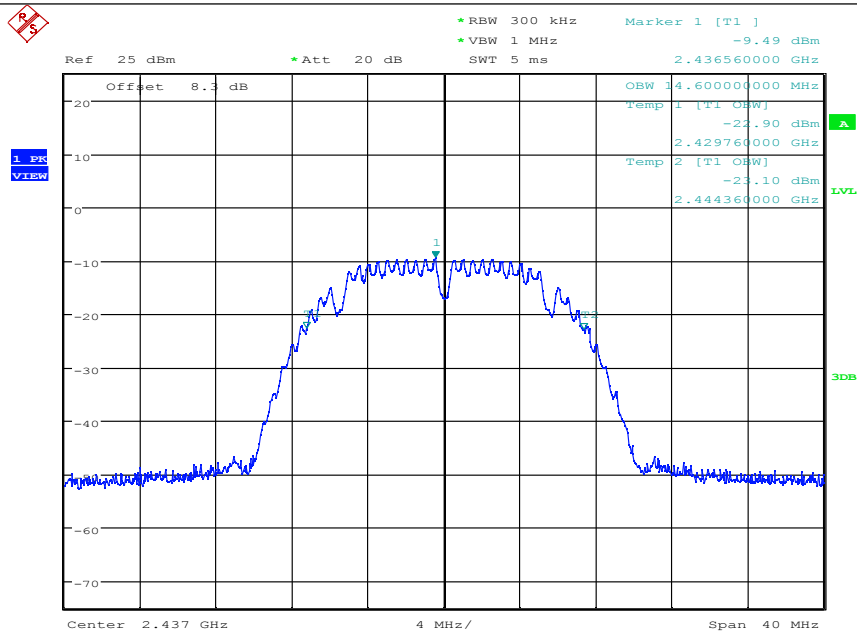


Date: 1.JUN.2021 17:06:19

11B/HCH

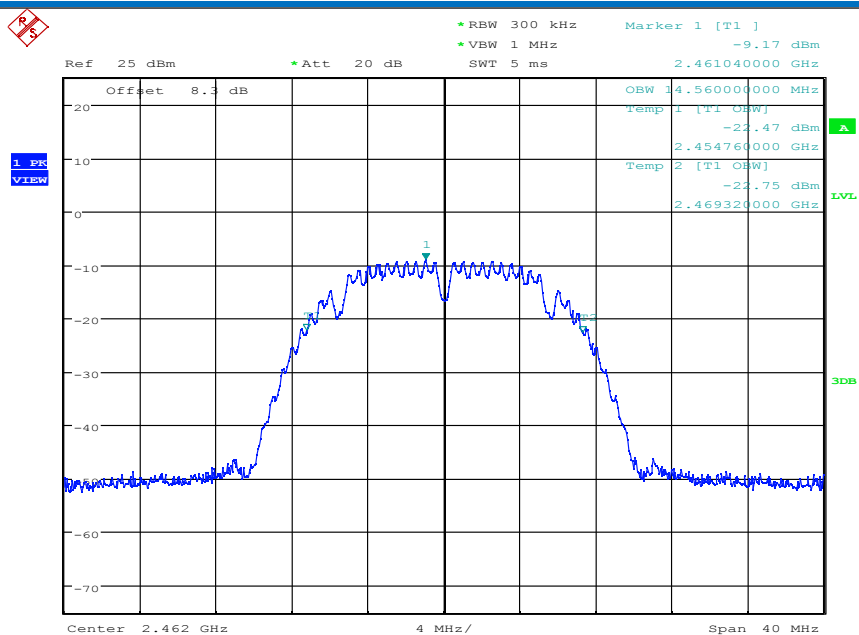


Date: 1.JUN.2021 17:20:38

11G/LCH

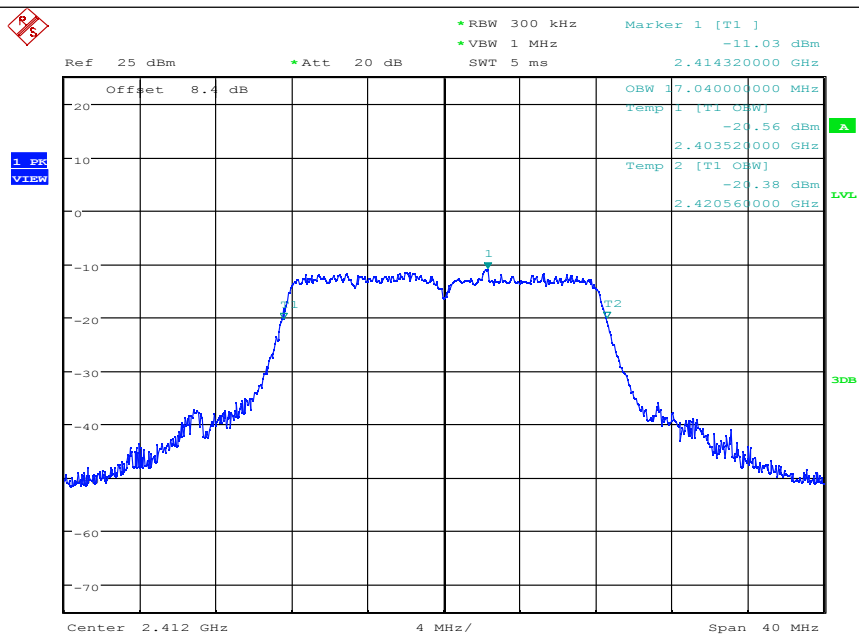


Date: 1.JUN.2021 17:25:38

11G/MCH

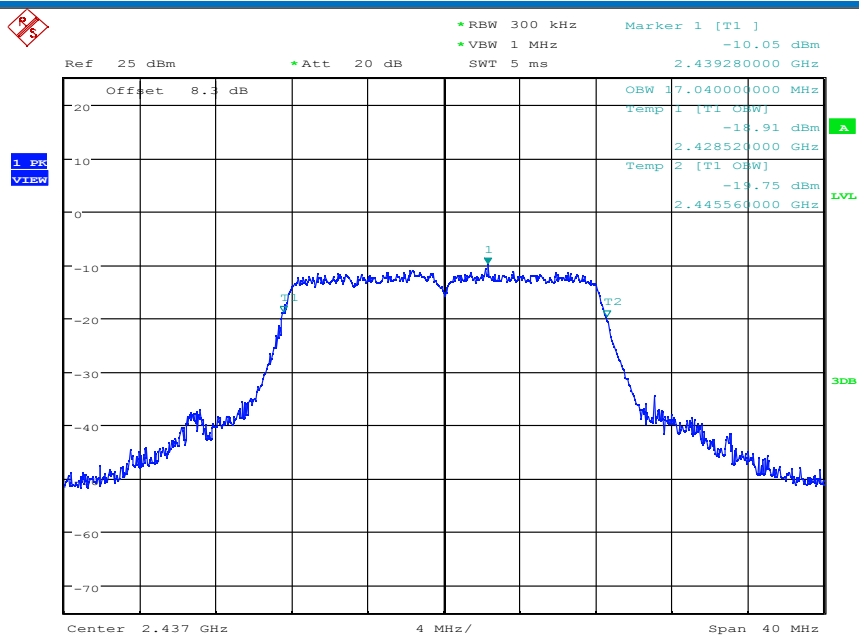


Date: 1.JUN.2021 17:30:41

11G/HCH

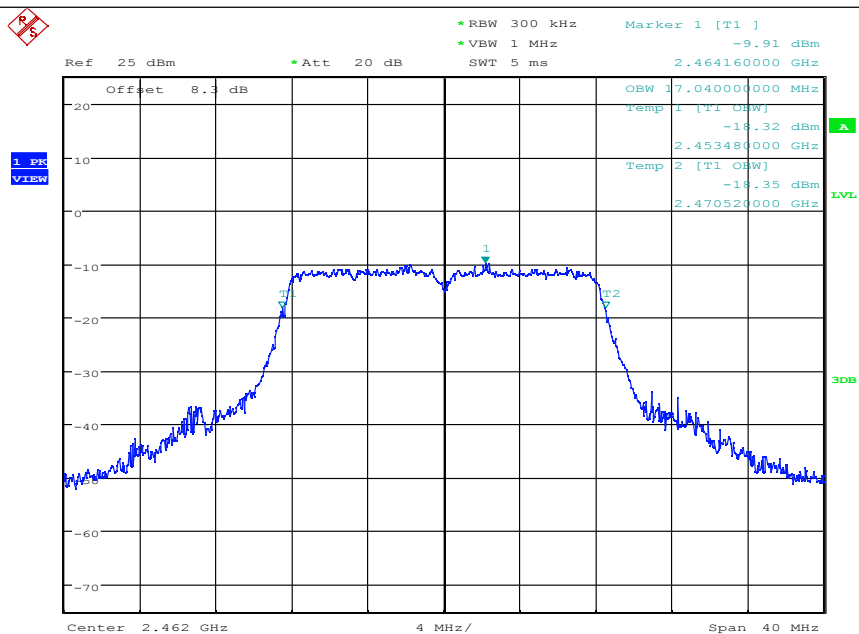


Date: 1.JUN.2021 17:35:06

11N20SISO/LCH

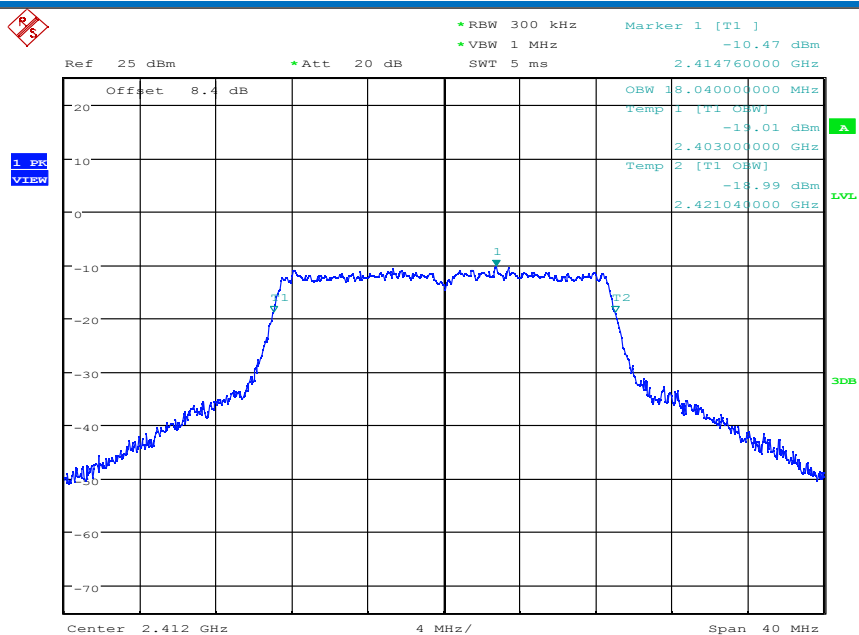


Date: 1.JUN.2021 17:43:04

11N20SISO/MCH

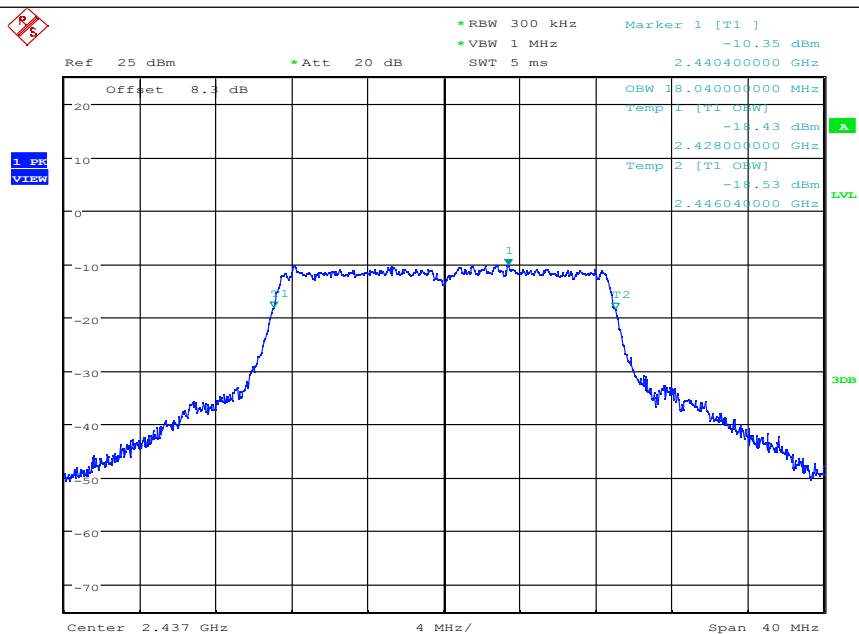


Date: 1.JUN.2021 17:51:19

11N20SISO/HCH

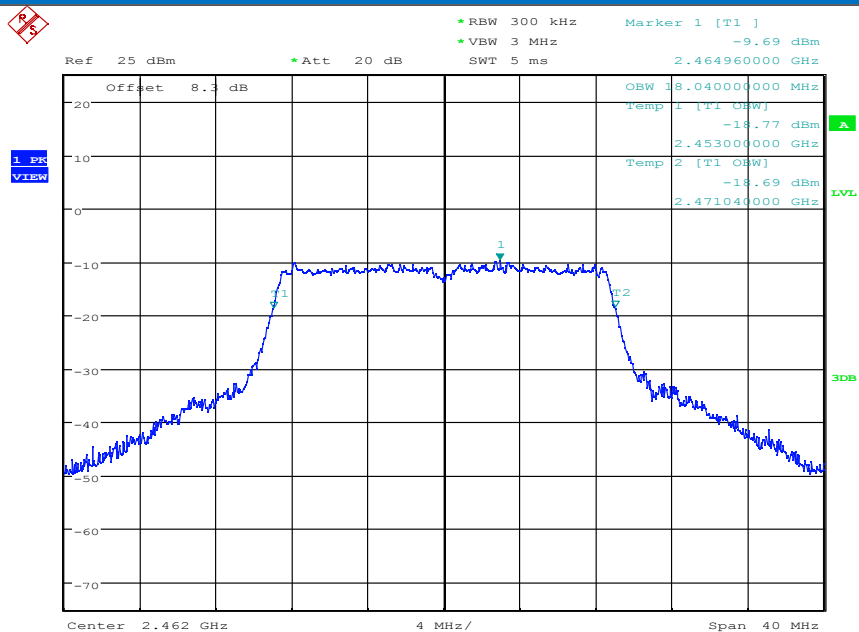

Date: 1.JUN.2021 18:00:01


5.5 Power Spectral Density

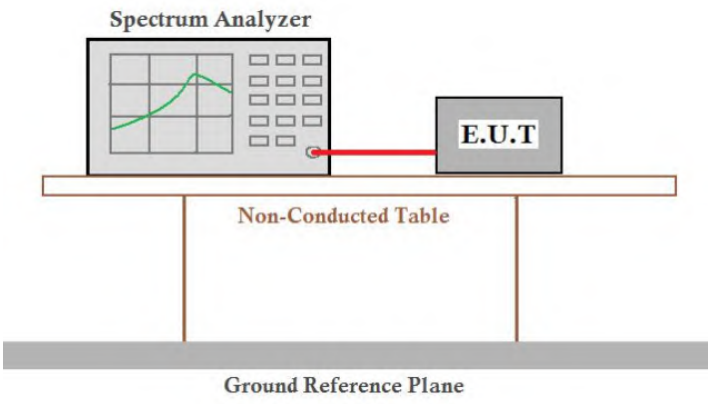Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ;
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass

Measurement Data

802.11b mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-26.960	≤ 8.00	Pass
Middle	-26.810	≤ 8.00	Pass
Highest	-26.410	≤ 8.00	Pass
802.11g mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-30.530	≤ 8.00	Pass
Middle	-29.180	≤ 8.00	Pass
Highest	-27.780	≤ 8.00	Pass
802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-28.530	≤ 8.00	Pass
Middle	-27.950	≤ 8.00	Pass
Highest	-27.660	≤ 8.00	Pass


Test plot as follows:

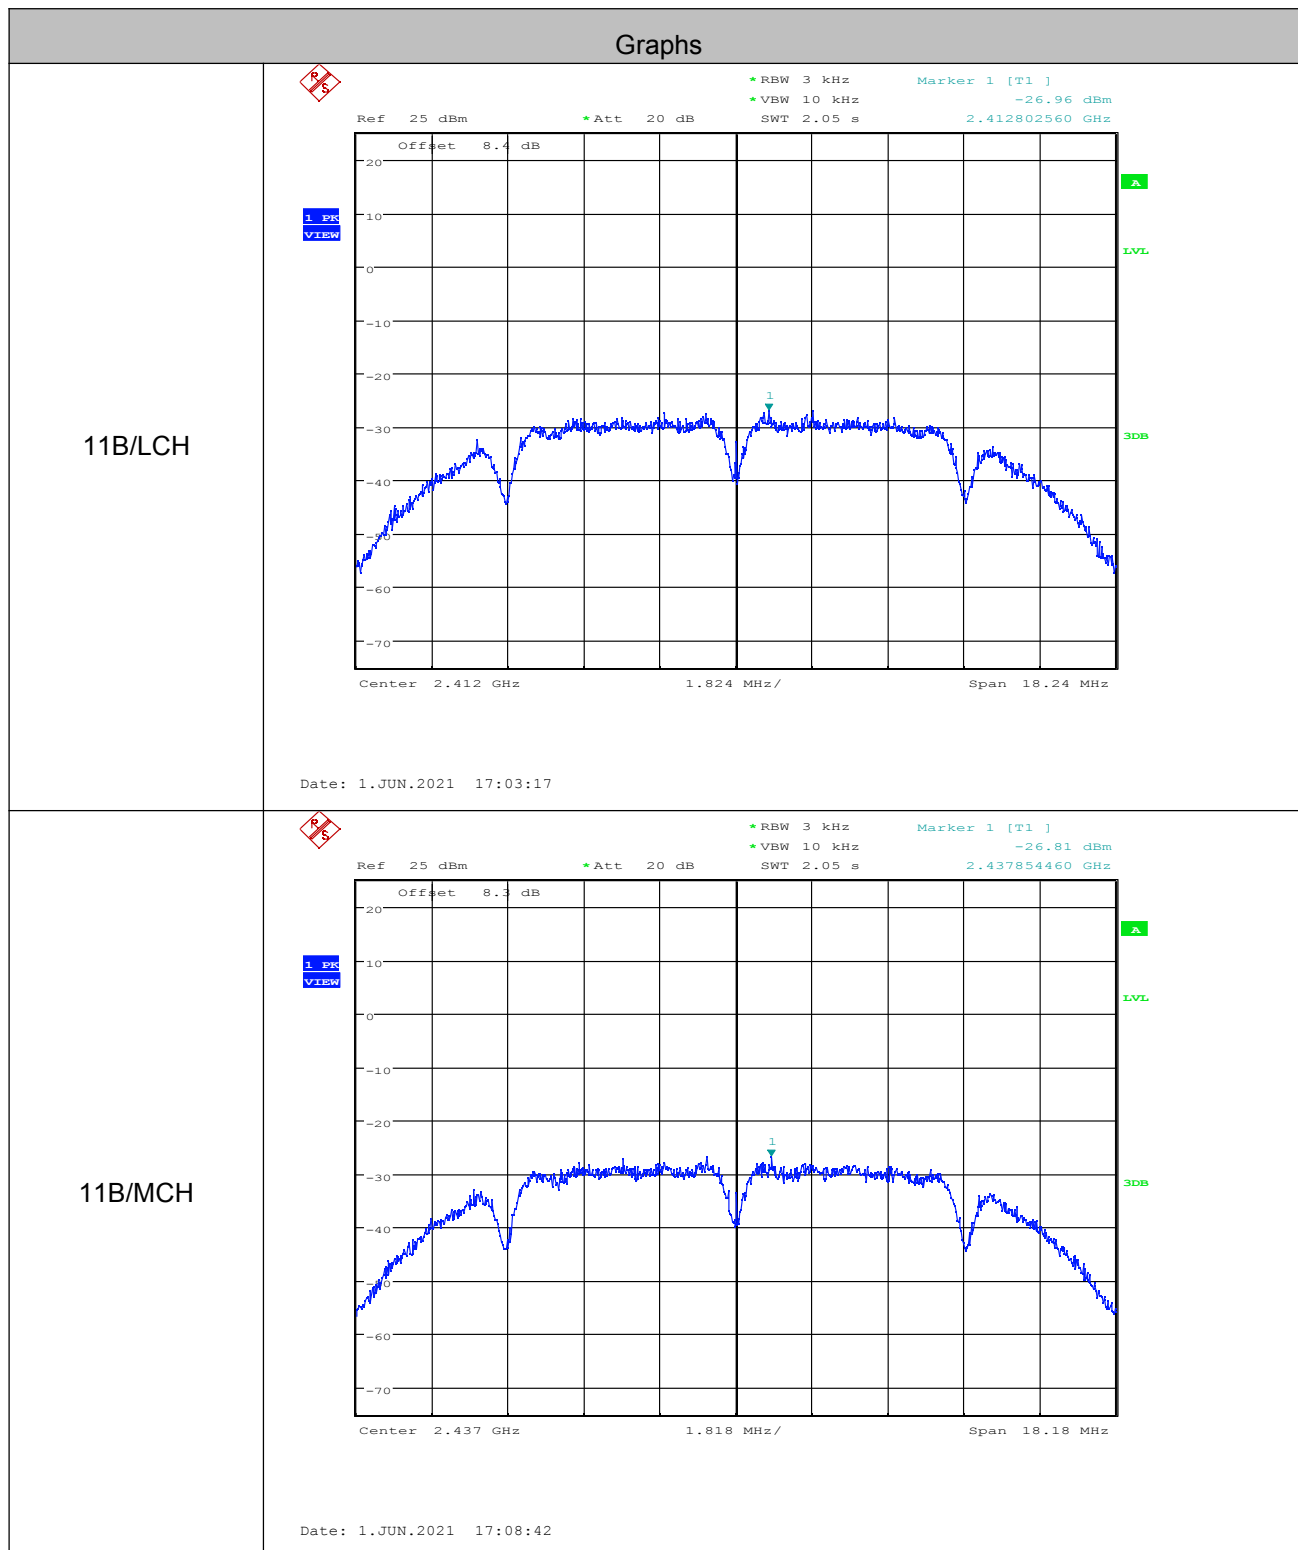

11B/HCH




1 PK
VIEW

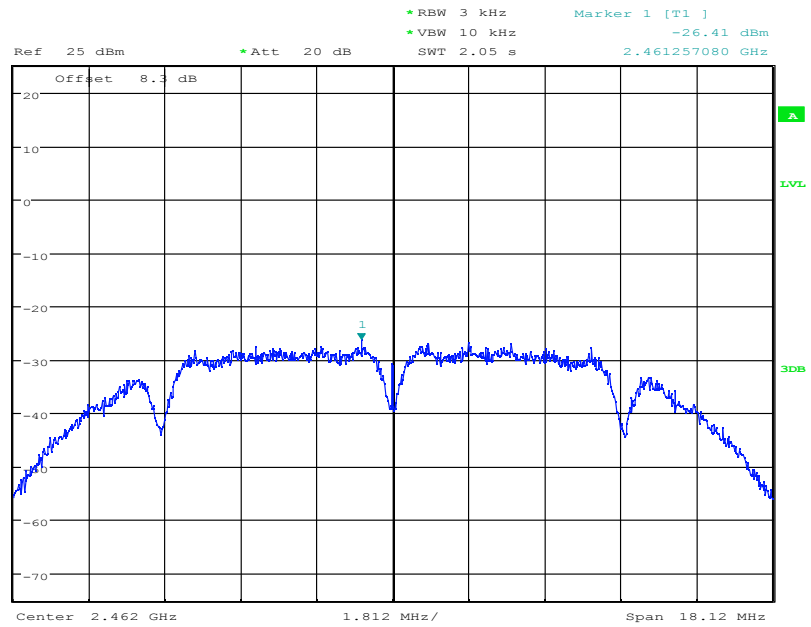


Date: 1.JUN.2021 17:23:01

11G/LCH

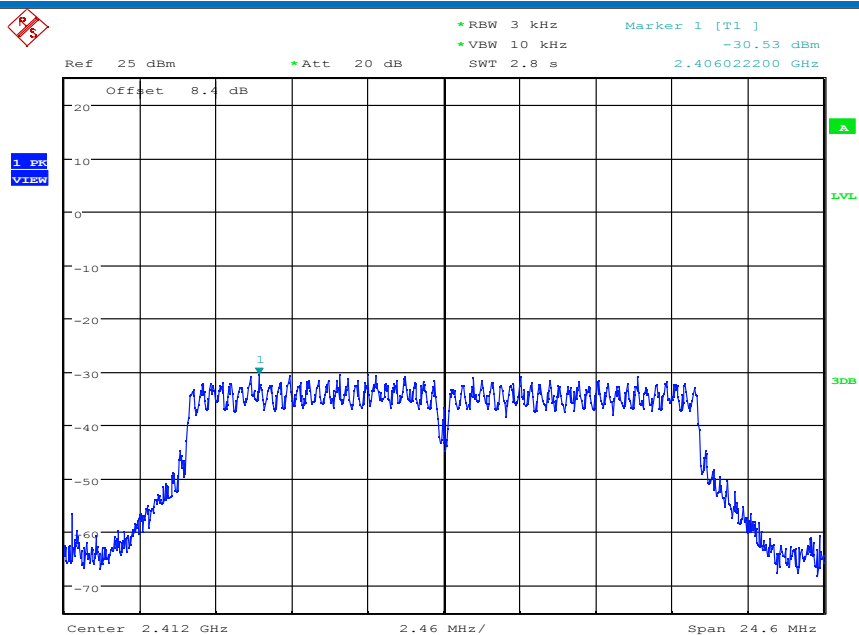


Date: 1.JUN.2021 17:28:01


11G/MCH

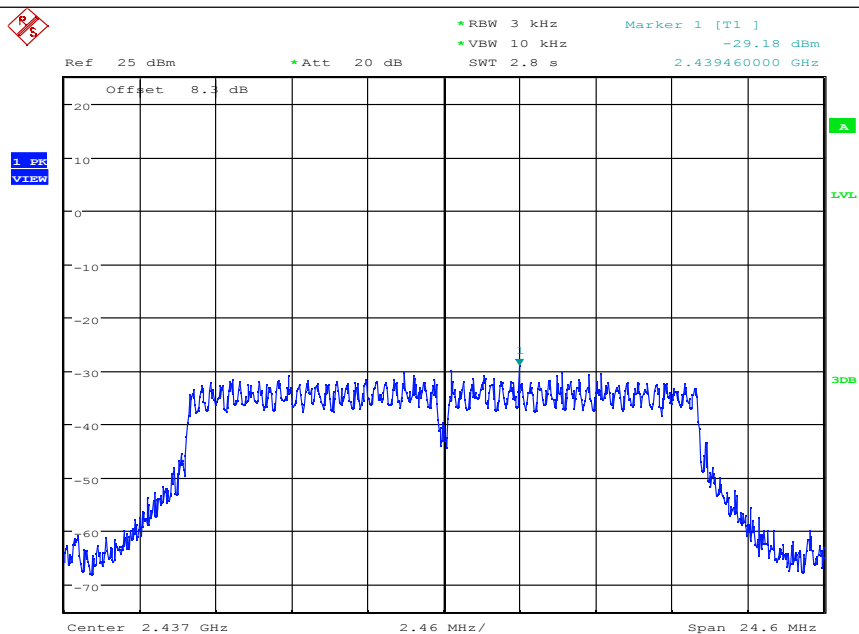

Date: 1.JUN.2021 17:33:04

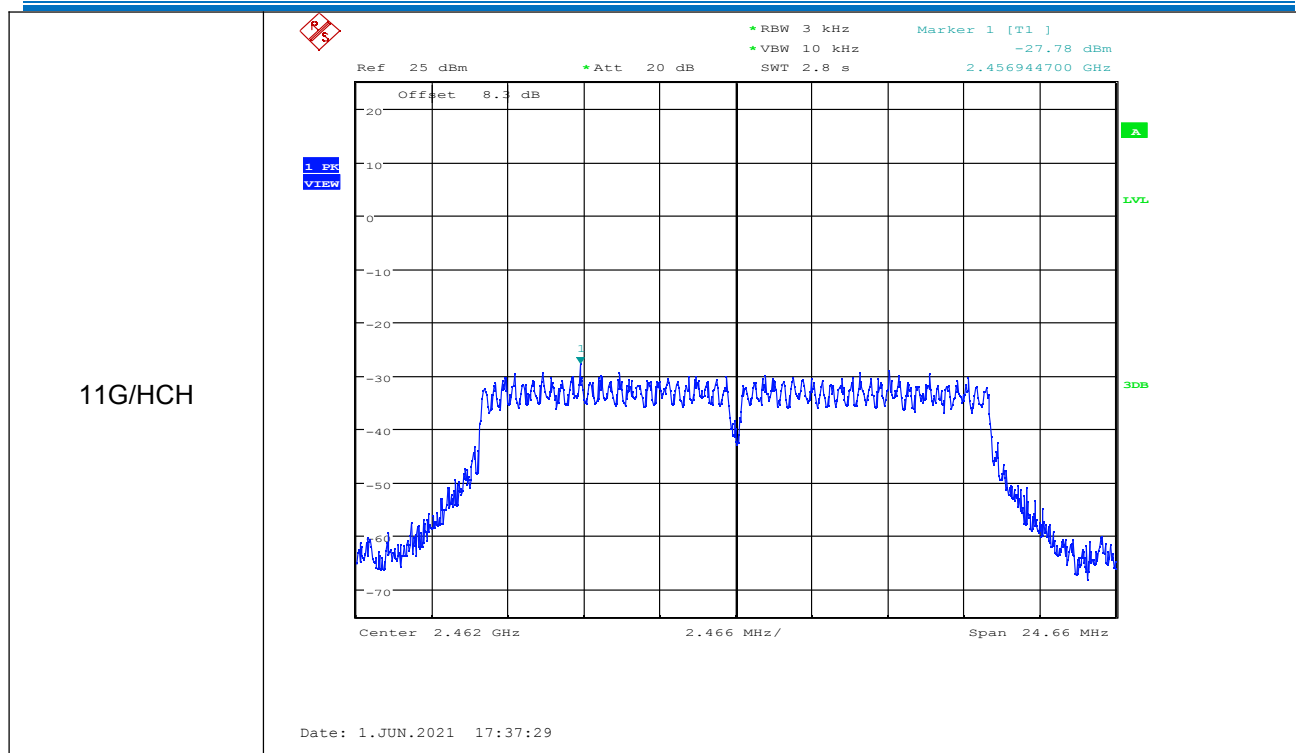


11N20SISO/LCH

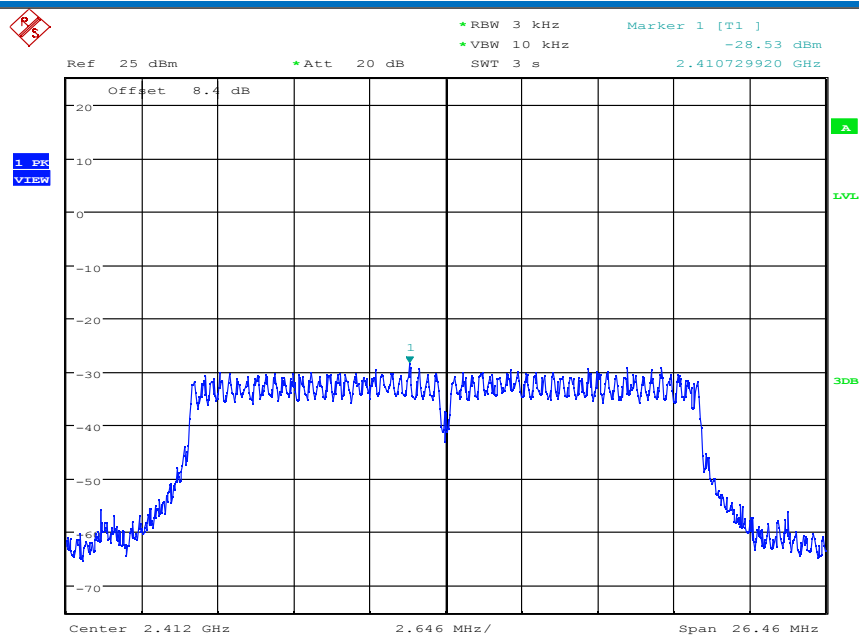


Date: 1.JUN.2021 17:47:06

11N20SISO/MCH

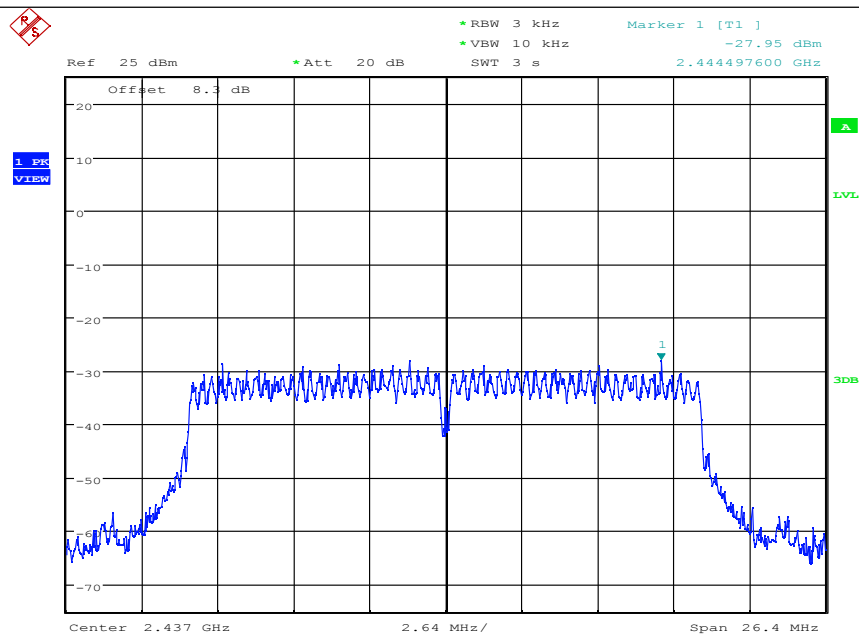


Date: 1.JUN.2021 17:55:22

11N20SISO/HCH

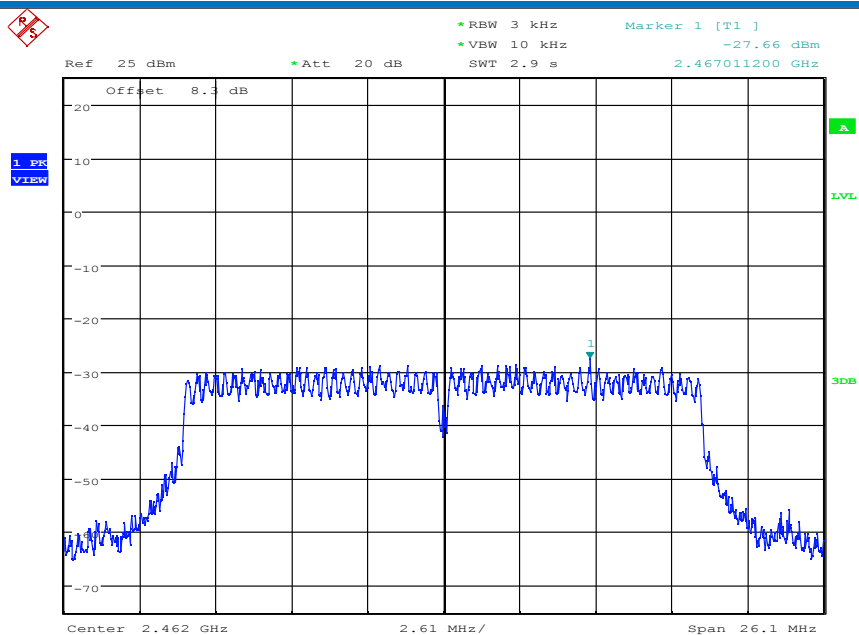

Date: 1.JUN.2021 18:04:04


5.6 Band-edge for RF Conducted Emissions

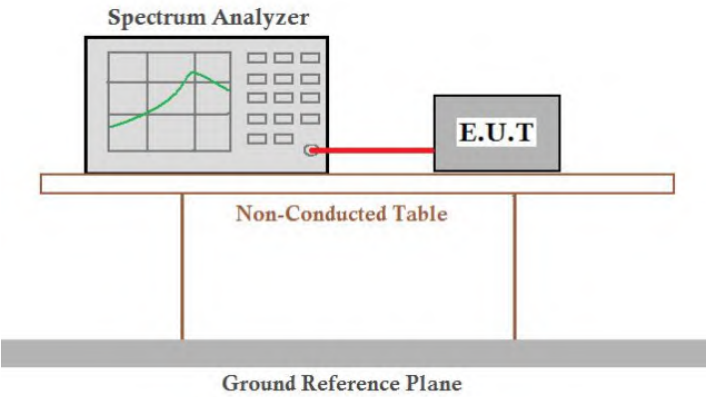Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ;
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Data:

Test mode: 802.11b				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-38.250	-31.32	Pass
Highest	2483.5	-52.350	-30.99	Pass
Test mode: 802.11g				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-37.670	-34.19	Pass
Highest	2483.5	-51.560	-33.72	Pass
Test mode: 802.11n(HT20)				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-37.550	-33.31	Pass
Highest	2483.5	-52.340	-32.6	Pass

Test plot as follows:

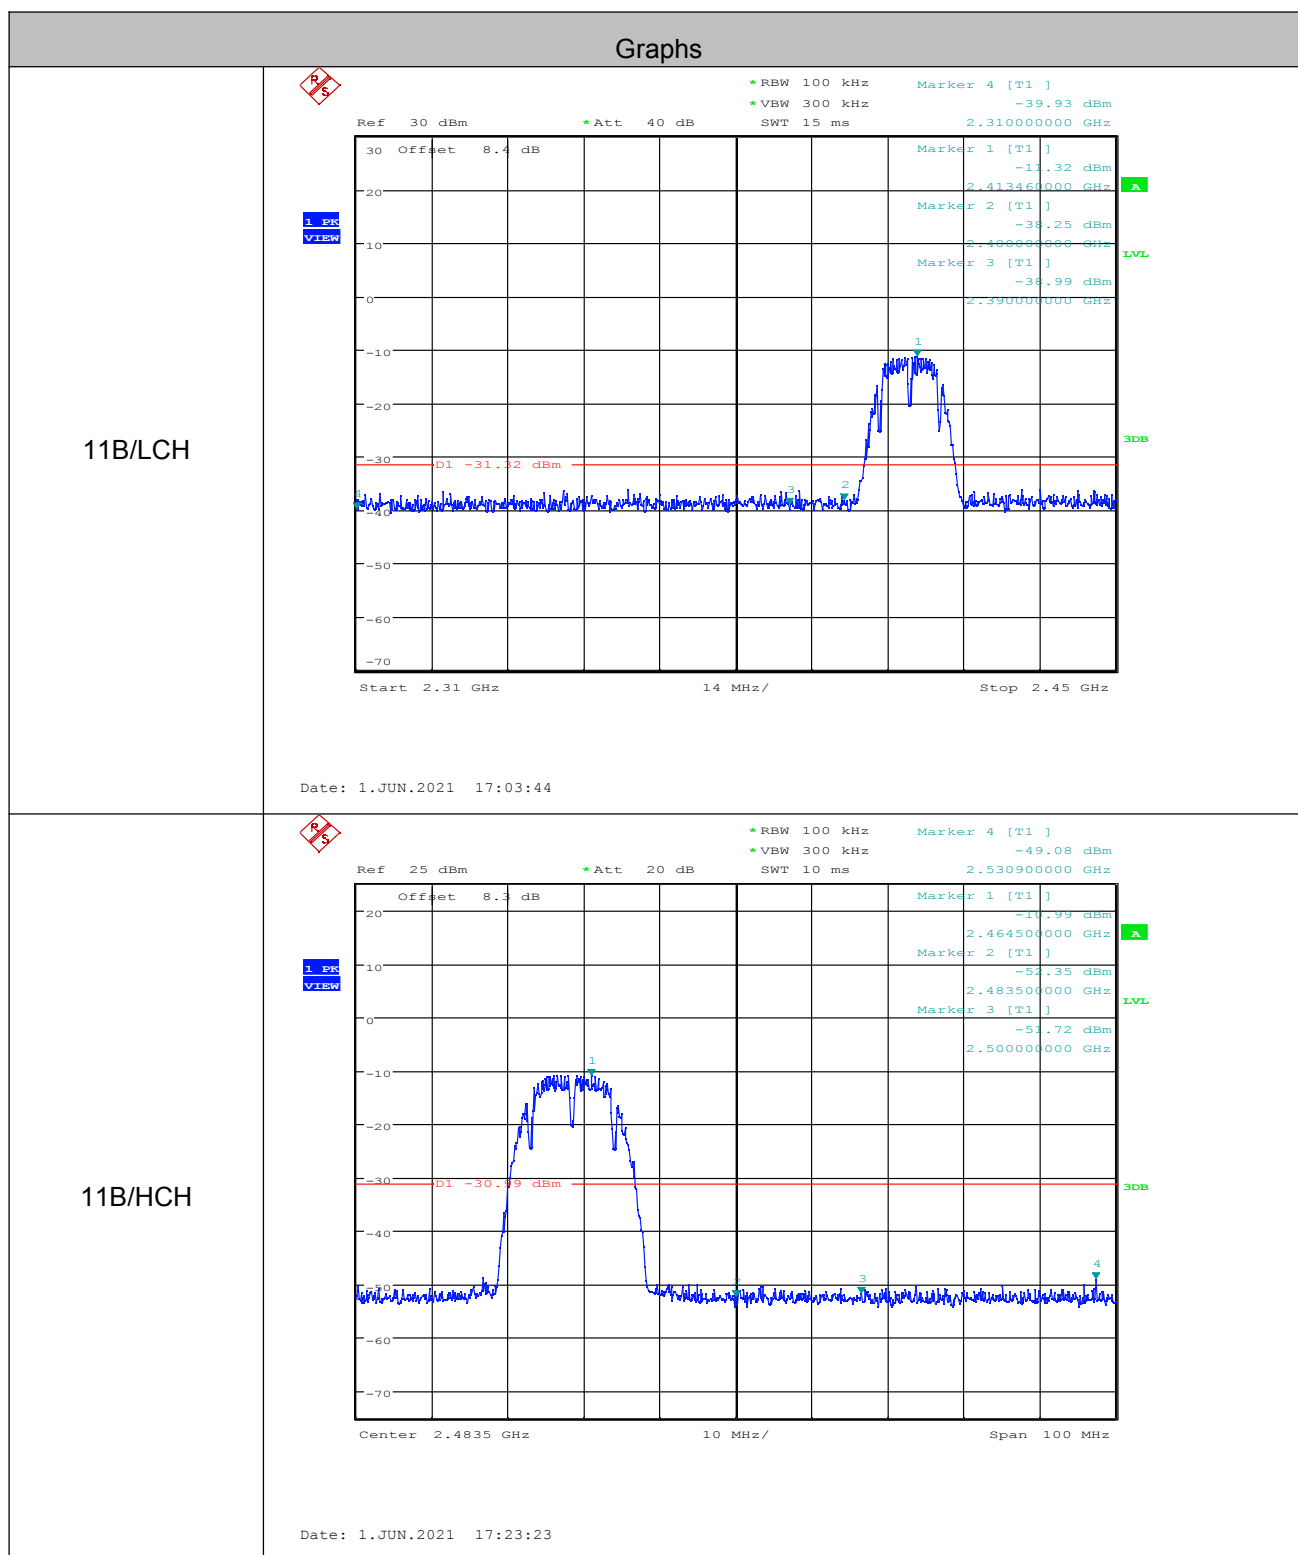


11G/LCH

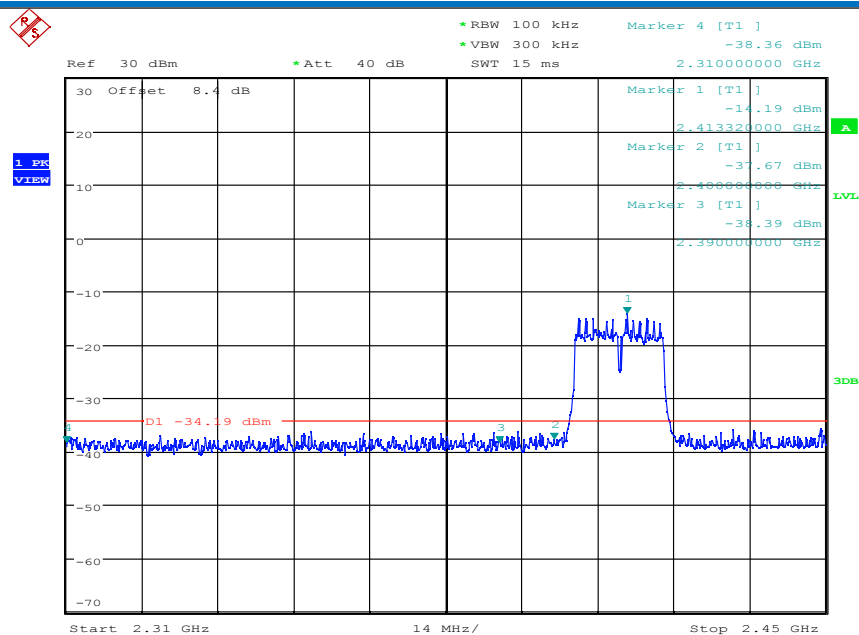


Date: 1.JUN.2021 17:28:28

11G/HCH

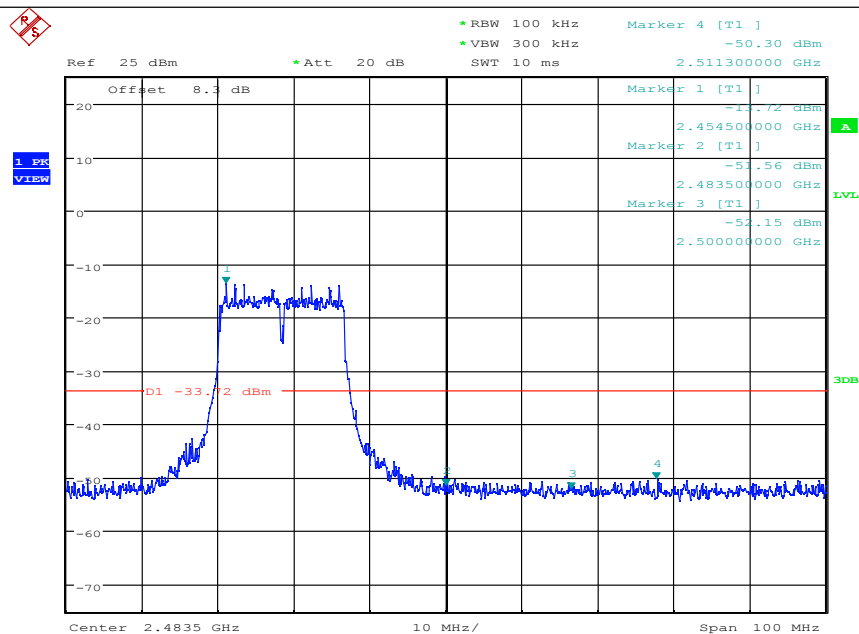


Date: 1.JUN.2021 17:37:52

11N20SISO/LCH

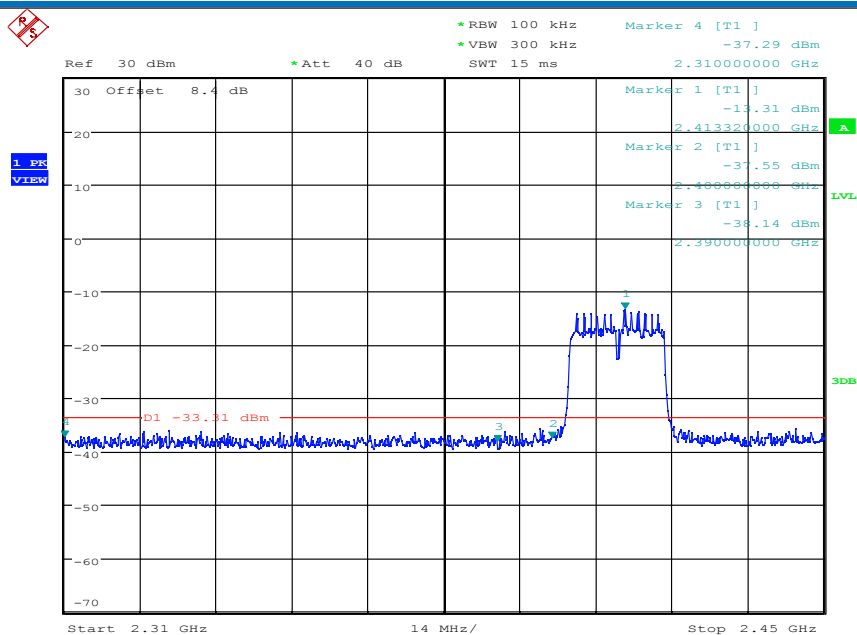


Date: 1.JUN.2021 17:47:54

11N20SISO/HCH

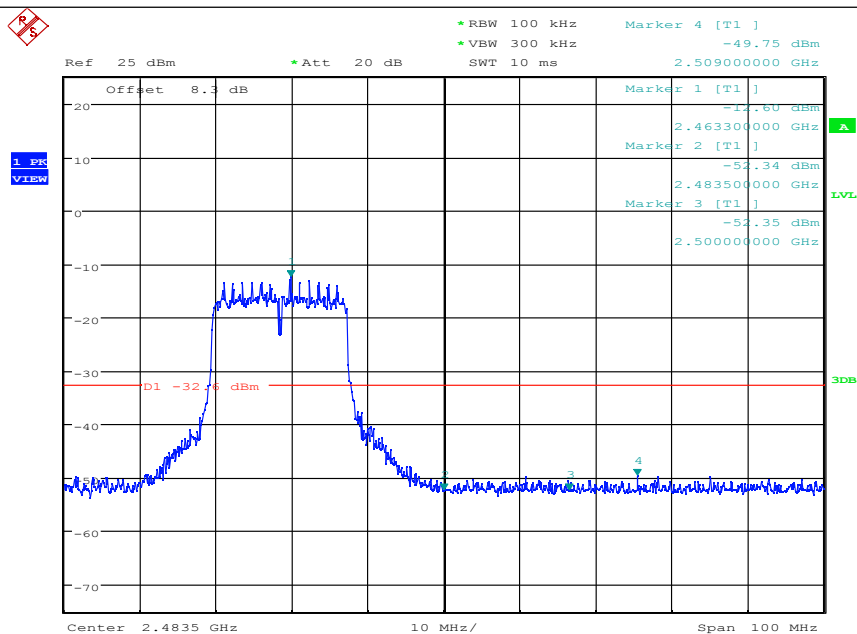



Date: 1.JUN.2021 18:04:46

5.7 RF Conducted Spurious Emissions

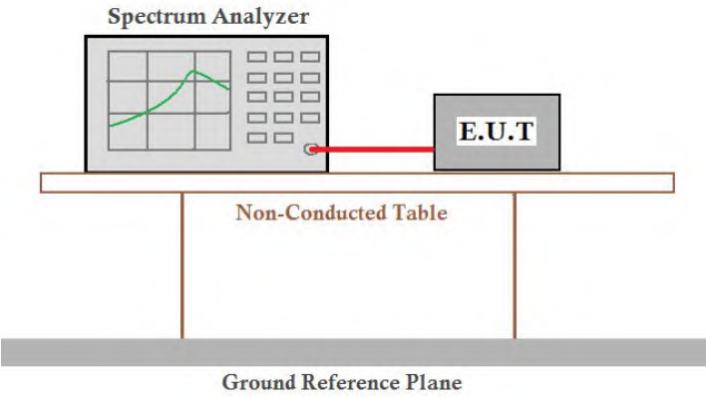Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ;
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test plot as follows:

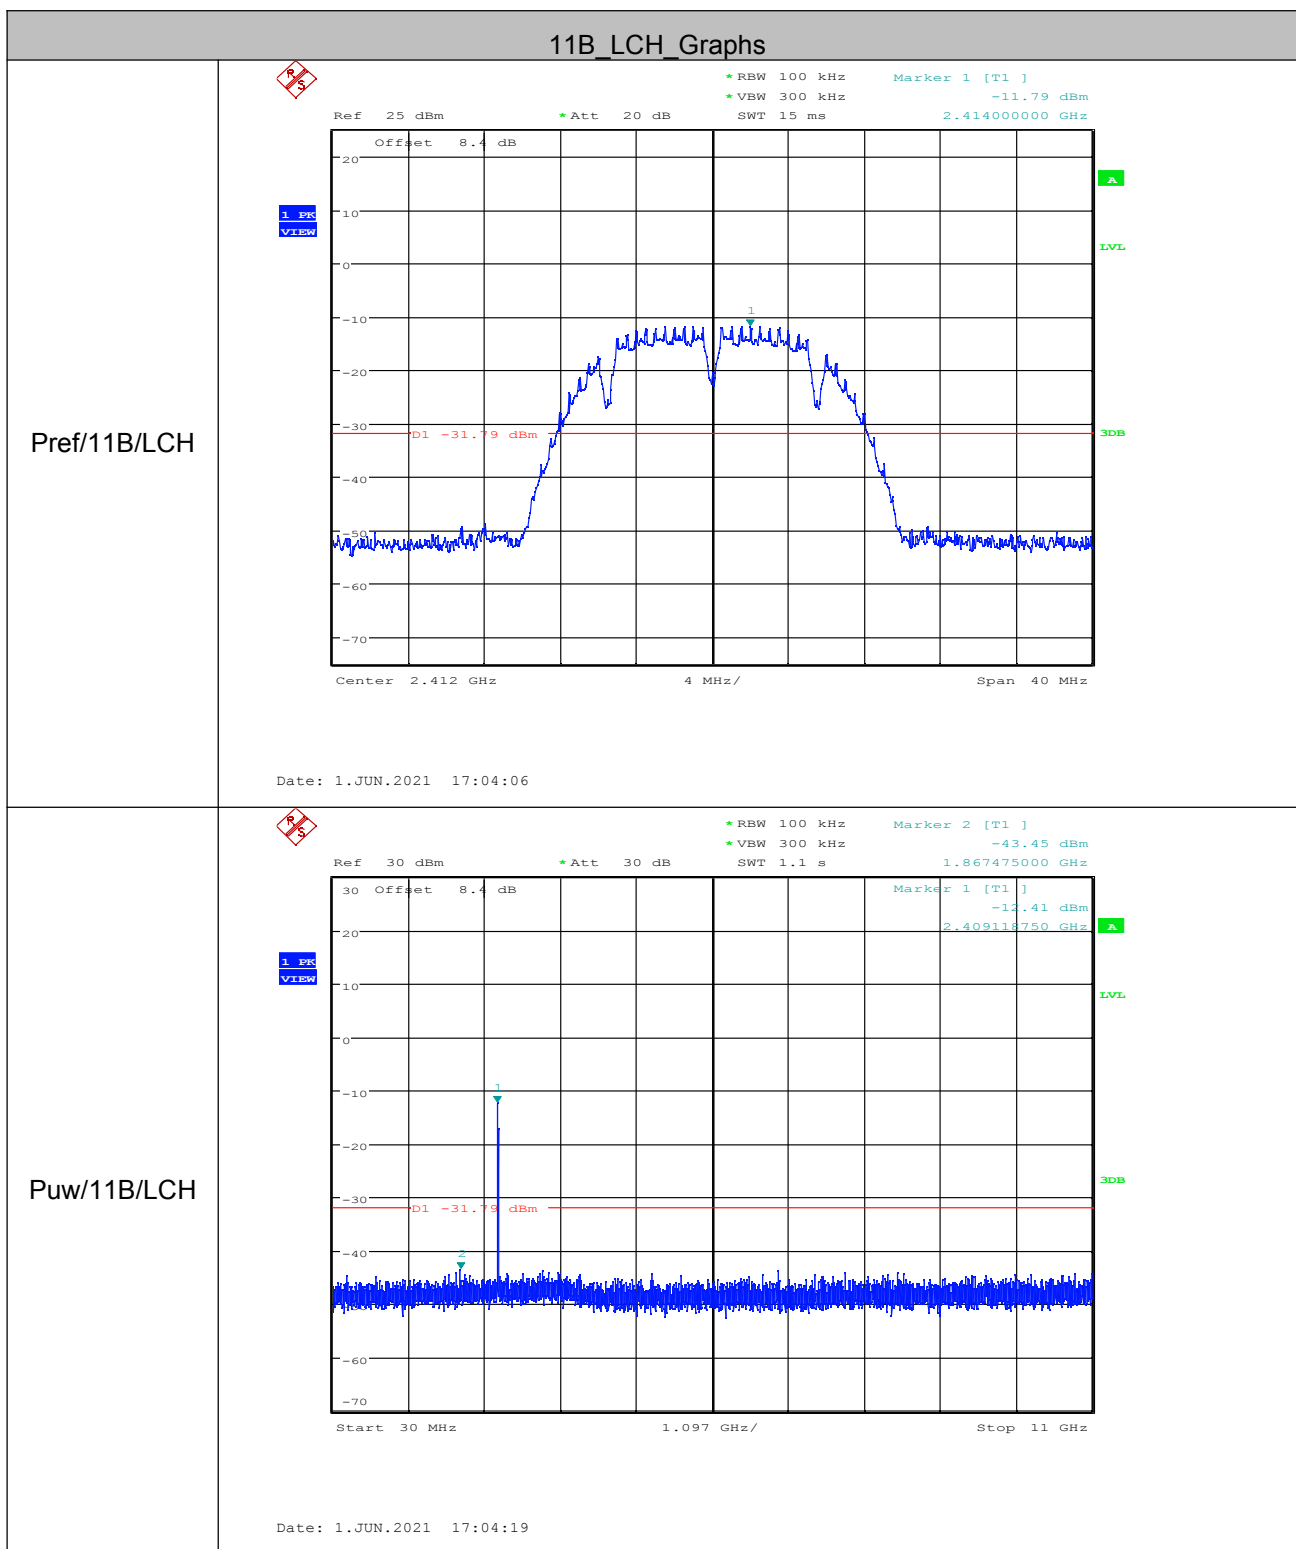

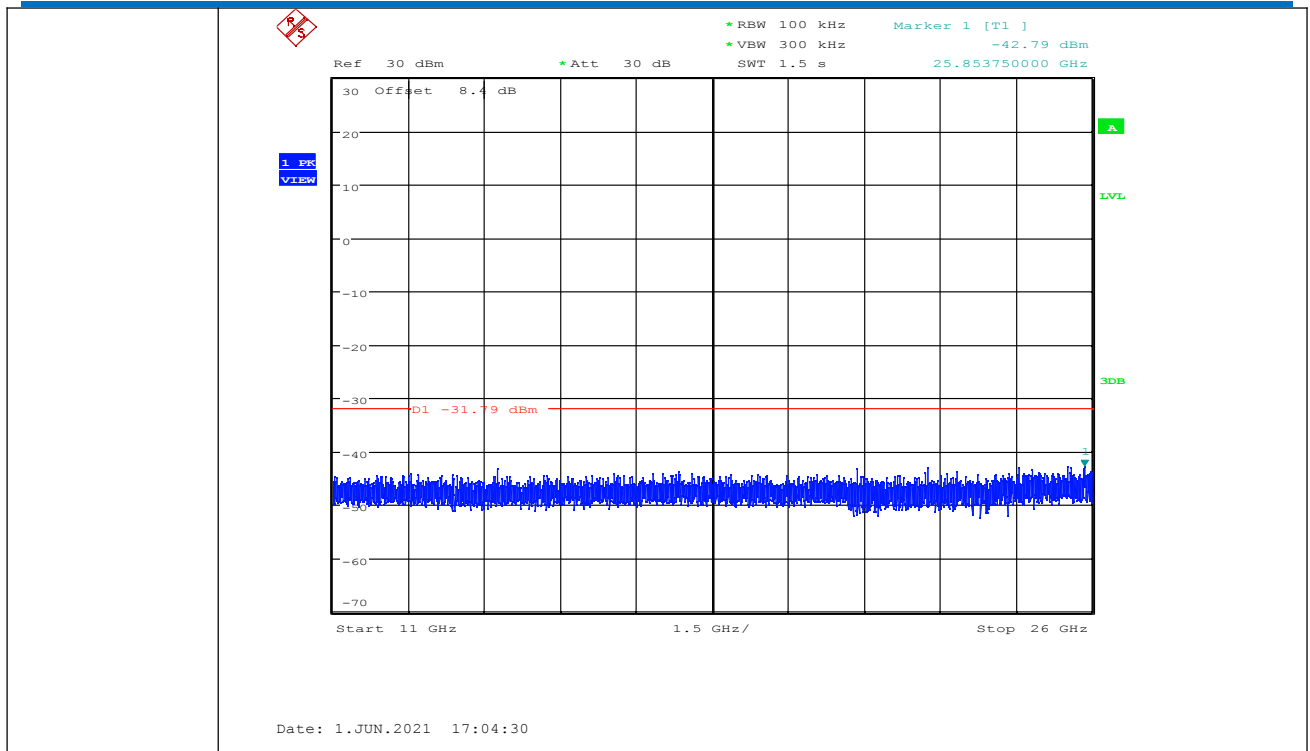


11B_MCH_Graphs

Pref/11B/MCH

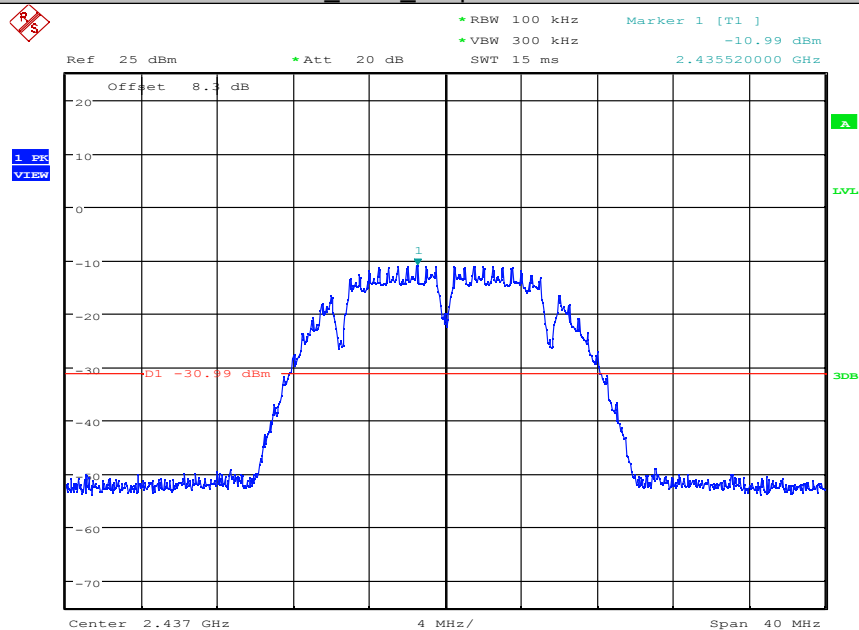


Date: 1.JUN.2021 17:09:04

Puw/11B/MCH

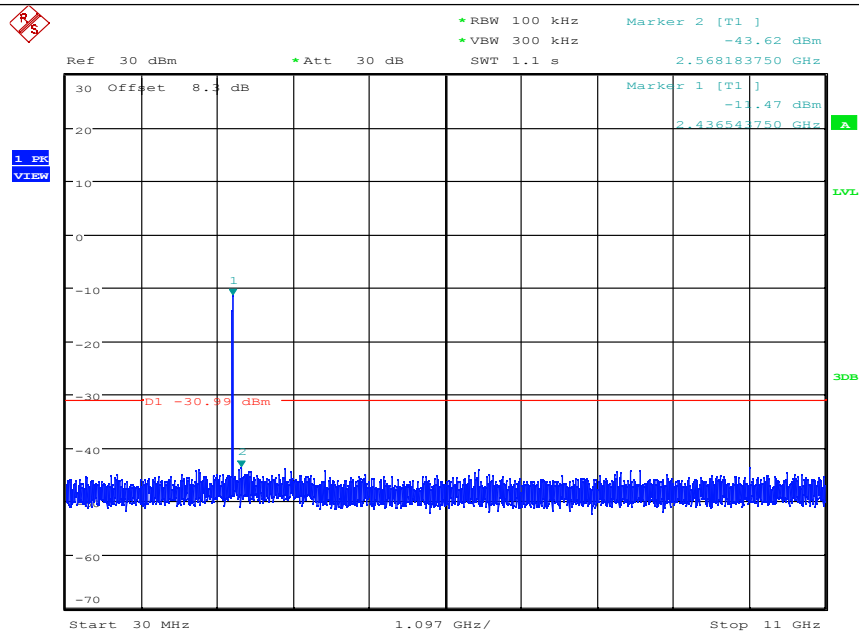


Date: 1.JUN.2021 17:09:17

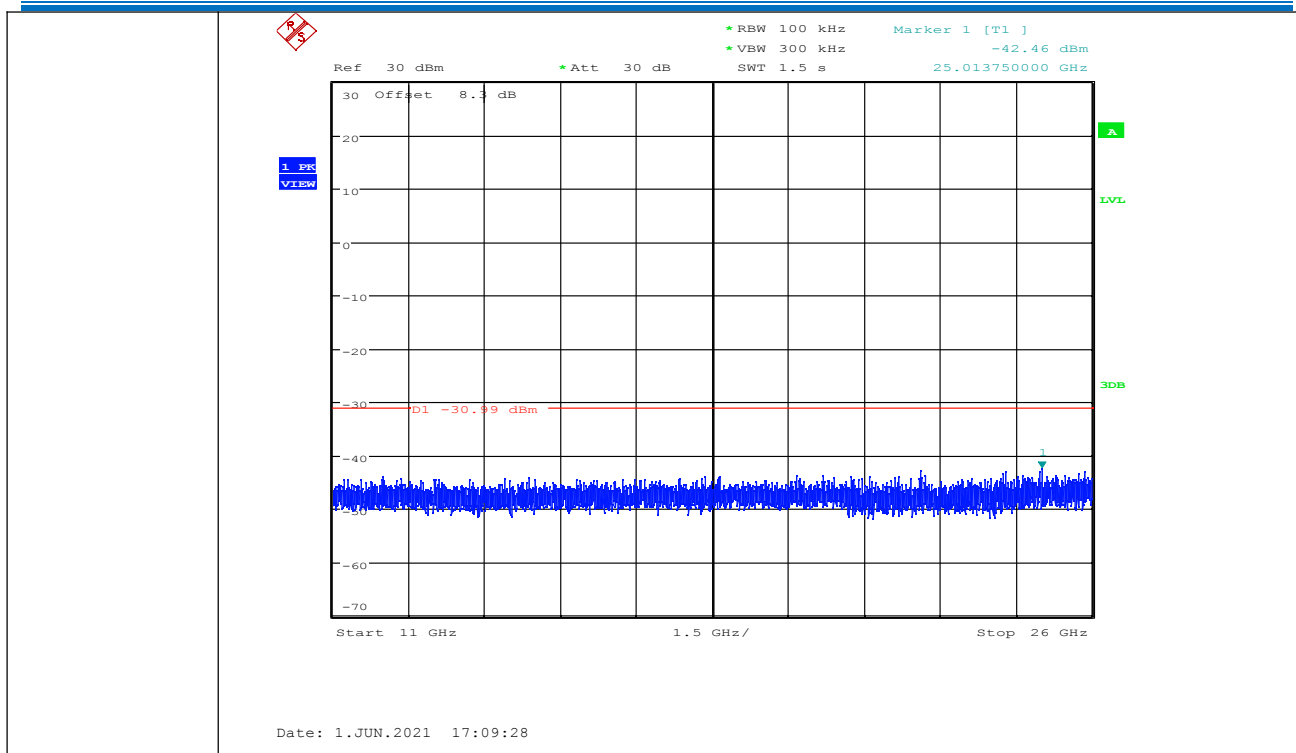


11B_HCH_Graphs

Pref/11B/HCH

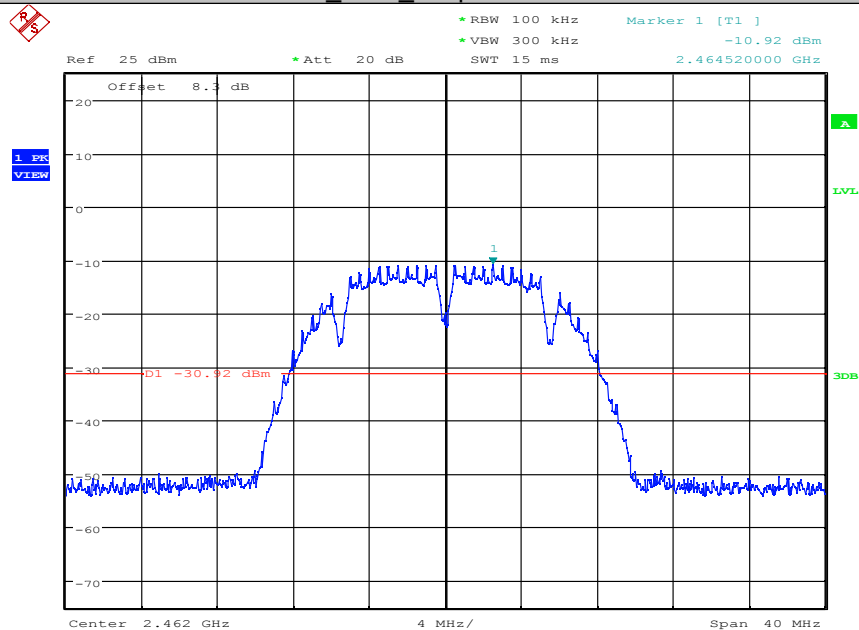


Date: 1.JUN.2021 17:23:46

Puw/11B/HCH

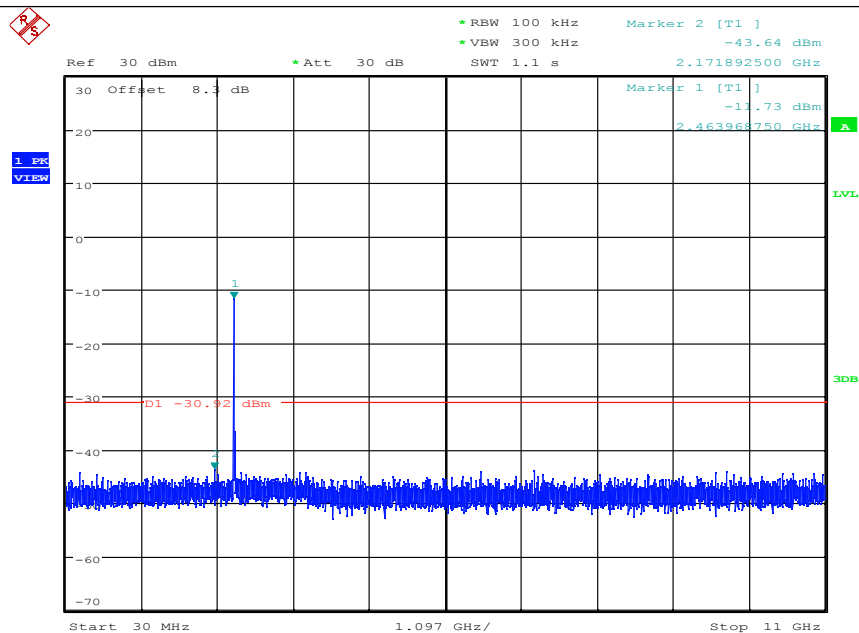


Date: 1.JUN.2021 17:23:59

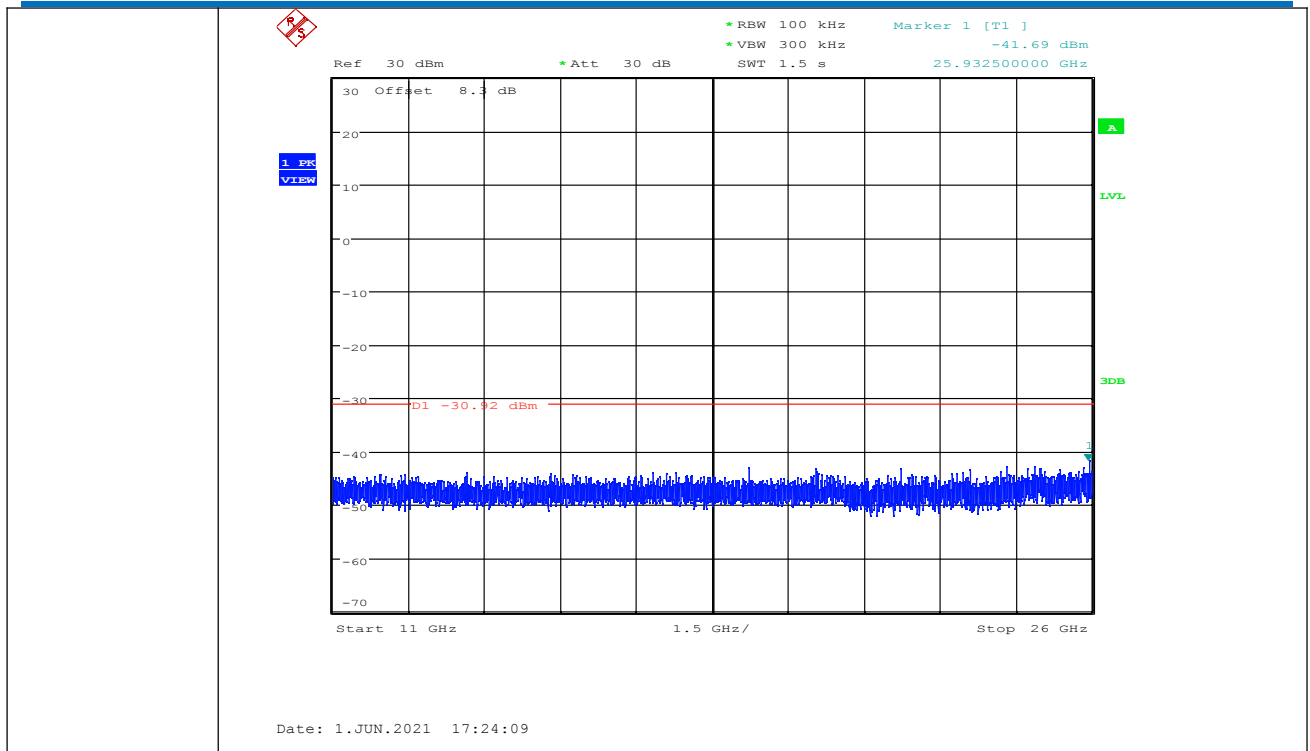


11G_LCH_Graphs

Pref/11G/LCH

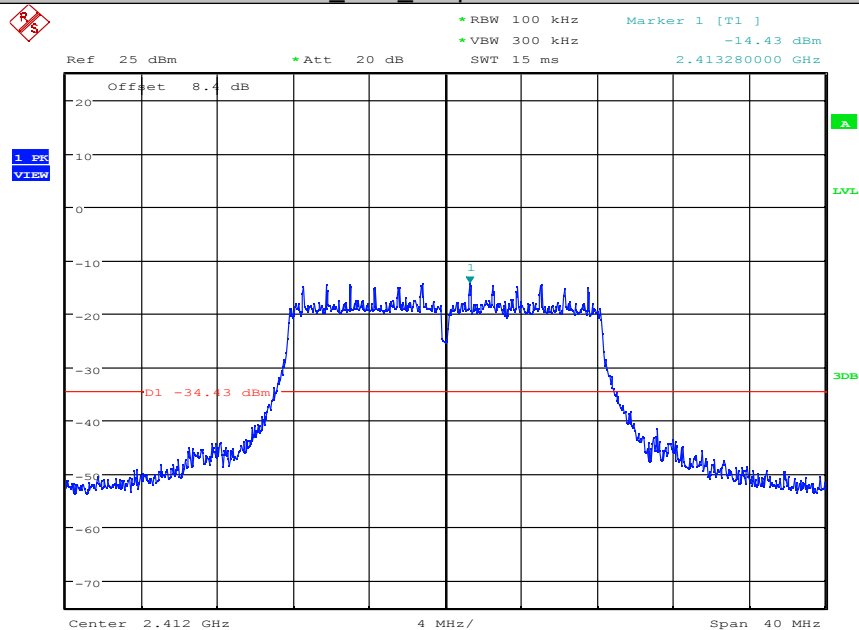


Date: 1.JUN.2021 17:28:51

Puw/11G/LCH

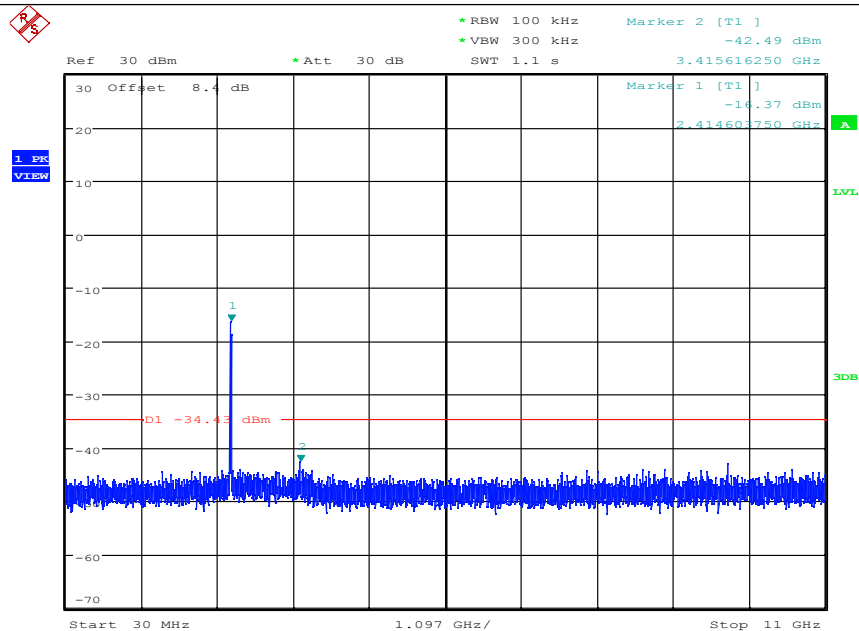


Date: 1.JUN.2021 17:29:03

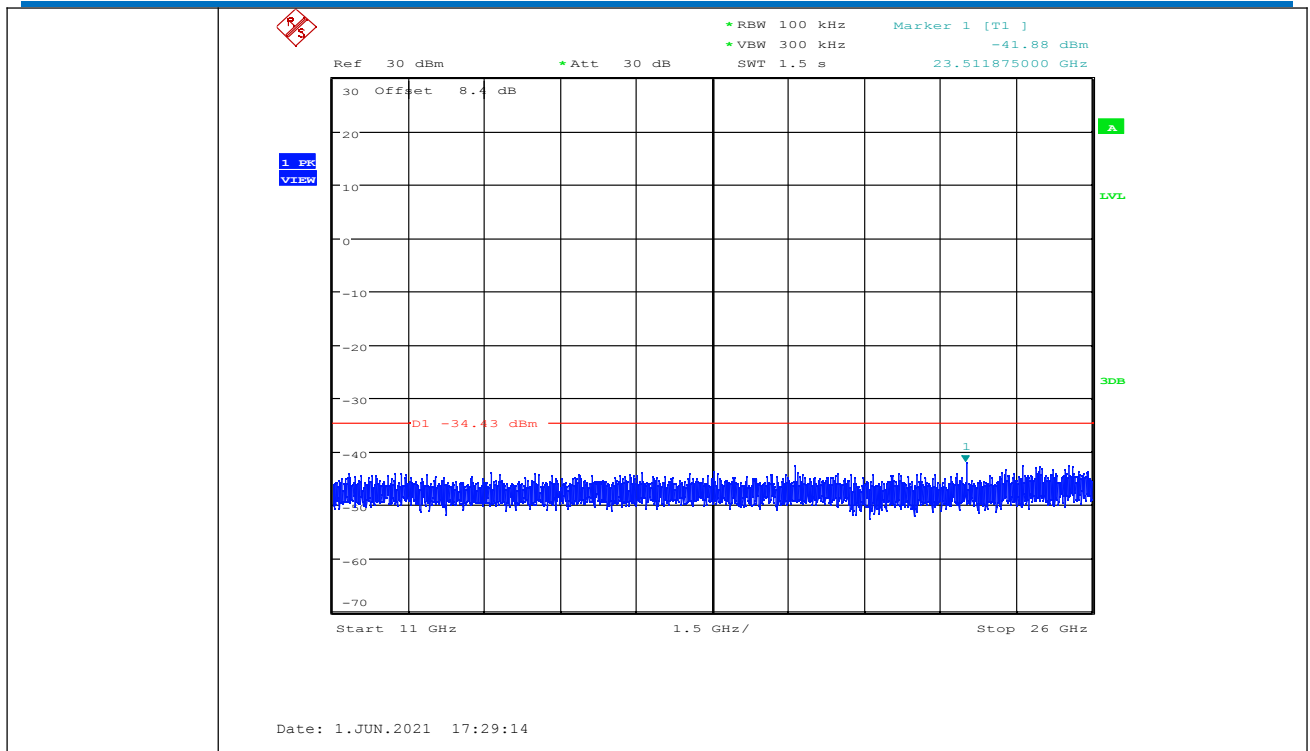


11G_MCH_Graphs

Pref/11G/MCH

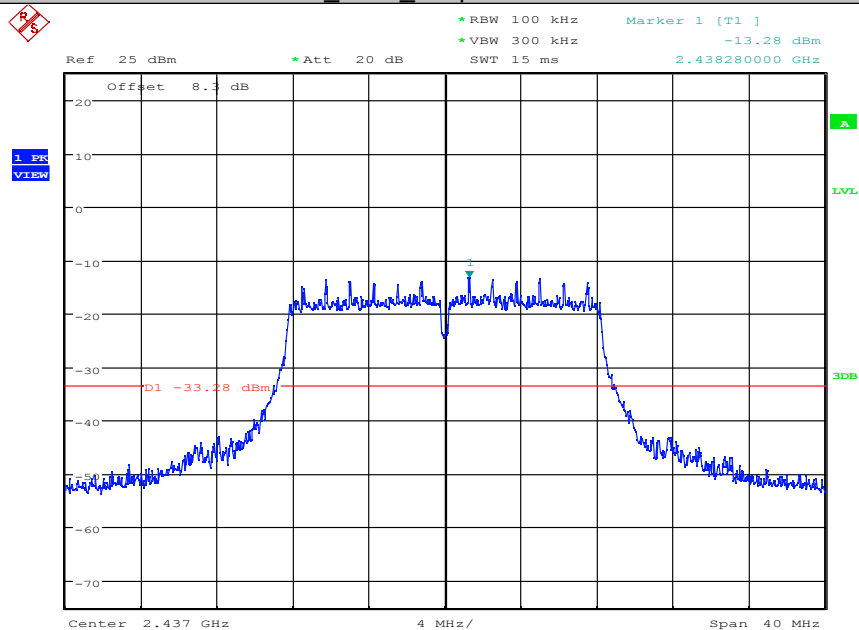


Date: 1.JUN.2021 17:33:26

Puw/11G/MCH

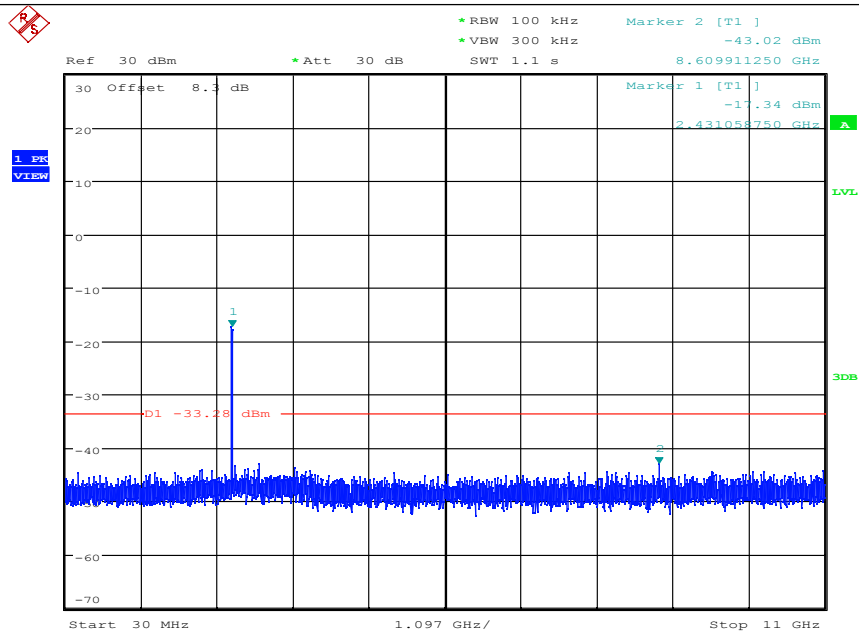


Date: 1.JUN.2021 17:33:39

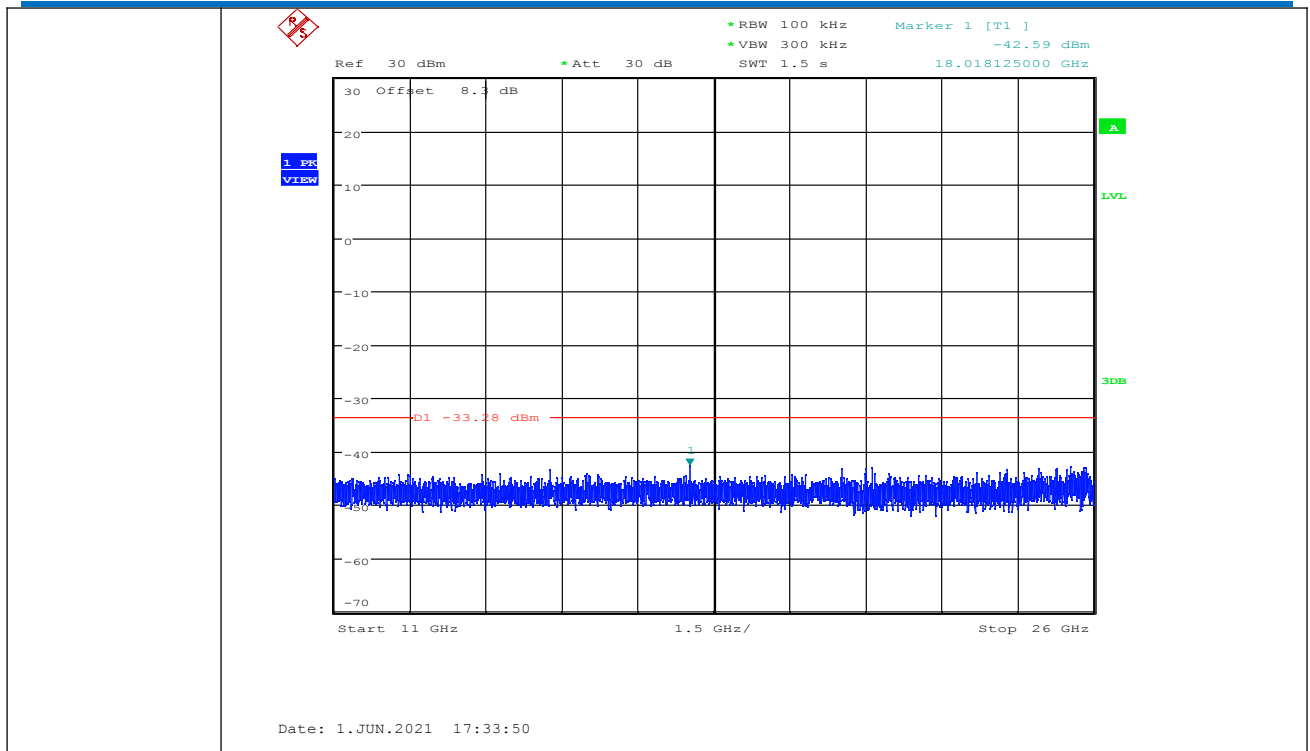


11G_HCH_Graphs

Pref/11G/HCH

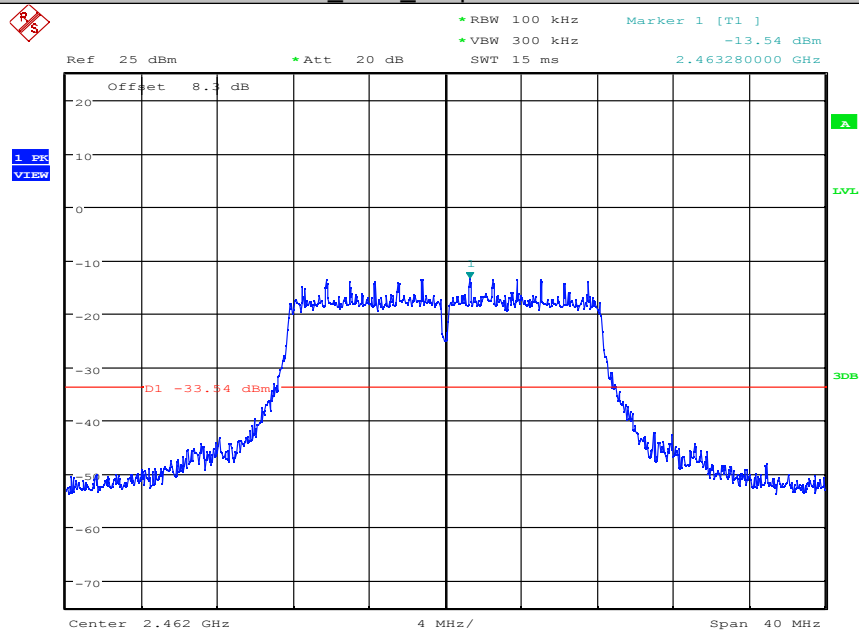


Date: 1.JUN.2021 17:38:15

Puw/11G/HCH

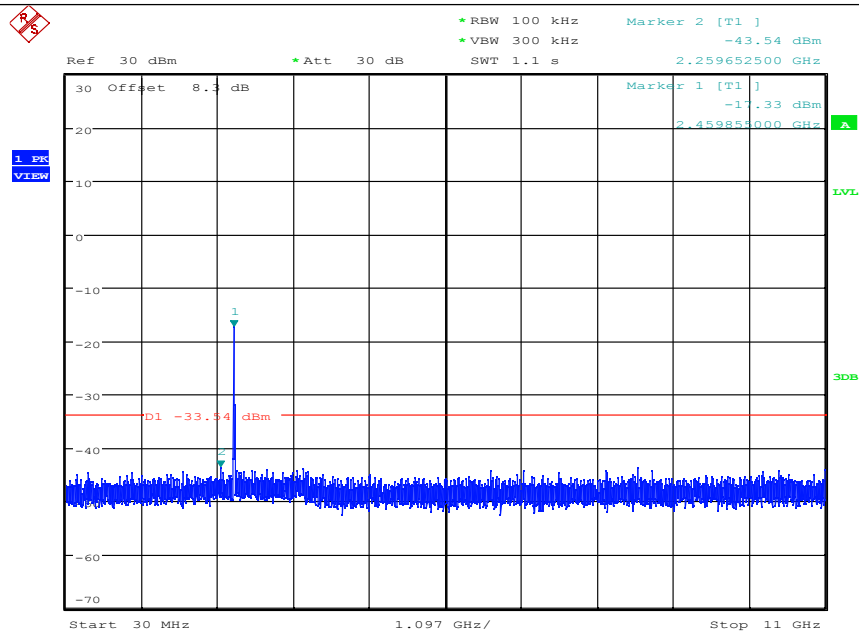


Date: 1.JUN.2021 17:38:27

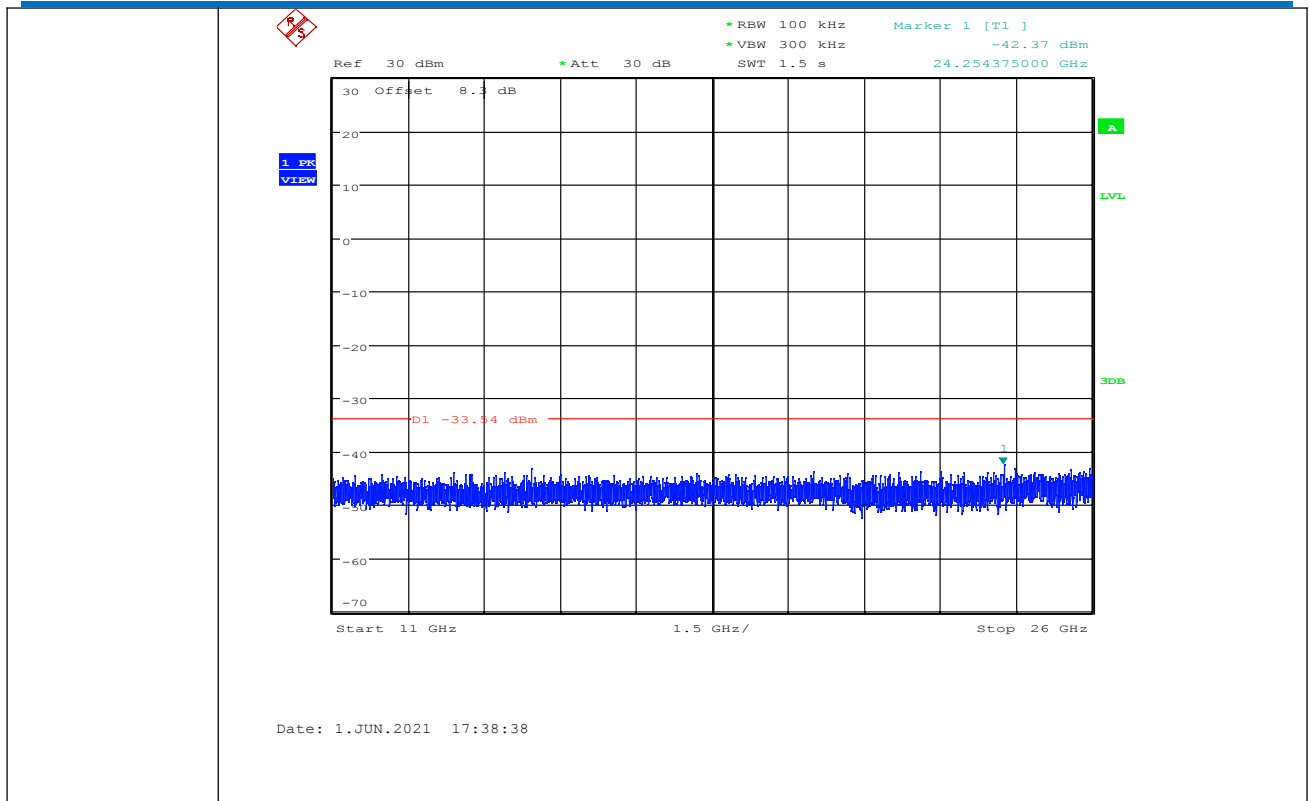


11N20SISO_LCH_Graphs

Pref/11N20SIS
O/LCH

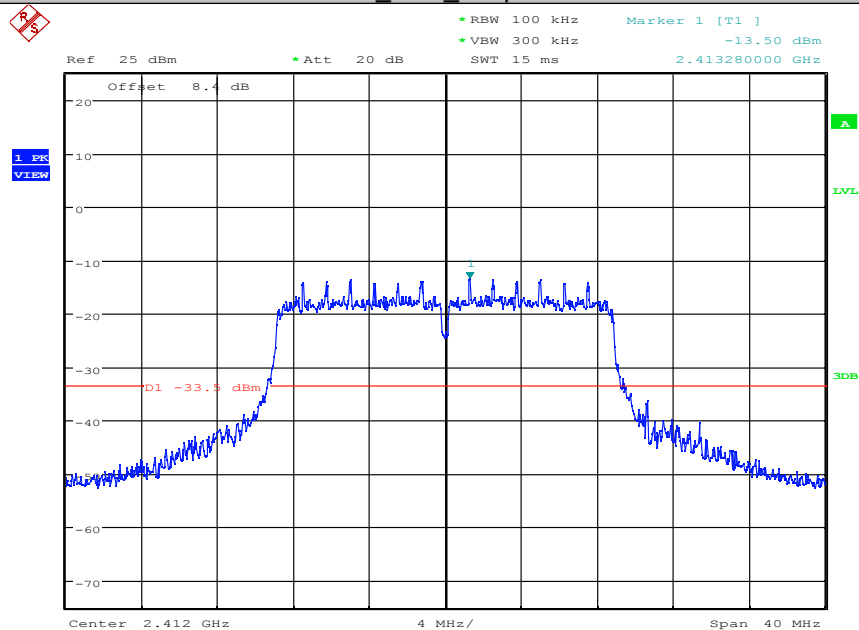


Date: 1.JUN.2021 17:48:36

/11N20SISO/L
CH

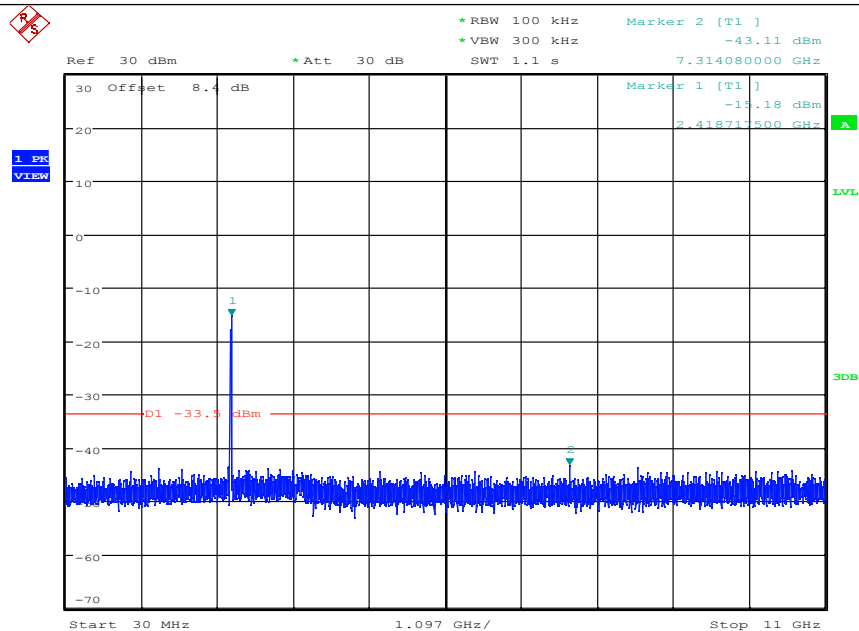


Date: 1.JUN.2021 17:48:49

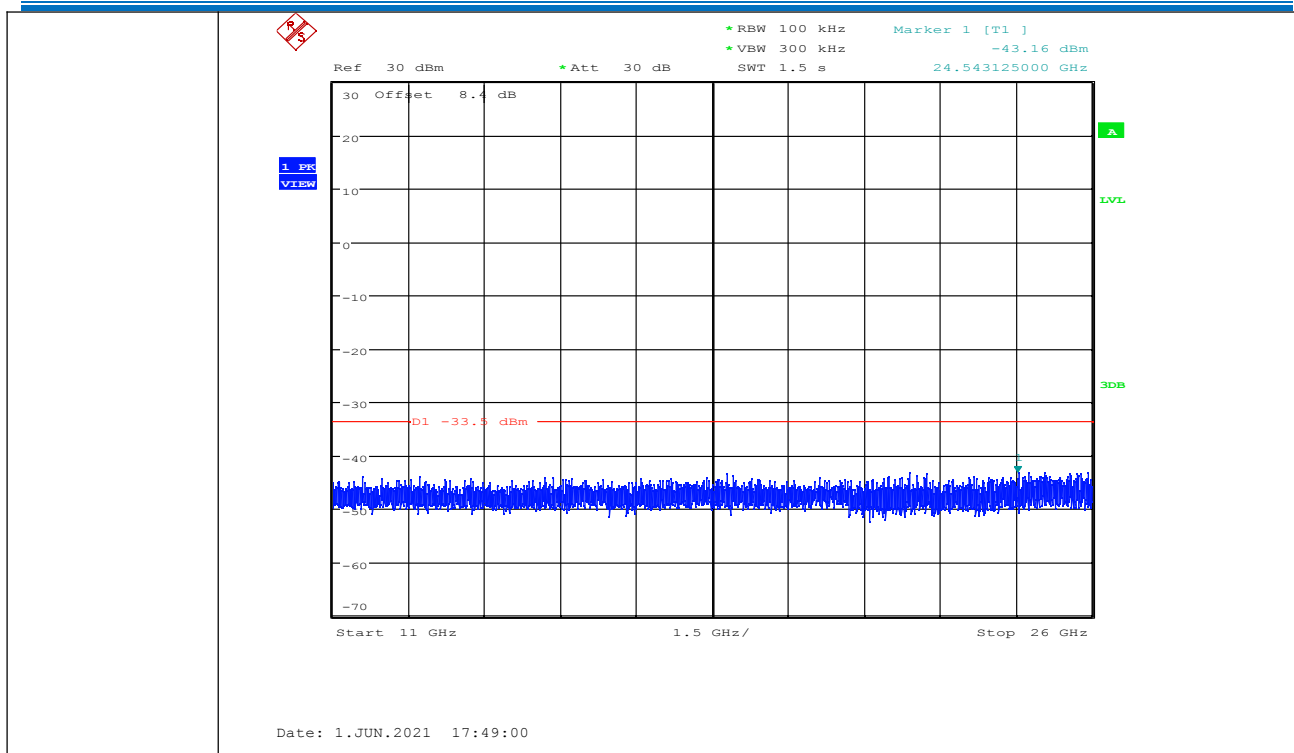


11N20SISO_MCH_Graphs

Pref/11N20SIS
O/MCH

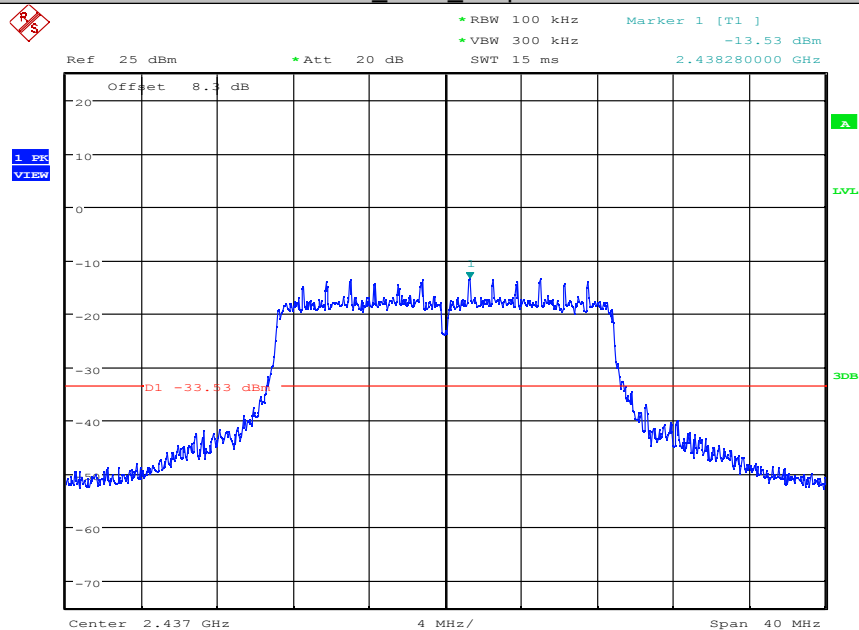


Date: 1.JUN.2021 17:57:23

Puw/11N20SIS
O/MCH

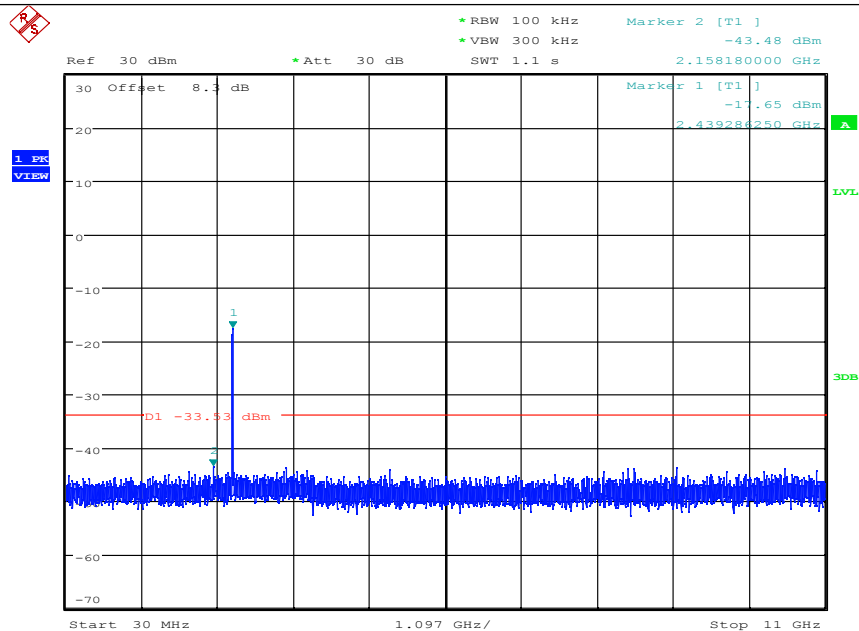


Date: 1.JUN.2021 17:57:36

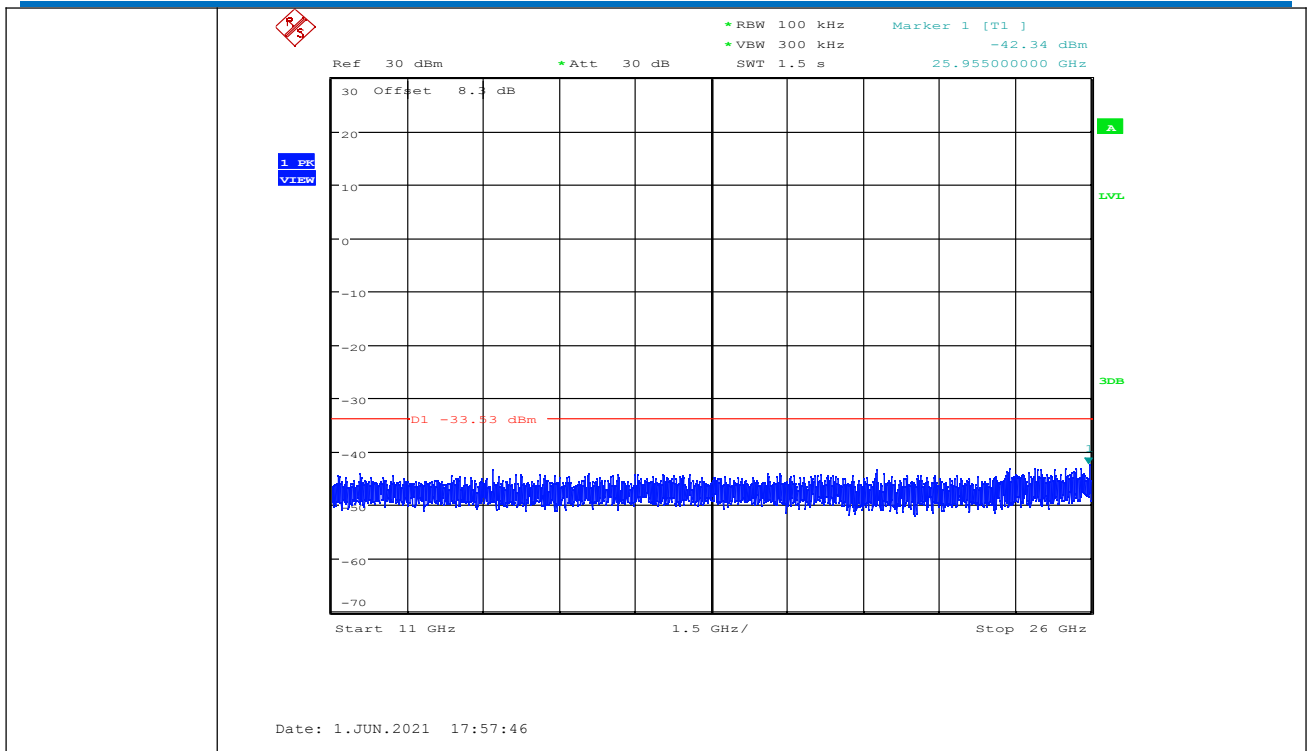


11N20SISO_HCH_Graphs

Pref/11N20SIS
O/HCH

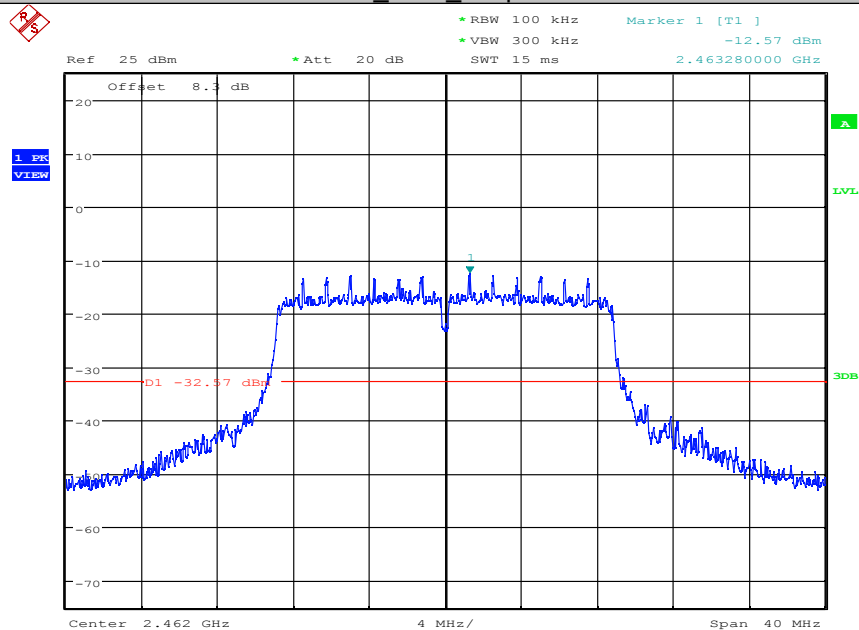


Date: 1.JUN.2021 18:05:29

Puw/11N20SIS
O/HCH

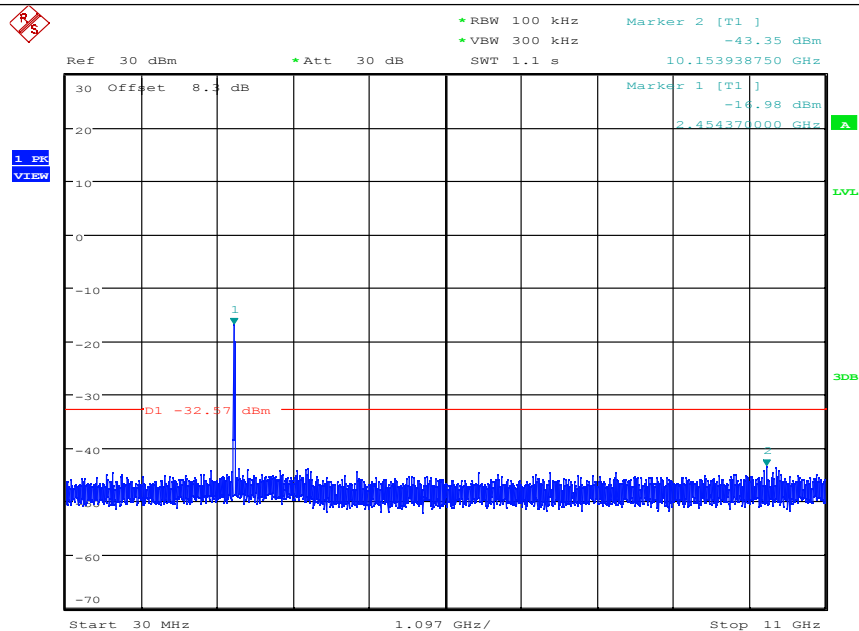

Date: 1.JUN.2021 18:05:42

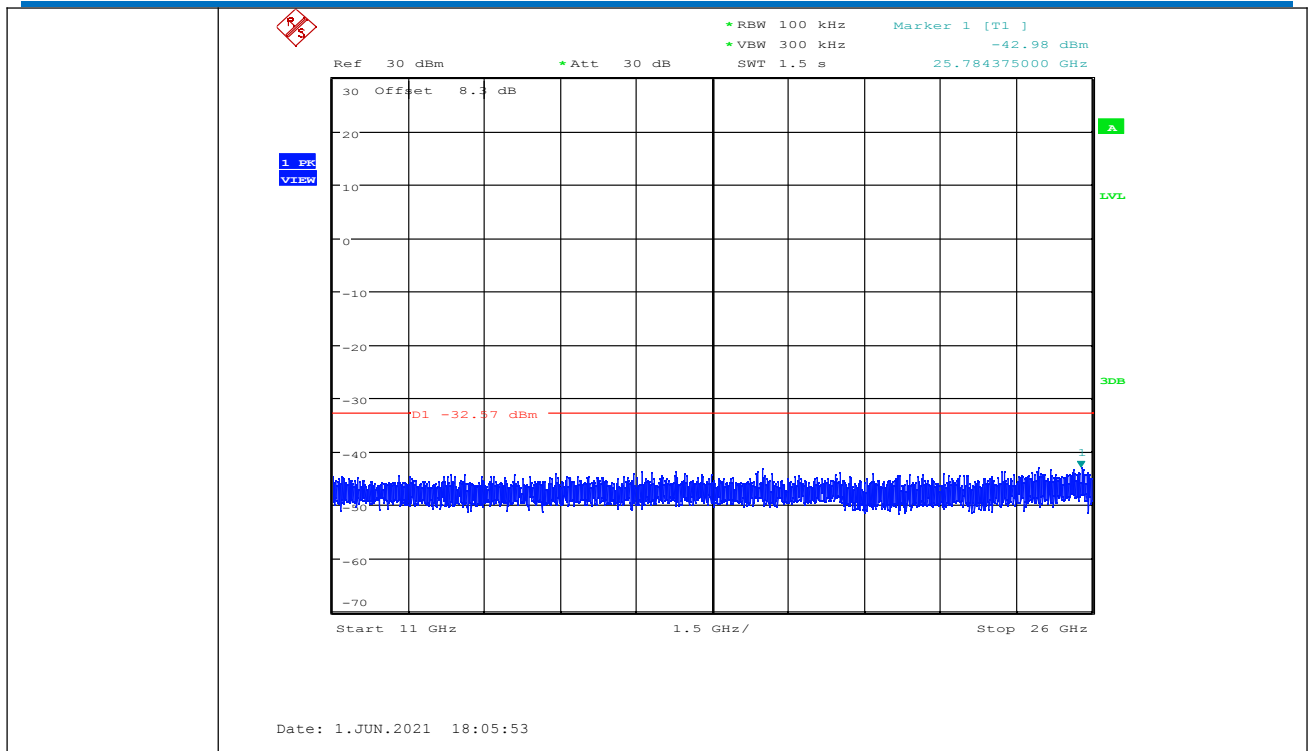

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

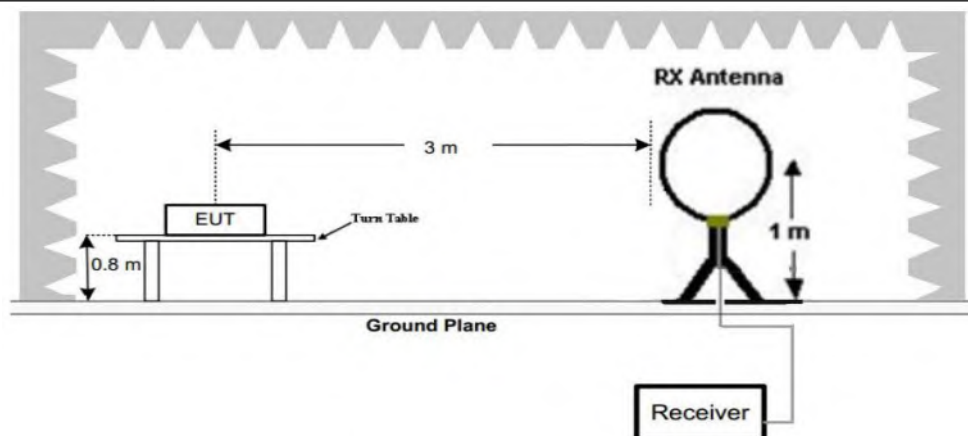


Figure 1. Below 30MHz

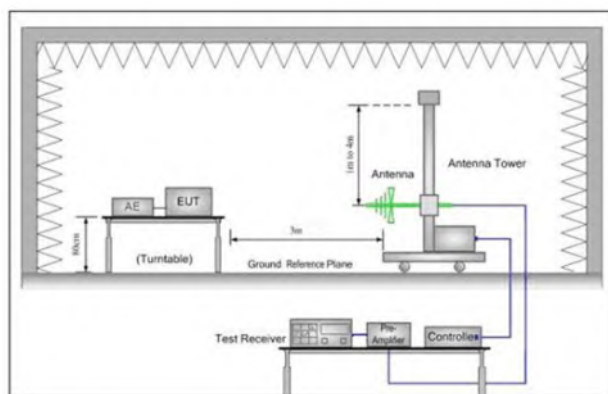


Figure 2. 30MHz to 1GHz

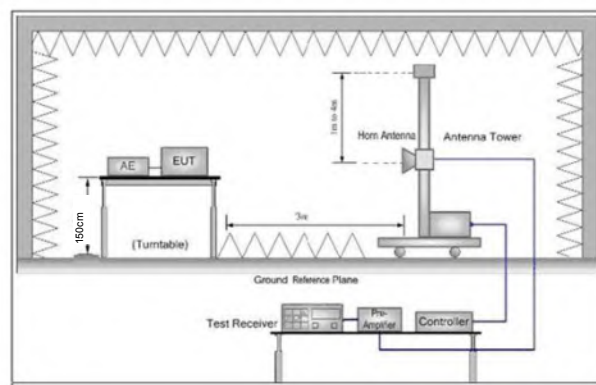


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

5.8.1 Radiated emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

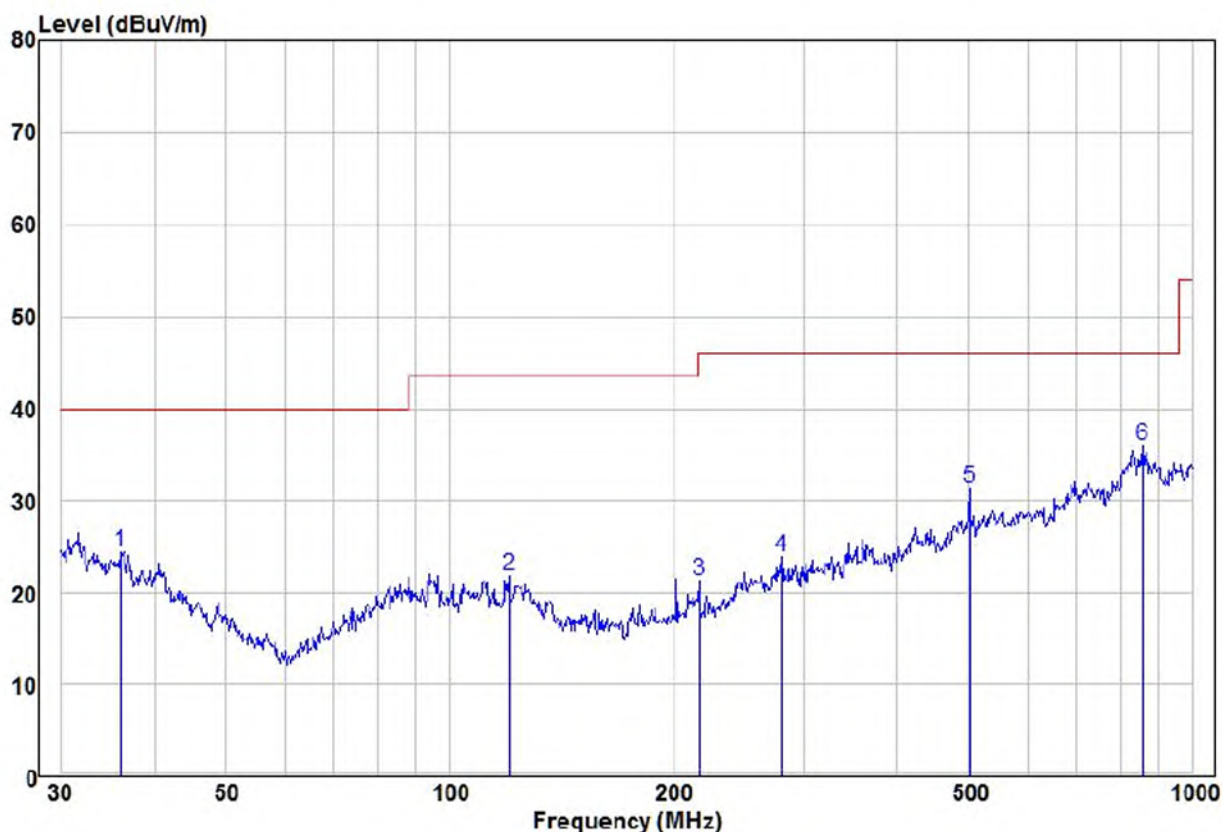

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	36.00	10.24	14.24	24.48	40.00	-15.52	Peak	VERTICAL
2	120.28	11.21	10.69	21.90	43.50	-21.60	Peak	VERTICAL
3	216.78	12.37	9.02	21.39	46.00	-24.61	Peak	VERTICAL
4	280.02	10.88	13.07	23.95	46.00	-22.05	Peak	VERTICAL
5	501.18	13.09	18.29	31.38	46.00	-14.62	Peak	VERTICAL
6 pp	857.02	11.92	24.02	35.94	46.00	-10.06	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

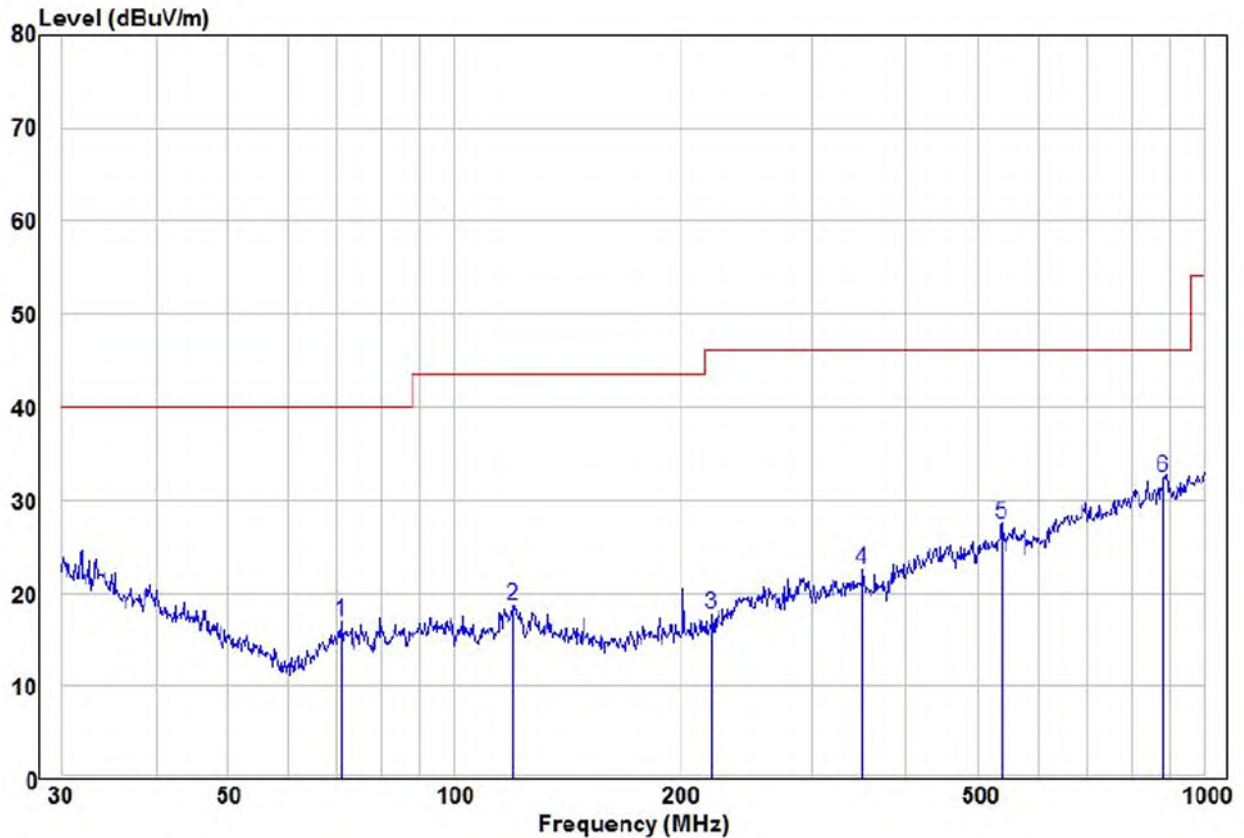

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	70.83	8.56	8.29	16.85	40.00	-23.15	Peak	HORIZONTAL
2	119.86	7.89	10.69	18.58	43.50	-24.92	Peak	HORIZONTAL
3	220.62	8.53	9.21	17.74	46.00	-28.26	Peak	HORIZONTAL
4	350.48	7.50	14.96	22.46	46.00	-23.54	Peak	HORIZONTAL
5	537.59	8.86	18.67	27.53	46.00	-18.47	Peak	HORIZONTAL
6 pp	884.50	8.43	23.90	32.33	46.00	-13.67	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.


30MHz~1GHz

Standby battery 1#

Test mode:

Transmitting

Vertical

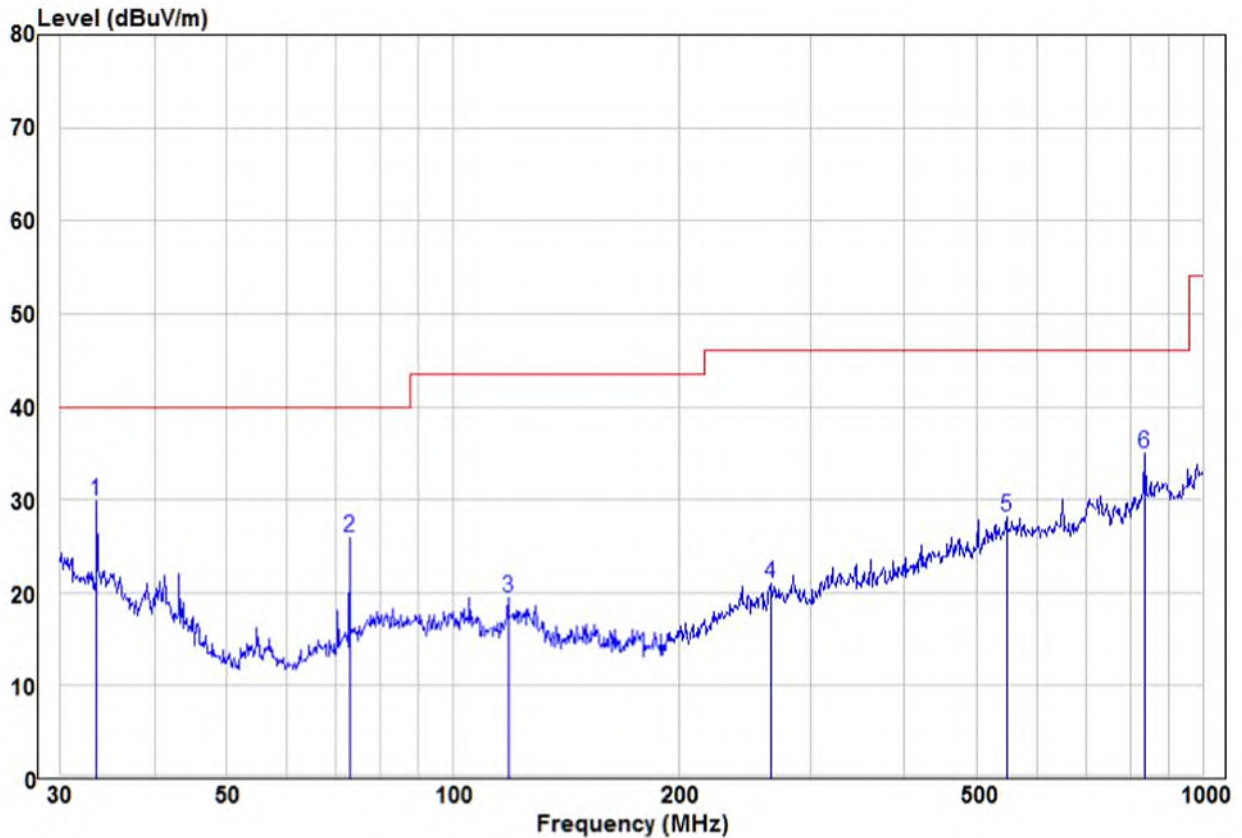

		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	33.56	14.90	14.99	29.89	40.00	-10.11 Peak
2		72.85	17.39	8.62	26.01	40.00	-13.99 Peak
3		118.60	8.90	10.62	19.52	43.50	-23.98 Peak
4		264.75	8.50	12.57	21.07	46.00	-24.93 Peak
5		547.10	9.33	18.77	28.10	46.00	-17.90 Peak
6		836.24	10.78	24.12	34.90	46.00	-11.10 Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

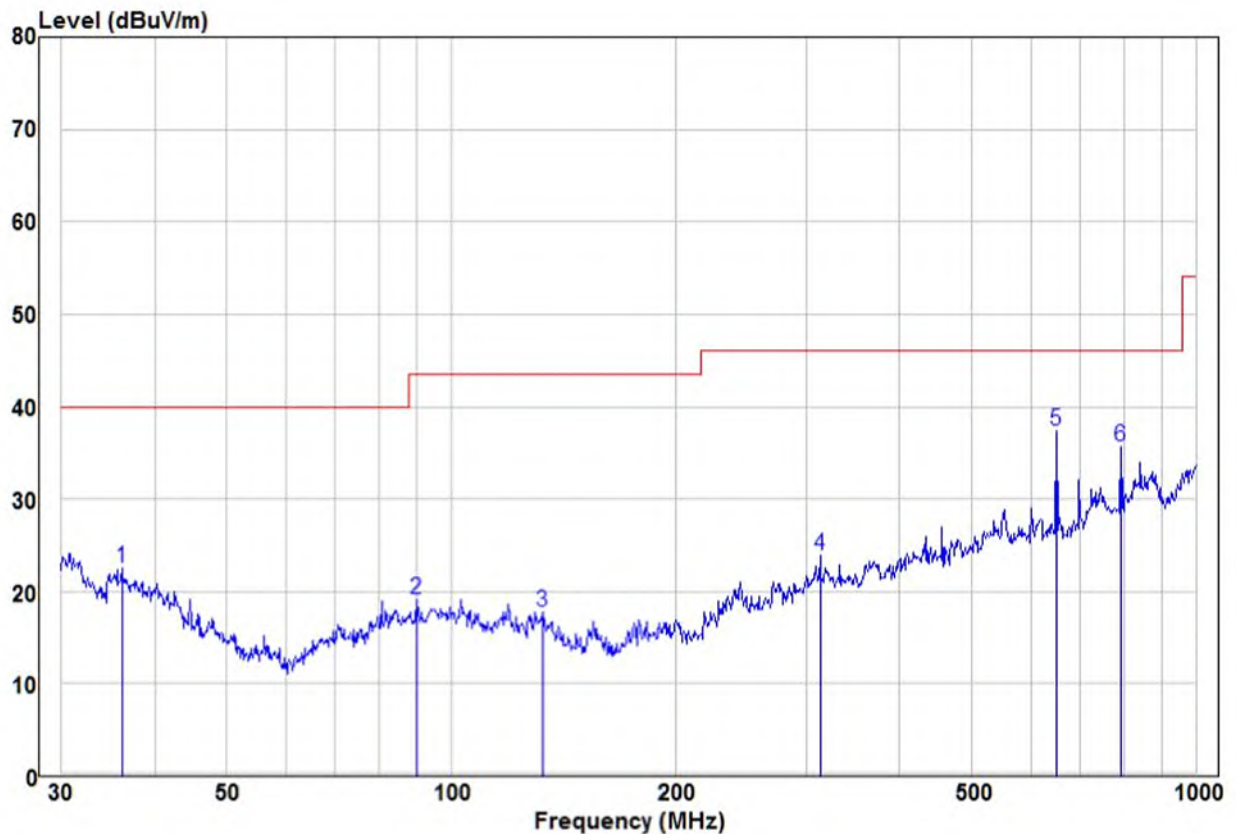

	Read Freq	Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	36.13	8.31	14.19	22.50	40.00	-17.50	Peak	HORIZONTAL
2	89.90	9.06	10.02	19.08	43.50	-24.42	Peak	HORIZONTAL
3	132.69	8.09	9.71	17.80	43.50	-25.70	Peak	HORIZONTAL
4	312.18	9.84	14.03	23.87	46.00	-22.13	Peak	HORIZONTAL
5 pp	649.66	17.67	19.67	37.34	46.00	-8.66	Peak	HORIZONTAL
6	793.40	13.45	22.27	35.72	46.00	-10.28	Peak	HORIZONTAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

30MHz~1GHz		
Standby battery 2#		
Test mode:	Transmitting	Vertical

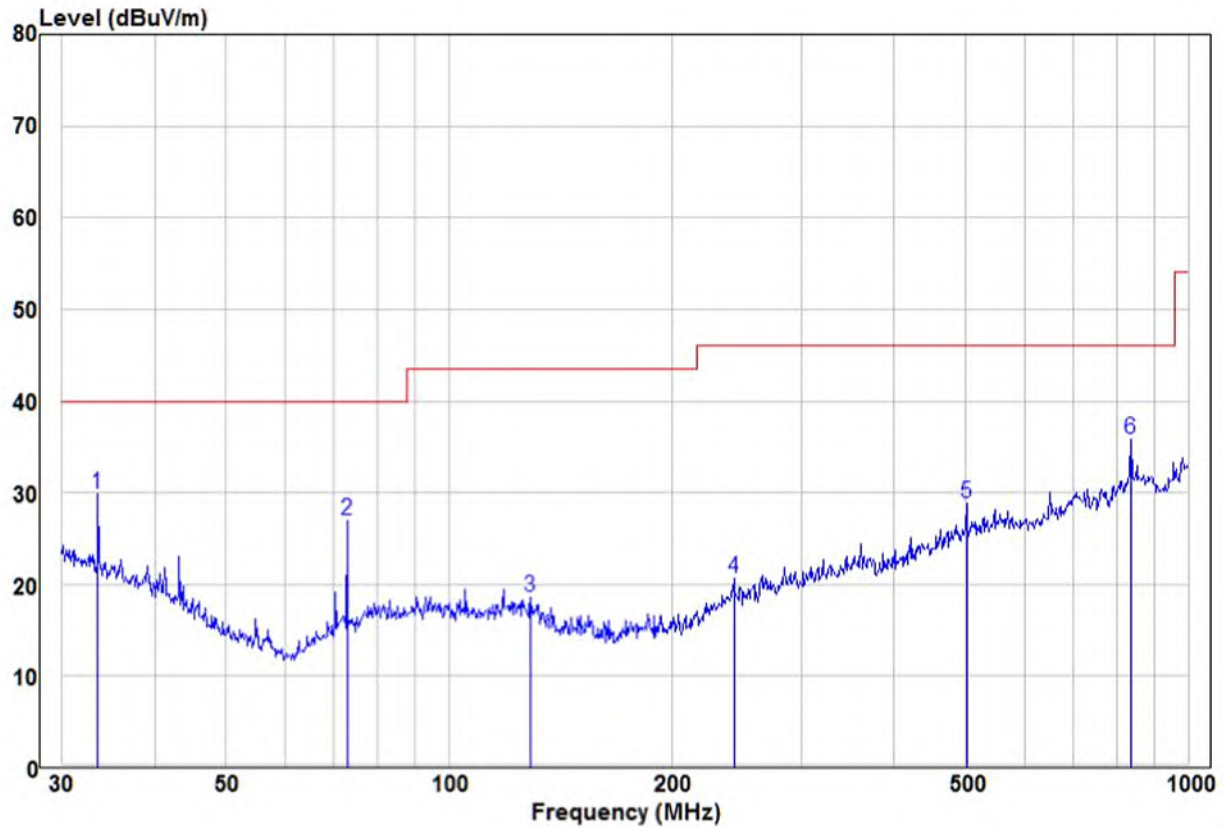

	Freq	Read		Limit	Over		
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	33.56	14.90	14.99	29.89	40.00	-10.11	Peak
2	72.85	18.39	8.62	27.01	40.00	-12.99	Peak
3	129.01	8.31	10.36	18.67	43.50	-24.83	Peak
4	242.53	8.97	11.74	20.71	46.00	-25.29	Peak
5	501.18	10.52	18.29	28.81	46.00	-17.19	Peak
6 pp	836.24	11.78	24.12	35.90	46.00	-10.10	Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

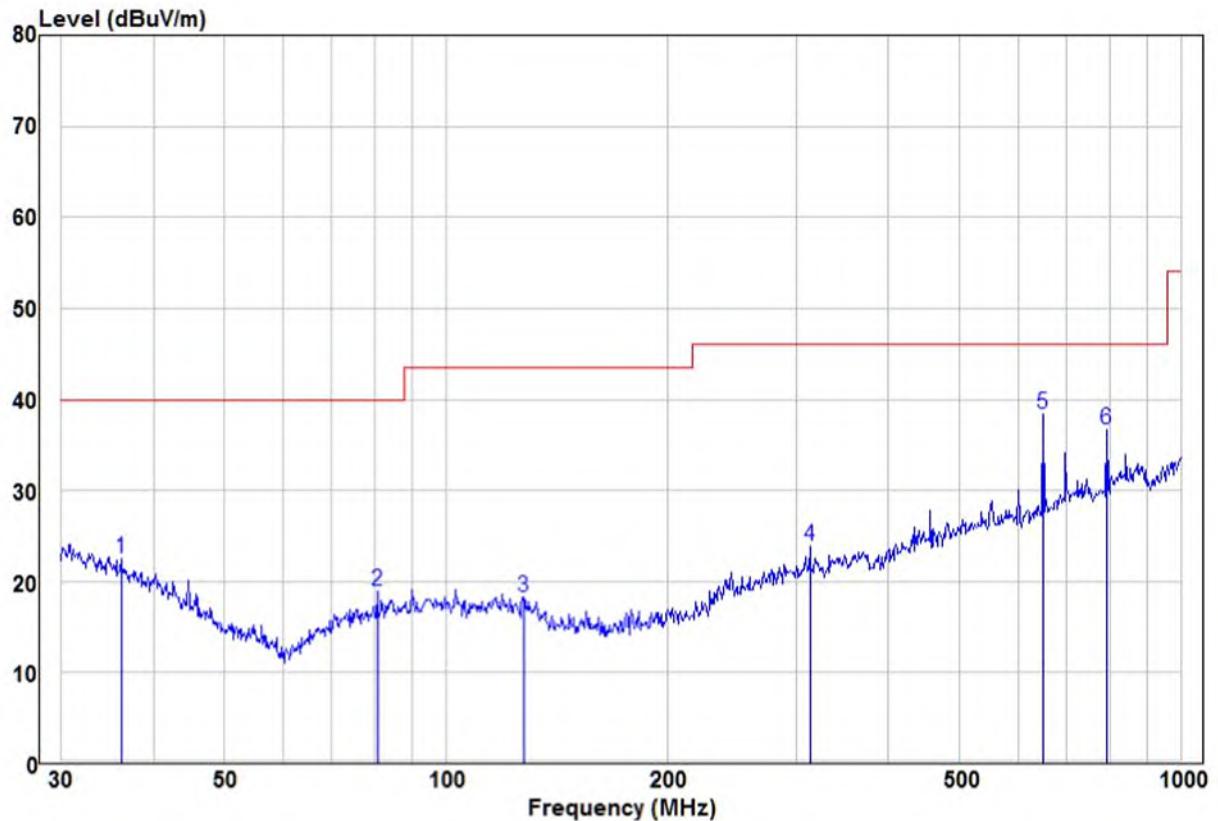

	Freq	Read		Limit	Over		
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	36.13	8.31	14.19	22.50	40.00	-17.50	Peak
2	80.64	9.06	9.80	18.86	40.00	-21.14	Peak
3	127.66	7.93	10.41	18.34	43.50	-25.16	Peak
4	312.18	9.84	14.03	23.87	46.00	-22.13	Peak
5 pp	649.66	18.67	19.67	38.34	46.00	-7.66	Peak
6	793.40	14.45	22.27	36.72	46.00	-9.28	Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

30MHz~1GHz		
Standby battery 3#		
Test mode:	Transmitting	Vertical

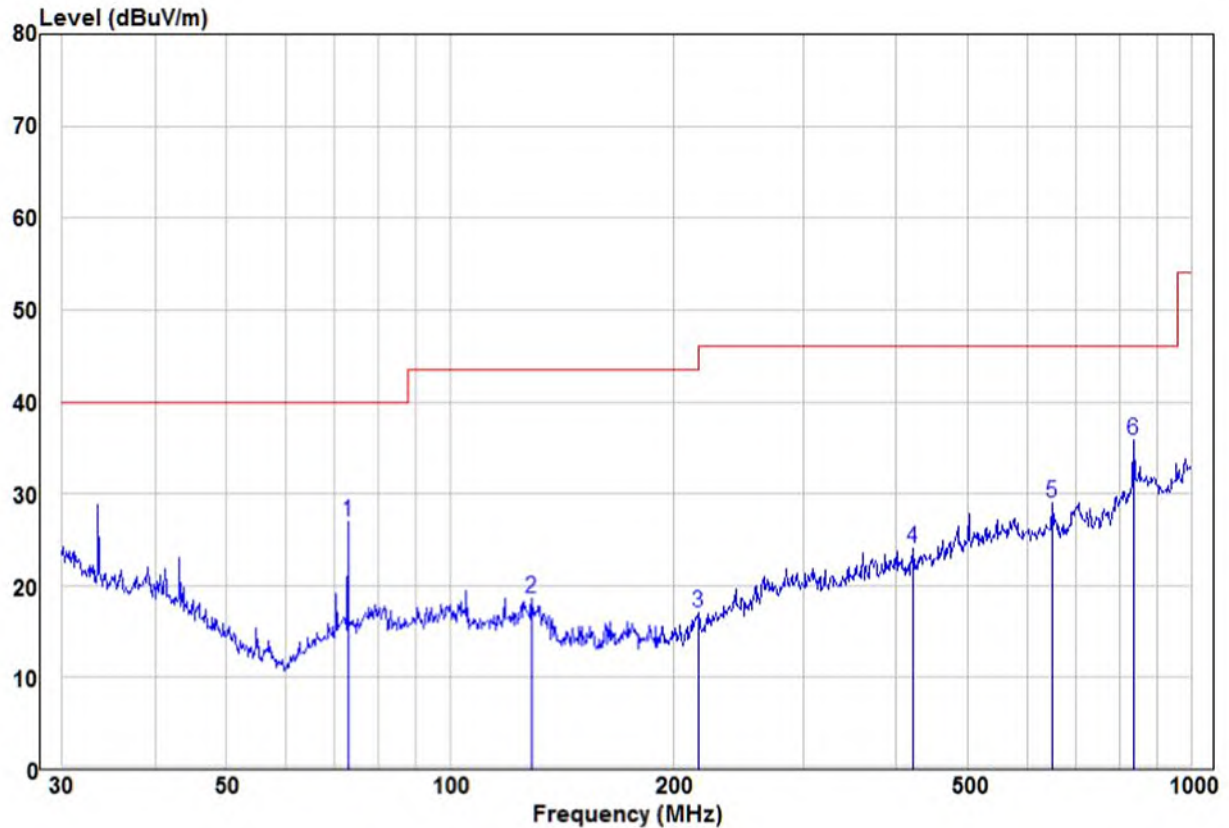

	Read Freq	Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	72.85	18.39	8.62	27.01	40.00	-12.99	Peak	VERTICAL
2	129.01	8.31	10.36	18.67	43.50	-24.83	Peak	VERTICAL
3	216.02	8.02	9.00	17.02	46.00	-28.98	Peak	VERTICAL
4	422.06	8.18	15.85	24.03	46.00	-21.97	Peak	VERTICAL
5	649.66	9.33	19.67	29.00	46.00	-17.00	Peak	VERTICAL
6 pp	836.24	11.78	24.12	35.90	46.00	-10.10	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

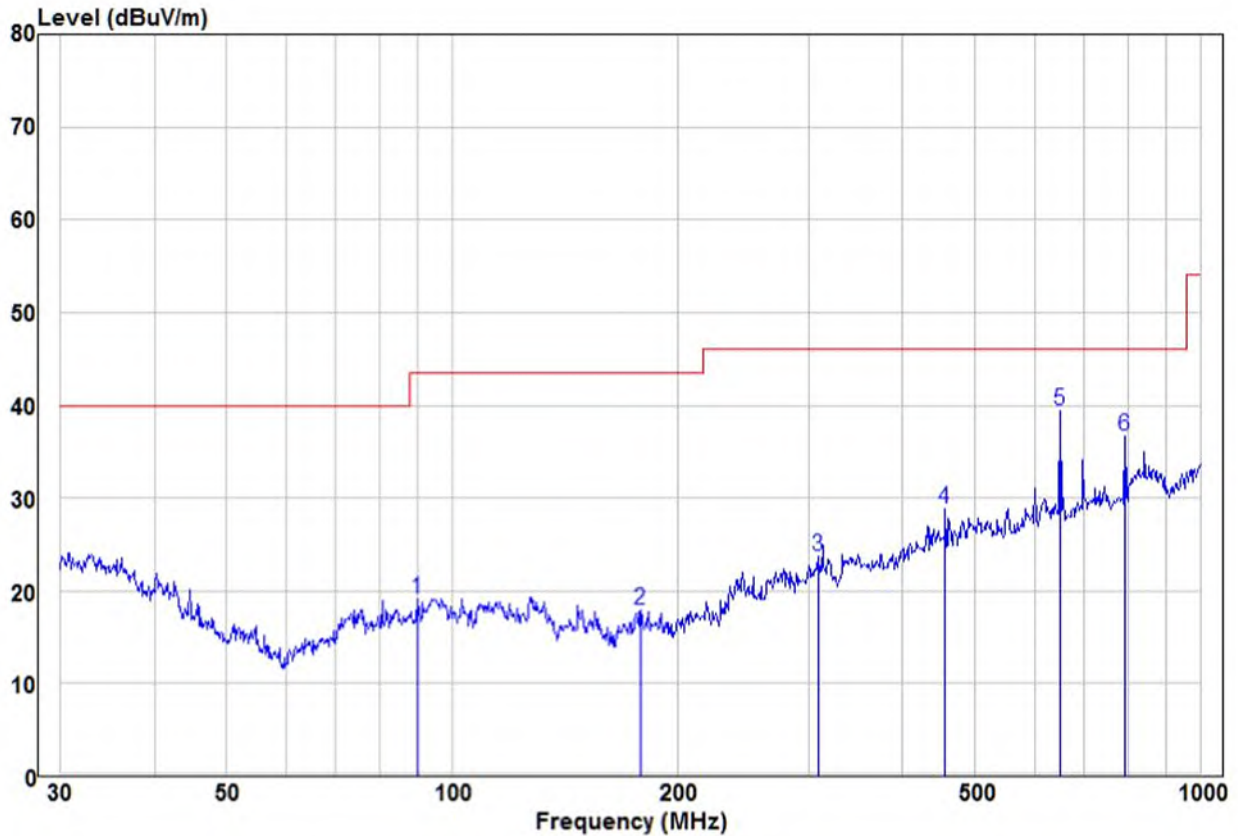

	Read Freq	Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	89.90	9.06	10.02	19.08	43.50	-24.42	Peak	HORIZONTAL
2	178.76	9.60	8.25	17.85	43.50	-25.65	Peak	HORIZONTAL
3	307.83	9.79	13.92	23.71	46.00	-22.29	Peak	HORIZONTAL
4	455.91	11.98	16.91	28.89	46.00	-17.11	Peak	HORIZONTAL
5 pp	649.66	19.67	19.67	39.34	46.00	-6.66	Peak	HORIZONTAL
6	793.40	14.45	22.27	36.72	46.00	-9.28	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.8.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	53.10	-4.26	48.84	74	-25.16	peak	H
4824.000	37.61	-4.26	33.35	54	-20.65	AVG	H
7236.000	50.99	1.18	52.17	74	-21.83	peak	H
7236.000	37.81	1.18	38.99	54	-15.01	AVG	H
4824.000	54.39	-4.26	50.13	74	-23.87	peak	V
4824.000	38.65	-4.26	34.39	54	-19.61	AVG	V
7236.000	52.09	1.18	53.27	74	-20.73	peak	V
7236.000	35.38	1.18	36.56	54	-17.44	AVG	V

Test mode:		802.11b(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	52.46	-4.12	48.34	74	-25.66	peak	H
4874.000	36.46	-4.12	32.34	54	-21.66	AVG	H
7311.000	49.55	1.46	51.01	74	-22.99	peak	H
7311.000	36.20	1.46	37.66	54	-16.34	AVG	H
4874.000	53.13	-4.12	49.01	74	-24.99	peak	V
4874.000	37.62	-4.12	33.50	54	-20.50	AVG	V
7311.000	49.89	1.46	51.35	74	-22.65	peak	V
7311.000	36.25	1.46	37.71	54	-16.29	AVG	V

Test mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	52.31	-4.03	48.28	74	-25.72	peak	H
4924.000	37.72	-4.03	33.69	54	-20.31	AVG	H
7386.000	50.18	1.66	51.84	74	-22.16	peak	H
7386.000	36.64	1.66	38.30	54	-15.70	AVG	H
4924.000	53.40	-4.03	49.37	74	-24.63	peak	V
4924.000	38.53	-4.03	34.50	54	-19.50	AVG	V
7386.000	49.89	1.66	51.55	74	-22.45	peak	V
7386.000	36.45	1.66	38.11	54	-15.89	AVG	V

Test mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	53.00	-4.26	48.74	74	-25.16	peak	H
4824.000	37.57	-4.26	33.31	54	-20.65	AVG	H
7236.000	51.71	1.18	52.89	74	-21.83	peak	H
7236.000	37.93	1.18	39.11	54	-15.01	AVG	H
4824.000	56.24	-4.26	51.98	74	-23.87	peak	V
4824.000	38.09	-4.26	33.83	54	-19.61	AVG	V
7236.000	50.75	1.18	51.93	74	-20.73	peak	V
7236.000	35.69	1.18	36.87	54	-17.44	AVG	V

Test mode:		802.11g(6Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	52.65	-4.12	48.53	74	-25.66	peak	H
4874.000	37.59	-4.12	33.47	54	-21.66	AVG	H
7311.000	48.81	1.46	50.27	74	-22.99	peak	H
7311.000	35.41	1.46	36.87	54	-16.34	AVG	H
4874.000	52.93	-4.12	48.81	74	-24.99	peak	V
4874.000	37.79	-4.12	33.67	54	-20.50	AVG	V
7311.000	50.10	1.46	51.56	74	-22.65	peak	V
7311.000	35.68	1.46	37.14	54	-16.29	AVG	V

Test mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	51.32	-4.03	47.29	74	-25.72	peak	H
4924.000	38.72	-4.03	34.69	54	-20.31	AVG	H
7386.000	49.26	1.66	50.92	74	-22.16	peak	H
7386.000	36.56	1.66	38.22	54	-15.70	AVG	H
4924.000	54.56	-4.03	50.53	74	-24.63	peak	V
4924.000	37.07	-4.03	33.04	54	-19.50	AVG	V
7386.000	50.57	1.66	52.23	74	-22.45	peak	V
7386.000	37.54	1.66	39.20	54	-15.89	AVG	V

Test mode:		802.11bn HT20 (6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	53.58	-4.26	49.32	74	-25.16	peak	H
4824.000	37.70	-4.26	33.44	54	-20.65	AVG	H
7236.000	51.78	1.18	52.96	74	-21.83	peak	H
7236.000	37.70	1.18	38.88	54	-15.01	AVG	H
4824.000	55.94	-4.26	51.68	74	-23.87	peak	V
4824.000	39.87	-4.26	35.61	54	-19.61	AVG	V
7236.000	50.44	1.18	51.62	74	-20.73	peak	V
7236.000	35.76	1.18	36.94	54	-17.44	AVG	V

Test mode:		802.11bn HT20 (6.5Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	53.11	-4.12	48.99	74	-25.66	peak	H
4874.000	36.83	-4.12	32.71	54	-21.66	AVG	H
7311.000	49.95	1.46	51.41	74	-22.99	peak	H
7311.000	36.18	1.46	37.64	54	-16.34	AVG	H
4874.000	54.05	-4.12	49.93	74	-24.99	peak	V
4874.000	37.95	-4.12	33.83	54	-20.50	AVG	V
7311.000	48.34	1.46	49.80	74	-22.65	peak	V
7311.000	35.33	1.46	36.79	54	-16.29	AVG	V

Test mode:		802.11bn HT20 (6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	52.31	-4.03	48.28	74	-25.72	peak	H
4924.000	37.72	-4.03	33.69	54	-20.31	AVG	H
7386.000	50.18	1.66	51.84	74	-22.16	peak	H
7386.000	36.64	1.66	38.30	54	-15.70	AVG	H
4924.000	53.40	-4.03	49.37	74	-24.63	peak	V
4924.000	38.53	-4.03	34.50	54	-19.50	AVG	V
7386.000	49.89	1.66	51.55	74	-22.45	peak	V
7386.000	36.45	1.66	38.11	54	-15.89	AVG	V

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

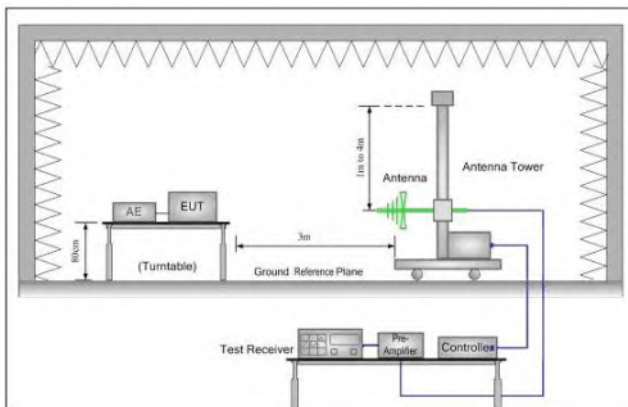


Figure 1. 30MHz to 1GHz

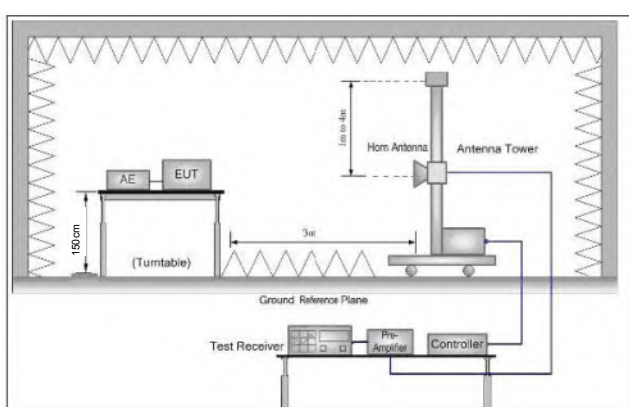


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

		then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Mode:	Test	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:		Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; Only the worst case is recorded in the report.
Test Results:		Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	59.18	-9.2	49.98	74	-24.02	peak	H
2390.000	44.56	-9.2	35.36	54	-18.64	AVG	H
2400.000	59.29	-9.39	49.90	74	-24.10	peak	H
2400.000	46.67	-9.39	37.28	54	-16.72	AVG	H
2390.000	59.03	-9.2	49.83	74	-24.17	peak	V
2390.000	44.66	-9.2	35.46	54	-18.54	AVG	V
2400.000	60.00	-9.39	50.61	74	-23.39	peak	V
2400.000	46.76	-9.39	37.37	54	-16.63	AVG	V

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	57.98	-9.29	48.69	74	-25.31	peak	H
2483.500	43.50	-9.29	34.21	54	-19.79	AVG	H
2483.500	58.08	-9.29	48.79	74	-25.21	peak	V
2483.500	46.30	-9.29	37.01	54	-16.99	AVG	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	58.63	-9.2	49.43	74	-24.57	peak	H
2390.000	44.54	-9.2	35.34	54	-18.66	AVG	H
2400.000	59.65	-9.39	50.26	74	-23.74	peak	H
2400.000	46.37	-9.39	36.98	54	-17.02	AVG	H
2390.000	58.47	-9.2	49.27	74	-24.73	peak	V
2390.000	44.51	-9.2	35.31	54	-18.69	AVG	V
2400.000	59.70	-9.39	50.31	74	-23.69	peak	V
2400.000	46.75	-9.39	37.36	54	-16.64	AVG	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	57.43	-9.29	48.14	74	-25.86	peak	H
2483.500	43.58	-9.29	34.29	54	-19.71	AVG	H
2483.500	58.14	-9.29	48.85	74	-25.15	peak	V
2483.500	46.23	-9.29	36.94	54	-17.06	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	58.39	-9.2	49.19	74	-24.81	peak	H
2390.000	44.24	-9.2	35.04	54	-18.96	AVG	H
2400.000	59.35	-9.39	49.96	74	-24.04	peak	H
2400.000	46.08	-9.39	36.69	54	-17.31	AVG	H
2390.000	58.43	-9.2	49.23	74	-24.77	peak	V
2390.000	44.18	-9.2	34.98	54	-19.02	AVG	V
2400.000	60.08	-9.39	50.69	74	-23.31	peak	V
2400.000	46.94	-9.39	37.55	54	-16.45	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	58.41	-9.29	49.12	74	-24.88	peak	H
2483.500	43.87	-9.29	34.58	54	-19.42	AVG	H
2483.500	57.80	-9.29	48.51	74	-25.49	peak	V
2483.500	45.81	-9.29	36.52	54	-17.48	AVG	V

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9KHz~30MHz:



30MHz~1GHz:

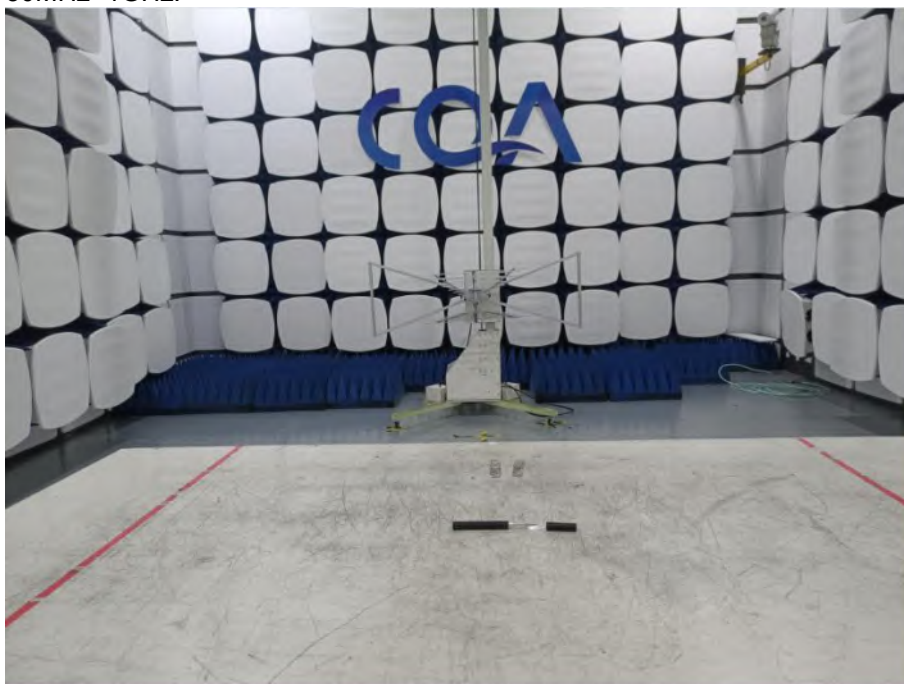

Above 1GHz:





6.2 Conducted Emission






7 Photographs - EUT Constructional Details



Test model No.: WS1


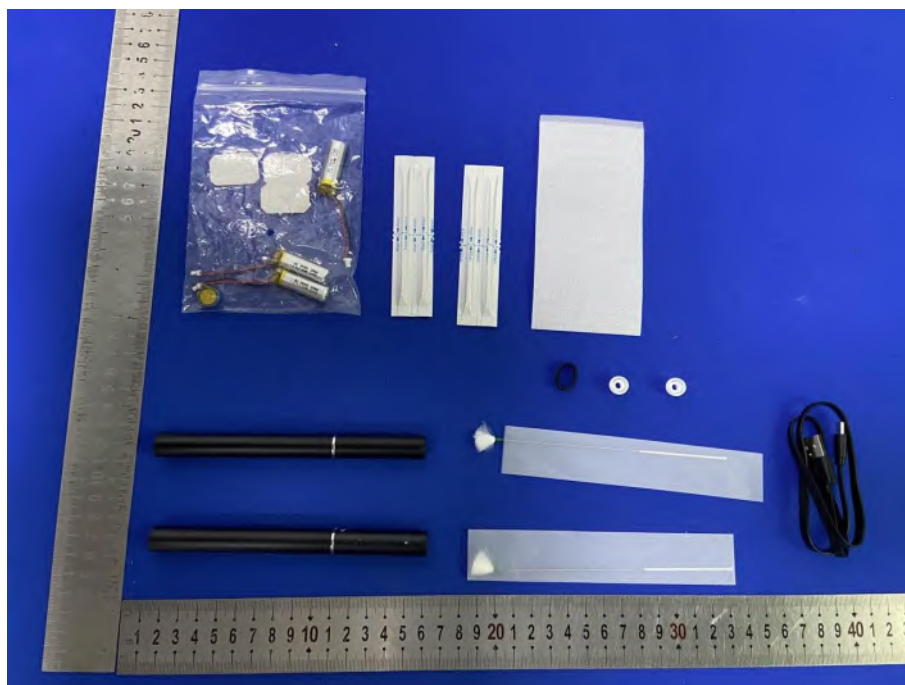



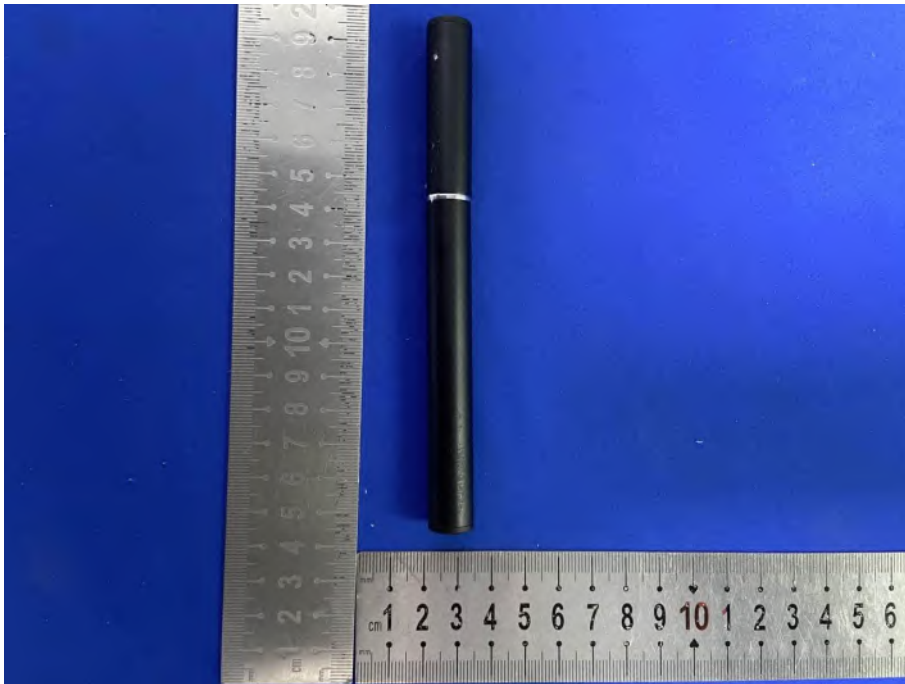


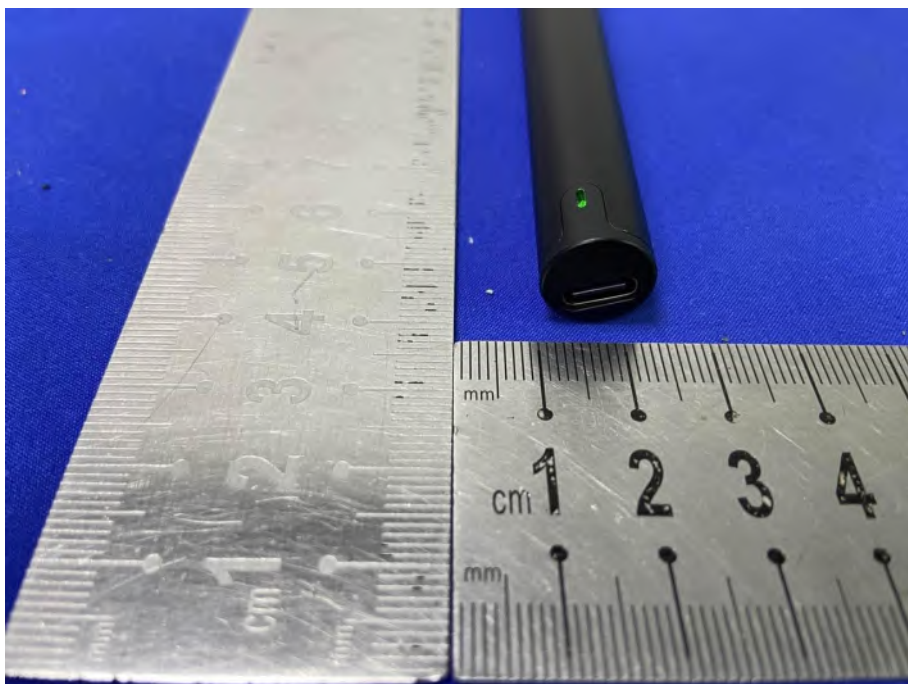

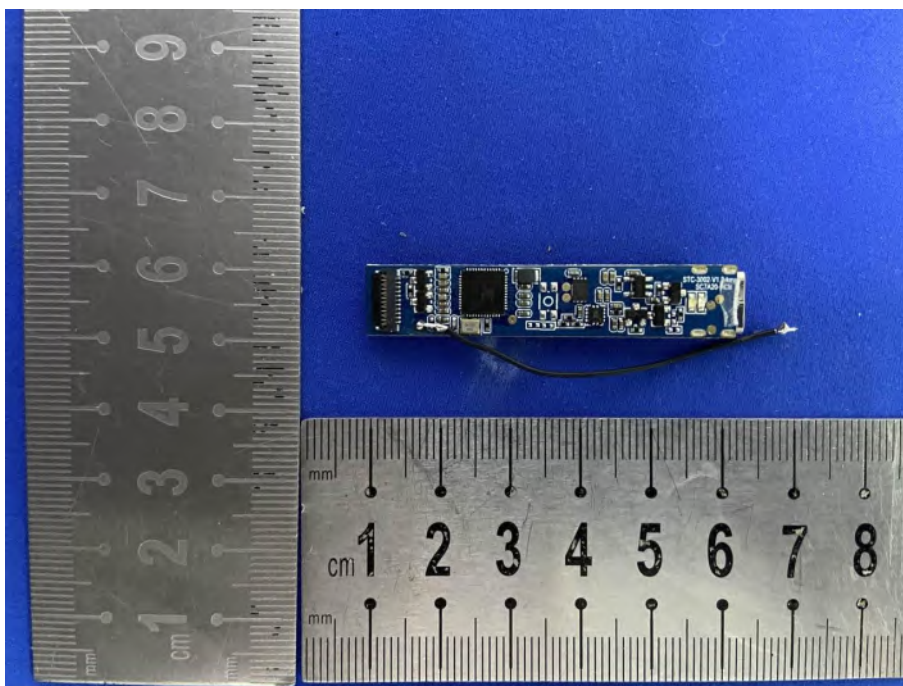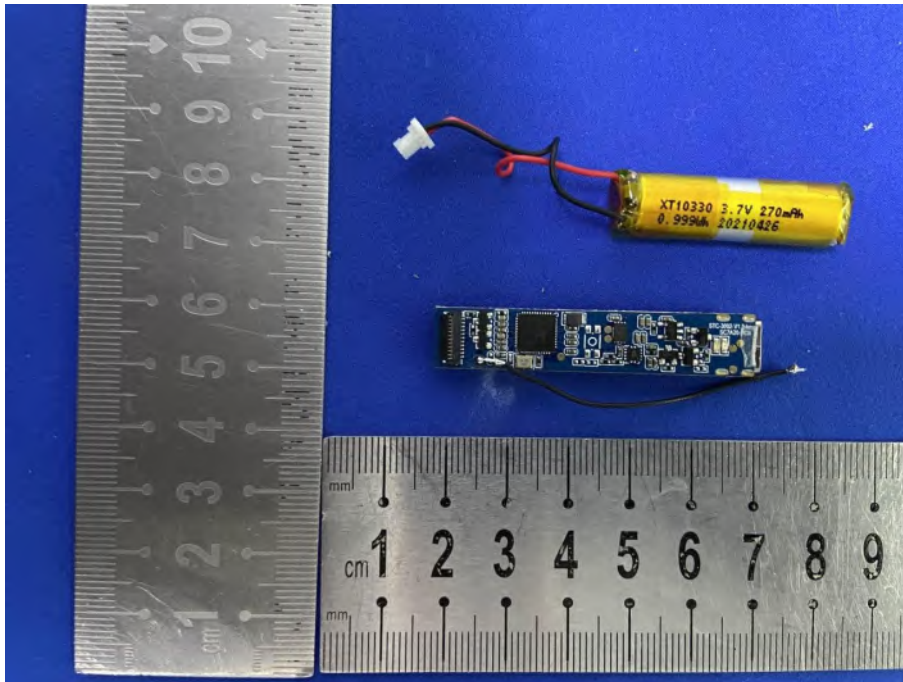

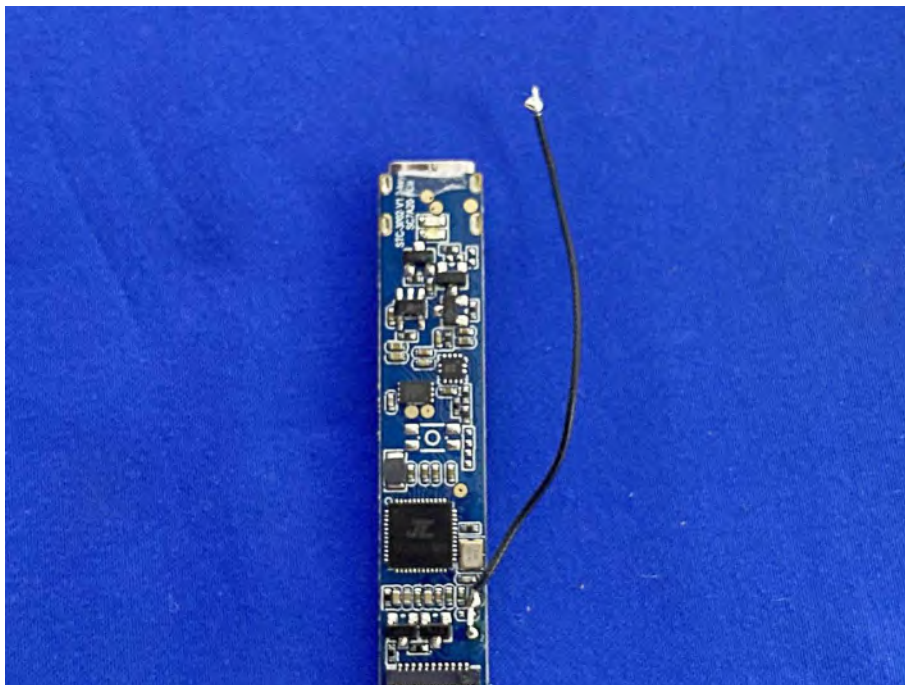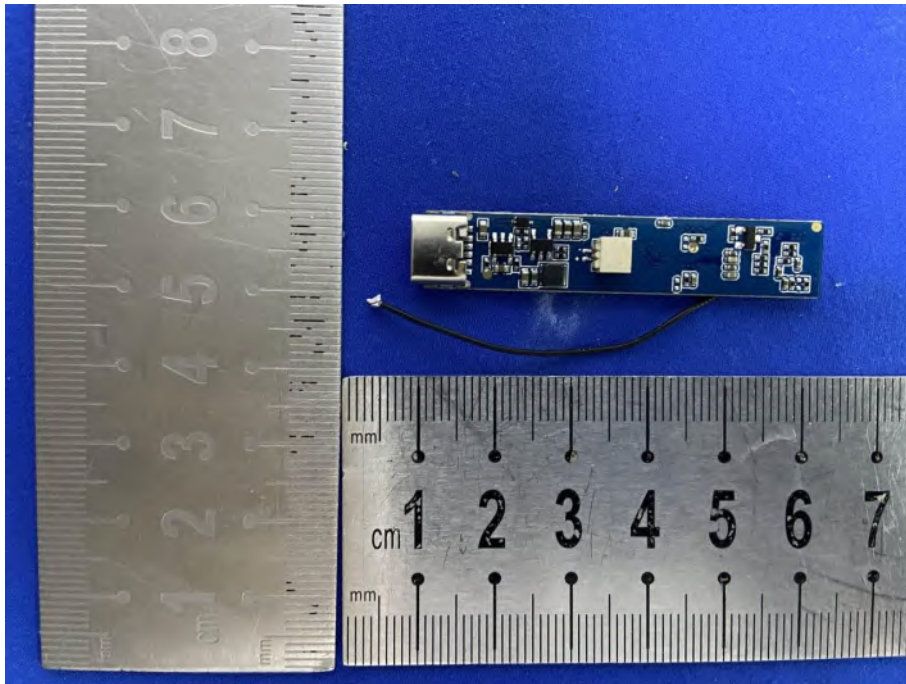

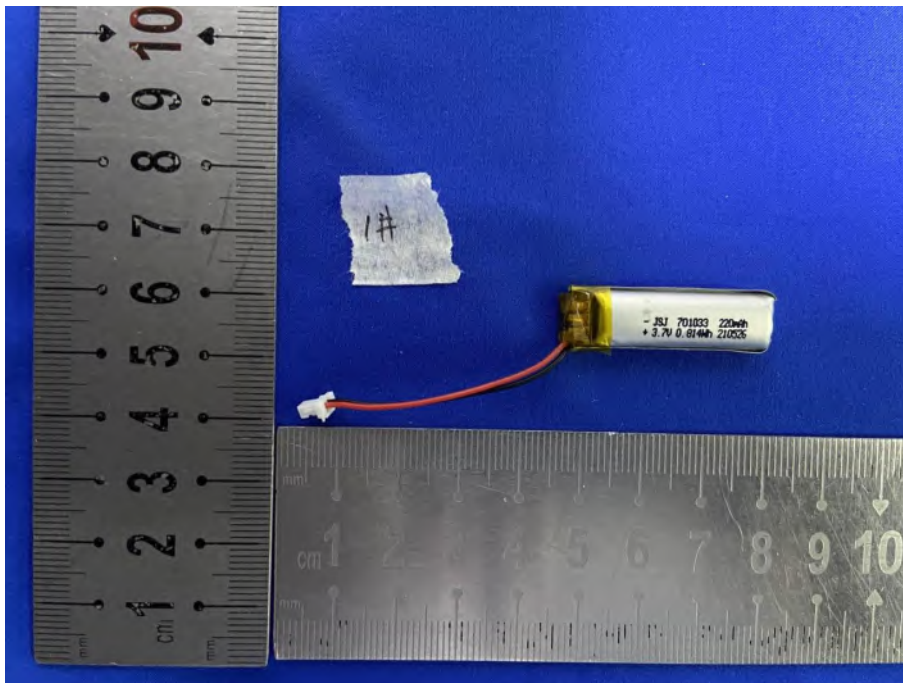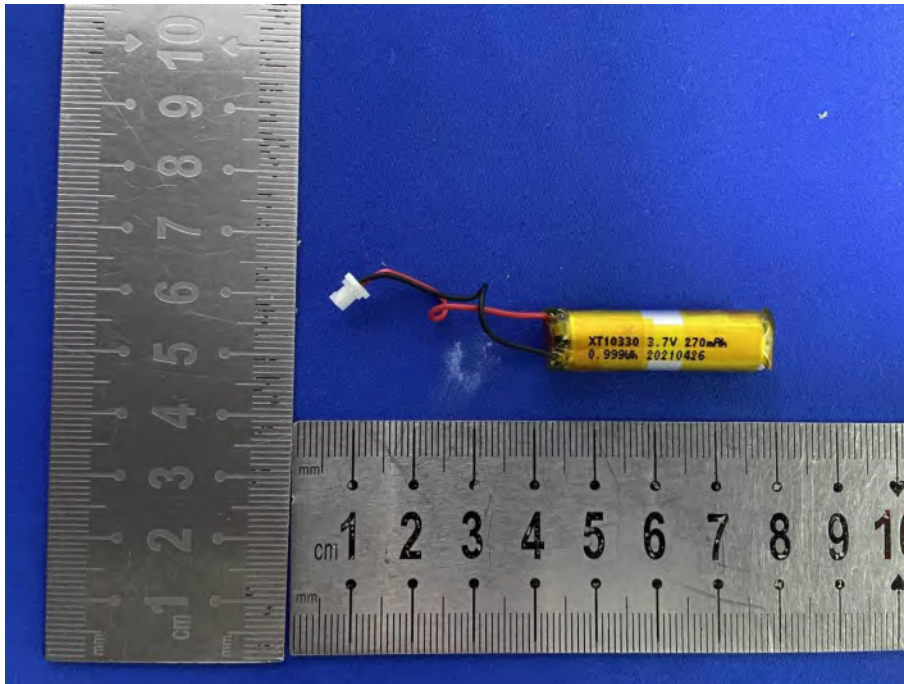

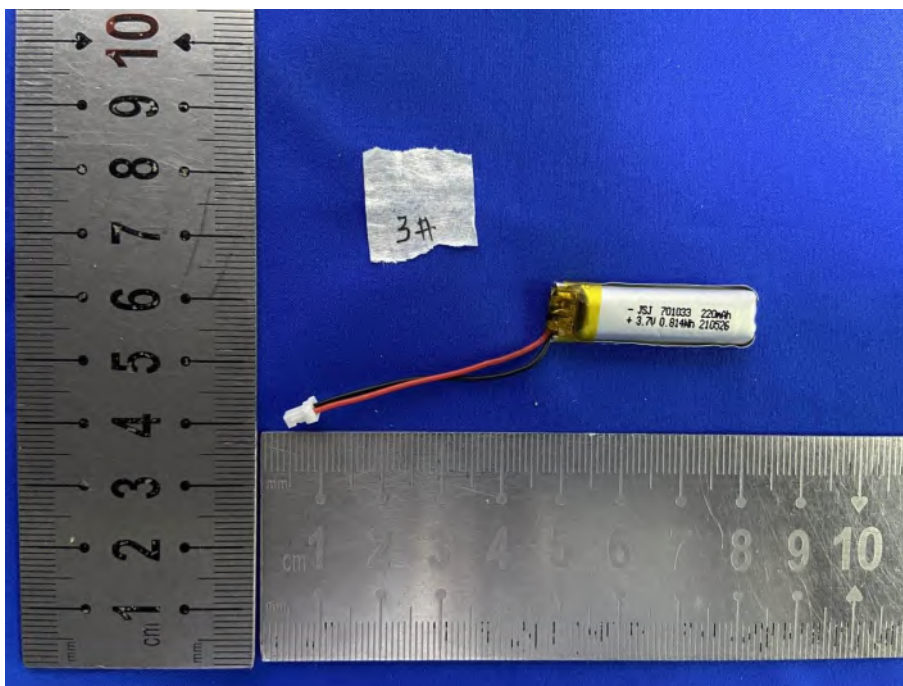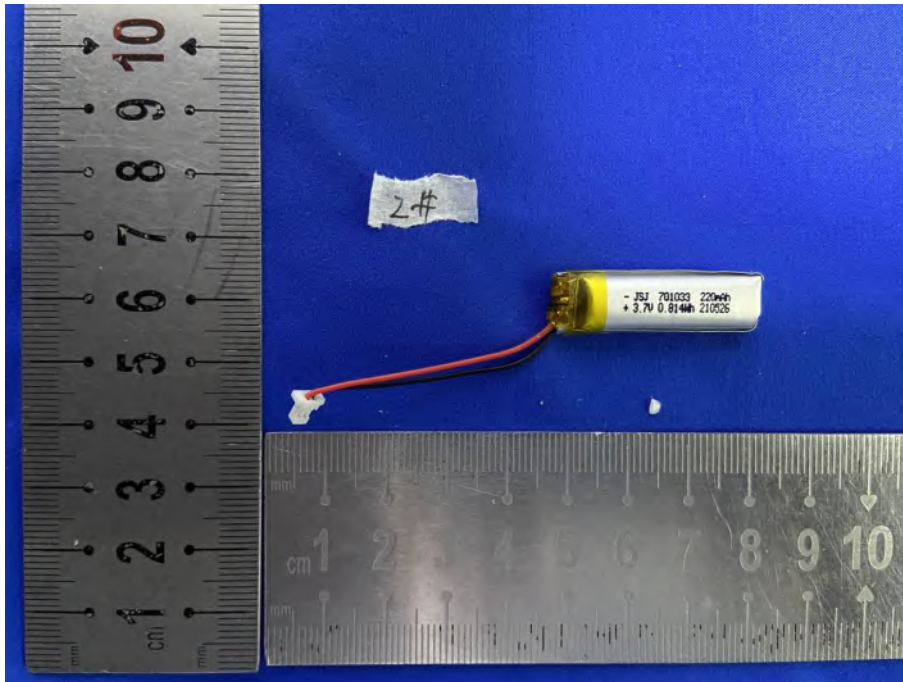

THE END