

TEST REPORT

Report No..... : **KS2105S1418E02**
 FCC ID..... : **2AZ4M-L7**
 Applicant..... : **ShenZhen Kingtex Technology Co.,Ltd**
 Address..... : Middle , 2/F, 3 Building, Jiantai Industrial Park, No.1 District Fuqiao, Fu Yong bridge community, Baoan District, Shenzhen,China
 Manufacturer..... : ShenZhen Kingtex Technology Co.,Ltd
 Address..... : Middle , 2/F, 3 Building, Jiantai Industrial Park, No.1 District Fuqiao, Fu Yong bridge community, Baoan District, Shenzhen,China
 Product Name..... : **Tablet PC**
 Trade Mark •..... : N/A
 Model/Type reference..... : L7
 Listed Model(s)..... : N/A
 Standard..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
 Date of Receipt..... : May. 26, 2021
 Date of Test Date..... : May. 30, 2021~June, 11, 2021
 Date of issue..... : June, 11, 2021
 Test result..... : **Pass**

Compiled by: (Printed name+signature)	Rory Huang	
Supervised by: (Printed name+signature)	Eder Zhan	
Approved by: (Printed name+signature)	Neil Wan	



Testing Laboratory Name..... : **KSIGN(Guangdong) Testing Co., Ltd.**
 Address..... : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.

TABLE OF CONTENTS**Page**

1. TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. MEASUREMENT UNCERTAINTY	4
1.4. TEST DESCRIPTION	5
1.5. TEST FACILITY.....	6
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. OPERATION STATE.....	8
2.4. MEASUREMENT INSTRUMENTS LIST.....	9
2.5. TEST SOFTWARE	10
3. TEST ITEM AND RESULTS	11
3.1. ANTENNA REQUIREMENT	11
3.2. PEAK OUTPUT POWER.....	12
3.3. 99% OCCUPIED BANDWIDTH & 20DB BANDWIDTH.....	19
3.4. CARRIER FREQUENCIES SEPARATION	32
3.5. NUMBER OF HOPPING CHANNEL	35
3.6. DWELL TIME.....	37
3.7. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED).....	40
3.8. BAND EDGE EMISSIONS(RADIATED)	46
3.9. RADIATED SPURIOUS EMISSIONS.....	55
3.10. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	66
3.11. CONDUCTED EMISSION	67
4. EUT TEST PHOTOS	70
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....	72

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

KDB 558074 D01 : The measurement guidance provided herein is applicable only to Digital Transmission System (DTS) devices operating in the 902-928 MHz. 2400-2483.5 MHz and/or 5725-5850 MHz bands under § 15.247 of the FCC rules (Title 47 of the Code of Federal Regulations)

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	June, 11, 2021	Original

1.3. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01” Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.4. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Rory Huang
Conducted Emission	15.207	Pass	Rory Huang
Restricted Bands	15.205	Pass	Rory Huang
Hopping Channel Separation	15.247(a)(1)	Pass	Rory Huang
Dwell Time	15.247(a)(1)	Pass	Rory Huang
Peak Output Power	15.247(b)(1)	Pass	Rory Huang
Number of Hopping Frequency	15.247 (a)(1)	Pass	Rory Huang
Band Edge Emissions	15.247(d)	Pass	Rory Huang
Radiated Spurious Emission	15.247(c)&15.209	Pass	Rory Huang
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)(1)	Pass	Rory Huang
Pseudorandom Frequency Hopping Sequence	15.247 (a)(1)	Pass	Rory Huang

Note: The measurement uncertainty is not included in the test result.

1.5. Test Facility

Address of the report laboratory

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: CN0096

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

FCC-Registration No.: CN1272

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. Client Information

Applicant:	ShenZhen Kingtex Technology Co.,Ltd
Address:	Middle , 2/F, 3 Building, Jiantai Industrial Park, No.1 District Fuqiao, Fu Yong bridge community, Baoan District, Shenzhen,China
Manufacturer:	ShenZhen Kingtex Technology Co.,Ltd
Address:	Middle , 2/F, 3 Building, Jiantai Industrial Park, No.1 District Fuqiao, Fu Yong bridge community, Baoan District, Shenzhen,China

2.2. General Description of EUT

Test Sample Number 1:	1-1-1(Normal Sample),1-1-2(Engineering Sample)
Product Name:	Tablet PC
Marketing Name:	N/A
Model/Type reference:	L7
Listed Model(s):	/
Model Difference:	/
Power supply:	INPUT:AC 100-240V 50/60Hz 0.35A Max Output:DC 5V 2A 10.0W
Power supply(Battery):	DC 3.8V, 3800mAh, 14.44Wh
Hardware version:	V1.0
Software version:	V1.0.0
Bluetooth 5.0	
Modulation:	GFSK(DH5), π /4-DQPSK(2DH5), 8DPSK(3DH5)
Operation frequency:	2402MHz~2480MHz
Max Peak Output Power:	DH5: 1.70dBm 2DH5: 0.49dBm 3DH5: 0.45dBm
Channel number:	79
Channel separation:	1MHz
Antenna type:	FPC Antenna
Antenna gain:	0.70dBi

2.3. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in gray were the channel selected for testing.

Test mode

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode $\pi/4$ -DQPSK
12	Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. The test software is the SecureCRTSecure_V7.0.0.326 which can set the EUT into the individual test modes.

2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	03/22/2022
2	Vector Signal Generator	Agilent	N5182A	MY50142520	03/18/2022
3	Analog Signal Generator	HP	83752A	3344A00337	03/18/2022
4	Power Sensor	Agilent	E9304A	MY50390009	03/18/2022
5	Power Sensor	Agilent	E9300A	MY41498315	03/18/2022
6	Wideband Radio Communication Tester	R&S	CMW500	157282	03/18/2022
7	Climate Chamber	Angul	AGNH80L	1903042120	03/18/2022
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	03/18/2022
9	RF Control Unit	Tonscend	JS0806-2	/	03/18/2022

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	03/18/2022
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	03/22/2022
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	03/22/2022
4	Spectrum Analyzer	HP	8593E	3831U02087	03/22/2022
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	03/29/2023
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	03/27/2022
7	Spectrum Analyzer	R&S	FSV40-N	101798	03/22/2022
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	03/29/2023
9	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	03/22/2022
10	Pre-Amplifier	EMCI	EMC051835SE	980662	03/22/2022
11	Pre-Amplifier	Schwarzbeck	BBV-9721	57	04/06/2022
12	Horn Antenna	Schwarzbeck	BBHA 9170	00939	03/28/2022

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV432	1326.6105.02	03/18/2022
2	EMI Test Receiver	R&S	ESR	102524	03/18/2022
3	Manual RF Switch	JS TOYO	/	MSW-01/002	03/18/2022

Note:

- 1)The Cal. Interval was one year.
- 2)The cable loss has calculated in test result which connection between each test instruments.

2.5. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):


(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

3.2. Peak Output Power

Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration

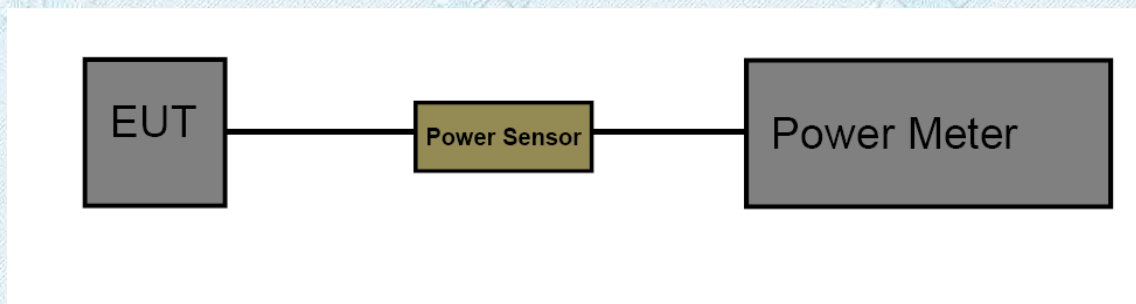

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=10 MHz for bandwidth more than 1MHz.


Test Mode



Please refer to the clause 2.3


Test Result


Test Mode:	DH5	
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
2402	1.48	30
2441	1.70	
2480	1.28	


2402 MHz

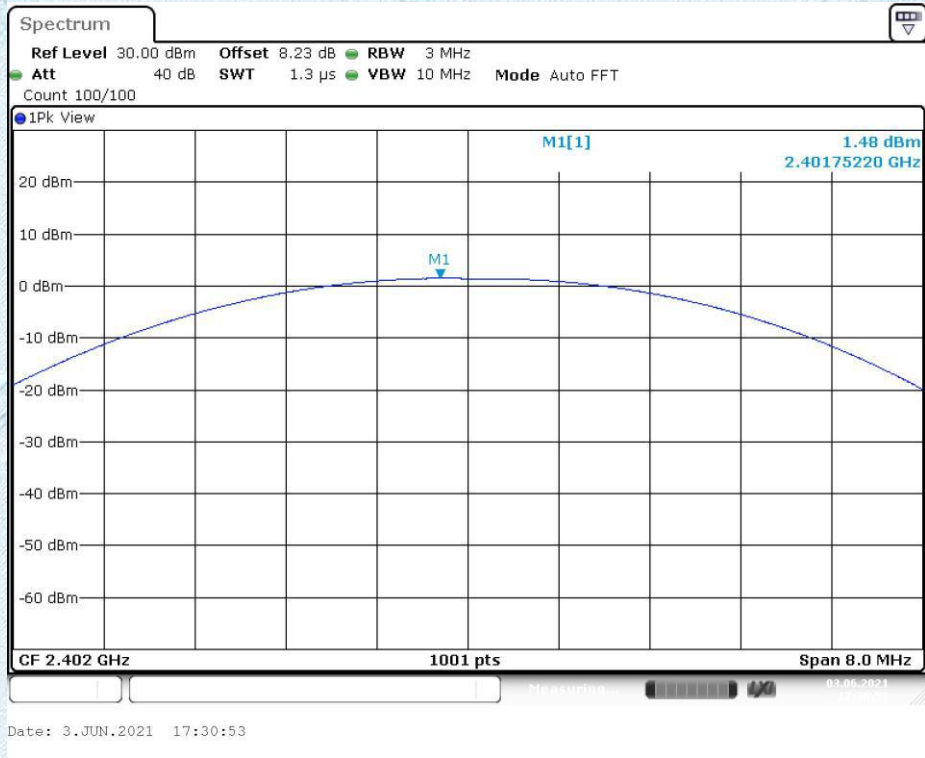


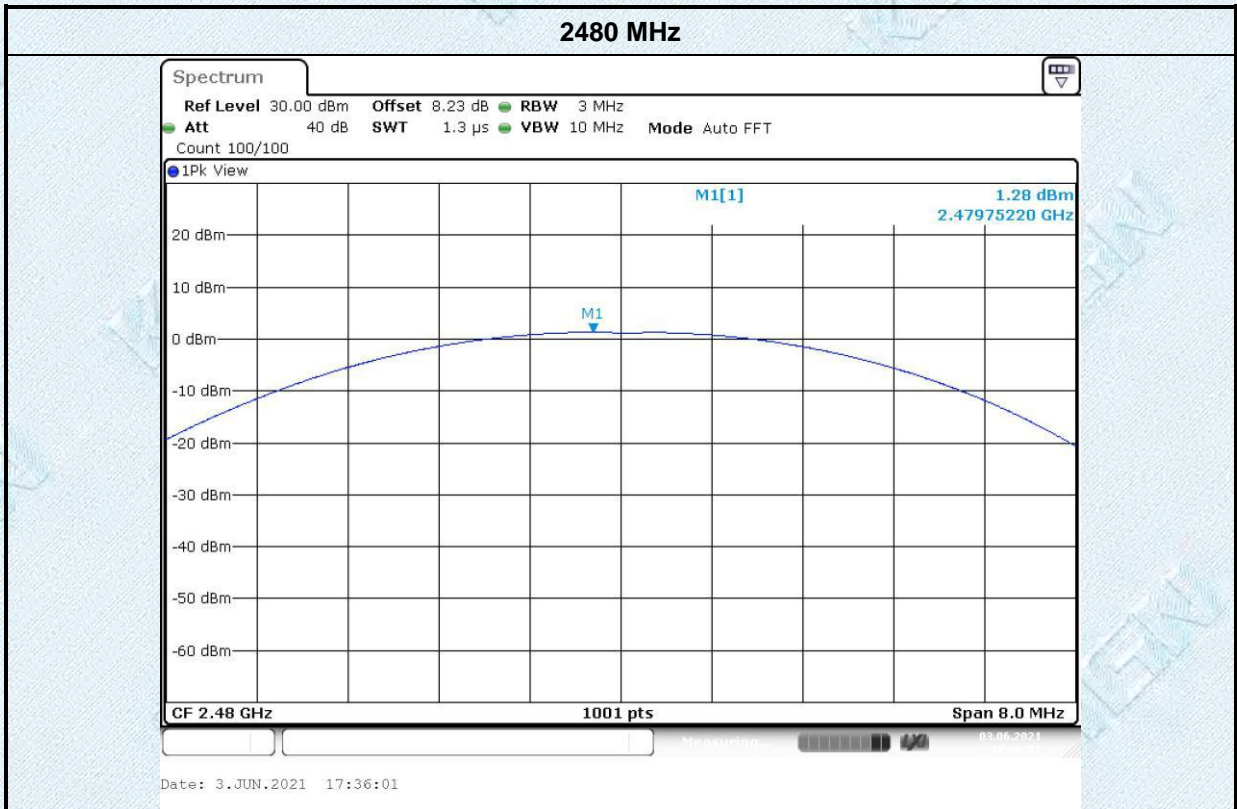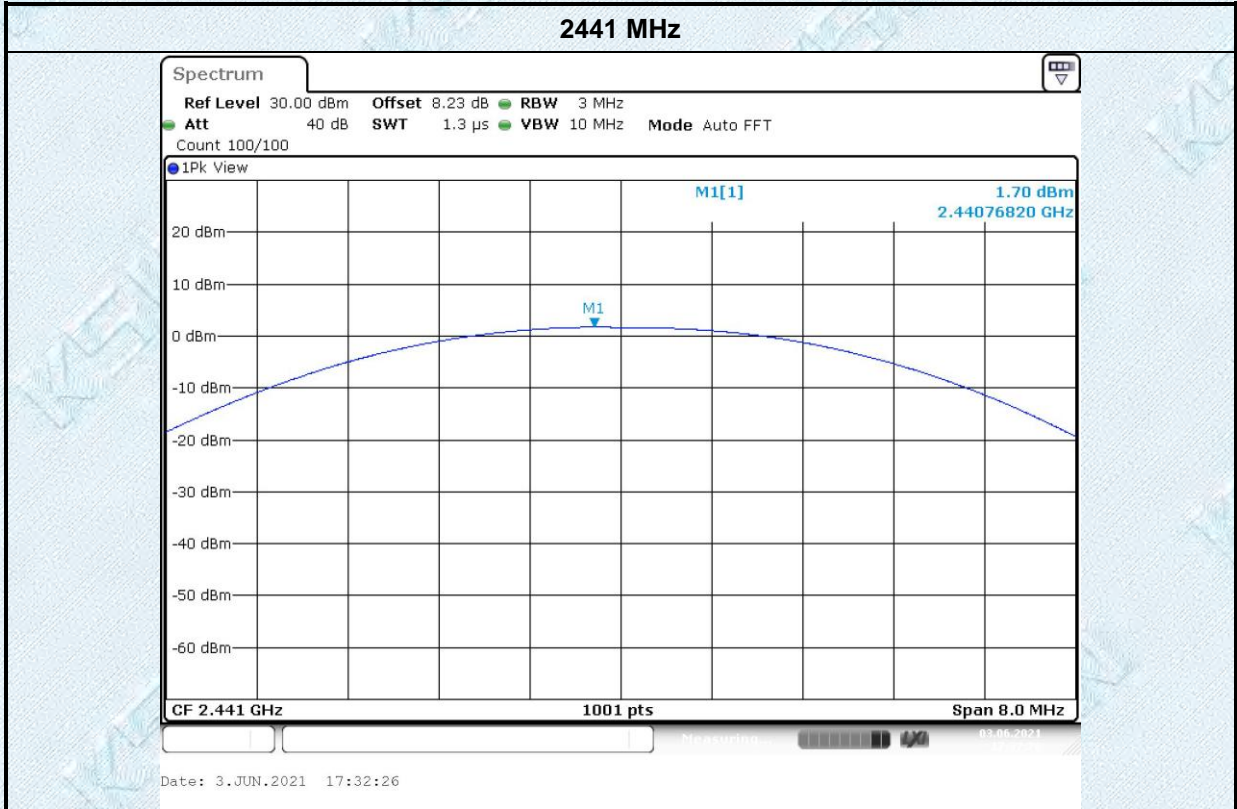

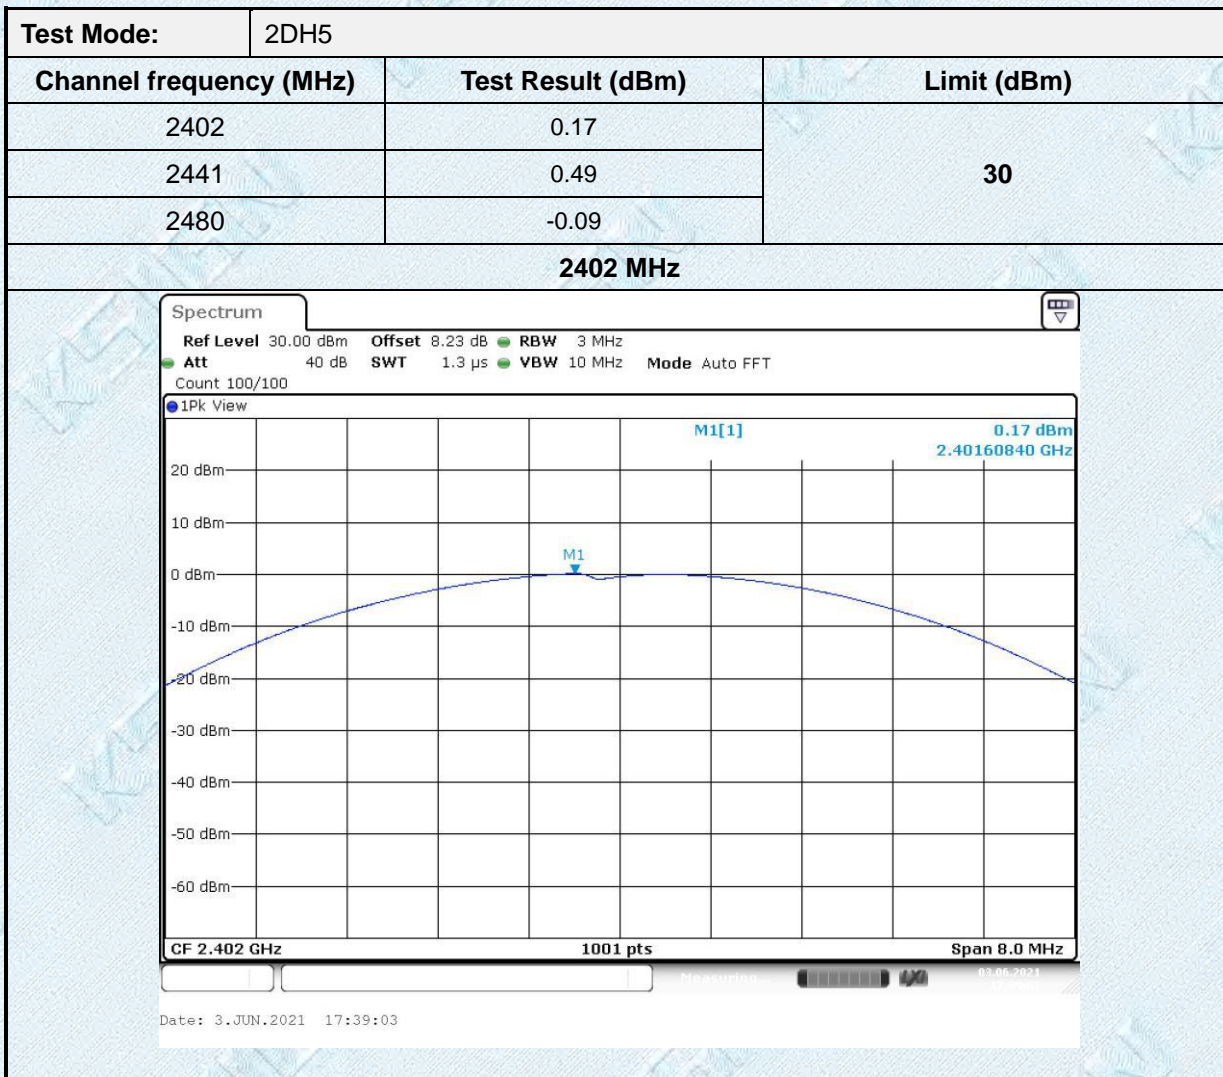

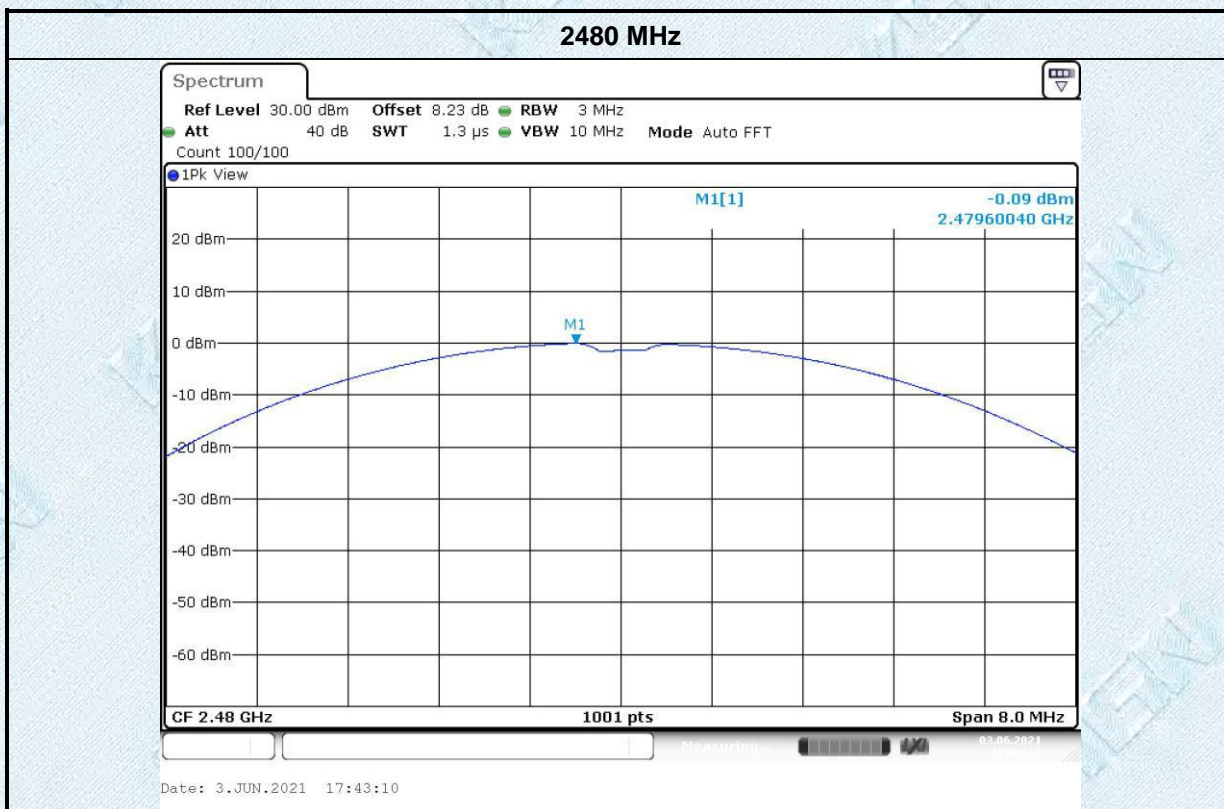

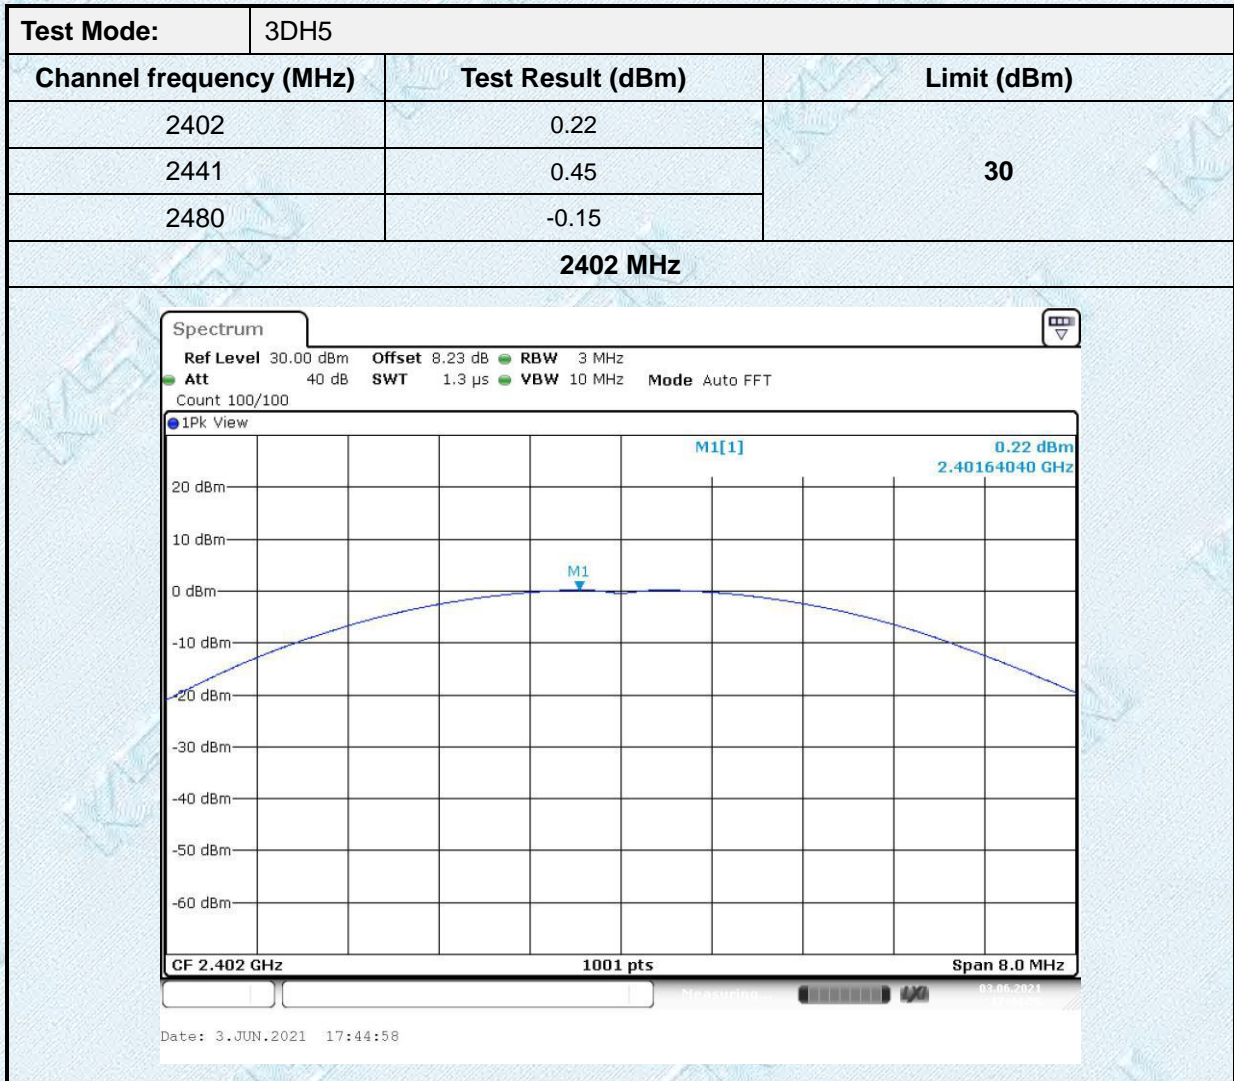

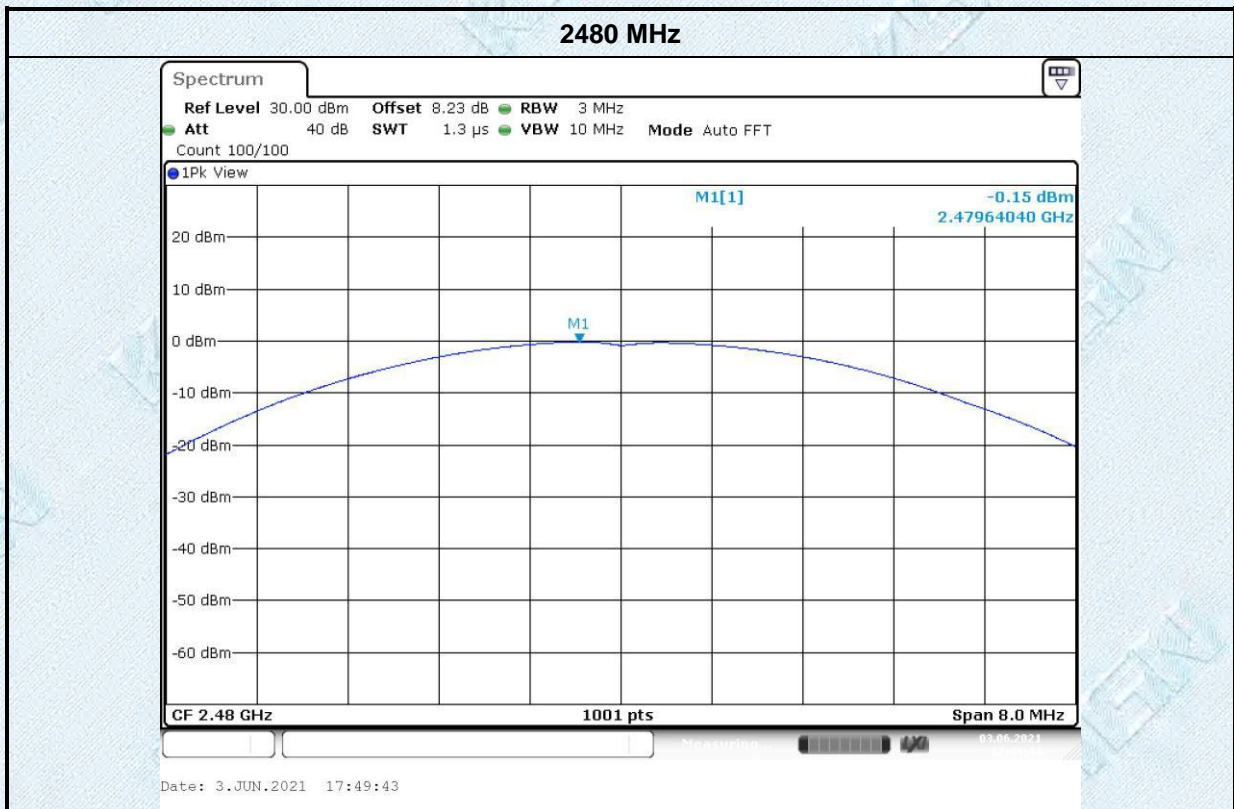


3.3. 99% Occupied Bandwidth & 20dB Bandwidth

Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	N/A	2400~2483.5

Test Configuration

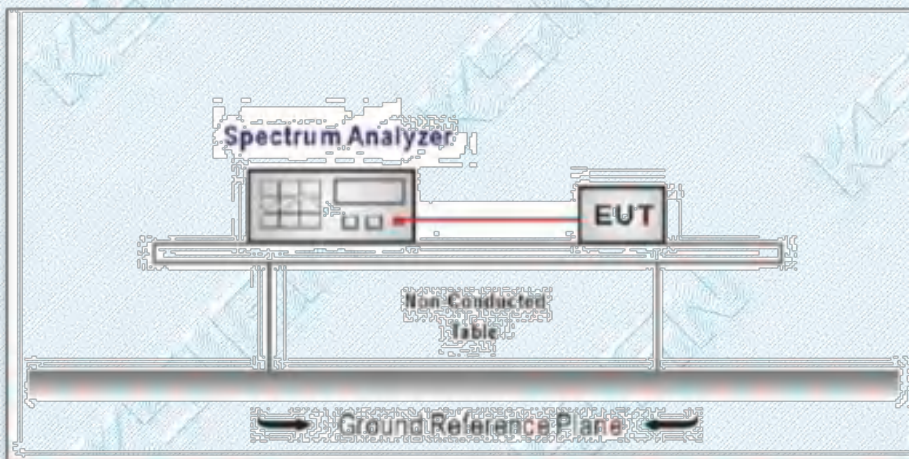

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Set RBW = 30 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3*RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


Test Mode



Please refer to the clause 2.3.


Test Results



Test Mode:	DH5			
Channel frequency (MHz)	20dB Bandwidth [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	0.726	2401.643	2402.369	PASS
2441	0.804	2440.562	2441.366	PASS
2480	0.729	2479.643	2480.372	PASS

2402 MHz

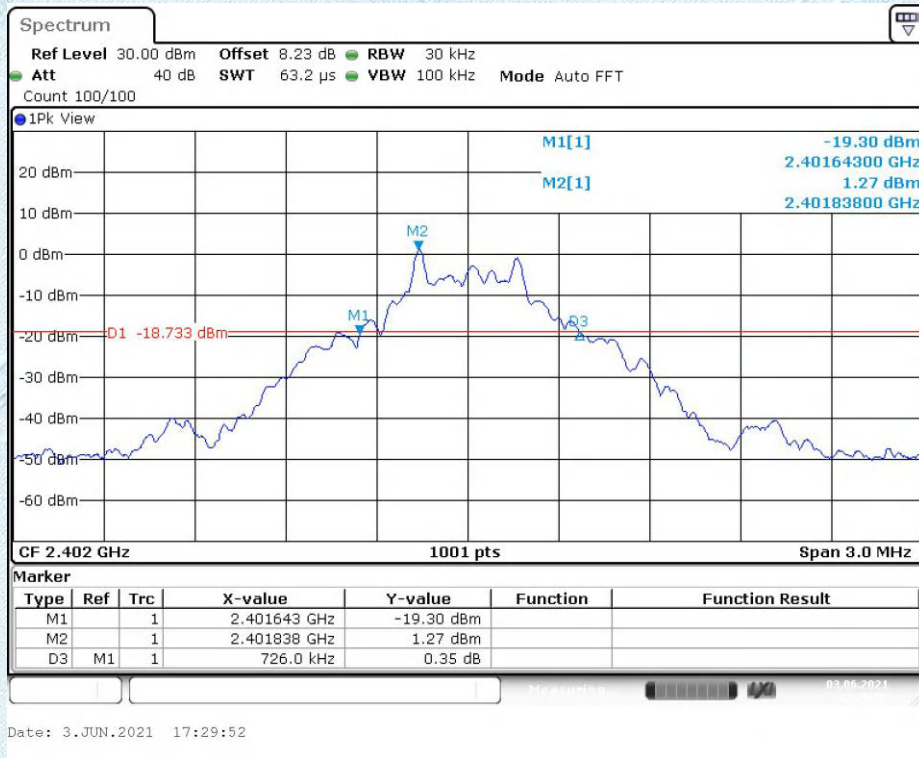

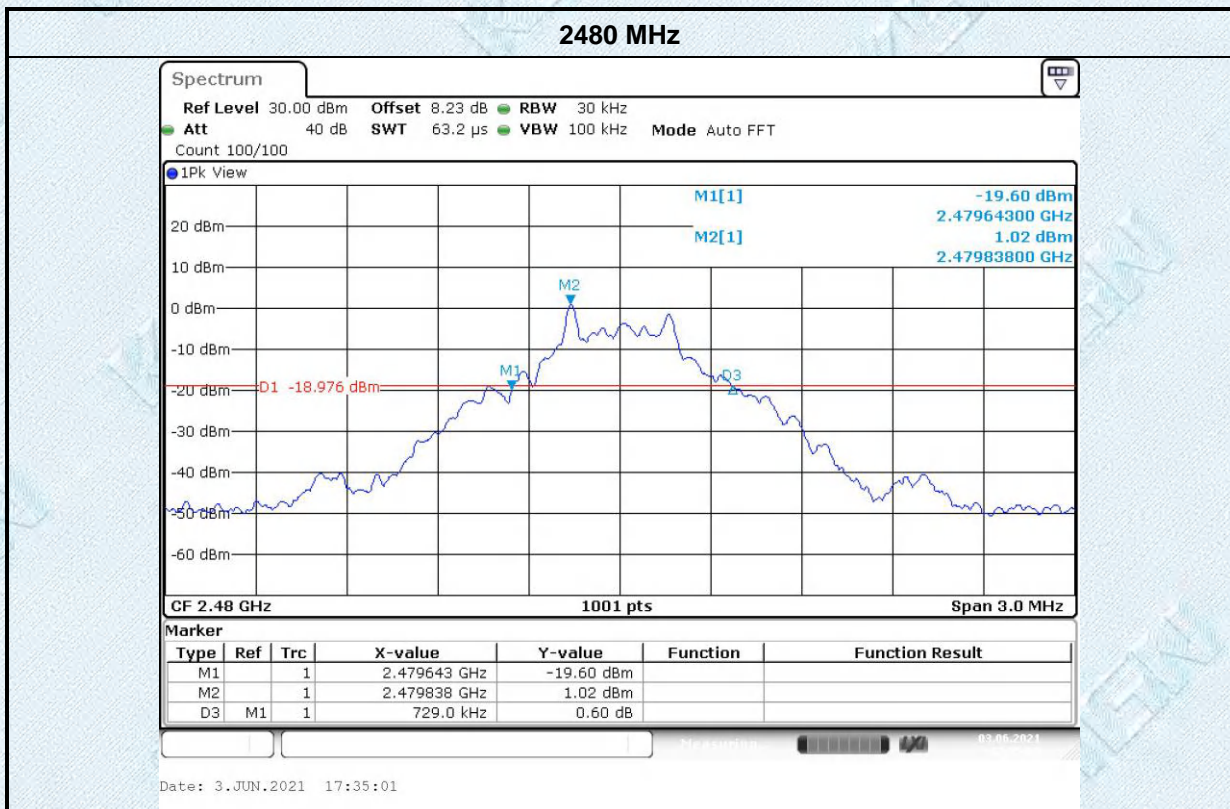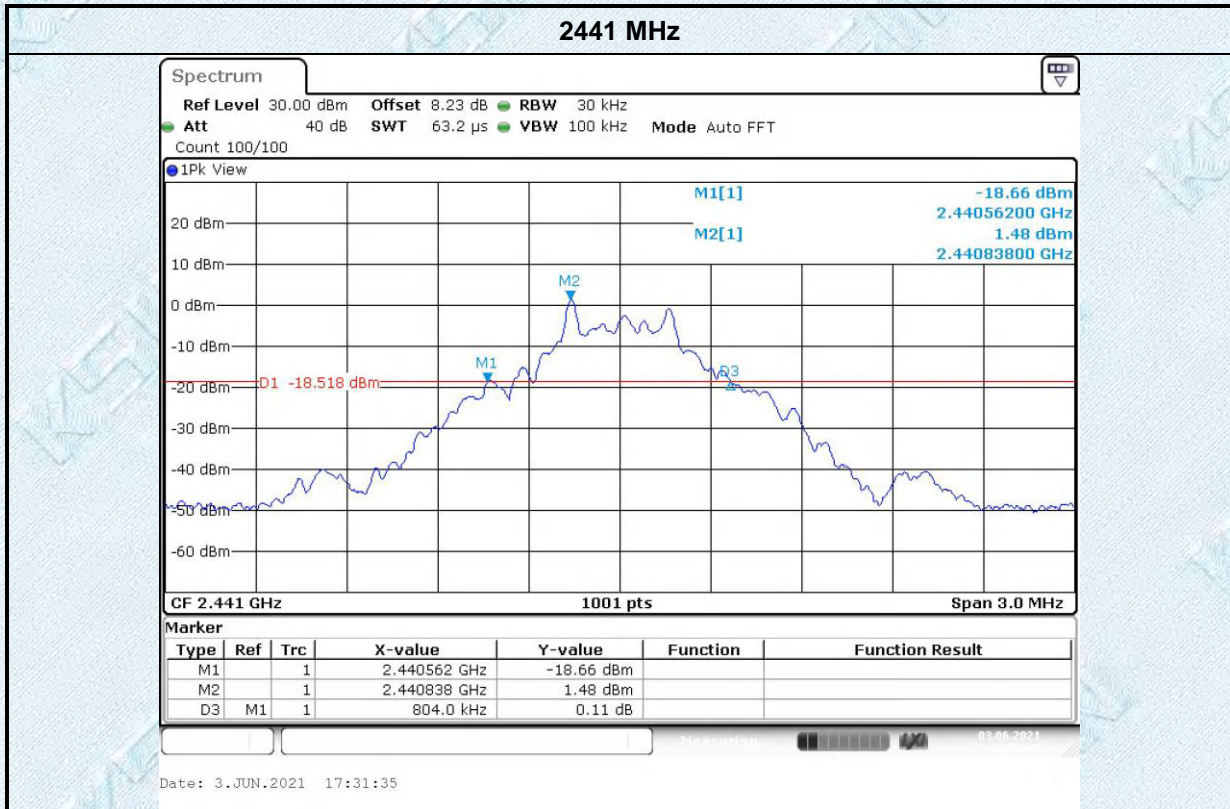

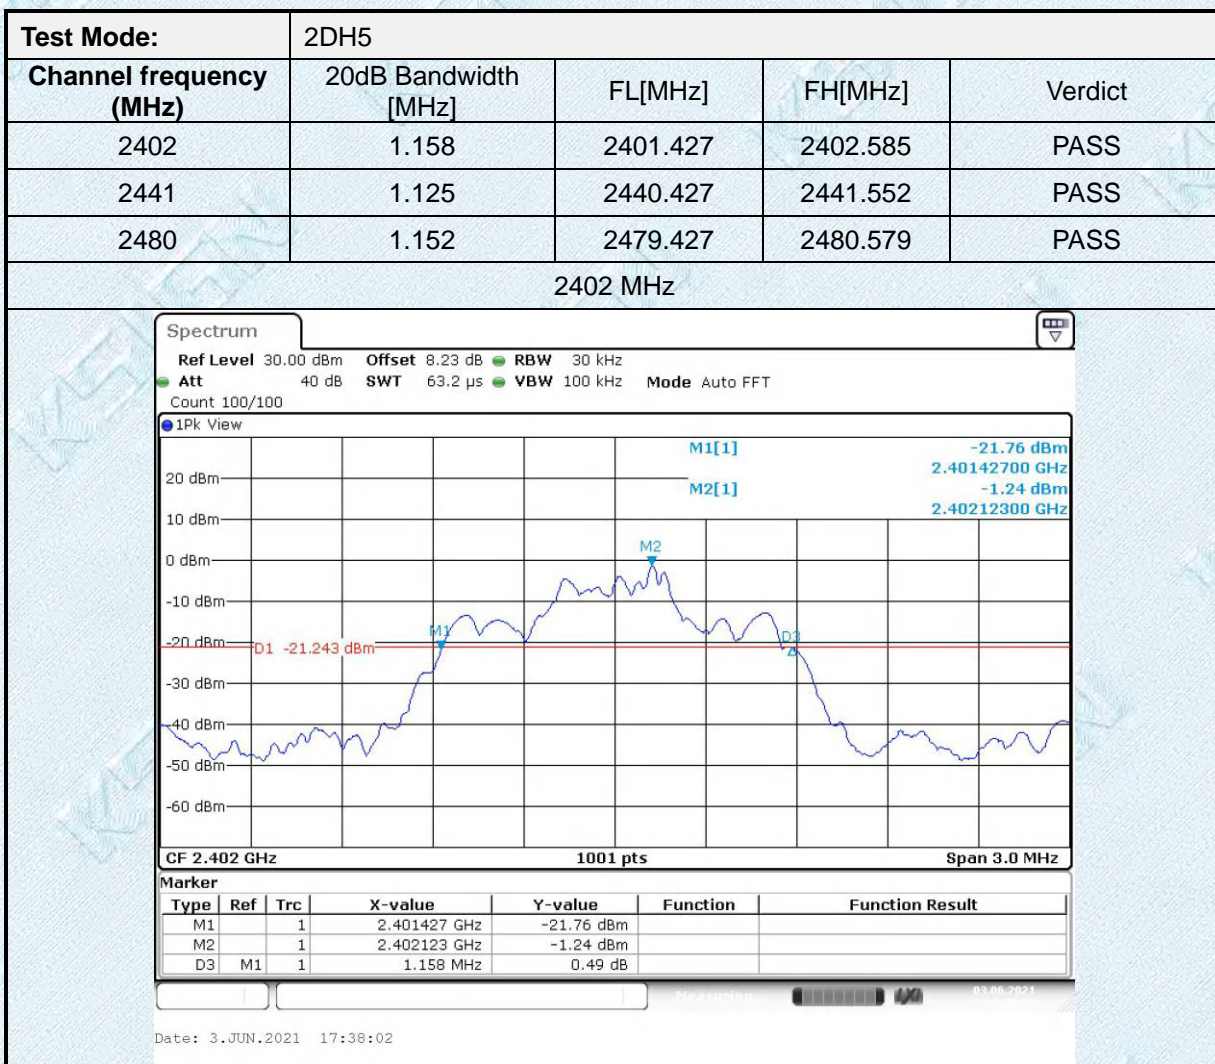

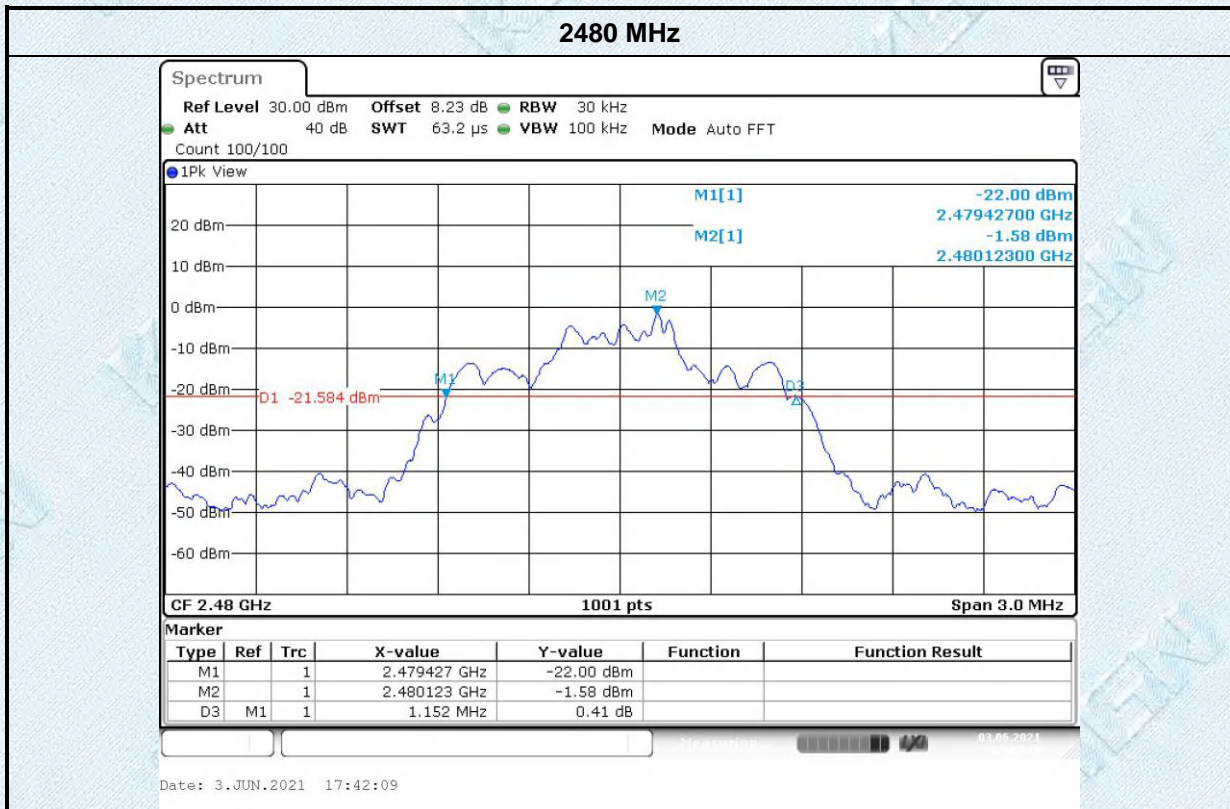
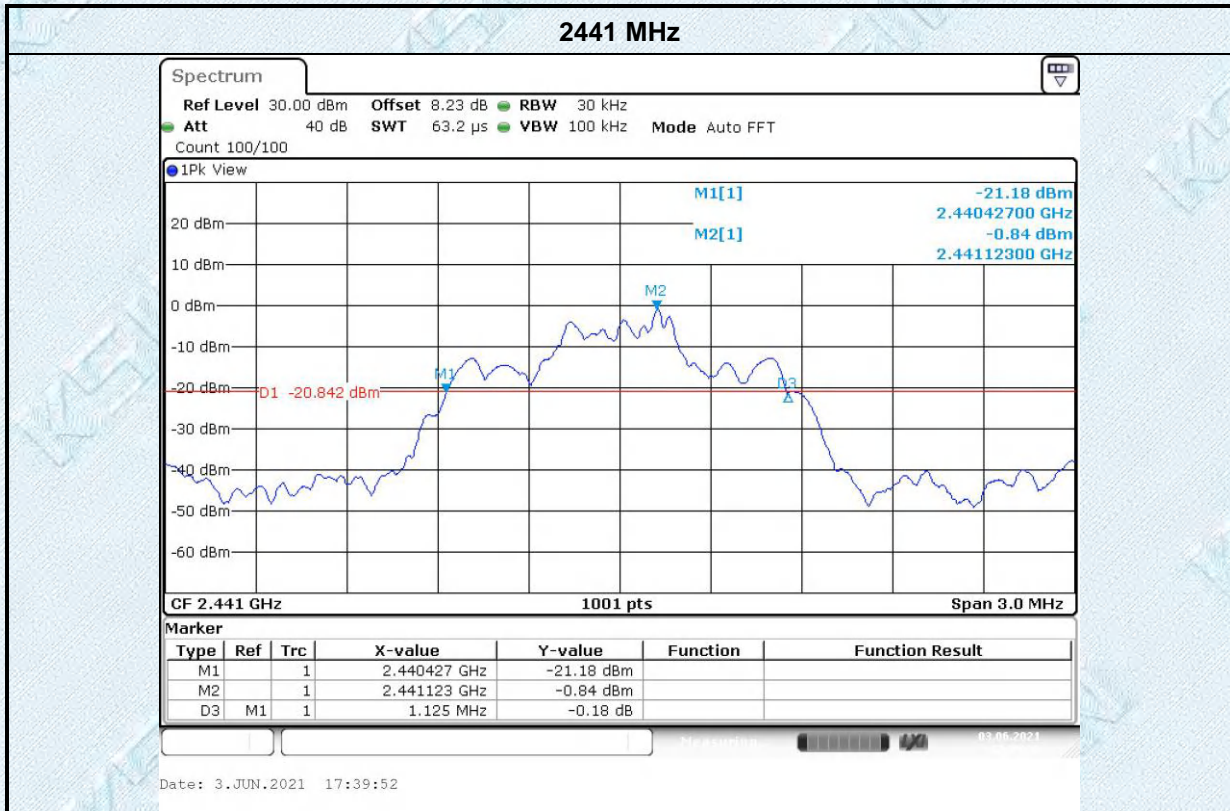


Test Mode:	3DH5			
Channel frequency (MHz)	20dB Bandwidth [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	1.122	2401.433	2402.555	PASS
2441	1.122	2440.430	2441.552	PASS
2480	1.122	2479.430	2480.552	PASS

2402 MHz





Date: 3.JUN.2021 17:43:58

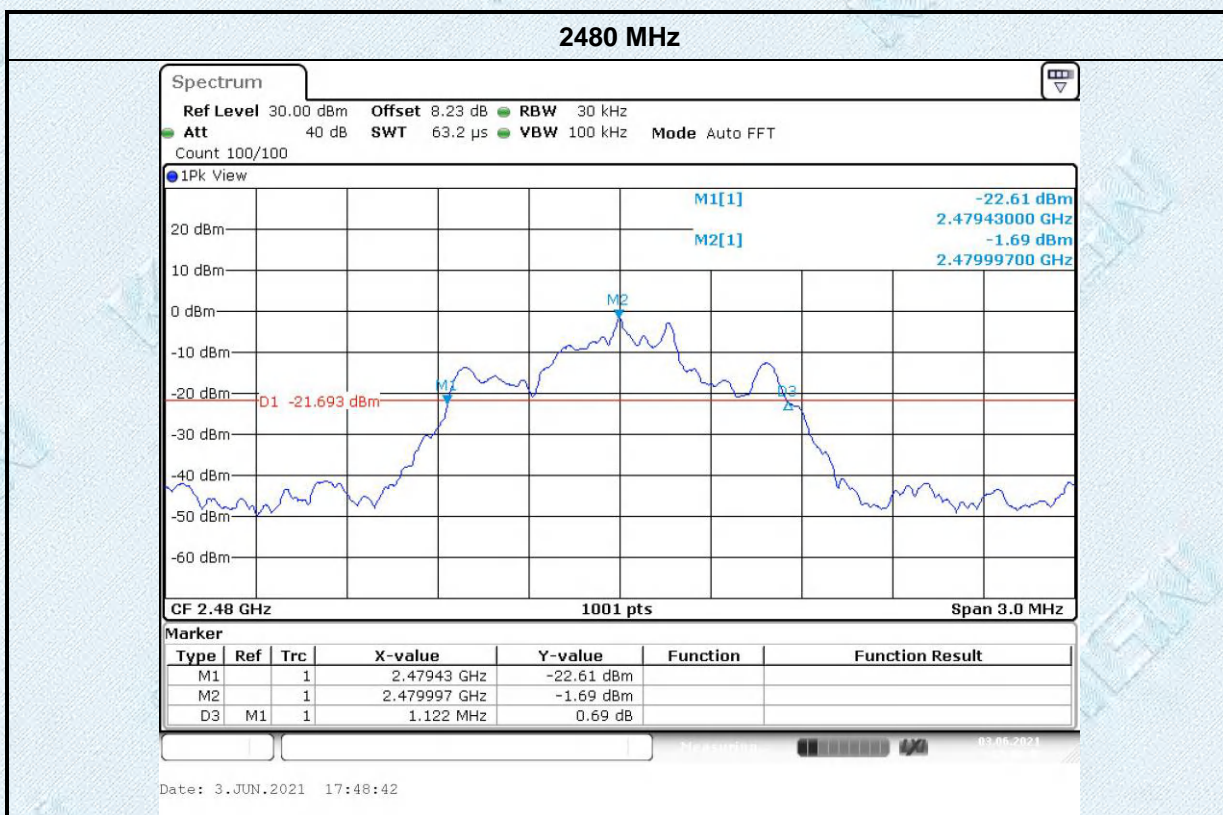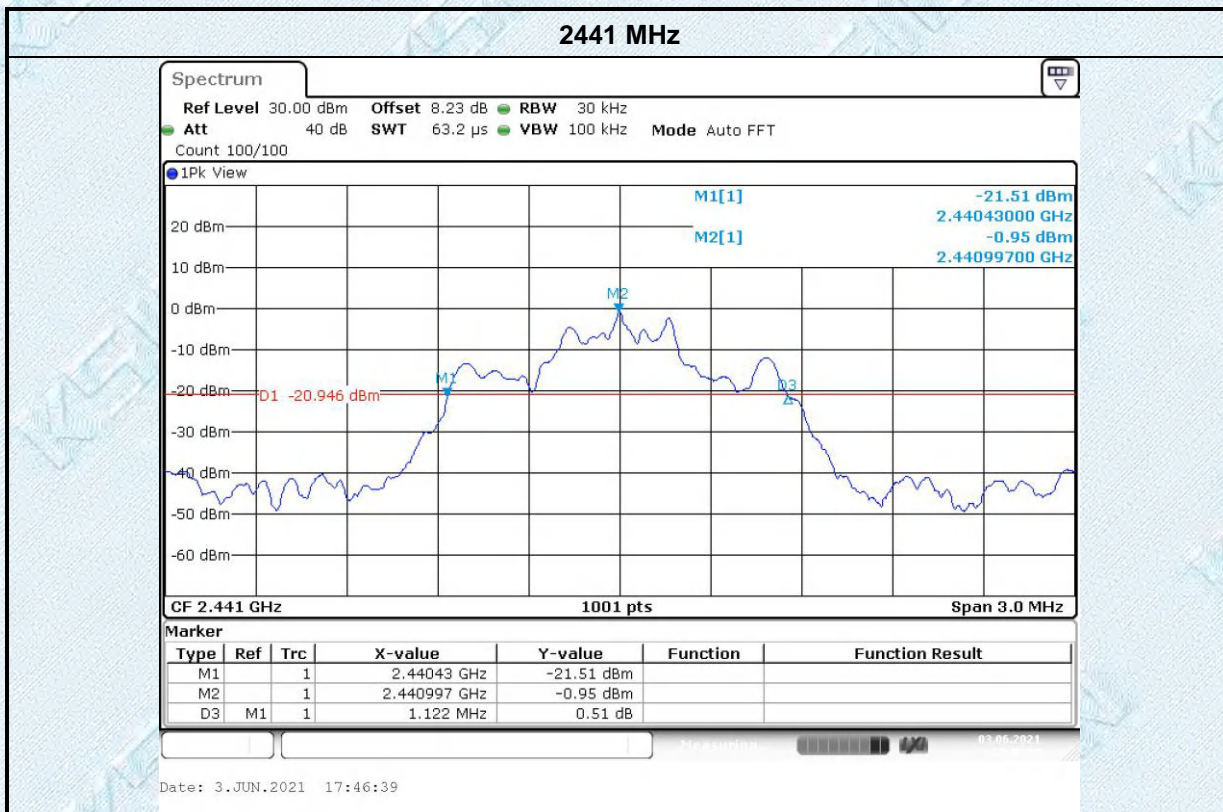

Test Mode:	DH5			
Channel frequency (MHz)	99% OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	0.863	2401.571	2402.435	PASS
2441	0.857	2440.568	2441.426	PASS
2480	0.86	2479.565	2480.426	PASS


2402 MHz

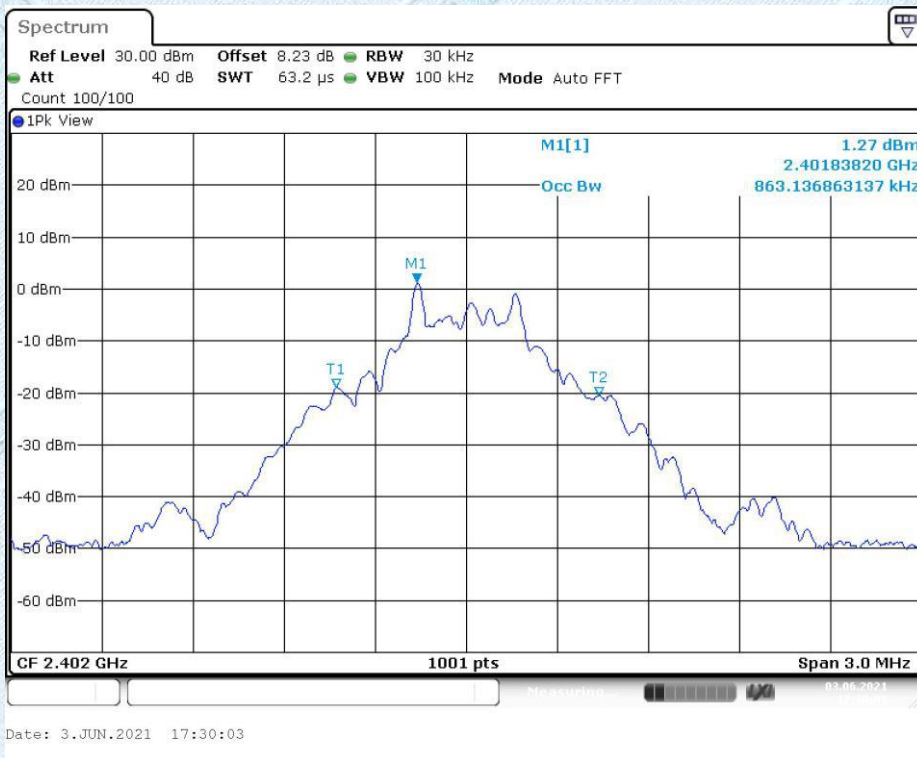


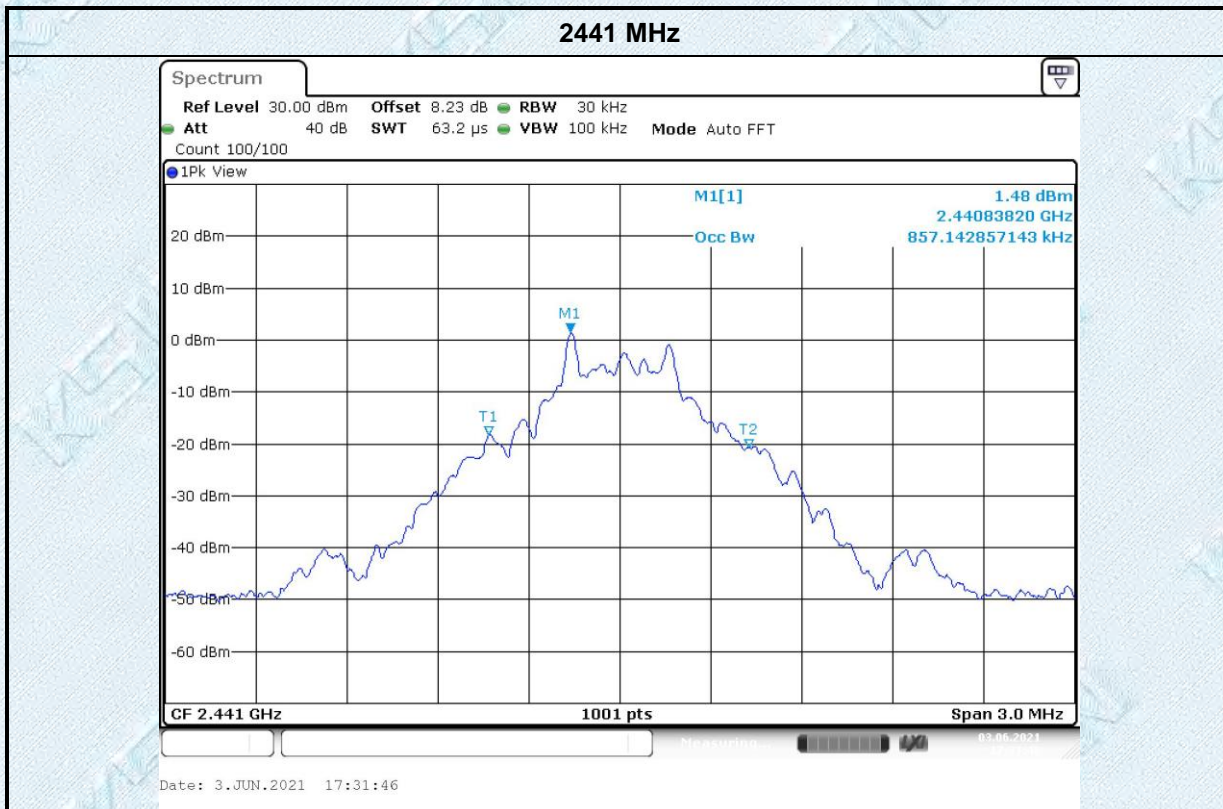

Test Mode:	2DH5			
Channel frequency (MHz)	99% OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	1.085	2401.458	2402.542	PASS
2441	1.091	2440.458	2441.548	PASS
2480	1.082	2479.458	2480.539	PASS


2402 MHz

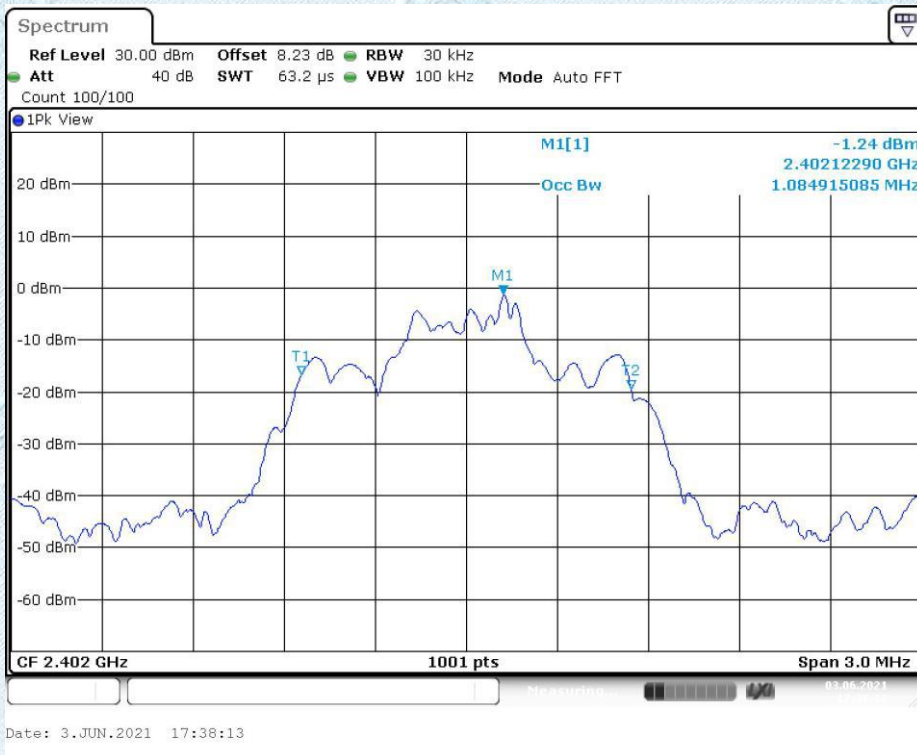


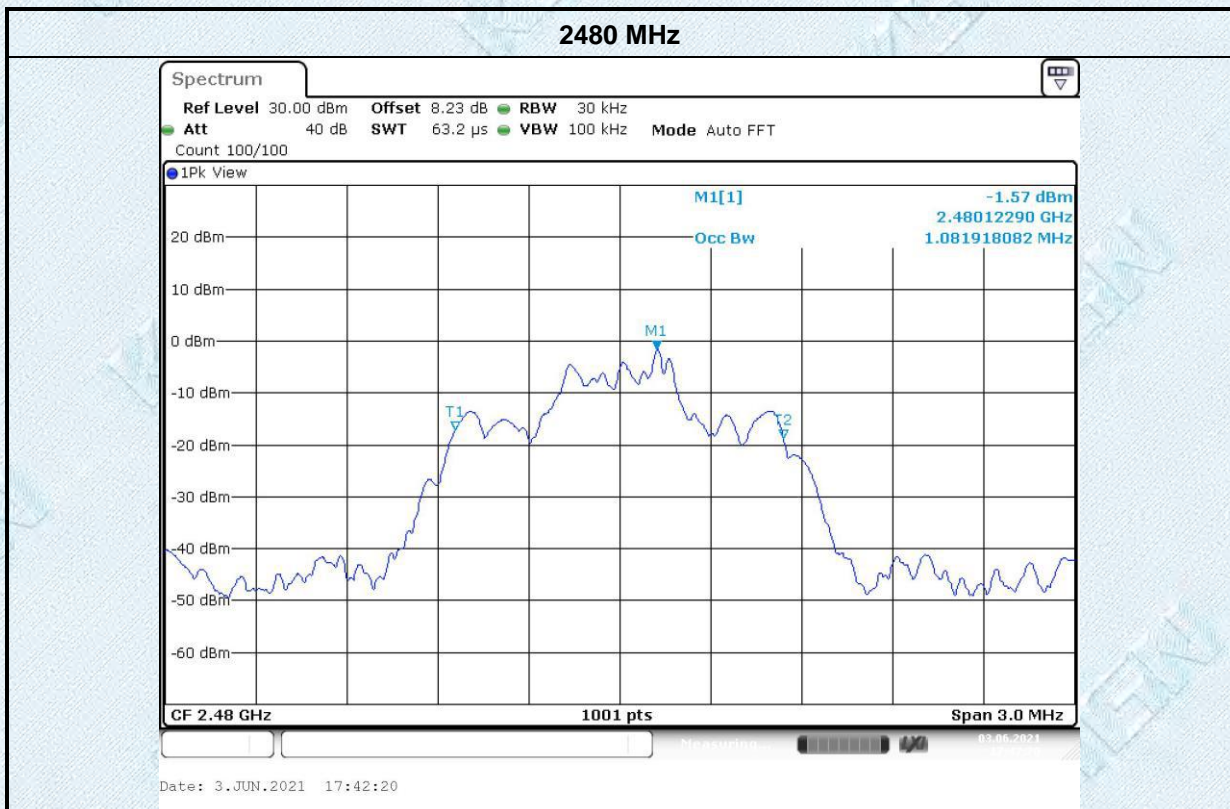

Test Mode:	3DH5			
Channel frequency (MHz)	99% OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	1.07	2401.461	2402.530	PASS
2441	1.07	2440.461	2441.530	PASS
2480	1.07	2479.458	2480.527	PASS

2402 MHz

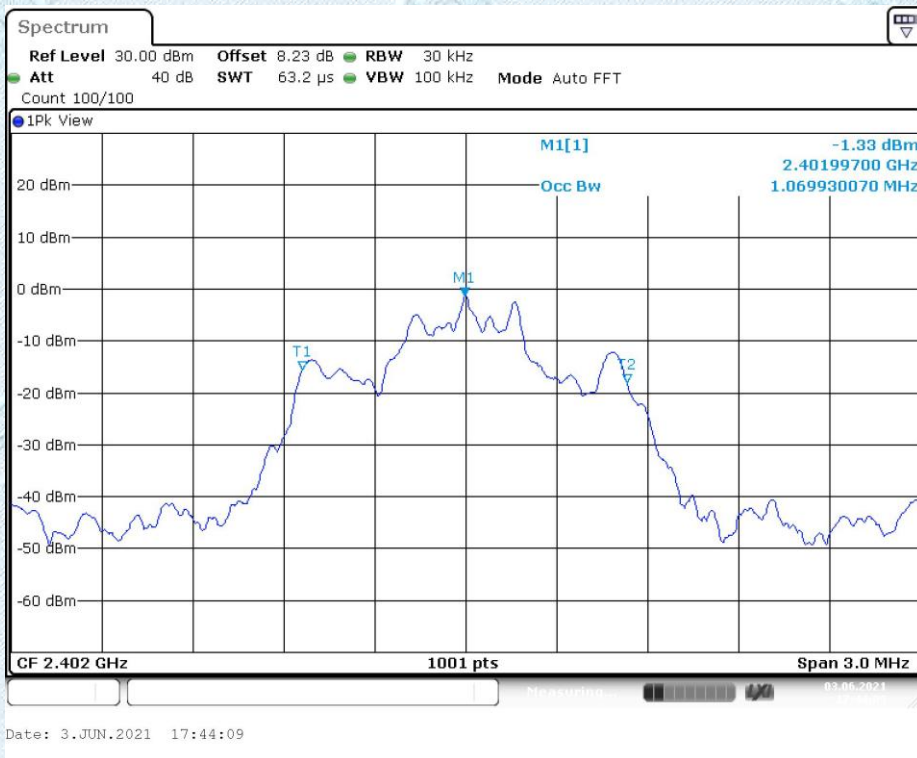

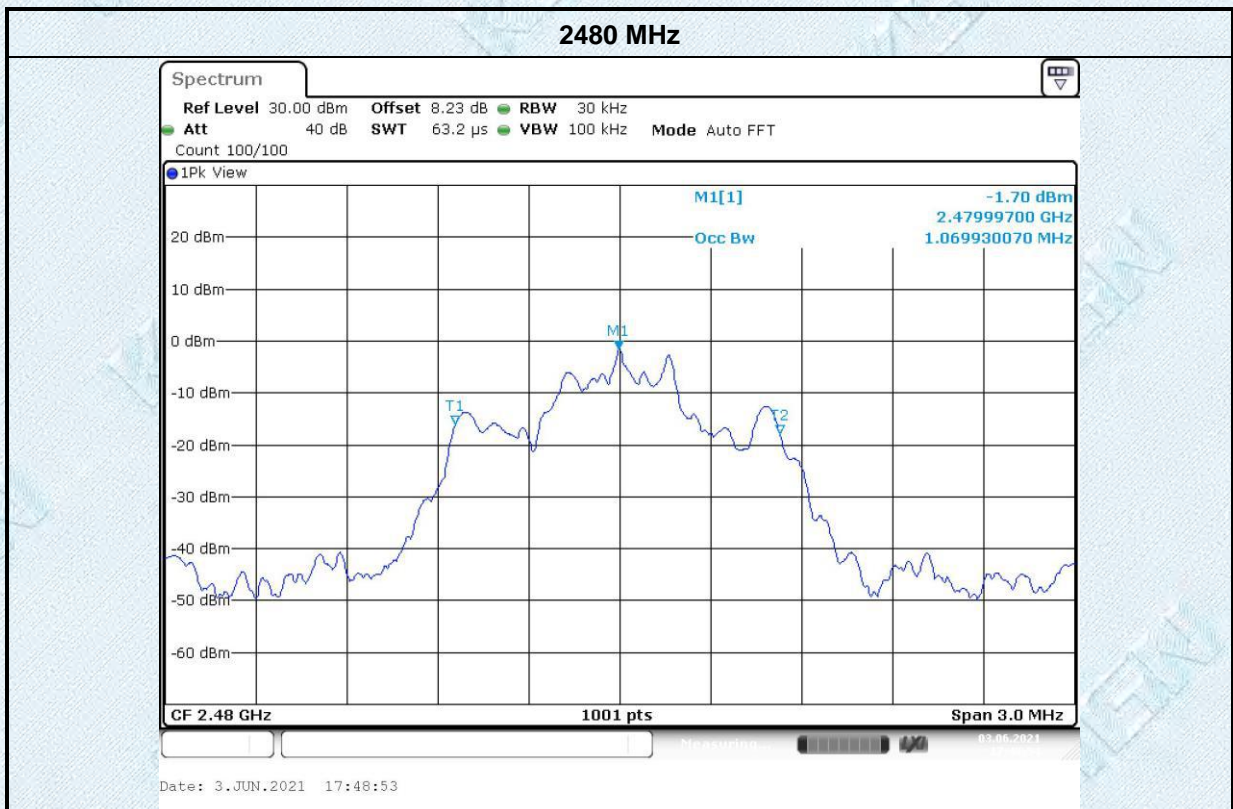

3.4. Carrier Frequencies Separation


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

Test Item	Limit	Frequency Range(MHz)
Channel Separation	$\geq 25\text{KHz}$ or \geq two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration

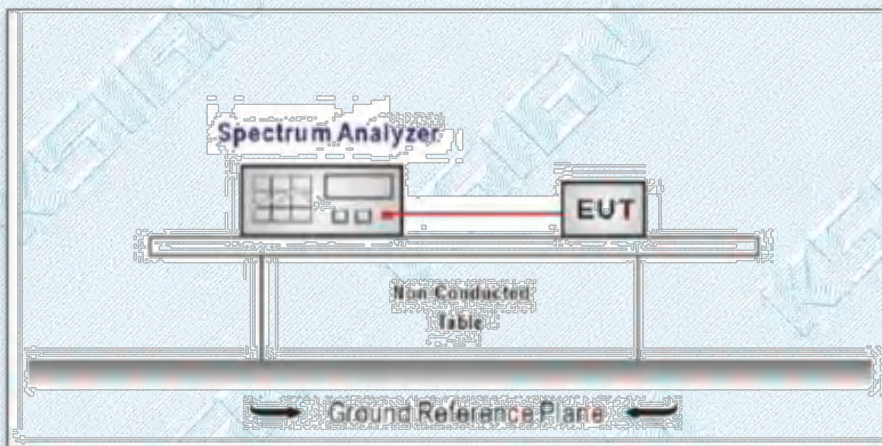

Test Procedure



1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.

Test Results

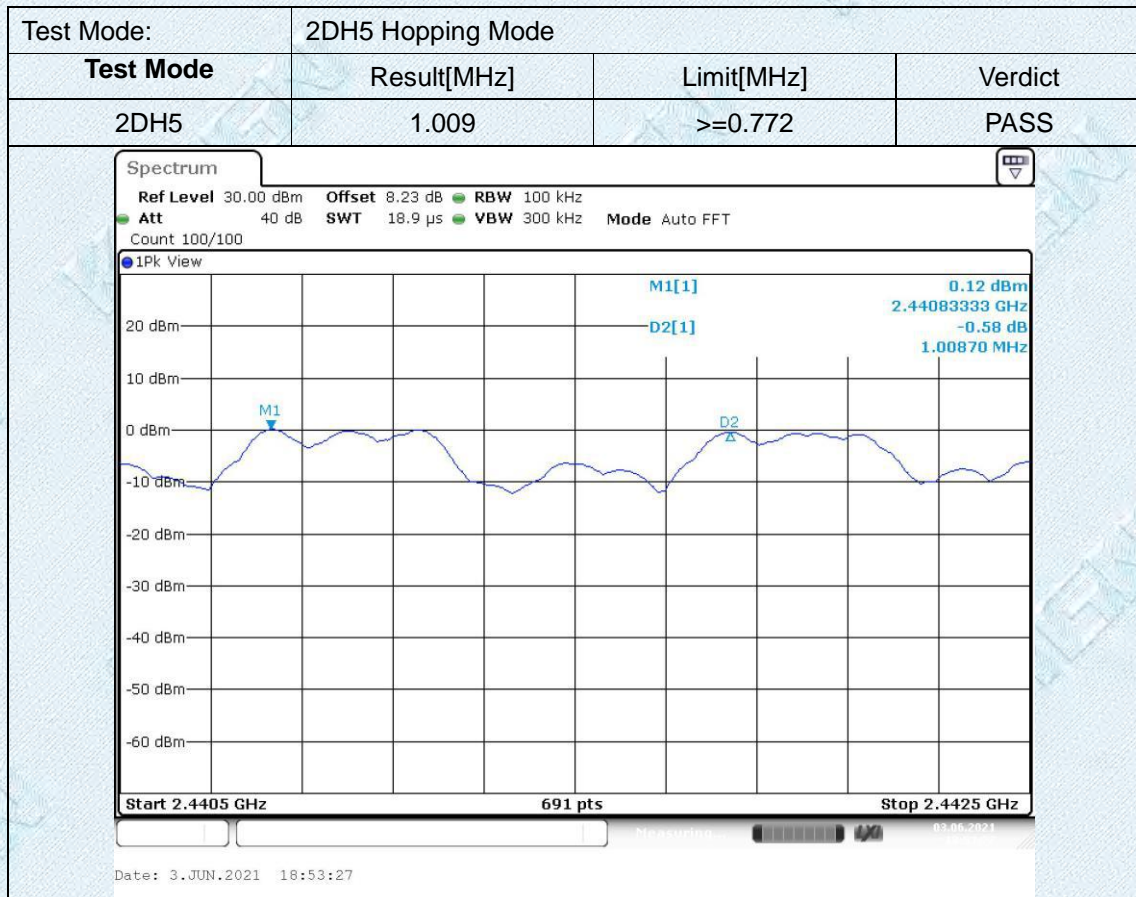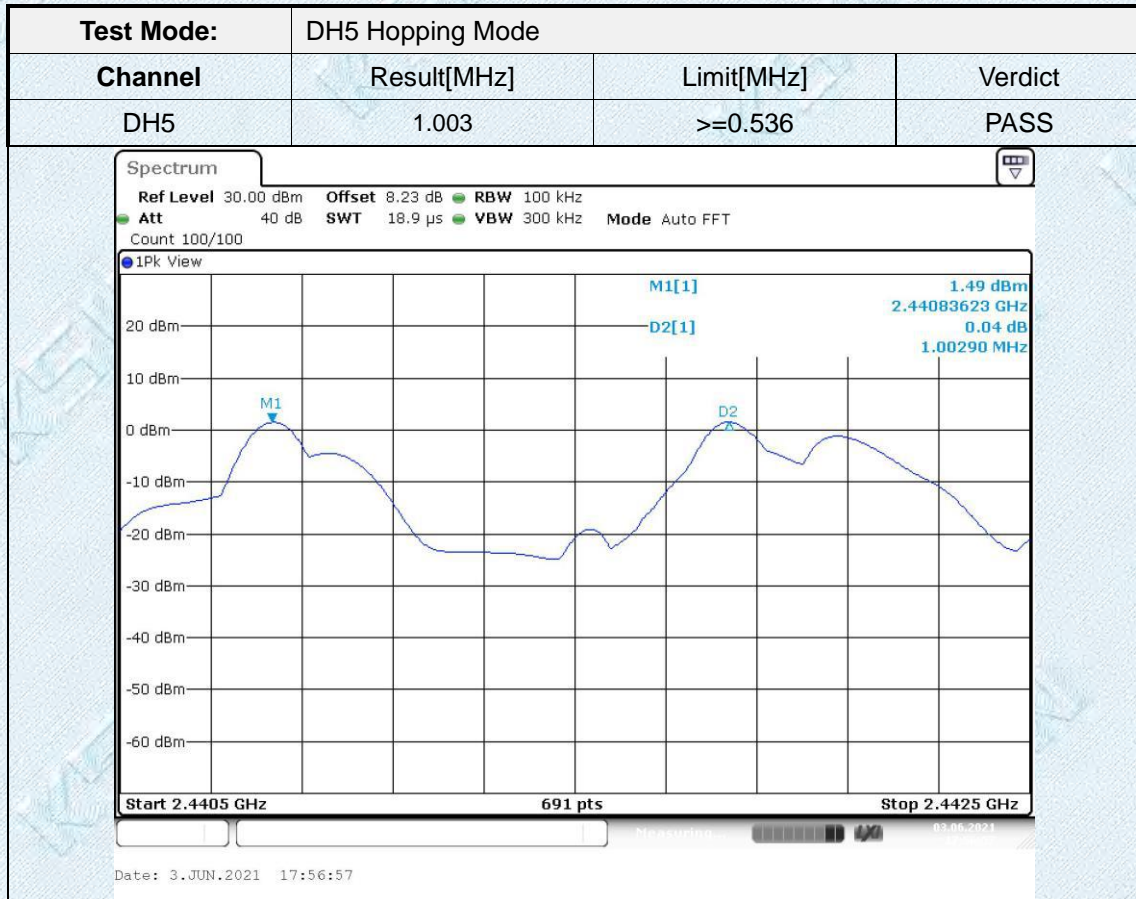

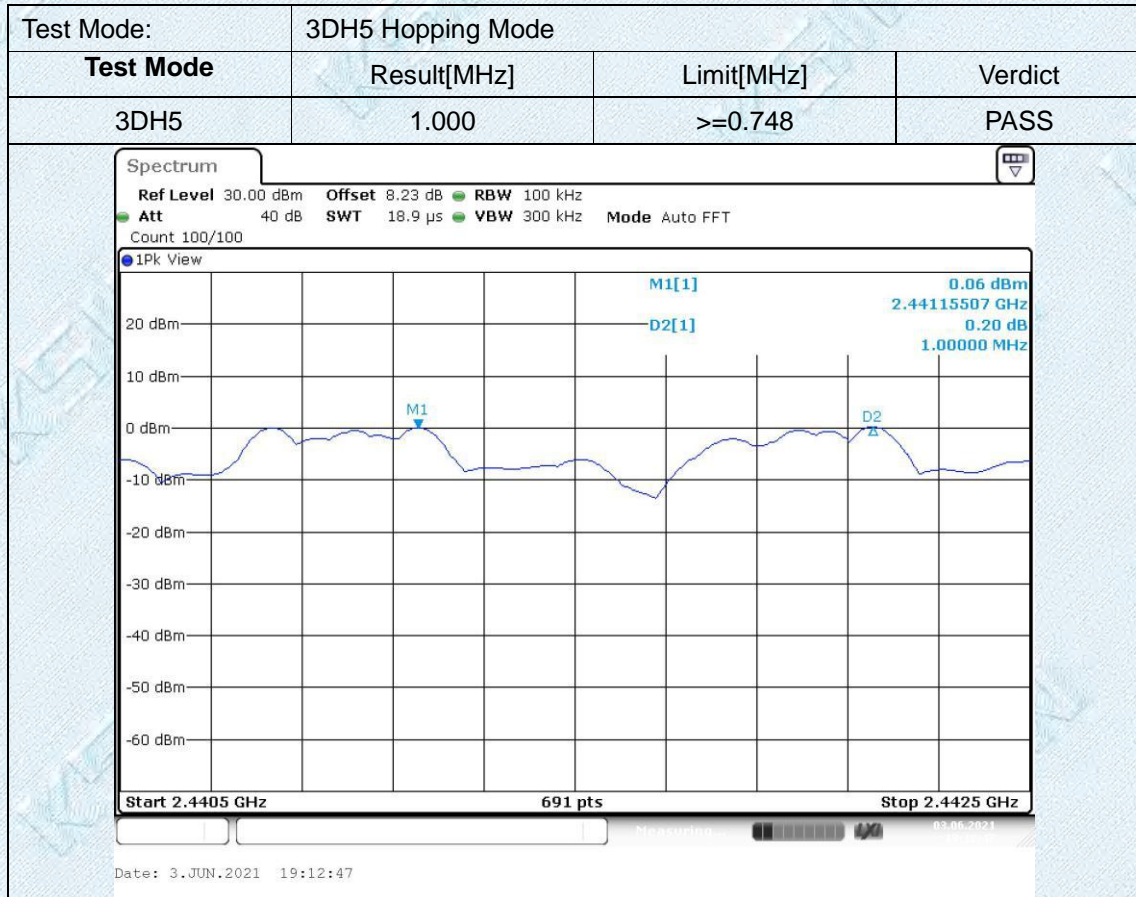


3.5. Number of Hopping Channel

Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

Test Configuration

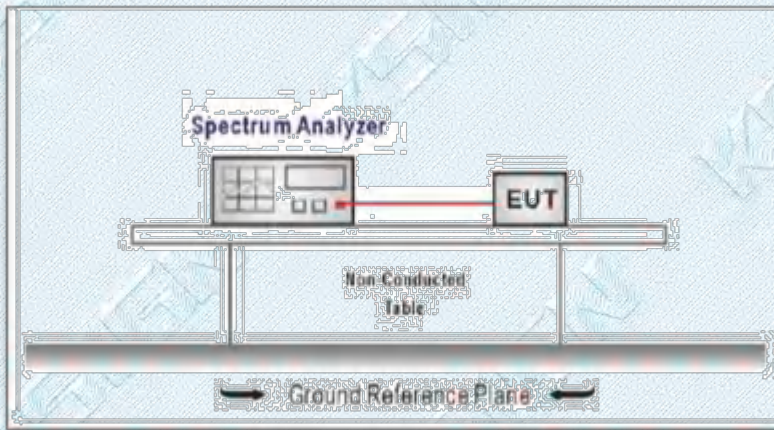

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.3.

Test Result