

Radio Testing of the AGC Automotive Europe SA AGC Jack 2

In accordance with FCC Part 15 Subpart C
§15.247 and ISED RSS-247 Issue 2 February
2017



America

Add value.
Inspire trust.

AGC Automotive Europe SA
Avenue Jean Monnet 4
Ottignies-Louvain-La-Neuve
1348 Belgium

COMMERCIAL-IN-CONFIDENCE

Date: June 2021

Document Number: 72165078A Issue 3 | Version Number: 03

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Xiaoying Zhang	June 11, 2021	A handwritten signature in blue ink that reads "Xiaoying Zhang".

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with FCC Part 15 Subpart C §15.247 and ISED RSS-247 Issue 2 February 2017.



DISCLAIMER AND COPYRIGHT

This report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

A2LA Cert. No. 2955.13

TÜV SÜD America, Inc.
10040 Mesa Rim Road
San Diego, CA 92121-2912

TÜV SÜD America, Inc.
Rancho Bernardo Facility
16936 Via Del Campo
San Diego, CA 92127

Phone: 858 678 1400
www.tuv-sud-america.com


REPORT ON Radio Testing of the
AGC Automotive Europe SA
Model: Jack 2 (Windshield Transducer)

TEST REPORT NUMBER 72165078A Issue 3

TEST REPORT DATE June 2021

PREPARED FOR AGC Automotive Europe SA
Avenue Jean Monnet 4
Ottignies-Louvain-La-Neuve
1348 Belgium

CONTACT PERSON Nicolas Chorine
Jack CEO
Nicolas.Chorine@agc.com
+32 473 66 33 68

PREPARED BY 
Ferdinand S. Custodio
Name
Authorized Signatory
Title: Senior EMC Test Engineer / Wireless Team Lead

APPROVED BY 
Xiaoying Zhang
Name
Authorized Signatory
Title: Senior RF Wireless Test Engineer

DATED June 11, 2021

Revision History

72165078A Issue 3 AGC Automotive Europe SA Model: AGC Jack 2					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
07/11/2020	Initial Release				Xiaoying Zhang
07/14/2021	Initial Release	Issue 2	Update company name and corresponding address from Celestica to AGC Automotive Europe SA		Ferdinand Custodio
07/16/2021	Issue 2	Issue 3	Update contact person to Mr. Nicolas Chorine		Ferdinand Custodio
07/23/2021	Issue 3	Issue 3 Version 2	Update title and email address of contact person	2	Ferdinand Custodio
08/09/2021	Issue 3 Version 2	Issue 3 Version 3	Minor formatting updates and removal of IC number reference		Ferdinand Custodio

CONTENTS

Section	Page No
1 REPORT SUMMARY	5
1.2 Brief Summary Of Results	7
1.3 Product Information	8
1.4 EUT Test Configuration	8
1.5 Deviations From The Standard.....	11
1.6 Modification Record.....	11
1.7 Test Methodology	11
1.8 Test Facility Location.....	11
1.9 Test Facility Registration	11
2 TEST DETAILS	13
2.1 Peak Output Power.....	14
2.2 Conducted Emissions	17
2.3 99% Emission Bandwidth	18
2.4 Minimum 6 dB RF Bandwidth	21
2.5 Out-Of-Band Emissions - Conducted	24
2.6 Band-Edge Compliance Of Rf Conducted Emissions	27
2.7 Radiated Spurious Emissions.....	38
2.8 Power Spectral Density	45
3 TEST EQUIPMENT USED	48
3.1 Test Equipment Used	49
3.2 Measurement Uncertainty	50
4 DIAGRAM OF TEST SETUP	53
4.1 Test Setup Diagram.....	54
5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....	57
5.1 Accreditation, Disclaimers and Copyright.....	58



SECTION 1

REPORT SUMMARY

Radio Testing of the
AGC Automotive Europe SA
AGC Jack 2

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the AGC Automotive Europe SA AGC Jack 2 Windshield Transducer to the requirements of FCC Part 15 Subpart C §15.247 and ISED RSS-247 Issue 2 February 2017.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	AGC Automotive Europe SA
EUT	Windshield Transducer
Trade Name	AGC Jack 2
Model Name	Jack 2
FCC ID	2AZ5PJACK-V2
FCC Classification	Low power Communications Device Transmitter (DTS)
Serial Number(s)	DVTMAIN\030
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none">• FCC Part 15 Subpart C §15.247 (October 1, 2019).• RSS-247—Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices (Issue 2, February 2017).• RSS-Gen - General Requirements for Compliance of Radio Apparatus (Issue 5, Amendment 1 March 2019).
Start of Test	December 01, 2020
Finish of Test	December 04, 2020
Name of Engineer(s)	Ferdinand S. Custodio
Related Document(s)	<ul style="list-style-type: none">• ANSI C63.10-2013. American National Standard of Procedures for Compliance testing of Unlicensed Wireless Devices.• KDB 558074 D01 15.247 v05r02 Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under Section 15.247 of the FCC rules.• AGC Jack Prescan Instruction 9Nov2020.docx• Supporting documents for EUT certification are separate exhibits.

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.247 and ISED RSS-247 Issue 2 February 2017 with cross-reference to the corresponding IC RSS standard are shown below.

Section	§15.247 Spec Clause	RSS	Test Description	Result	Comments /Base Standard
2.1	§15.247(b)(3)	RSS-247 5.4(d)	Peak Output Power	Compliant	
2.2	§15.207(a)	RSS-Gen 8.8	Conducted Emissions	N/A	
2.3	-	RSS-Gen 6.7	99% Emission Bandwidth	Compliant	
2.4	§15.247(a)(2)	RSS-247 5.2(a)	Minimum 6 dB RF Bandwidth	Compliant	
2.5	§15.247(d)	RSS-247 5.5	Out-of-Band Emissions - Conducted	Compliant	
2.6	§15.247(d)	RSS-247 5.5	Band-edge Compliance of RF Conducted Emissions	Compliant	
2.7	§15.247(d)	RSS-247 5.5	Radiated Spurious Emissions	Compliant	
	-	RSS-Gen 7.3 and 7.4	Receiver Spurious Emissions	N/A*	
2.8	§15.247(e)	RSS-247 5.2(b)	Power Spectral Density for Digitally Modulated Device	Compliant	

N/A EUT is for vehicular use. AC Conducted Emissions verification doesn't apply.

N/A* Not required as per RSS-Gen 5.3 The EUT does not fall into any category defined as Receiver under RSS-Gen.



1.3 PRODUCT INFORMATION

1.3.1 Technical Description

The Equipment Under Test (EUT) is a AGC Jack 2 Windshield Transducer manufactured by AGC Automotive Europe SA. The EUT is a transducer able to record vibration and temperature of a car's windshield, to detect movement via an accelerometer and to send information to gateway device through BLE communication. The EUT is a small device with plastic enclosure mounted on the car's windshield by means of a bonding tape. The EUT is powered by a solar panel with a small non-rechargeable battery as back-up. The EUT awakens when the car starts to move and goes to sleep when the car stops moving.

1.3.2 EUT General Description

EUT Description	Windshield Transducer
Trade Name	AGC Jack 2
Model Name	Jack 2
Rated Voltage	3.3 VDC battery powered
Mode Verified	BT LE
Capability	BT LE
Primary Unit (EUT)	<input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
Manufacturer Declared Temperature Range	-40°C to 85°C
Antenna Type	Ceramic Chip Antenna
Manufacturer	YAGEO Phicomp
Antenna Model	ANT3216LL00R2400A
Maximum Antenna Gain	5.05 dBi

1.3.3 Maximum Conducted Output Power

Bluetooth Low Energy (LE)	Frequency Range (MHz)	Gated RMS (dBm)	Duty Cycle (%)
	2402-2480	-1.7	38% 2M / 68% 1M

Note: 1M and 2M are PHY settings (Physical Layer).

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description	
Default	Antenna Conducted Port Configuration. A temporary antenna connector was provided for the evaluation. The EUT is connected to a support laptop via a UART Serial USB cable. The support laptop is running STM32CubeMonitor-RF version 2.5.0 which enables configuration of the BLE 5.0 RF module. TX and RX test modes are available. The following settings were used for both 1M and 2M PHY configurations:	
	PA Level	24 (-0.15 dBm)
	Packet Payload	0x00-Pseudo-Random bit sequence 9
	Length of Data	0x25

1.4.2 EUT Exercise Software


“STM32CubeMonitor-RF” on the support laptop

1.4.3 Support Equipment and I/O cables


Manufacturer	Equipment/Cable	Description
Hewlett Packard	System DC Power Supply	Model 6632B S/N US37472178
Lenovo	Support Laptop	Model: Thinkpad T530 Type 2392-45U S/N R9-RM96L
EVE Energy Co., LTD.	External Battery	IMR 18650 3.6V 1/2AA
FTDI	UART USB Serial Cable	180cm USB to UART cable with +3.3V TTL level UART signals TTL-232R-3V3

1.4.4 Simplified Test Configuration Diagram

Antenna Port Conducted Test Setup

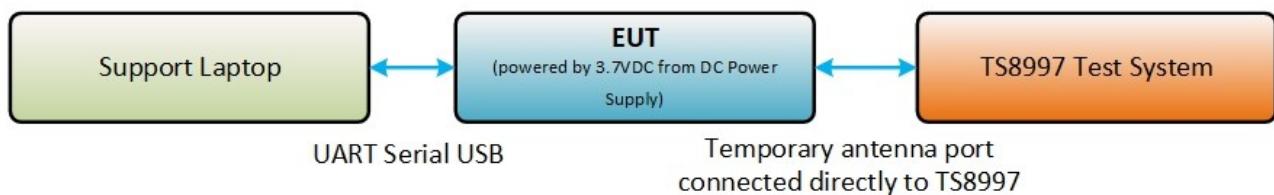

Cabinet Spurious Emissions Test Setup

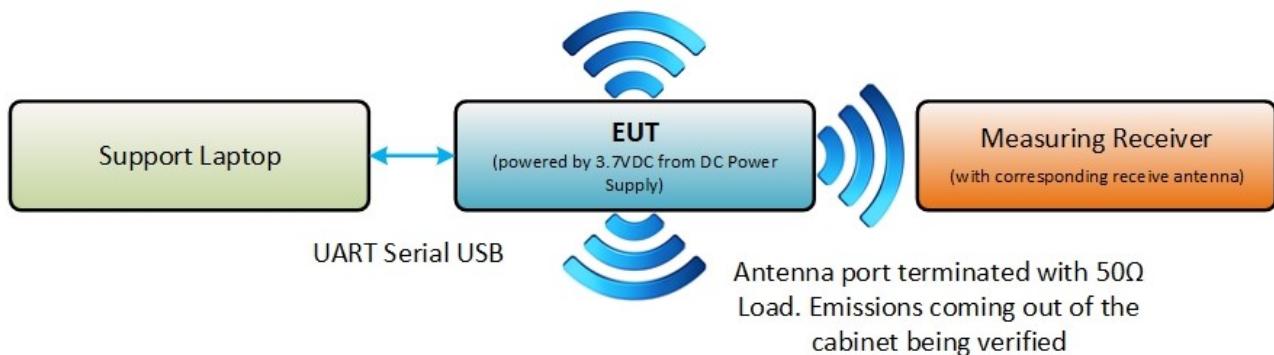

1.4.5 Worst Case Configuration (Cabinet Spurious Emissions)

Mid channel was chosen as the representative channel given that there are no significant differences between each channel in terms of emissions:

Mode	Channel	Data Rate
Bluetooth LE	17 (Mid Channel)	1Mbps



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: No modifications		
N/A		

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

For conducted and radiated emissions, the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.10-2013. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400
FAX: 858-546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16936 Via Del Campo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 678-1400
Fax: 858 546 0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Designation No.: US1146

TÜV SÜD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Designation is US1146.

1.9.2 Innovation, Science and Economic Development Canada (IC) Registration No.: 3067A-1 & 22806-1

The 10m Semi-anechoic chamber of TUV SUD America Inc. (San Diego Rancho Bernardo) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A-1.

The 3m Semi-anechoic chamber of TUV SUD America Inc. (San Diego Mira Mesa) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 22806-1.

1.9.3 BSMI – Laboratory Code: SL2-IN-E-028R (US0102)

TUV Product Service Inc. (San Diego) is a recognized EMC testing laboratory by the BSMI under the MRA (Mutual Recognition Arrangement) with the United States. Accreditation includes CNS 13438 up to 6GHz.

1.9.4 NCC (National Communications Commission - US0102)

TUV SUD America Inc. (San Diego) is listed as a Foreign Recognized Telecommunication Equipment Testing Laboratory and is accredited to ISO/IEC 17025 (A2LA Certificate No.2955.13) which under APEC TEL MRA Phase 1 was designated as a Conformity Assessment Body competent to perform testing of equipment subject to the Technical Regulations covered under its scope of accreditation including RTTE01, PLMN01 and PLMN08 for TTE type of testing and LP002 for Low-Power RF Device type of testing.

1.9.5 VCCI – Registration No. A-0280 and A-0281

TUV SUD America Inc. (San Diego) is a VCCI registered measurement facility which includes radiated field strength measurement, radiated field strength measurement above 1GHz, mains port interference measurement and telecommunication port interference measurement.

1.9.6 RRA – Identification No. US0102

TUV SUD America Inc. (San Diego) is National Radio Research Agency (RRA) recognized laboratory under Phase I of the APEC Tel MRA.

1.9.7 OFCA – U.S. Identification No. US0102

TUV SUD America Inc. (San Diego) is recognized by Office of the Communications Authority (OFCA) under Appendix B, Phase I of the APEC Tel MRA.



SECTION 2

TEST DETAILS

Radio Testing of the
AGC Automotive Europe SA
AGC Jack 2



2.1 PEAK OUTPUT POWER

2.1.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.247(b)(3)
RSS-247, Clause 5.4 (d)

2.1.2 Standard Applicable

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands, the maximum peak conducted output shall not exceed 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

2.1.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.1.4 Date of Test/Initial of test personnel who performed the test

December 01, 2020 / FSC

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions (Rancho Bernardo Satellite Facility)

Ambient Temperature	21.5°C
Relative Humidity	36.7%
ATM Pressure	99.9kPa


2.1.7 Additional Observations

- This is a conducted test using direct connection to the TS8997 Test System.
- The path loss was all accounted for with the test system calibration.
- Test methodology is per FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.9.2.3.2.
- The requirement is the total transmit power delivered to the antenna. Therefore, Gated EIRP data are for reference only. The actual antenna gain of the EUT was not considered.

2.1.8 Test Results

DUT Frequency (MHz)	PHY setting	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	1M	-1.7	30.0	-1.7	67.658	PASS
	2M	-1.7	30.0	-1.7	38.286	PASS
2440.000000	1M	-1.7	30.0	-1.7	67.649	PASS
	2M	-1.7	30.0	-1.7	38.278	PASS
2480.000000	1M	-1.8	30.0	-1.8	67.645	PASS
	2M	-1.9	30.0	-1.9	38.274	PASS

2.1.9 Sample Test Plots

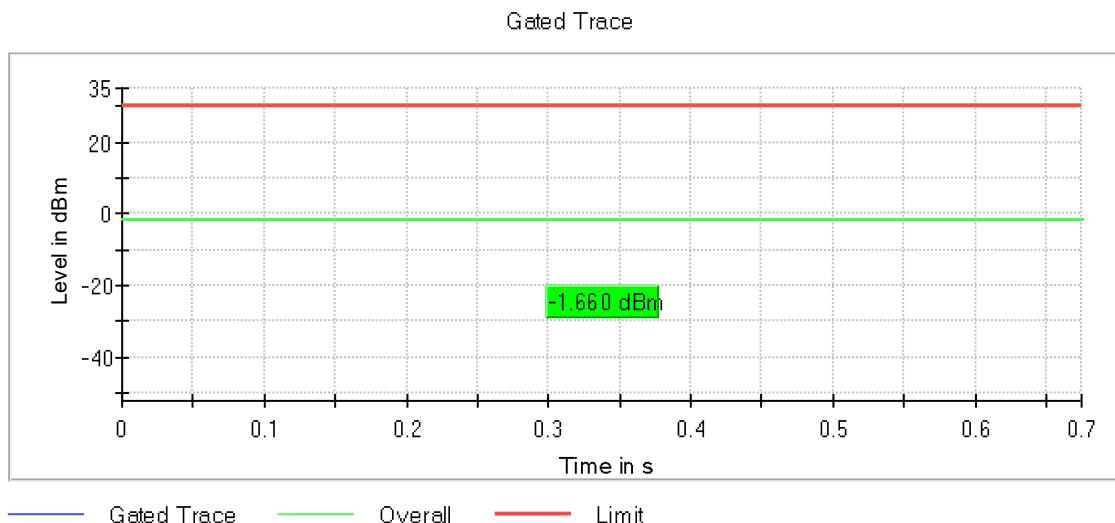

Bluetooth LE. Mid Channel 1Mbps



Bluetooth LE. Mid Channel 2Mbps

2.1.10 Power Meter Settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

2.2 CONDUCTED EMISSIONS

2.2.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.207(a)
RSS-GEN, Clause 8.8

2.2.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

**Decreases with the logarithm of the frequency.*

2.2.3 Equipment Under Test and Modification State

Serial No:

2.2.4 Date of Test/Initial of test personnel who performed the test

N/A. EUT is for vehicular use. AC Conducted Emissions verification doesn't apply.



2.3 99% EMISSION BANDWIDTH

2.3.1 Specification Reference

RSS-Gen Clause 6.7

2.3.2 Standard Applicable

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth. When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

2.3.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.3.4 Date of Test/Initial of test personnel who performed the test

December 01, 2020 / FSC

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions (Rancho Bernardo Satellite Facility)

Ambient Temperature	21.5°C
Relative Humidity	36.7%
ATM Pressure	99.9kPa

2.3.7 Additional Observations

- This is a conducted test using direct connection to the TS8997 Test System.



- The path loss was all accounted for with the test system calibration.
- Test methodology is per Test according to KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1.

2.3.8 Sample Measurement Settings


Setting	Instrument Value	Target Value
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.30 dB

2.3.9 Test Results

DUT Frequency (MHz)	PHY setting	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	1M	0.995000	2401.587500	2402.582500	PASS
	2M	2.000000	2401.075000	2403.075000	PASS
2440.000000	1M	0.995000	2439.587500	2440.582500	PASS
	2M	2.000000	2439.075000	2441.075000	PASS
2480.000000	1M	0.995000	2479.587500	2480.582500	PASS
	2M	2.000000	2479.075000	2481.075000	PASS


2.3.10 Worst Case Test Plots

99 % Bandwidth

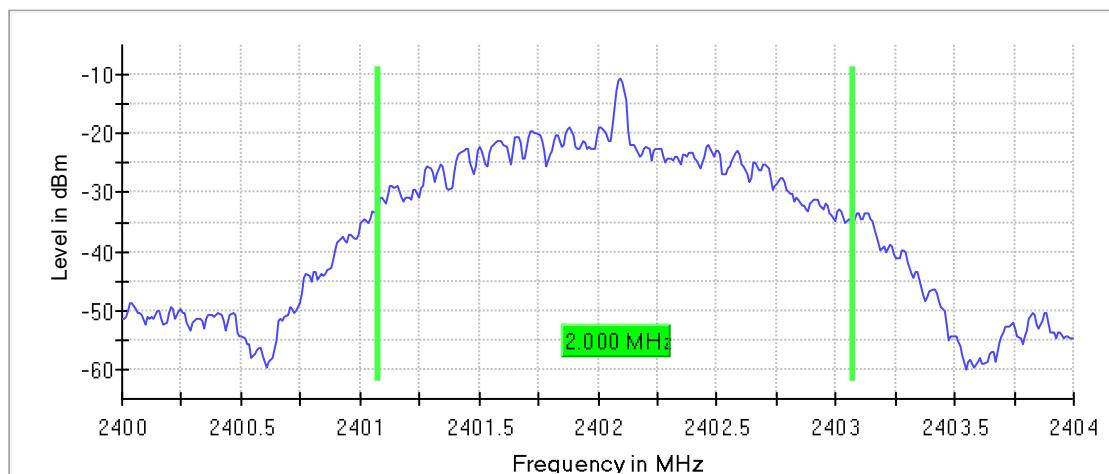

Bluetooth LE Low Channel (2M PHY)

99 % Bandwidth

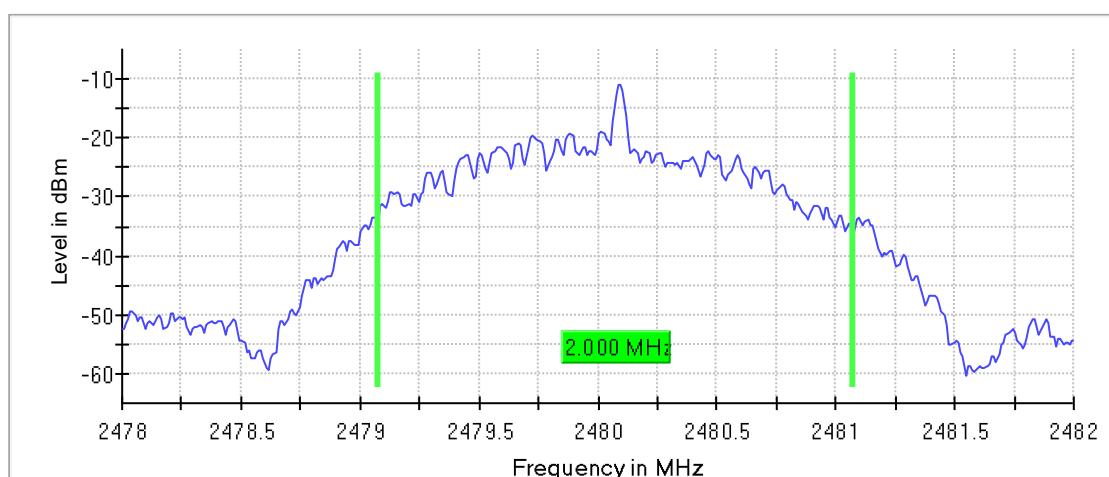

Bluetooth LE High Channel (2M PHY)

2.4 MINIMUM 6 dB RF BANDWIDTH

2.4.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.247(a)(2)
RSS-247, Clause 5.2 (a)

2.4.2 Standard Applicable

(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.4.4 Date of Test/Initial of test personnel who performed the test

December 01, 2020 / FSC

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions (Rancho Bernardo Satellite Facility)

Ambient Temperature	21.5°C
Relative Humidity	36.7%
ATM Pressure	99.9kPa

2.4.7 Additional Observations

- This is a conducted test using direct connection to the TS8997 Test System.
- The path loss was all accounted for with the test system calibration.
- Test methodology is per FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.8.1.




2.4.8 Sample Measurement Settings (1M PHY)

Setting	Instrument Value	Target Value
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.26 dB	0.50 dB


2.4.9 Test Results

DUT Frequency (MHz)	PHY setting	Bandwidth (MHz)	Limit Min (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	1M	0.673268	0.500000	2401.742574	2402.415842	PASS
	2M	1.188118	0.500000	2401.485149	2402.673267	PASS
2440.000000	1M	0.673268	0.500000	2439.742574	2440.415842	PASS
	2M	1.188118	0.500000	2439.485149	2440.673267	PASS
2480.000000	1M	0.693070	0.500000	2479.742574	2480.435644	PASS
	2M	1.188118	0.500000	2479.485149	2480.673267	PASS

2.4.10 Worst Case Test Plots

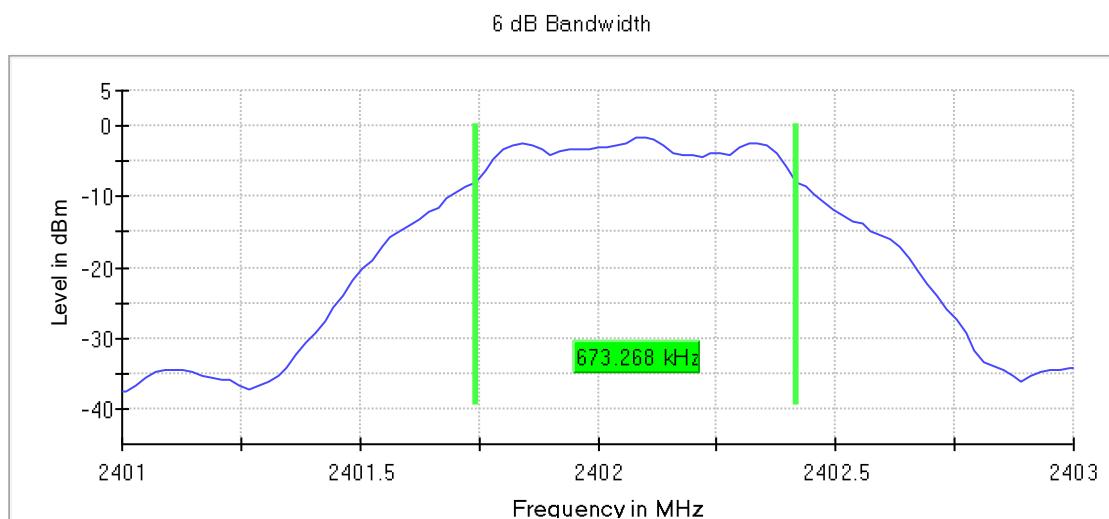

Bluetooth LE Low Channel (1M PHY)

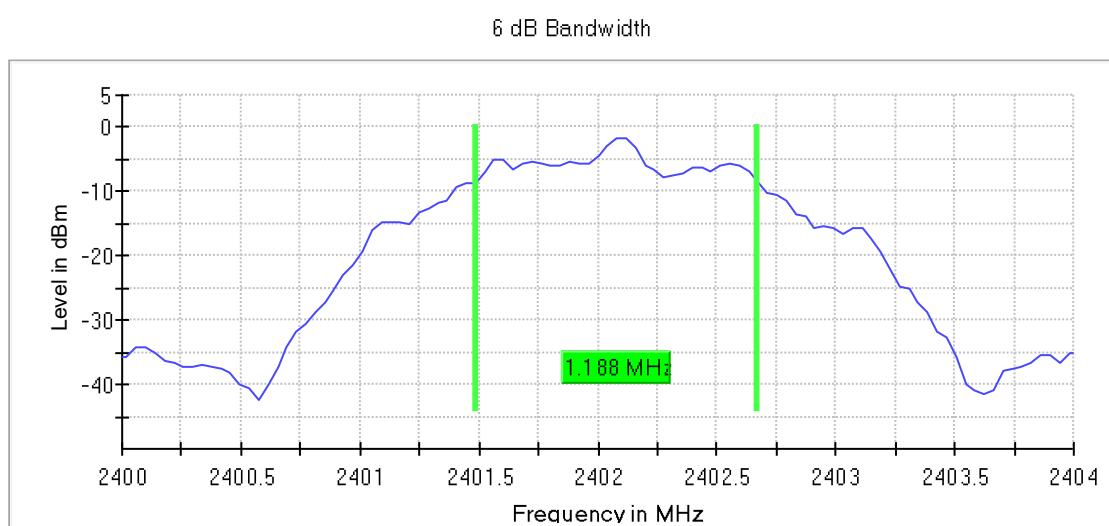

Bluetooth LE Low Channel (2M PHY)



2.5 OUT-OF-BAND EMISSIONS - CONDUCTED

2.5.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.247(d)
RSS-247, Clause 5.5

2.5.2 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.5.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.5.4 Date of Test/Initial of test personnel who performed the test

December 02, 2020 / FSC

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions (Rancho Bernardo Satellite Facility)


Ambient Temperature	21.5°C
Relative Humidity	36.7%
ATM Pressure	99.9kPa

2.5.7 Additional Observations

- This is a conducted test using a spectrum analyser.
- The path loss was all accounted for using a transducer factor (TDF) including the maximum antenna gain of 5.05 dBi.
- Test methodology is per FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 11.11.2 & 11.11.3.
- Limit used is the more stringent §15.209 limits converted to power (dBm). There were no emissions observed within 30dB of the fundamental satisfying the requirement of §15.247(d).
- Sample calculation of the limit:


§15.209 limit at 2GHz = 500µV @ 3 meters
= 53.97dBµV @ 3 meters
= -41.26 dBm (solving for EIRP using formula from Clause 12.7.2(d) of ANSI C63.10-2013)
= **-51.26 dBm** (with RBW correction factor from 1MHz to 100kHz)

2.5.8 Test Results Plots

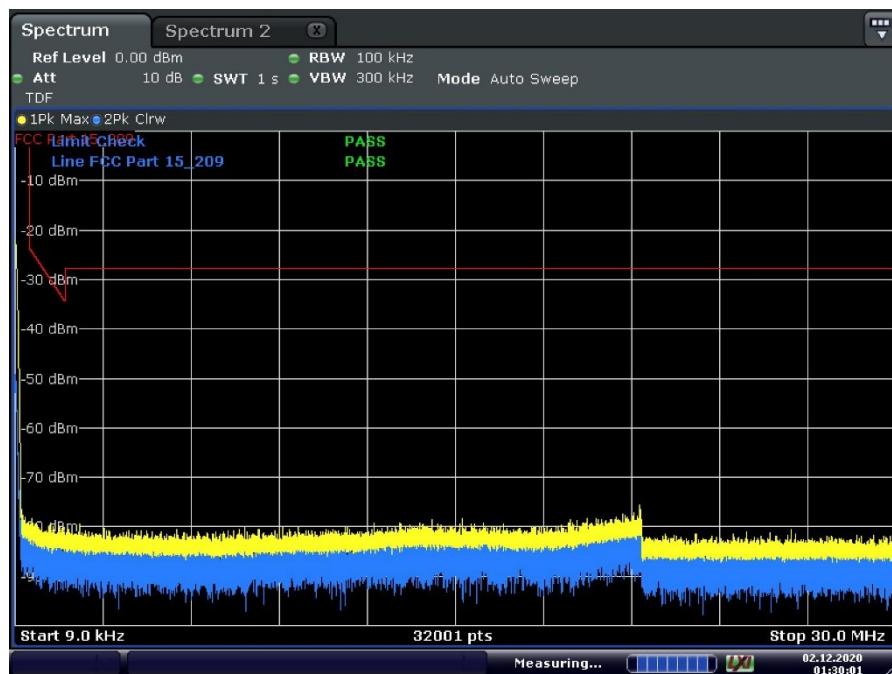


Date: 2.DEC.2020 01:30:01

BLE Low Channel 1M PHY (9kHz to 30MHz)

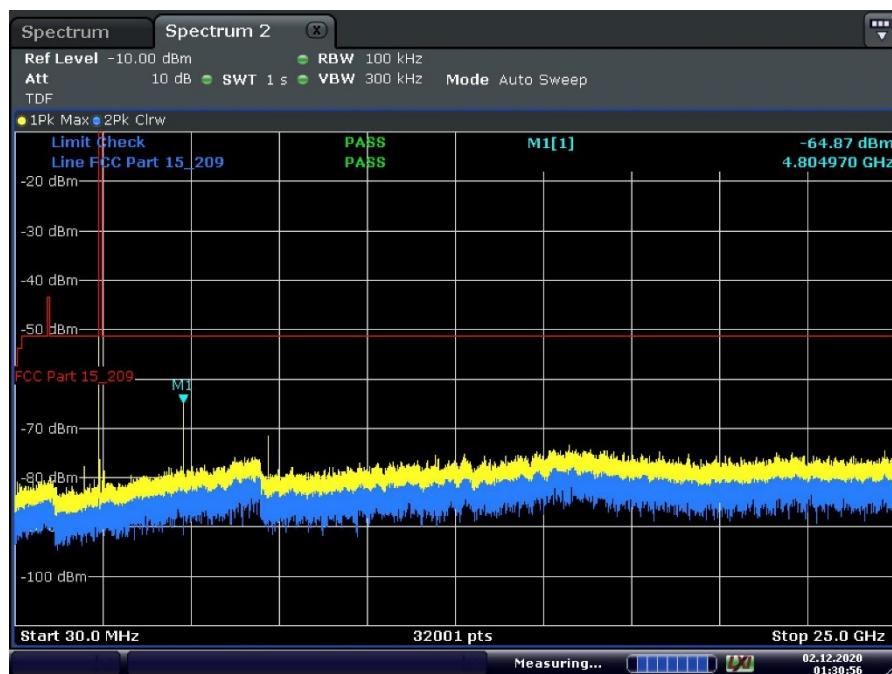


Date: 2.DEC.2020 01:30:56

BLE Low Channel 1M PHY (30MHz to 25GHz)

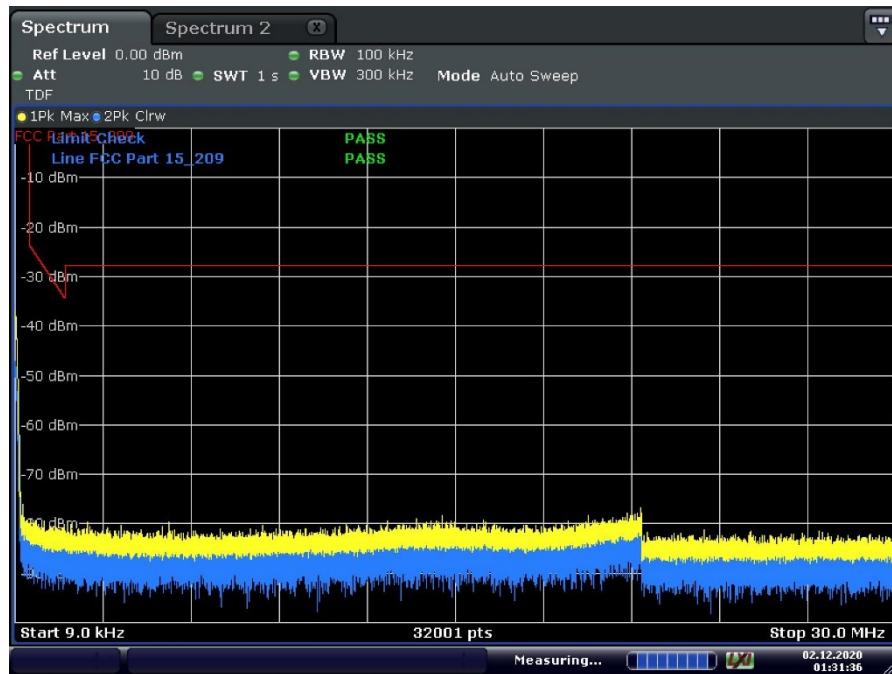


Date: 2.DEC.2020 01:31:37

BLE Mid Channel 1M PHY (9kHz to 30MHz)

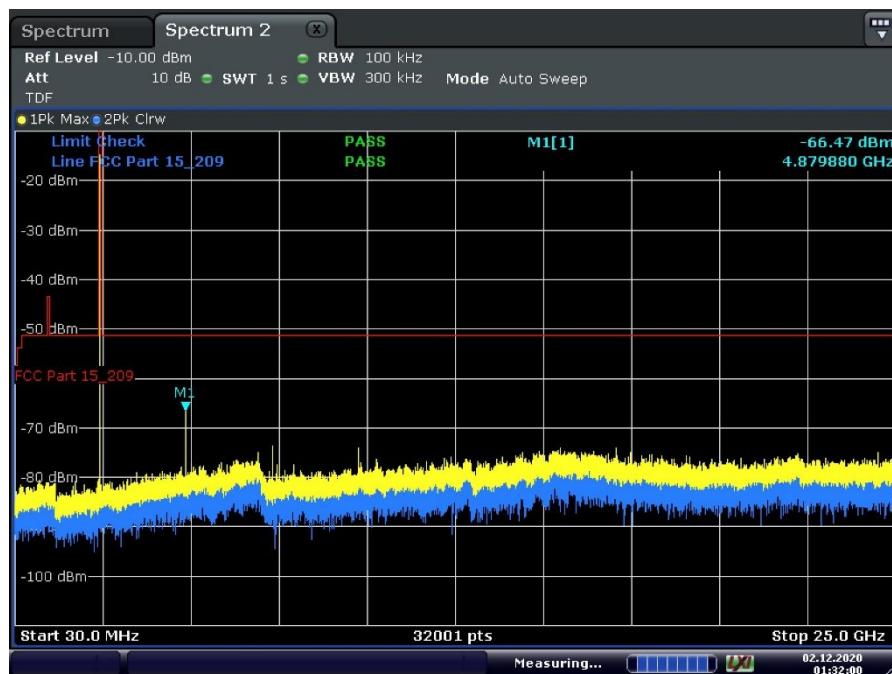


Date: 2.DEC.2020 01:32:00

BLE Mid Channel 1M PHY (30MHz to 25GHz)

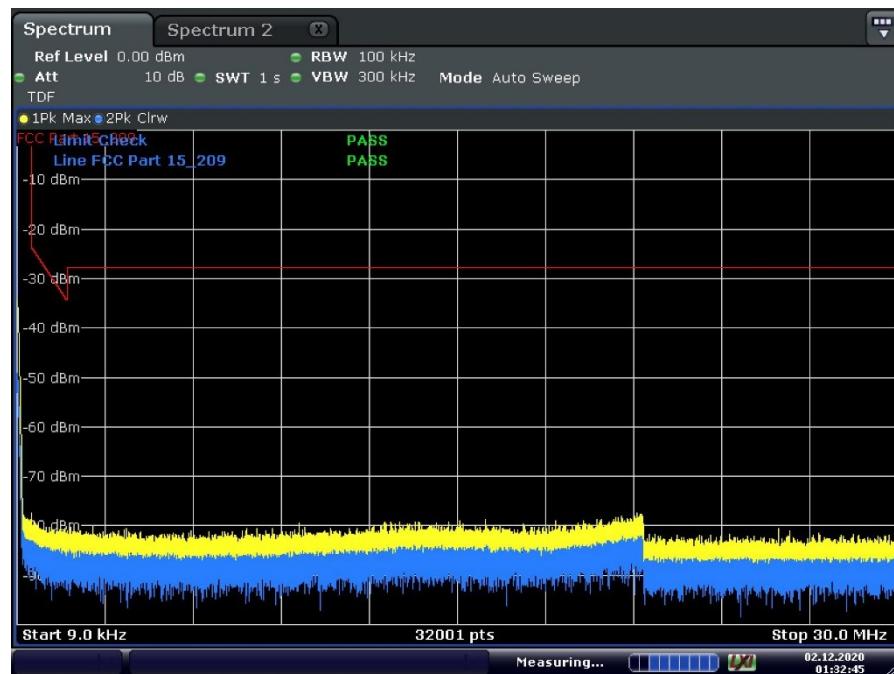


Date: 2.DEC.2020 01:32:45

BLE High Channel 1M PHY (9kHz to 30MHz)

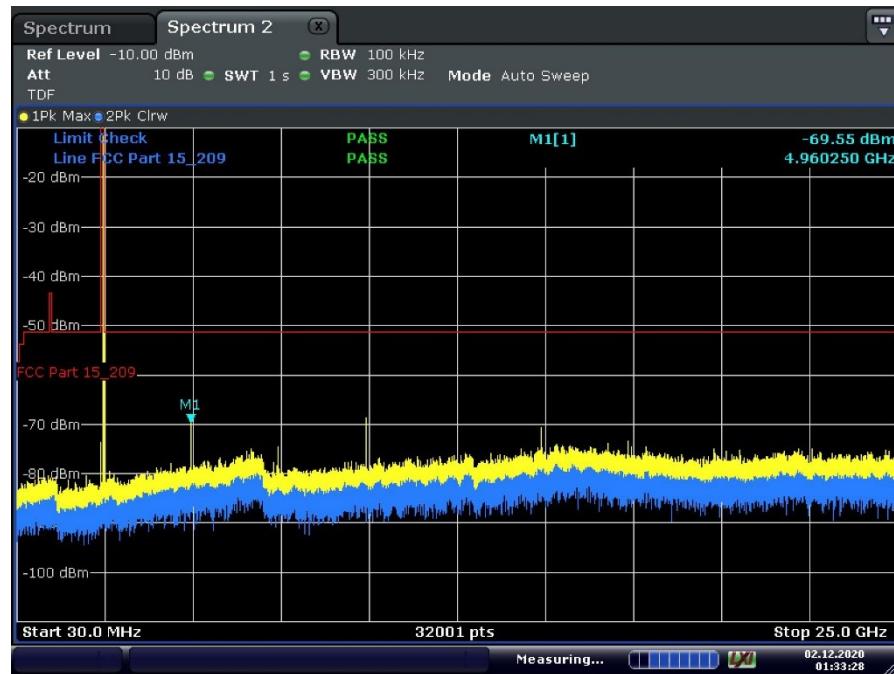


Date: 2.DEC.2020 01:33:28

BLE High Channel 1M PHY (30MHz to 25GHz)

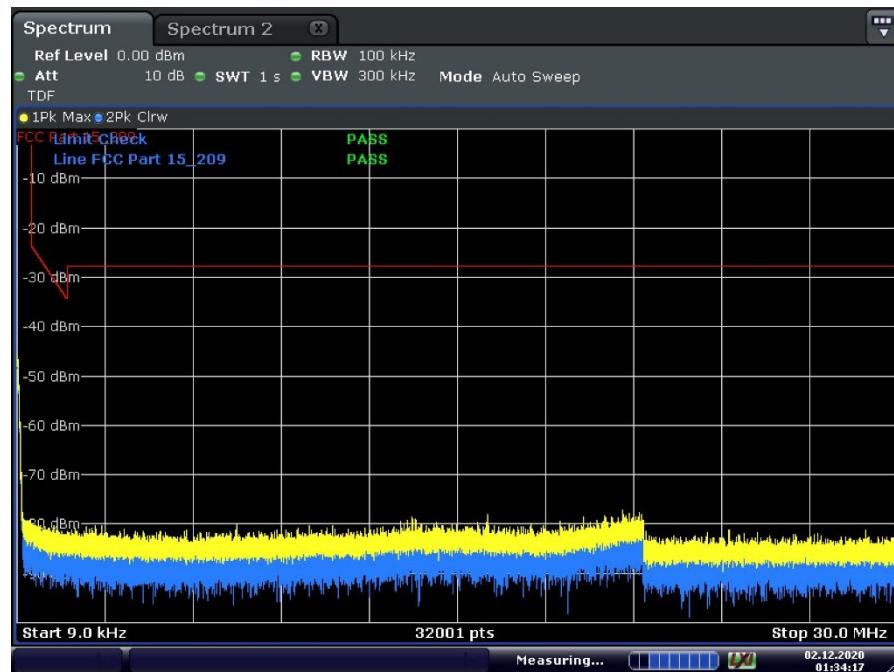


Date: 2.DEC.2020 01:34:17

BLE Low Channel 2M PHY (9kHz to 30MHz)

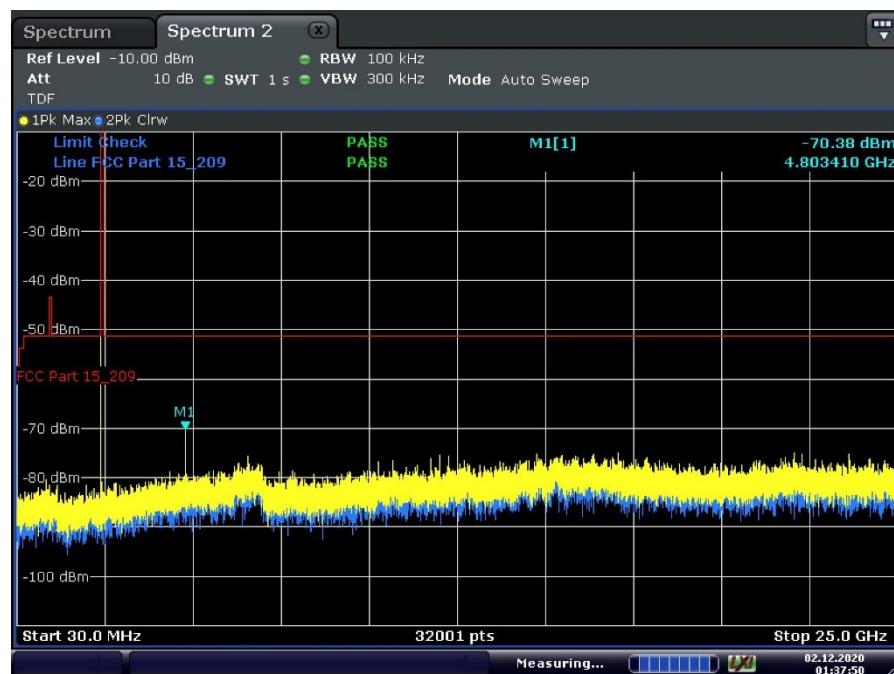


Date: 2.DEC.2020 01:37:50


BLE Low Channel 2M PHY (30MHz to 25GHz)

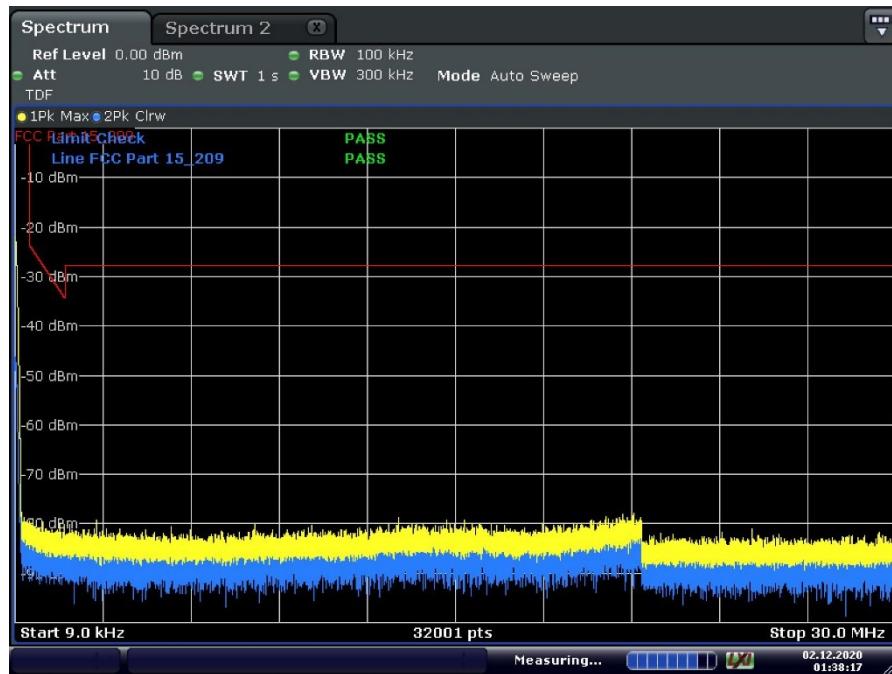

BLE Mid Channel 2M PHY (9kHz to 30MHz)

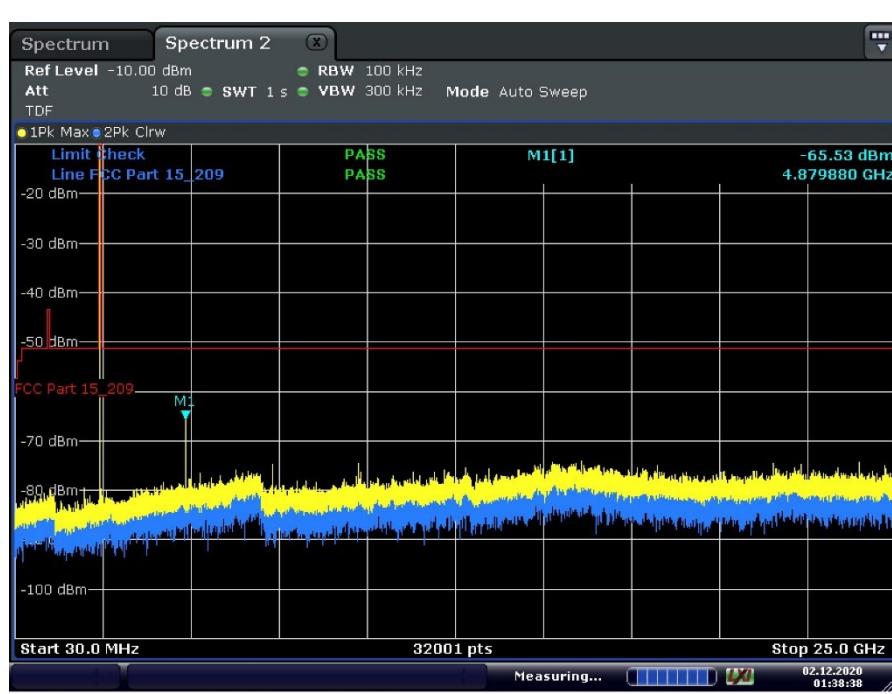


BLE Mid Channel 2M PHY (30MHz to 25GHz)

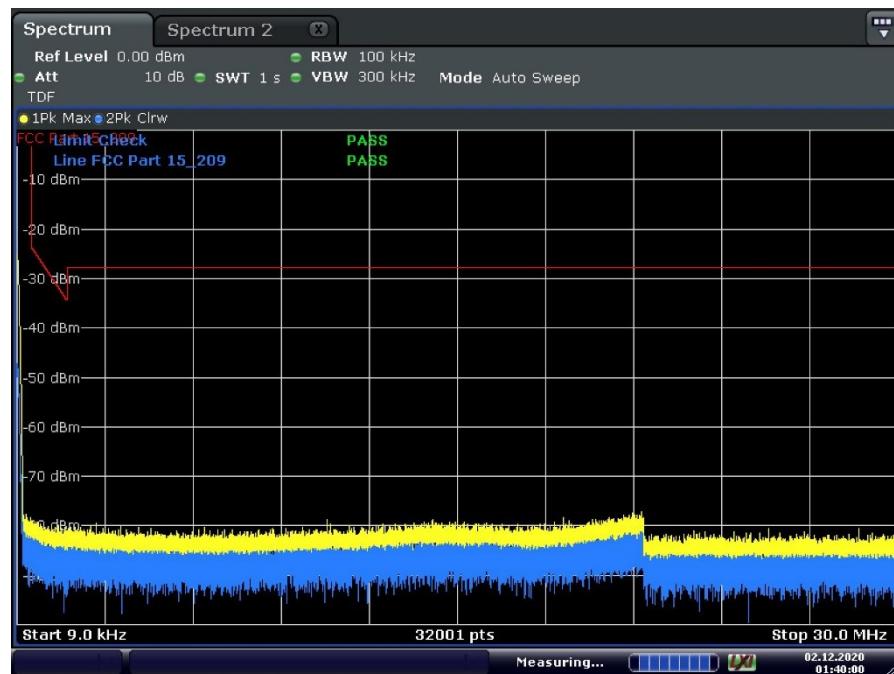

Date: 2.DEC.2020 01:40:00

BLE High Channel 2M PHY (9kHz to 30MHz)

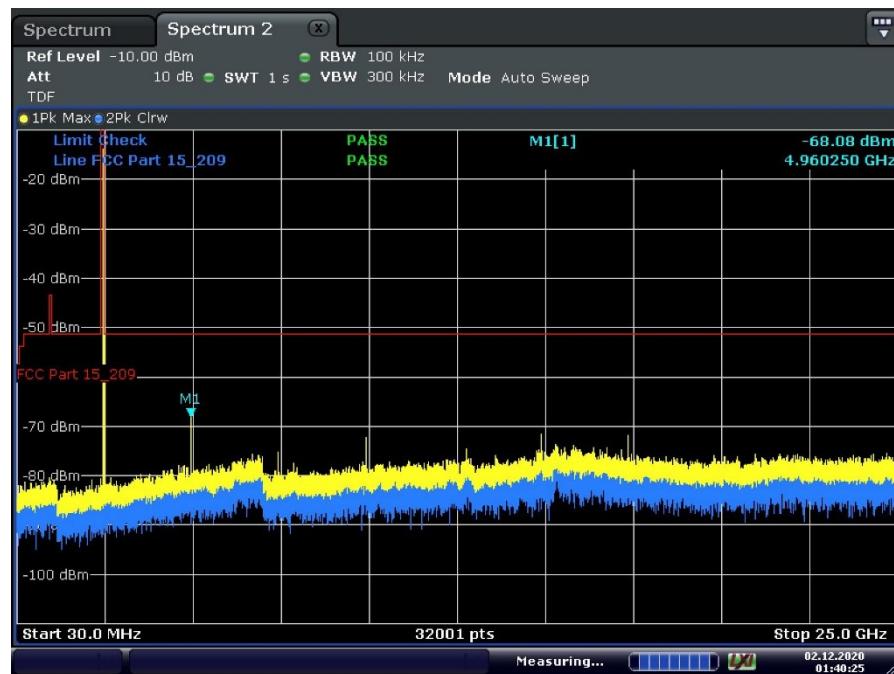

Date: 2.DEC.2020 01:40:25

BLE High Channel 2M PHY (30MHz to 25GHz)



2.6 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS

2.6.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.247(d)
FCC 47 CFR Part 15, Clause 15.205
RSS-247, Clause 5.5

2.6.2 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.6.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.6.4 Date of Test/Initial of test personnel who performed the test

December 01, 2020 / FSC

2.6.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.6 Environmental Conditions (Rancho Bernardo Satellite Facility)

Ambient Temperature	21.5°C
Relative Humidity	36.7%
ATM Pressure	99.9kPa

2.6.7 Additional Observations

- This is a conducted test using direct connection to the Spectrum Analyzer being controlled by the TS8997 Test System.
- The path loss was all accounted for with the test system calibration.
- Test methodology is per FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05 8.7 and ANSI C63.10-2013.



2.6.8 Sample Measurement Settings

Measurement 1		
Setting	Instrument Value	Target Value
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.03 dB	0.50 dB

Measurement 2		
Setting	Instrument Value	Target Value
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.50 dB

2.6.9 Test Results (Lower Band Edge 1M PHY)

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.875000	-54.9	28.4	-26.5	PASS
2399.825000	-55.0	28.5	-26.5	PASS
2399.775000	-55.7	29.2	-26.5	PASS
2399.725000	-55.8	29.3	-26.5	PASS
2399.975000	-56.0	29.5	-26.5	PASS
2399.425000	-56.7	30.2	-26.5	PASS
2399.925000	-56.8	30.3	-26.5	PASS
2399.625000	-56.9	30.4	-26.5	PASS
2398.975000	-56.9	30.4	-26.5	PASS
2399.375000	-56.9	30.4	-26.5	PASS
2399.025000	-56.9	30.4	-26.5	PASS
2399.675000	-56.9	30.4	-26.5	PASS
2399.075000	-57.3	30.8	-26.5	PASS
2399.475000	-57.3	30.8	-26.5	PASS
2399.125000	-57.4	30.8	-26.5	PASS

2.6.10 Test Results (Lower Band Edge 2M PHY)

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-32.9	6.3	-26.5	PASS
2399.925000	-36.1	9.6	-26.5	PASS
2399.875000	-38.6	12.0	-26.5	PASS
2399.825000	-39.3	12.8	-26.5	PASS
2399.775000	-42.5	15.9	-26.5	PASS
2399.725000	-44.3	17.8	-26.5	PASS
2399.675000	-46.5	19.9	-26.5	PASS
2399.625000	-48.4	21.9	-26.5	PASS
2399.575000	-50.2	23.7	-26.5	PASS
2399.525000	-51.5	24.9	-26.5	PASS
2399.475000	-52.8	26.3	-26.5	PASS
2399.125000	-53.1	26.6	-26.5	PASS
2399.425000	-53.7	27.2	-26.5	PASS
2399.175000	-53.9	27.3	-26.5	PASS
2399.075000	-54.0	27.4	-26.5	PASS




2.6.11 Test Results (Upper Band Edge 1M PHY)

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-56.9	30.0	-26.9	PASS
2483.775000	-57.1	30.3	-26.9	PASS
2483.725000	-57.6	30.7	-26.9	PASS
2483.625000	-57.6	30.8	-26.9	PASS
2483.675000	-57.7	30.9	-26.9	PASS
2483.825000	-58.1	31.2	-26.9	PASS
2483.575000	-58.3	31.4	-26.9	PASS
2483.875000	-58.8	32.0	-26.9	PASS
2484.225000	-59.0	32.1	-26.9	PASS
2484.475000	-59.0	32.2	-26.9	PASS
2484.175000	-59.1	32.3	-26.9	PASS
2483.975000	-59.3	32.5	-26.9	PASS
2483.925000	-59.4	32.6	-26.9	PASS
2484.625000	-59.5	32.6	-26.9	PASS
2484.425000	-59.5	32.6	-26.9	PASS


2.6.12 Test Results (Upper Band Edge 2M PHY)

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2484.175000	-57.1	30.2	-26.9	PASS
2484.125000	-57.8	30.9	-26.9	PASS
2484.225000	-58.0	31.0	-26.9	PASS
2483.525000	-58.0	31.1	-26.9	PASS
2483.675000	-58.6	31.7	-26.9	PASS
2483.575000	-58.7	31.7	-26.9	PASS
2483.725000	-58.8	31.9	-26.9	PASS
2484.025000	-59.0	32.1	-26.9	PASS
2484.075000	-59.1	32.1	-26.9	PASS
2484.375000	-59.1	32.2	-26.9	PASS
2483.825000	-59.2	32.2	-26.9	PASS
2483.875000	-59.2	32.2	-26.9	PASS
2485.225000	-59.2	32.3	-26.9	PASS
2484.325000	-59.2	32.3	-26.9	PASS
2485.175000	-59.2	32.3	-26.9	PASS

2.6.13 Test Plots

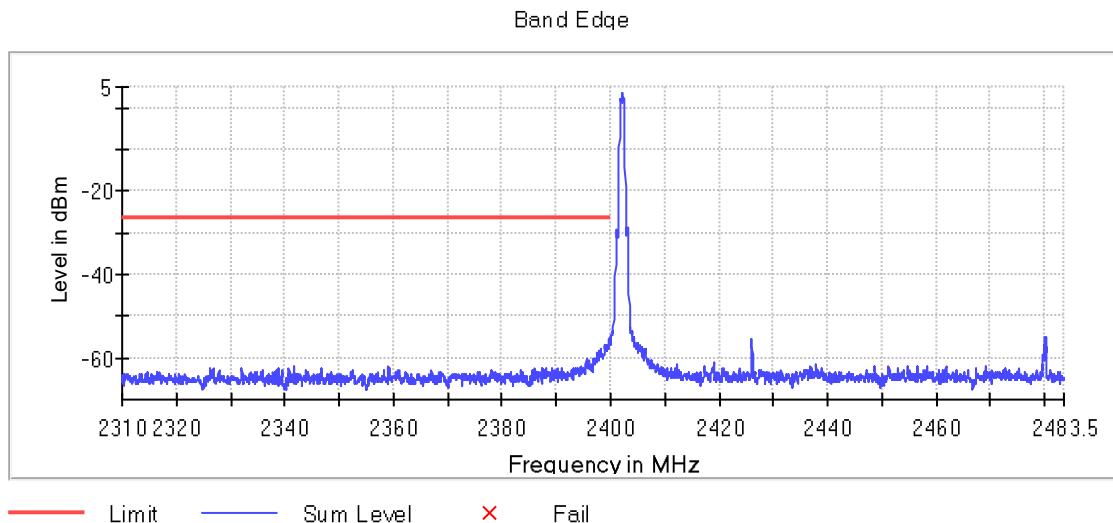


Bluetooth LE Low Band Edge 2400MHz (1M PHY)

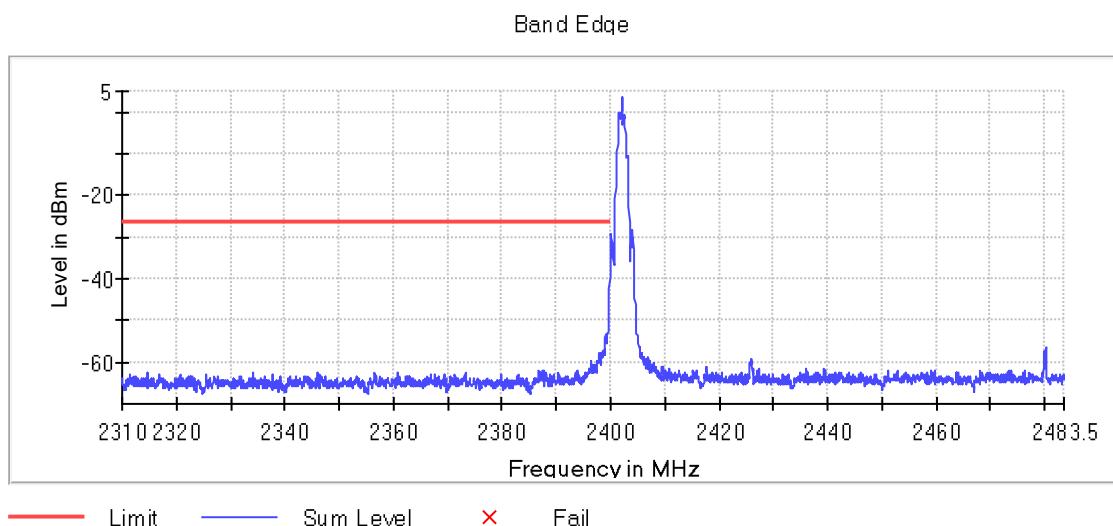


Bluetooth LE Low Band Edge 2400MHz (2M PHY)

Band Edge

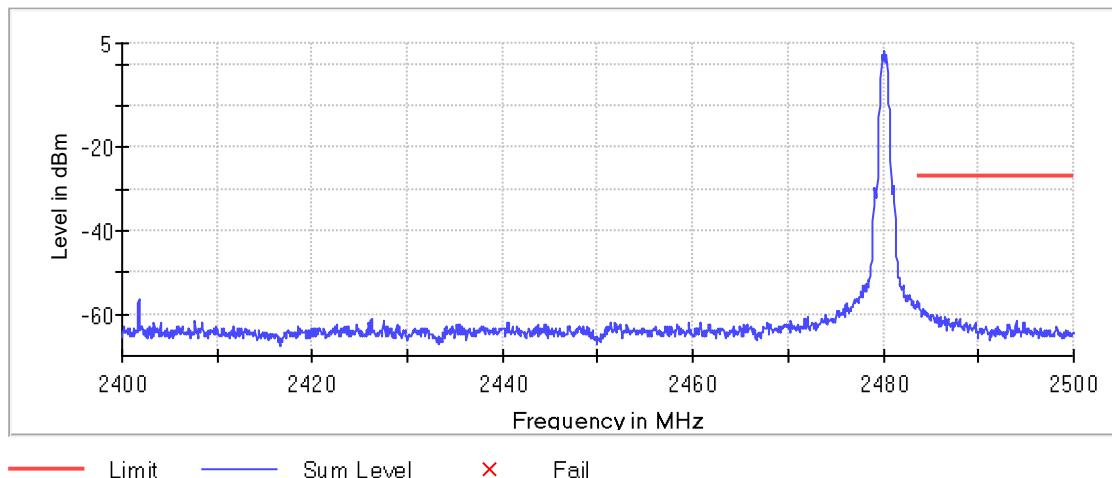

Bluetooth LE Upper Band Edge 2483.5MHz (1M PHY)

Band Edge

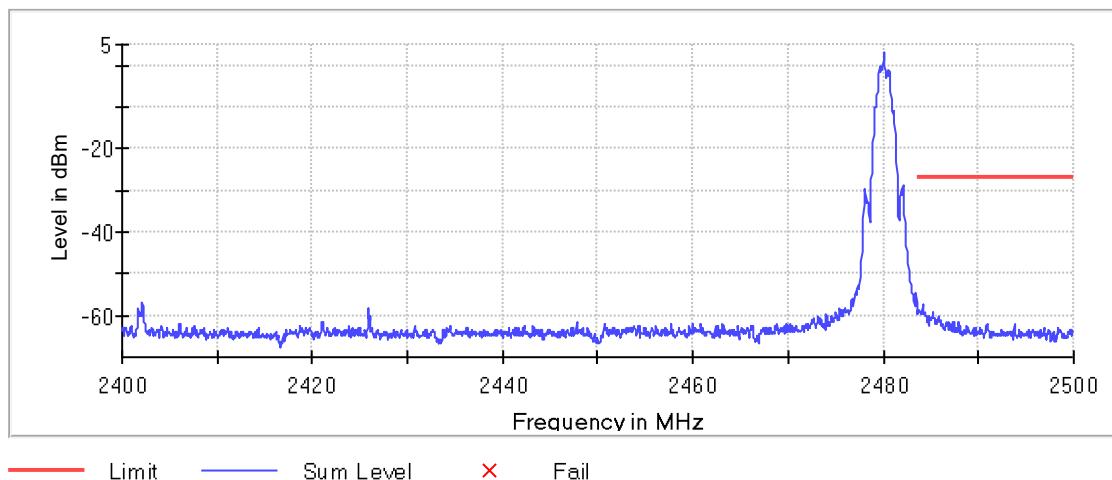

Bluetooth LE Upper Band Edge 2483.5MHz (2M PHY)

2.6.14 Upper band edge calculation (2483.5 MHz 1M PHY) within Restricted Band:

- 2483.525 MHz (in the restricted bands)
- Procedure is per Clause 12.7.2 of ANSI C63.10-2013.
- Use the following formula as per Clause 12.7.2(d) of ANSI C63.10-2013.

$$\begin{aligned} E(\text{dB}\mu\text{V/m}) &= \text{EIRP (dBm)} + 95.2 \\ &= (-56.9 \text{ dBm} + 5.05 \text{ dBi antenna gain}) + 95.2 \\ &= 43.35 \text{ dB}\mu\text{V/m} @ 3 \text{ meters} \text{ (Peak complies with 54 dB}\mu\text{V/m Average limit)} \end{aligned}$$

2.6.15 Upper band edge calculation (2483.5 MHz 2M PHY) within Restricted Band:

- 2483.525 MHz (in the restricted bands)
- Procedure is per Clause 12.7.2 of ANSI C63.10-2013.
- Use the following formula as per Clause 12.7.2(d) of ANSI C63.10-2013.

$$\begin{aligned} E(\text{dB}\mu\text{V/m}) &= \text{EIRP (dBm)} + 95.2 \\ &= (-58.0 \text{ dBm} + 5.05 \text{ dBi antenna gain}) + 95.2 \\ &= 42.25 \text{ dB}\mu\text{V/m} @ 3 \text{ meters} \text{ (Peak complies with 54 dB}\mu\text{V/m Average limit)} \end{aligned}$$



2.7 RADIATED SPURIOUS EMISSIONS

2.7.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.247(d)
RSS-247, Clause 5.5

2.7.2 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.7.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.7.4 Date of Test/Initial of test personnel who performed the test

December 04, 2020 / FSC

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions (Mira Mesa Facility)

Ambient Temperature	20.3 °C
Relative Humidity	43.4 %
ATM Pressure	100.3 kPa

2.7.7 Additional Observations


- This is a radiated test. The spectrum was searched from 30MHz to the 10th harmonic.
- There are no emissions found that do not comply to the restricted bands defined in FCC Part 15 Subpart C, 15.205 or Part 15.247(d).
- Only the worst case BLE (Mid Channel) presented. There are no significant differences in emissions between all channels.
- Antenna port terminated with 50 Ω load. Emissions coming out of the cabinet being verified

- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.7.8 for sample computation.

2.7.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (db μ V) @ 30 MHz			-0.8
Correction Factor (dB)	Asset# 1066 (cable)	18.1	12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1175(cable)	0.3	
	Asset# 1002 (antenna)	17.2	
Reported QuasiPeak Final Measurement (db μ V/m) @ 30MHz			11.8


2.7.9 Test Results for 9kHz to 30MHz

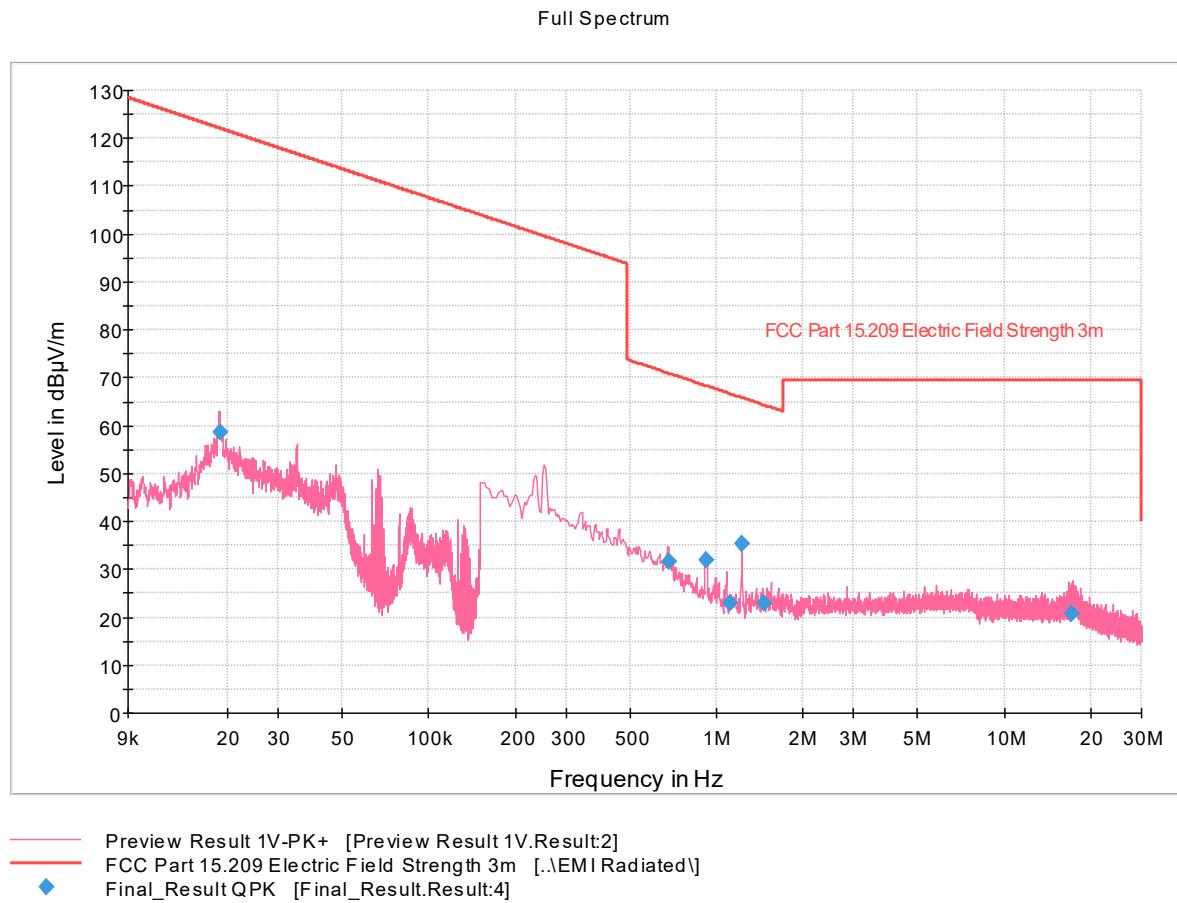

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)	Frequency (MHz)
0.018798	58.69	122.1	63.42	1000.	0.200	H	15.0	15	0.018798
0.680830	31.71	70.94	39.23	1000.	9.000	H	256.0	14	0.680830
0.917535	32.01	68.35	36.33	1000.	9.000	H	318.0	14	0.917535
1.109769	22.95	66.69	43.75	1000.	9.000	H	224.0	14	1.109769
1.226472	35.30	65.82	30.53	1000.	9.000	H	230.0	14	1.226472
1.462655	22.96	64.29	41.33	1000.	9.000	H	243.0	14	1.462655
17.232227	20.69	69.50	48.81	1000.	9.000	H	199.0	15	17.232227


2.7.10 Test Results for 30MHz to 1GHz

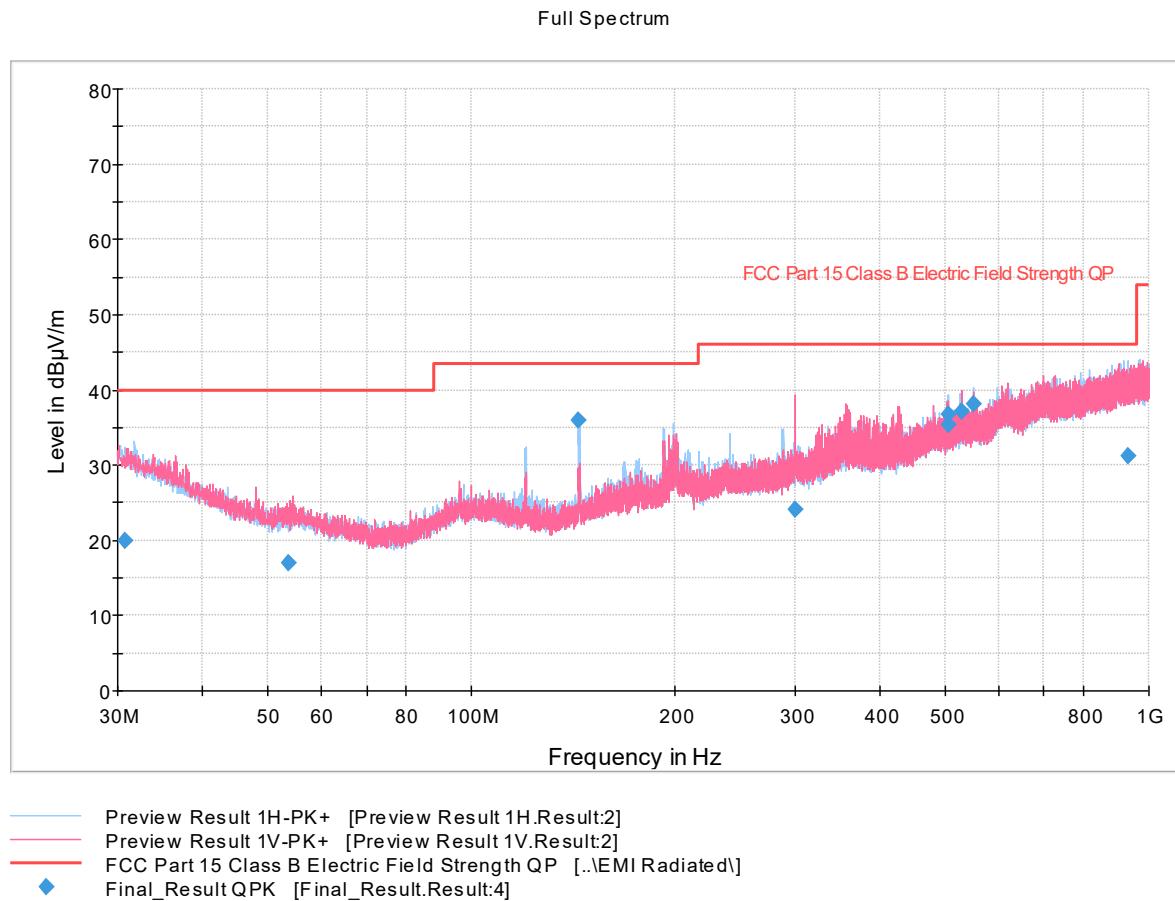

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.698333	20.03	40.00	19.97	1000.	120.000	202.0	H	228.0	22
53.556333	16.91	40.00	23.09	1000.	120.000	109.0	V	-6.0	14
144.00900	36.03	43.50	7.47	1000.	120.000	200.0	H	170.0	15
300.69566	24.06	46.00	21.94	1000.	120.000	193.0	V	146.0	22
504.59966	35.31	46.00	10.69	1000.	120.000	193.0	H	68.0	25
505.01733	36.73	46.00	9.27	1000.	120.000	107.0	H	161.0	25
528.00366	37.13	46.00	8.87	1000.	120.000	109.0	V	263.0	26
552.04800	38.08	46.00	7.92	1000.	120.000	125.0	H	176.0	26
930.75400	31.24	46.00	14.76	1000.	120.000	403.0	H	238.0	31

2.7.11 Test Results for 1GHz to 18GHz

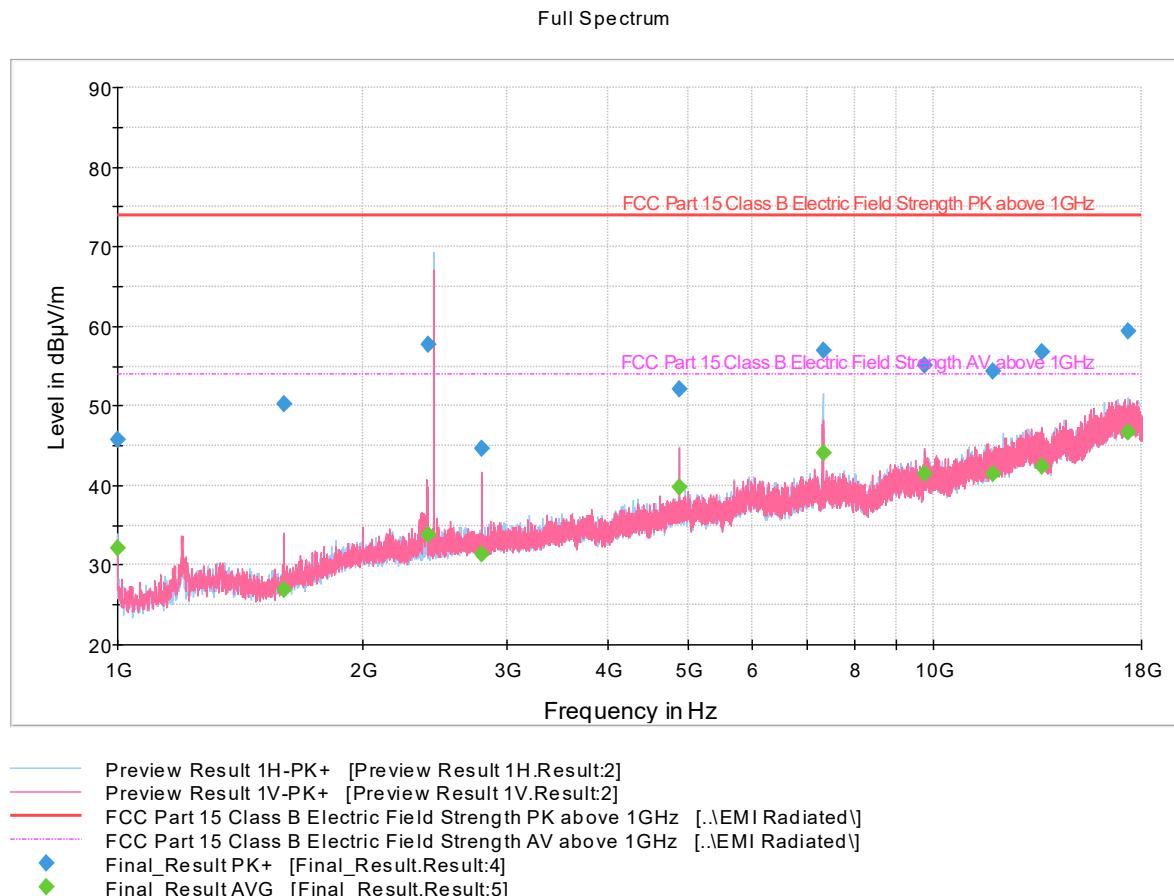

Peak Data

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00000	45.69	73.90	28.21	1000.0	1000.000	220.0	H	109.0	-6
1597.00000	50.25	73.90	23.65	1000.0	1000.000	239.0	V	171.0	-3
2398.46666	57.73	73.90	16.17	1000.0	1000.000	335.0	V	294.0	1
2793.53333	44.63	73.90	29.27	1000.0	1000.000	161.0	V	307.0	1
4880.56666	52.03	73.90	21.87	1000.0	1000.000	284.0	H	154.0	5
7321.03333	56.96	73.90	16.94	1000.0	1000.000	353.0	H	232.0	7
9761.50000	55.05	73.90	18.85	1000.0	1000.000	298.0	V	76.0	10
11809.7000	54.36	73.90	19.54	1000.0	1000.000	175.0	H	218.0	14
13606.2000	56.70	73.90	17.20	1000.0	1000.000	175.0	V	305.0	12
17335.0666	59.40	73.90	14.50	1000.0	1000.000	335.0	H	44.0	19




Average Data

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00000	32.06	53.90	21.84	1000.0	1000.000	220.0	H	109.0	-6
1597.00000	26.88	53.90	27.02	1000.0	1000.000	239.0	V	171.0	-3
2398.46666	33.89	53.90	20.01	1000.0	1000.000	335.0	V	294.0	1
2793.53333	31.30	53.90	22.60	1000.0	1000.000	161.0	V	307.0	1
4880.56666	39.71	53.90	14.19	1000.0	1000.000	284.0	H	154.0	5
7321.03333	44.01	53.90	9.89	1000.0	1000.000	353.0	H	232.0	7
9761.50000	41.54	53.90	12.36	1000.0	1000.000	298.0	V	76.0	10
11809.7000	41.45	53.90	12.45	1000.0	1000.000	175.0	H	218.0	14
13606.2000	42.34	53.90	11.56	1000.0	1000.000	175.0	V	305.0	12
17335.0666	46.74	53.90	7.16	1000.0	1000.000	335.0	H	44.0	19

Test Notes: Fundamental will be ignored for this test (antenna port terminated).



2.7.12 Test Results for 18GHz to 26GHz

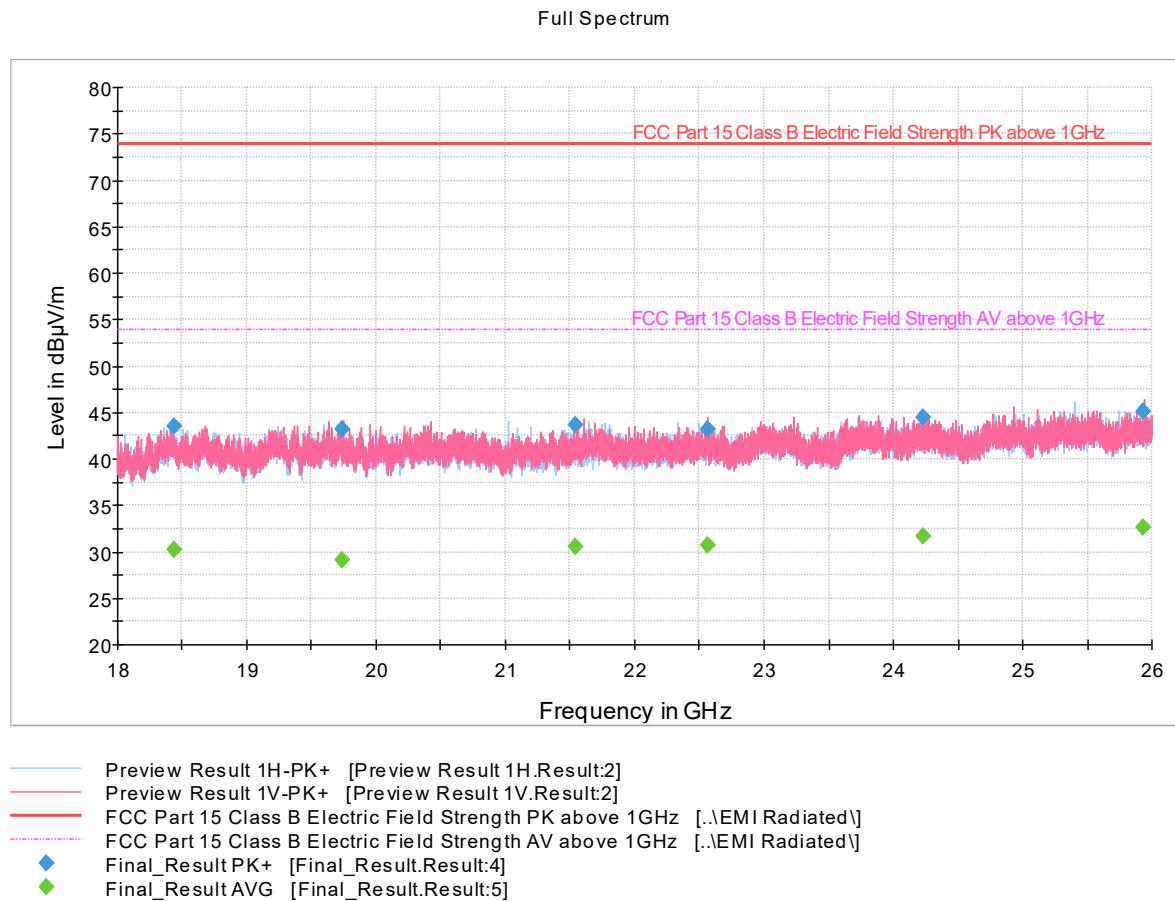

Peak Data

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18431.1150	43.57	73.90	30.33	1000.0	1000.000	143.0	H	146.0	-3
19737.4000	43.14	73.90	30.76	1000.0	1000.000	163.0	V	232.0	-4
21538.6530	43.61	73.90	30.29	1000.0	1000.000	163.0	H	332.0	-2
22560.1975	43.17	73.90	30.73	1000.0	1000.000	187.0	V	84.0	-1
24227.4170	44.55	73.90	29.35	1000.0	1000.000	152.0	V	304.0	0
25929.4470	45.10	73.90	28.80	1000.0	1000.000	162.0	V	61.0	1

Average Data

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18431.1150	30.25	53.90	23.65	1000.0	1000.000	143.0	H	146.0	-3
19737.4000	29.18	53.90	24.72	1000.0	1000.000	163.0	V	232.0	-4
21538.6530	30.64	53.90	23.26	1000.0	1000.000	163.0	H	332.0	-2
22560.1975	30.66	53.90	23.24	1000.0	1000.000	187.0	V	84.0	-1
24227.4170	31.66	53.90	22.24	1000.0	1000.000	152.0	V	304.0	0
25929.4470	32.72	53.90	21.18	1000.0	1000.000	162.0	V	61.0	1

2.8 POWER SPECTRAL DENSITY

2.8.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.247(e)
RSS-247, Clause 5.2(b)

2.8.2 Standard Applicable

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.8.3 Equipment Under Test and Modification State

Serial No: DVTMAIN\030 / Default Test Configuration

2.8.4 Date of Test/Initial of test personnel who performed the test

December 01, 2020 / FSC

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions (Rancho Bernardo Satellite Facility)

Ambient Temperature	21.5°C
Relative Humidity	36.7%
ATM Pressure	99.9kPa

2.8.7 Additional Observations

- This is a conducted test using direct connection to the TS8997 Test System.
- The path loss was all accounted for with the test system calibration.
- Test methodology is per FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05 F and ANSI C63.10-2013.

2.8.8 Test Results Summary

DUT Frequency (MHz)	PHY setting	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2402.000000	1M	2402.097500	-15.216	8.0	PASS
	2M	2402.087500	-14.756	8.0	PASS
2440.000000	1M	2440.087500	-14.994	8.0	PASS
	2M	2440.087500	-14.554	8.0	PASS




2480.000000	1M	2480.082500	-14.979	8.0	PASS
	2M	2480.087500	-14.818	8.0	PASS

2.8.9 Sample Measurement Settings (2M PHY)


Setting	Instrument Value	Target Value
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
Sweeptime	3.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.34 dB	0.50 dB

2.8.10 Worst Case Test Plots

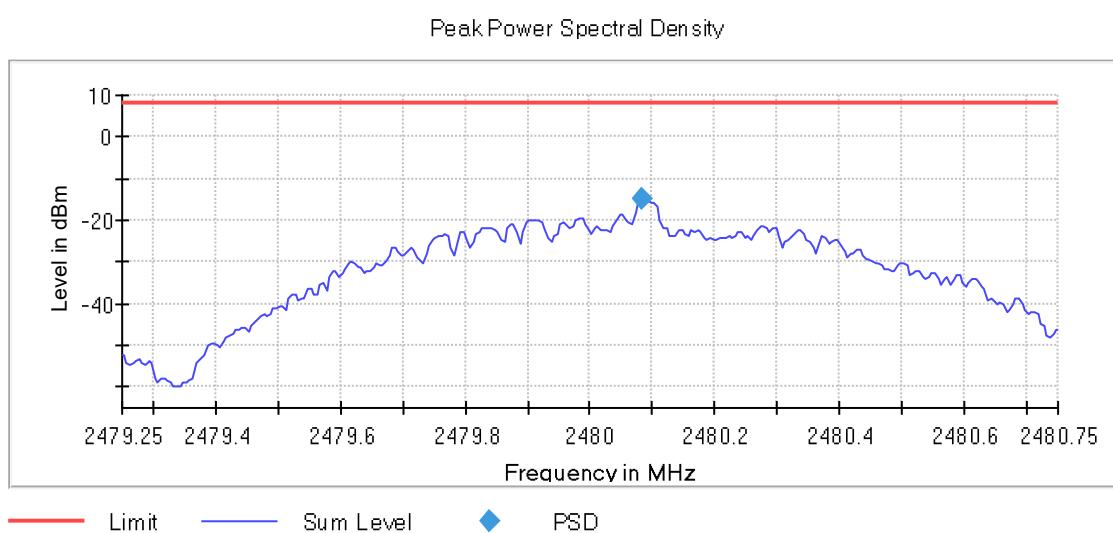

Bluetooth LE High Channel (1M PHY)

Peak Power Spectral Density

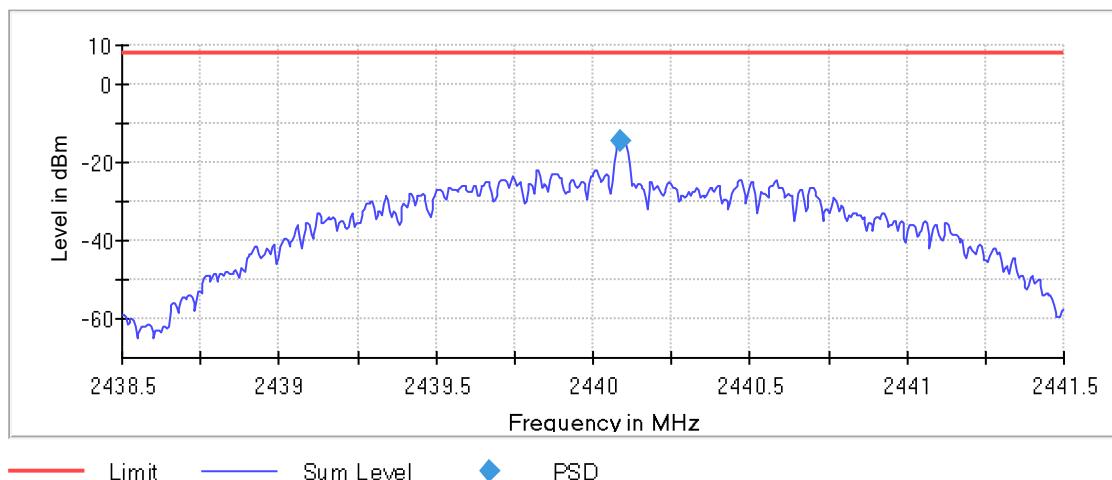

Bluetooth LE Mid Channel (2M PHY)



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Conducted Port Setup						
7643	Signal/Spectrum Analyzer	FSV30	1321.3008K3 0/103166	Rhode & Schwarz	04/15/20	04/04/21
7655	Vector Signal Generator	SMBV100A	260734	Rhode & Schwarz	12/05/19	12/05/20
7654	Signal Generator	SMB 100A	175750	Rhode & Schwarz	12/06/19	12/06/20
7656	OSP with B157	OSP120	101310	Rhode & Schwarz	07/23/20	07/23/21
8825	20dB Attenuator	46-20-34	BK5773	Weinschel Corp.	Verified by 7643 and 7654	
Radiated Emission						
1002	Bilog Antenna	3142C	0058717	EMCO	10/09/19	10/09/21
7631	Double-ridged waveguide horn	3117	00205418	ETS-Lindgren	09/16/20	09/16/22
46797	Preamplifier	PA-122	181925	Com Power	10/28/20	10/28/21
09001	Horn Antenna	HO42S	101	Custom Microwave Inc	09/09/19	09/09/21
40815	Low Noise Amplifier	SLKKa-30-6	19D18	Spacek Labs	10/18/20	10/18/21
6628	Loop Antenna	HFH2-Z2335.4711.52	FNr.800.458/2 5	Schwarbeck	05/22/20	05/20/22
1049	EMI Test Receiver	ESU40	100133	Rhode & Schwarz	09/25/20	09/25/21
Miscellaneous						
11312	Mini Environmental Quality Meter	850027	CF099-56010-340	11312	05/22/20	05/22/21
43003	True RMS Multimeter	85 III	69880143	Fluke	10/23/20	10/23/21
40923	System DC Power Supply	6632B	US37472178	Hewlett Packard	Verified by 43003	
6672	D.C. Power Supply	E3611A	KR73012637	Hewlett Packard	Verified by 43003	
	Test Software	EMC32	V10.50.40	Rhode & Schwarz	N/A	

3.2 Measurement Uncertainty

Calculation of Measurement Uncertainty per CISPR 16-4-2:2011 with Corr. 1

3.2.1 Radiated Measurements (9kHz to 30MHz)

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.44 dB	Normal, k=2	2.000	0.22	0.05
4	Receiver sinewave accuracy	0.15 dB	Normal, k=2	2.000	0.08	0.01
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 10 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 10 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarization	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	0.00 dB	Triangular	2.449	0.00	0.00
16	Separation distance at 10 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.00 dB	Rectangular	1.732	0.00	0.00
18	Table height at 10 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
				Combined standard uncertainty	Normal	2.45 dB
				Expanded uncertainty	Normal, k=2	4.91 dB

3.2.2 Radiated Measurements (30MHz to 1GHz)

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u(x)$	$u(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.58 dB	Normal, k=2	2.000	0.29	0.08
4	Receiver sinewave accuracy	0.15 dB	Normal, k=2	2.000	0.08	0.01
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarization	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.99 dB	Triangular	2.449	1.63	2.65
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.57 dB	Rectangular	1.732	0.33	0.11
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
Combined standard uncertainty				Normal	2.97 dB	
Expanded uncertainty				Normal, k=2	5.94 dB	

3.2.3 Radiated Emission Measurements (1GHz to 18GHz)


	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.15	0.02
3	Antenna factor AF	0.75 dB	Normal, k=2	2.000	0.10	0.01
4	Receiver sinewave accuracy	0.45 dB	Normal, k=2	2.000	0.24	0.06
5	Receiver pulse amplitude	1.50 dB	Rectangular	2.000	0.08	0.01
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.70	0.49
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.40	0.16
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	1.00	0.99
9	AF frequency interpolation	0.30 dB	Rectangular	1.414	0.92	0.85
10	AF height deviations	0.10 dB	Rectangular	1.732	0.17	0.03
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	0.87	0.75
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.17	0.03
13	Cross-polarisation	0.90 dB	Rectangular	1.732	0.52	0.27
14	Site imperfections VSWR (Method 2)	0.00 dB	Rectangular	2.000	4.89	1.21
15	Effect of setup table material	3.25 dB	Triangular	1.732	0.91	0.82
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Table height at 3 m	0.77 dB	Rectangular	2.000	0.00	0.00
Combined standard uncertainty					Normal	2.39 dB
Expanded uncertainty					Normal, k=2	4.79 dB




SECTION 4


Diagram of Test Setup

4.1 Test Setup Diagram

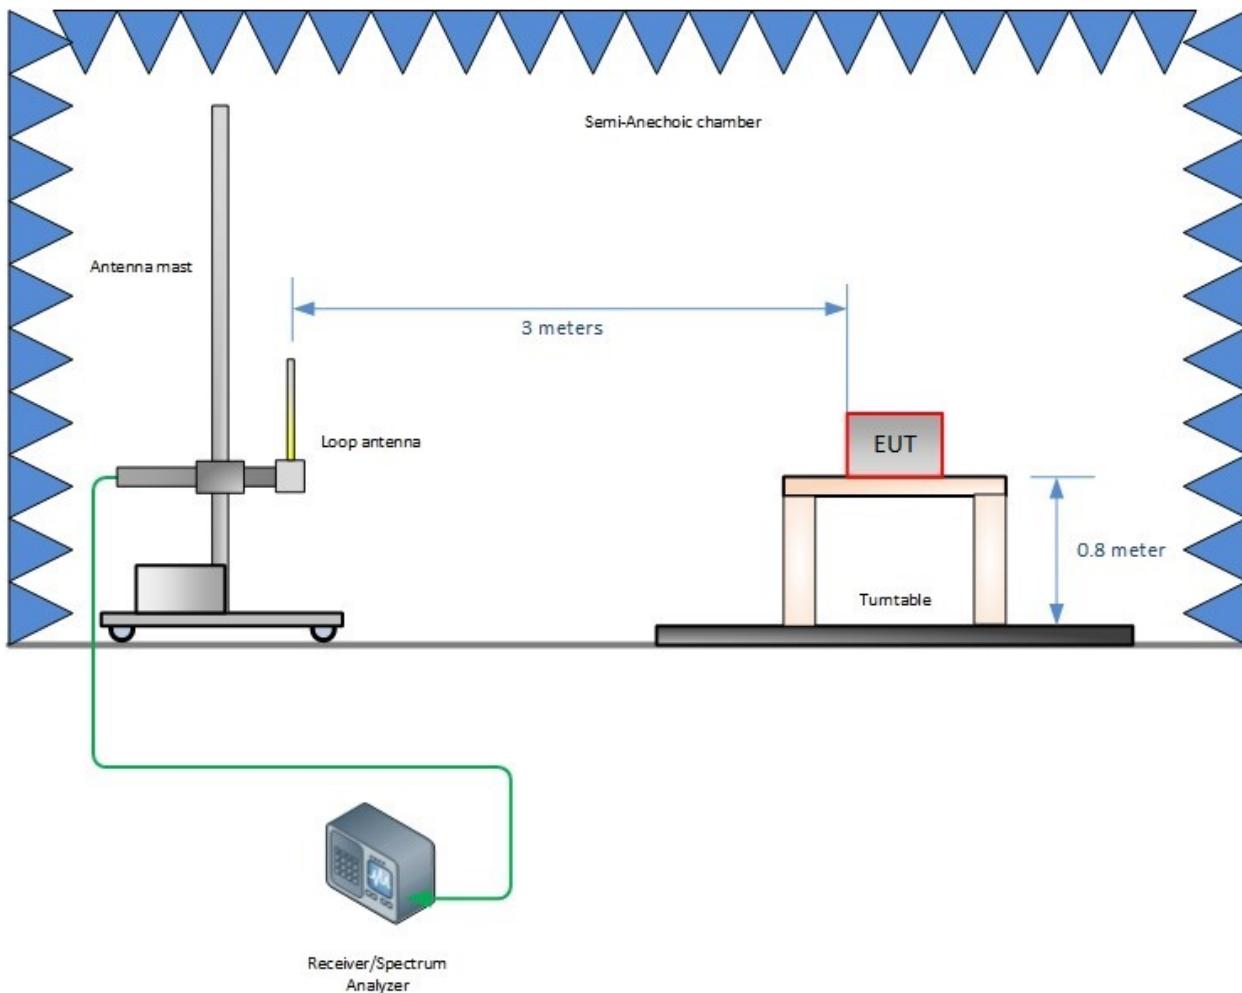

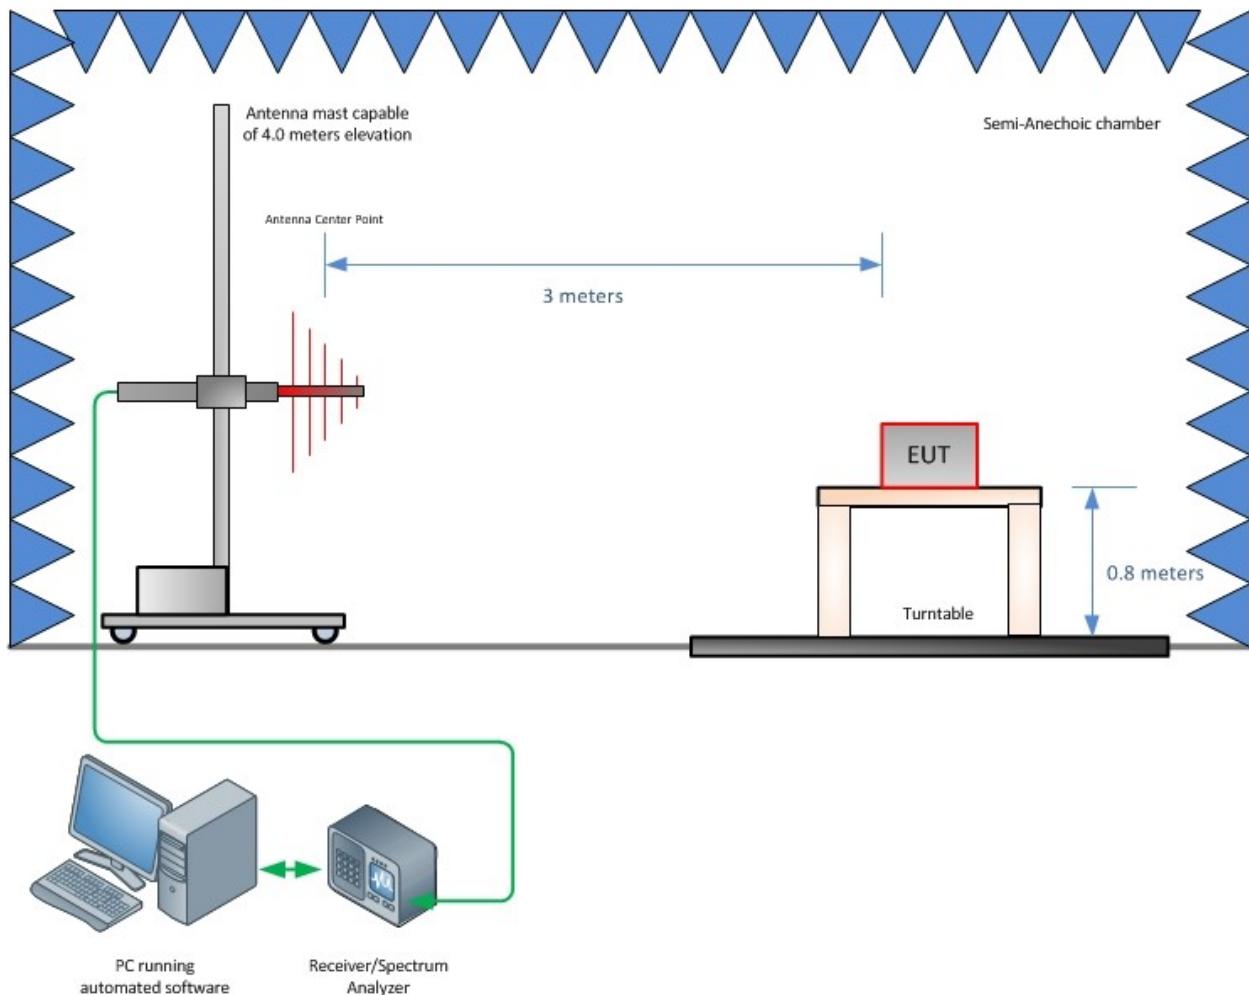

Radiated Emission Test Setup (Below 1GHz)

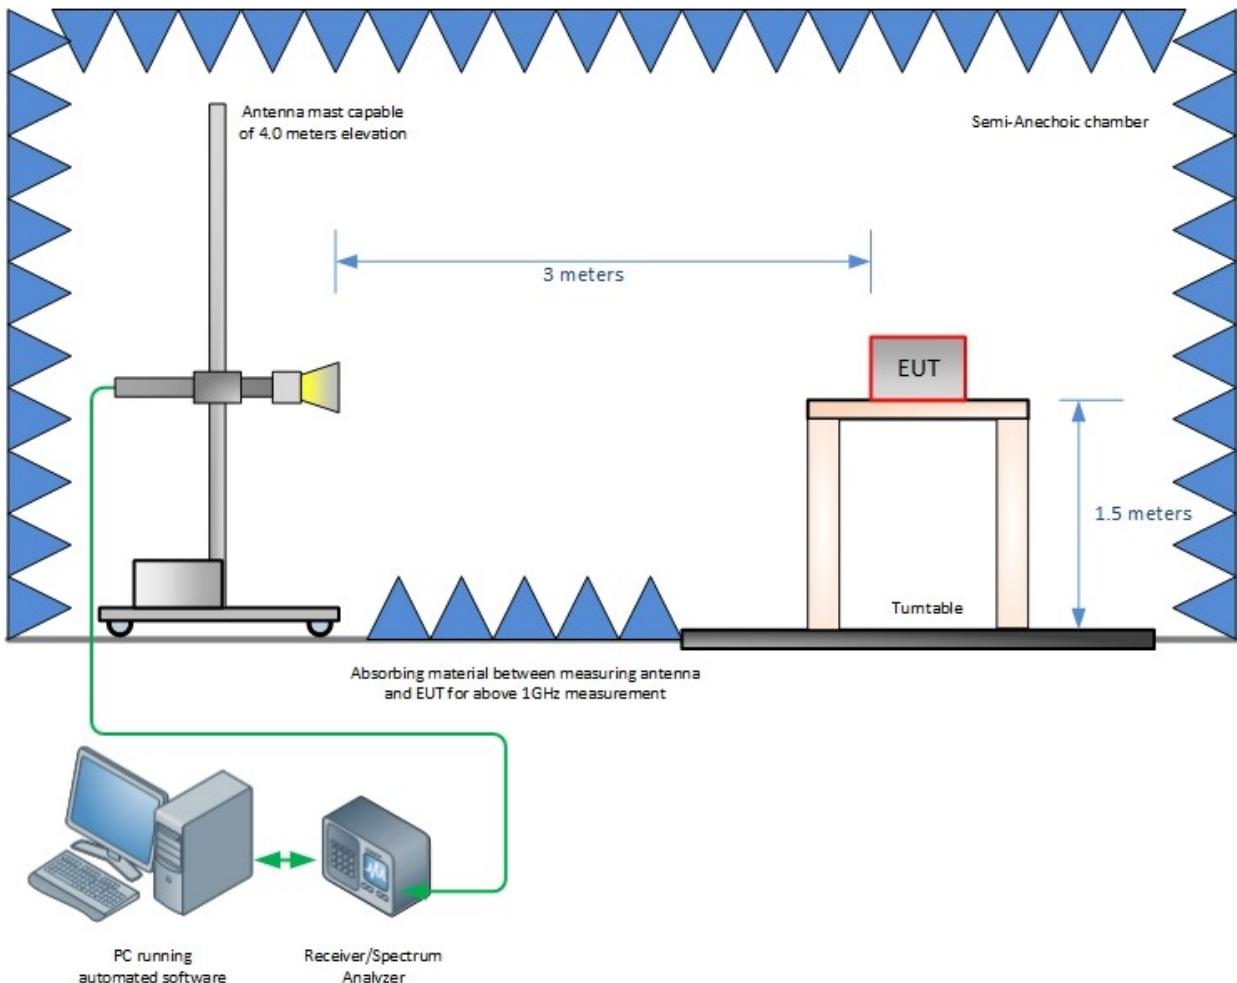

Radiated Emission Test Setup (Above 1GHz)



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13