

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2311-0152

2. Customer

- Name (FCC) : PLUTO Solution Inc.
- Address (FCC) : B-1122, Kumkang Penterium IT Tower 282, Hagui-ro, Dongan-gu Anyang-si, Gyeonggi-do South Korea

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : SQF Flow rate FOUP / NFD-100
FCC ID : 2AZ8A-NFD-100

5. FCC Regulation(s): Part 15.407

Test Method used: KDB789033 D02v02r01, ANSI C63.10-2013

6. Date of Test : 2023.08.28 ~ 2023.10.06

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : SeungMin Gil 	Technical Manager Name : JaeJin Lee
-------------	--------------------------------------	--

2023 . 11 . 27 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2311-0152	Nov. 27, 2023	Initial issue	SeungMin Gil	JaeJin Lee

CONTENTS

1. General Information	4
1.1. Description of EUT	4
1.2. Declaration by the applicant / manufacturer	5
1.3. Testing Laboratory	5
1.4. Testing Environment	5
1.5. Measurement Uncertainty	5
1.6. Test Equipment List	6
2. Test Methodology	7
2.1. EUT Configuration	7
2.2. EUT Exercise	7
2.3. General Test Procedures	7
2.4. Instrument Calibration	7
2.5. Description of Test Modes	8
3. Antenna Requirements	10
4. Summary of Test Result	11
5. TEST RESULT	12
5.1. Emission Bandwidth (26 dB Bandwidth)	12
5.2. Minimum Emission Bandwidth (6 dB Bandwidth)	31
5.3. Maximum Conducted Output Power	39
5.4. Maximum Power Spectral Density	43
5.5. Unwanted Emissions	70
5.6. AC Power-Line Conducted Emissions	78
APPENDIX I	87
APPENDIX II	88
APPENDIX III	91

1. General Information

1.1. Description of EUT

Equipment Class	Unlicensed National Information Infrastructure TX(NII)
Product Name	SQF Flow rate FOUP
Model Name	NFD-100
Add Model Name	-
Firmware Version Identification Number	V1.0.17
EUT Serial Number	Conducted : N2QFB8MN140004A, Radiated: N2QFB8MN140006A
Power Supply	DC 10.92 V
Modulation Technique	OFDM
Antenna Specification	Antenna Type: DIPOLE antenna U-NII 1: 1.40 dBi U-NII 2A : 1.55 dBi U-NII 2C : 1.42 dBi U-NII 3: 1.74 dBi

Band	Mode	Tx. frequency(MHz)	Max. conducted power(dBm)
U-NII 1	802.11a	5 180 ~ 5 240	7.23
	802.11n(HT20)	5 180 ~ 5 240	7.29
	802.11ac(VHT20)	5 180 ~ 5 240	7.13
	802.11n(HT40)	5 190 ~ 5 230	7.59
	802.11ac(VHT40)	5 190 ~ 5 230	7.52
	802.11ac(VHT80)	5 210	7.58
U-NII 2A	802.11a	5 260 ~ 5 320	9.25
	802.11n(HT20)	5 260 ~ 5 320	9.11
	802.11ac(VHT20)	5 260 ~ 5 320	9.16
	802.11n(HT40)	5 270 ~ 5 310	9.33
	802.11ac(VHT40)	5 270 ~ 5 310	9.38
	802.11ac(VHT80)	5 290	9.19
U-NII 2C	802.11a	5 500 ~ 5 720	9.63
	802.11n(HT20)	5 500 ~ 5 720	9.64
	802.11ac(VHT20)	5 500 ~ 5 720	9.76
	802.11n(HT40)	5 510 ~ 5 710	9.89
	802.11ac(VHT40)	5 510 ~ 5 710	9.78
	802.11ac(VHT80)	5 530 ~ 5 690	9.70
U-NII 3	802.11a	5 745 ~ 5 825	9.91
	802.11n(HT20)	5 745 ~ 5 825	9.87
	802.11ac(VHT20)	5 745 ~ 5 825	9.86
	802.11n(HT40)	5 755 ~ 5 795	9.94
	802.11ac(VHT40)	5 755 ~ 5 795	9.93
	802.11ac(VHT80)	5 775	9.93

1.2. Declaration by the applicant / manufacturer

N/A

1.3. Testing Laboratory

Dt&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.

- FCC & IC MRA Designation No. : KR0034
- ISED#: 5740A

www.dtnc.net

Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.4. Testing Environment

Ambient Condition

▪ Temperature	+21 °C ~ +23 °C
▪ Relative Humidity	+40 % ~ +53 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	4.9 dB (The confidence level is about 95 %, $k = 2$)

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY48010133
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY50110097
Spectrum Analyzer	Agilent Technologies	N9020A	23/06/23	24/06/23	US47360812
Spectrum Analyzer	KEYSIGHT	N9030B	22/12/16	23/12/16	MY55480168
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
Signal Generator	KEYSIGHT	N5182B	22/12/16	23/12/16	MY53050182
Signal Generator	ANRITSU	MG3695C	22/12/16	23/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-2
Thermohygrometer	BODYCOM	BJ5478	23/06/23	24/06/23	N/A
Loop Antenna	ETS-Lindgren	6502	22/04/22	24/04/22	203480
Hybrid Antenna	Schwarzbeck	VULB 9160	22/12/16	23/12/16	3362
Horn Antenna	ETS-Lindgren	3117	23/06/23	24/06/23	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	23/06/23	24/06/23	155
PreAmplifier	tsj	MLA-0118-B01-40	22/12/16	23/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	23/06/23	24/06/23	16966-10728
PreAmplifier	H.P	8447D	22/12/16	23/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	23/06/23	24/06/23	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	23/06/23	24/06/23	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	23/06/23	24/06/23	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	23/06/23	24/06/23	16012202
Attenuator	SRTechnology	F01-B0606-01	23/06/23	24/06/23	13092403
Attenuator	Aeroflex/Weinschel	56-3	23/06/23	24/06/23	Y2370
Attenuator	SMAJK	SMAJK-2-3	23/06/23	24/06/23	2
Attenuator	Aeroflex/Weinschel	86-10-11	23/06/23	24/06/23	408
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2490A	22/12/16	23/12/16	1338004 1249303
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	23/02/24	24/02/24	100364
PULSE LIMITER	ROHDE&SCHWARZ	ESH3-Z2	23/08/21	24/08/21	101333
LISN	SCHWARZBECK	NSLK 8128 RC	22/10/26	23/10/26	8128 RC-387
Thermo Hygro Meter	TESTO	608-H1	23/01/13	24/01/13	45084791
Cable	Dt&C	Cable	23/01/04	24/01/04	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	23/01/04	24/01/04	G-3
Cable	Dt&C	Cable	23/01/04	24/01/04	G-4
Cable	OMT	YSS21S	23/01/04	24/01/04	G-5
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-1
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-02
Cable	JUNKOSHA	MWX241/B	23/01/04	24/01/04	M-03
Cable	JUNKOSHA	J12J101757-00	23/01/04	24/01/04	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-09
Cable	DT&C	Cable	23/01/04	24/01/04	RFC-44
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0185
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0185

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB789033 D02v02r01 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB789033 D02v02r01. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB789033 D02v02r01.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB789033 D02v02r01. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on KDB789033 D02v02r01.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 m or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Transmitting Configuration of EUT

Mode	Data rate
802.11a	6 Mbps ~ 54 Mbps
802.11n(HT20)	MCS 0 ~ 7
802.11ac(VHT20)	MCS 0 ~ 8
802.11n(HT40)	MCS 0 ~ 7
802.11ac(VHT40)	MCS 0 ~ 9
802.11ac(VHT80)	MCS 0 ~ 9

EUT Operation test setup

- **Test Software:** DUT_CTRL_0710_V2.0
- **Power setting:** Refer to the table below

Tested frequency and power setting

Band	802.11a		
	Channel	Frequency (MHz)	Power Setting
U-NII 1	36	5 180	8
	40	5 200	8
	48	5 240	8
U-NII 2A	52	5 260	10
	60	5 300	10
	64	5 320	10
U-NII 2C	100	5 500	10
	120	5 600	10
	144	5 720	10
U-NII 3	149	5 745	10
	157	5 785	10
	165	5 825	10

Band	802.11n(HT20) / 802.11ac(VHT20)		
	Channel	Frequency (MHz)	Power Setting
U-NII 1	36	5 180	8
	40	5 200	8
	48	5 240	8
U-NII 2A	52	5 260	10
	60	5 300	10
	64	5 320	10
U-NII 2C	100	5 500	10
	120	5 600	10
	144	5 720	10
U-NII 3	149	5 745	10
	157	5 785	10
	165	5 825	10

Band	802.11n(HT40) / 802.11ac(VHT40)		
	Channel	Frequency (MHz)	Power Setting
U-NII 1	38	5 190	8
	46	5 230	8
U-NII 2A	54	5 270	10
	62	5 310	10
U-NII 2C	102	5 510	10
	118	5 590	10
	142	5 710	10
U-NII 3	151	5 755	10
	159	5 795	10

Band	802.11ac(VHT80)		
	Channel	Frequency (MHz)	Power Setting
U-NII 1	42	5 210	8
U-NII 2A	58	5 290	10
U-NII 2C	106	5 530	10
	122	5 610	10
	138	5 690	10
U-NII 3	155	5 775	10

Tested Mode

Test mode	Mode	Worst case data rate
TM 1	802.11a	6 Mbps
TM 2	802.11n(HT20)	MCS 0
TM 3	802.11n(HT40)	MCS 0
TM 4	802.11ac(VHT80)	MCS 0

Note1: The worst case data rate was determined according to the power measurements.

3. Antenna Requirements

According to Part 15.203

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

This device must be professionally installed.

4. Summary of Test Result

FCC Part Section(s)	Test Description	Limit	Test Condition	Status Note 1
15.407(a)	Emission Bandwidth (26 dB Bandwidth)	N/A	Conducted	C
15.407(e)	Minimum Emission Bandwidth (6 dB Bandwidth)	> 500 kHz in 5 725 ~ 5 850 MHz		C
15.407(a)	Maximum Conducted Output Power	Part 15.407(a) (Refer to section 5.3)		C
15.407(a)	Peak Power Spectral Density	Part 15.407(a) (Refer to section 5.4)		C
15.407(h)	Dynamic Frequency Selection	Part 15.407(h) (Refer to the DFS test report)		C Note 3
15.205 15.209 15.407(b)	Unwanted Emissions	Part 15.209, 15.407(b) (Refer to section 5.5)	Radiated	C
15.207	AC Conducted Emissions	Part 15.207 (Refer to section 5.6)	AC Line Conducted	C
15.203	Antenna Requirements	Part 15.203 (Refer to section 3)	-	C

Note 1: **C** = Comply **NC** = Not Comply **NT** = Not Tested **NA** = Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: Refer to the DFS test report.

5. TEST RESULT

5.1. Emission Bandwidth (26 dB Bandwidth)

Test Requirements

- Emission Bandwidth (26 dB Bandwidth)

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The 26 dB bandwidth is used to determine the conducted output power limit.

Test Configuration

Refer to the APPENDIX I.

Test Procedure

- Emission Bandwidth (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v02r01**.

1. Set resolution bandwidth (RBW) = approximately **1 %** of the EBW.
2. Set the video bandwidth (**VBW**) > RBW.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

□ Test Results: Comply

Test Mode	Band	Channel	Frequency(MHz)	26 dB BW(MHz)
TM 1	U-NII 1	36	5 180	21.52
		40	5 200	21.19
		48	5 240	21.38
	U-NII 2A	52	5 260	21.41
		60	5 300	21.31
		64	5 320	21.17
	U-NII 2C	100	5 500	21.60
		120	5 600	21.15
		144	5 720	21.36
TM 2	U-NII 1	36	5 180	21.57
		40	5 200	21.39
		48	5 240	21.46
	U-NII 2A	52	5 260	21.30
		60	5 300	21.59
		64	5 320	21.31
	U-NII 2C	100	5 500	21.37
		120	5 600	21.60
		144	5 720	21.60
TM 3	U-NII 1	38	5 190	39.76
		46	5 230	40.11
	U-NII 2A	54	5 270	39.74
		62	5 310	39.70
	U-NII 2C	102	5 510	40.19
		118	5 590	39.72
		142	5 710	39.70
TM 4	U-NII 1	42	5 210	81.03
	U-NII 2A	58	5 290	81.83
	U-NII 2C	106	5 530	81.80
		122	5 610	81.39
		138	5 690	80.90


26 dB Bandwidth

Test Mode: TM 1 & Ch.36




26 dB Bandwidth

Test Mode: TM 1 & Ch.40

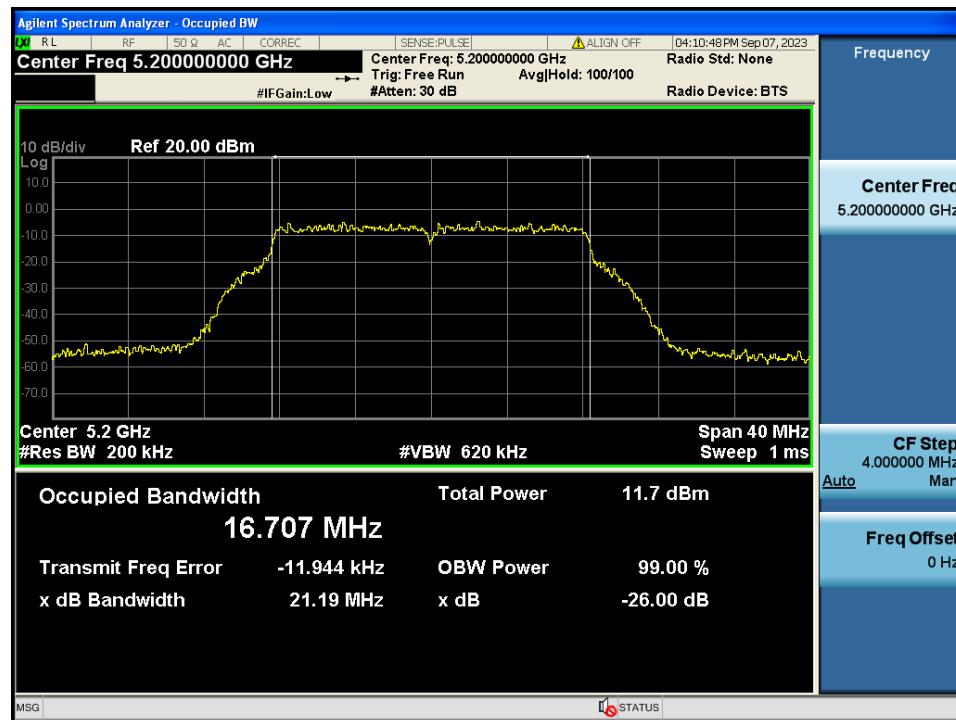

26 dB Bandwidth

Test Mode: TM 1 & Ch.48

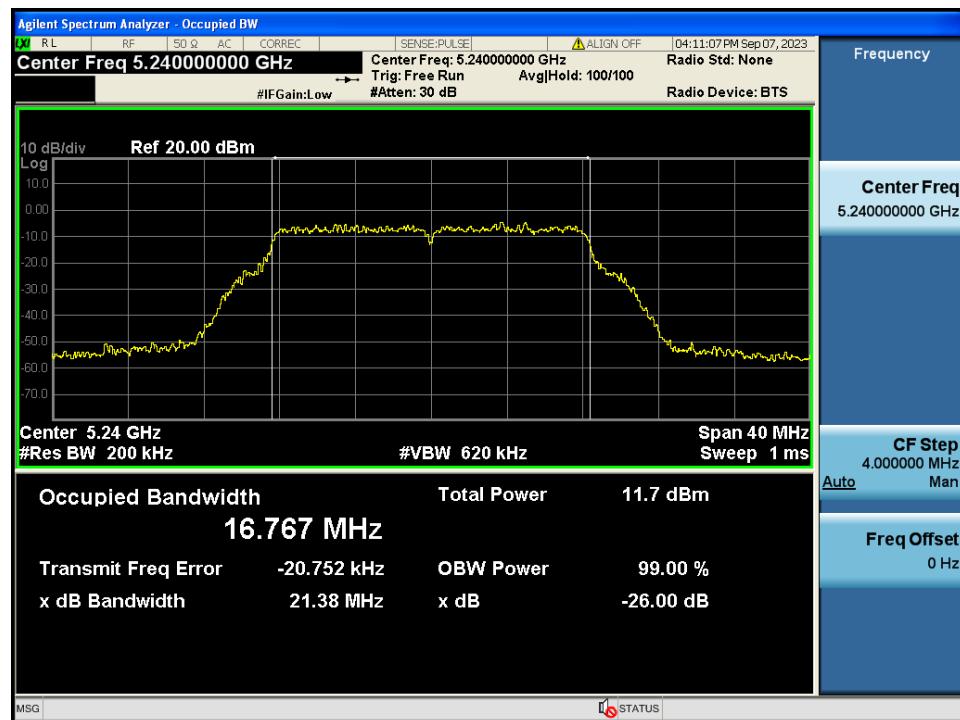


26 dB Bandwidth

Test Mode: TM 1 & Ch.52



26 dB Bandwidth

Test Mode: TM 1 & Ch.60

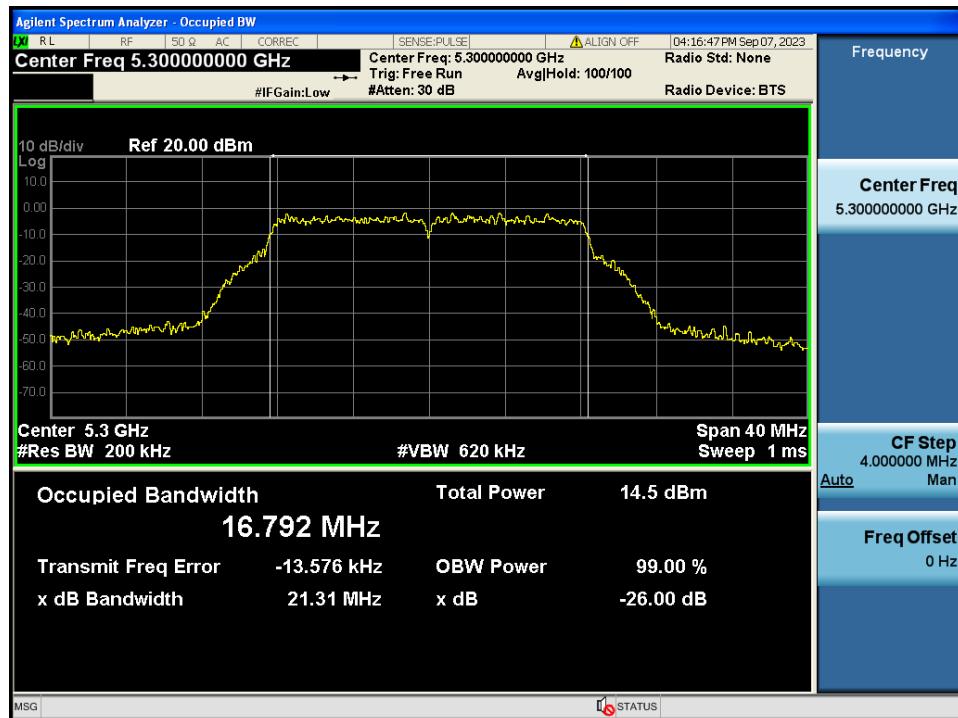

26 dB Bandwidth

Test Mode: TM 1 & Ch.64



26 dB Bandwidth

Test Mode: TM 1 & Ch.100



26 dB Bandwidth

Test Mode: TM 1 & Ch.120




26 dB Bandwidth

Test Mode: TM 1 & Ch.144




26 dB Bandwidth

Test Mode: TM 2 & Ch.36

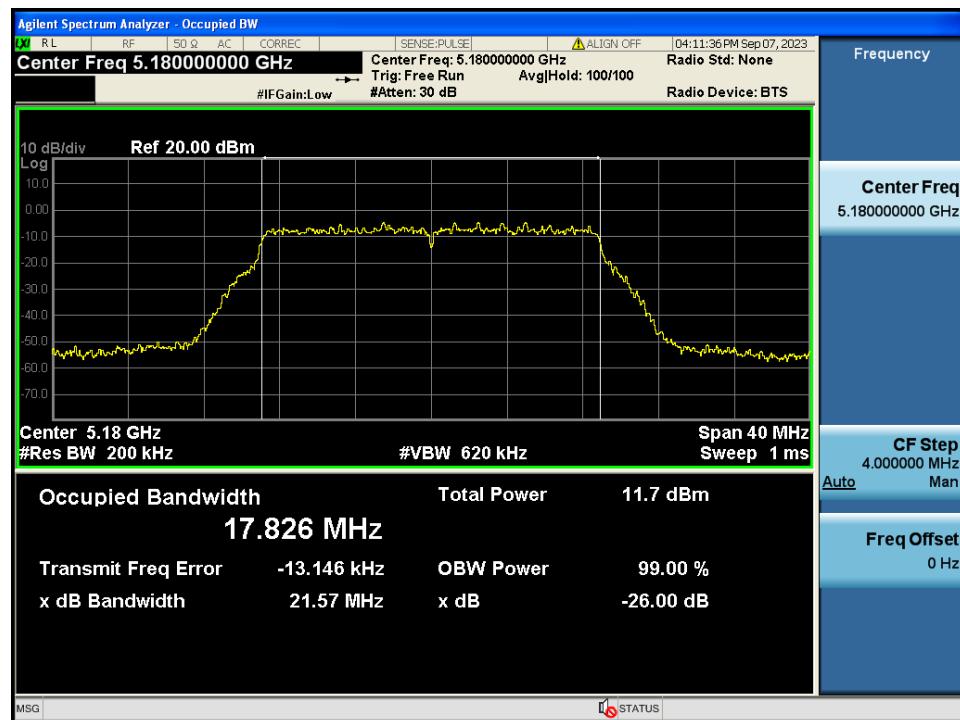


26 dB Bandwidth

Test Mode: TM 2 & Ch.40

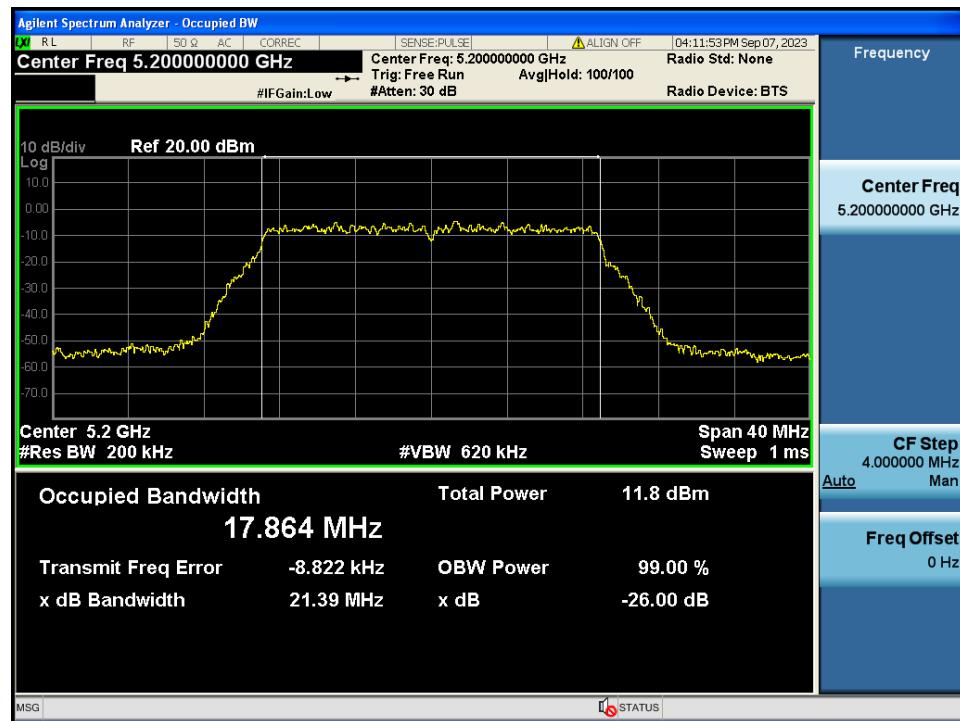


26 dB Bandwidth

Test Mode: TM 2 & Ch.48

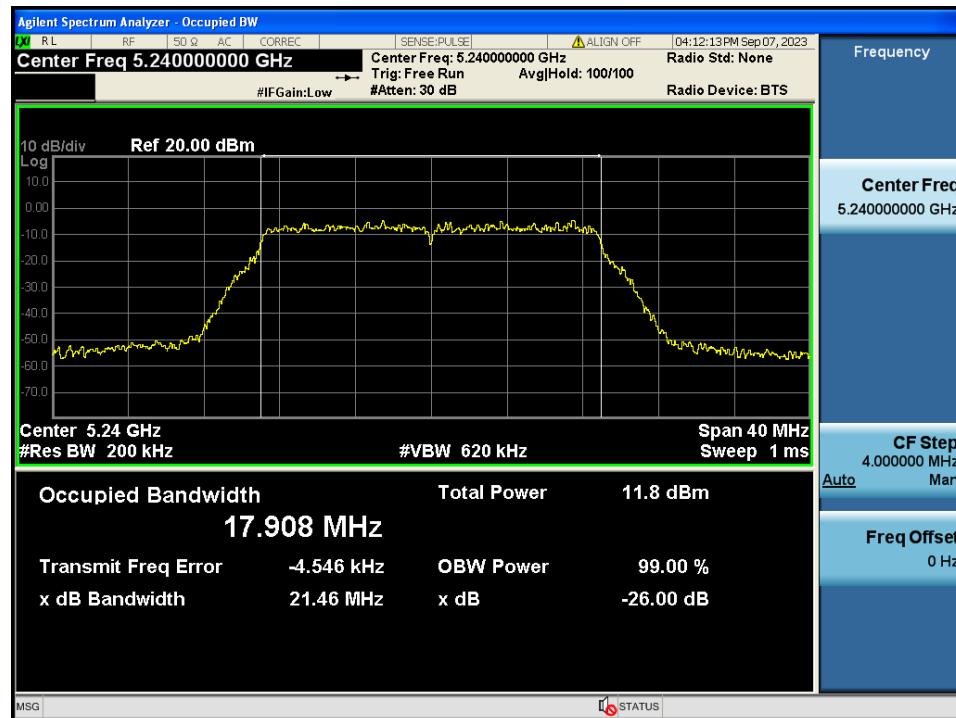


26 dB Bandwidth

Test Mode: TM 2 & Ch.52

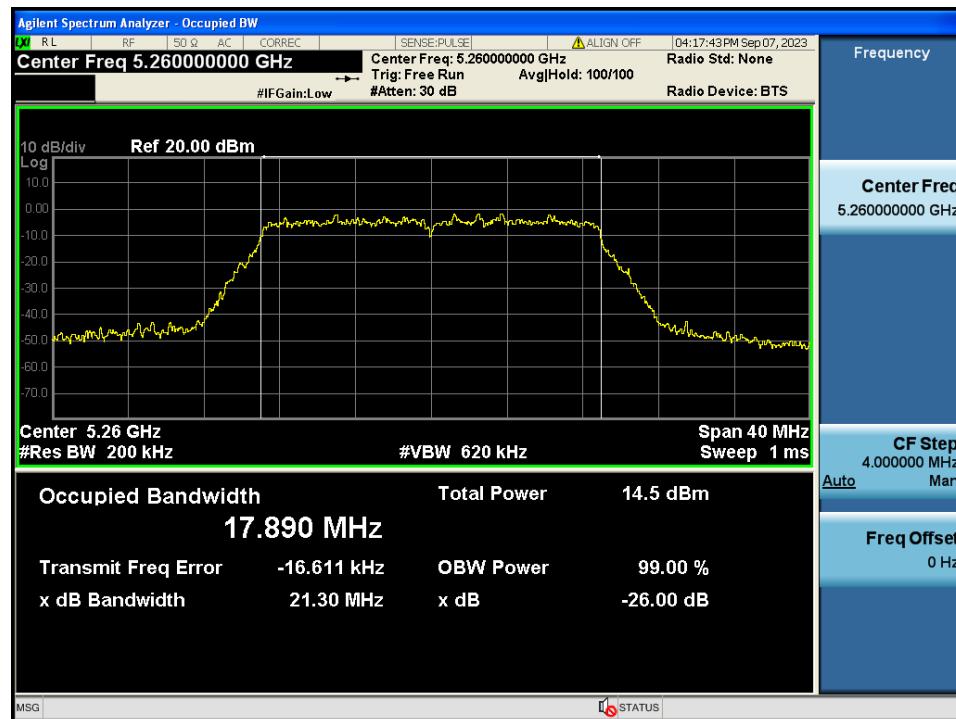

26 dB Bandwidth

Test Mode: TM 2 & Ch.60

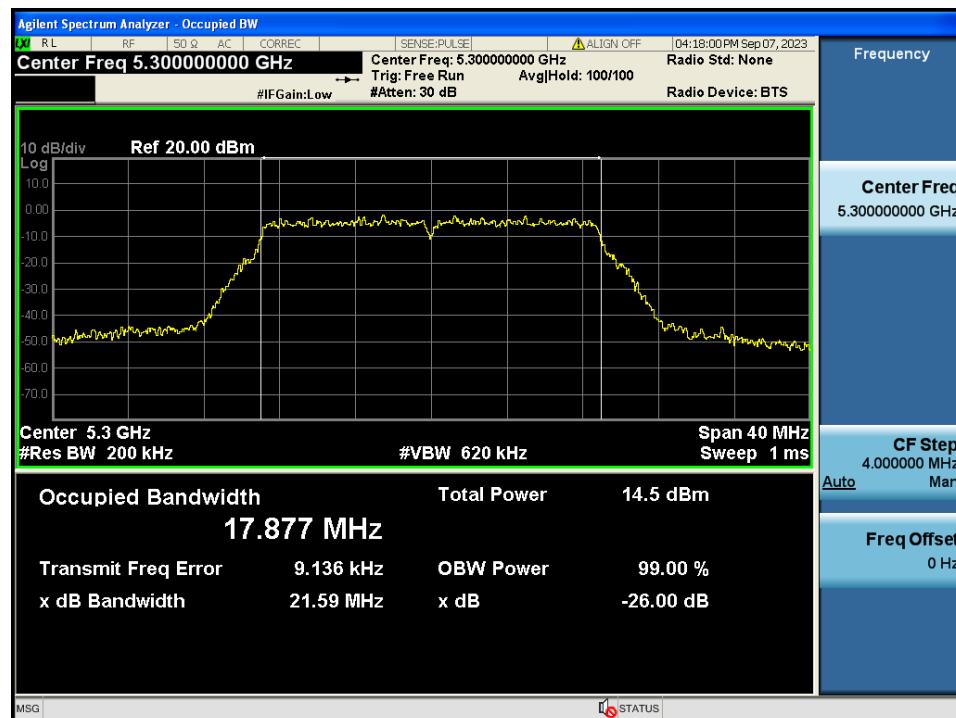


26 dB Bandwidth

Test Mode: TM 2 & Ch.64




26 dB Bandwidth

Test Mode: TM 2 & Ch.100

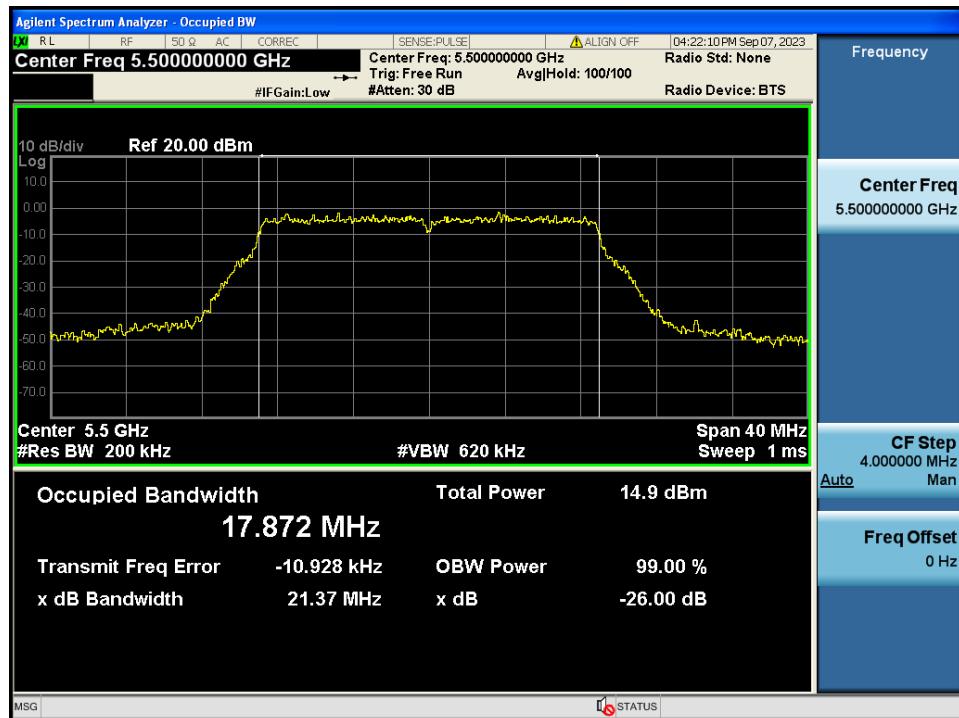

26 dB Bandwidth

Test Mode: TM 2 & Ch.120

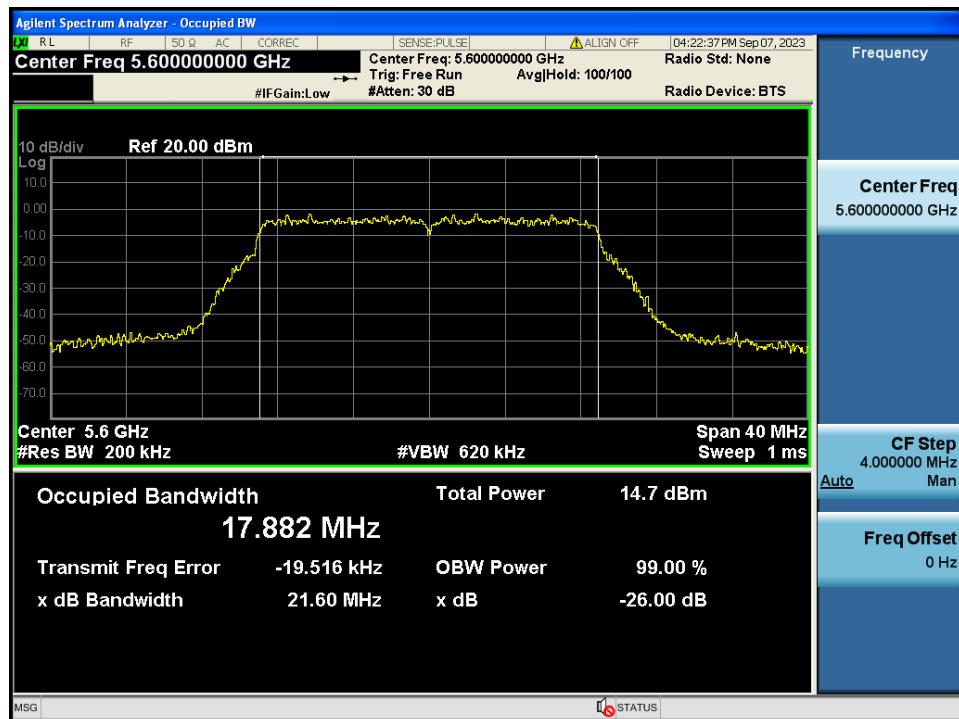


26 dB Bandwidth

Test Mode: TM 2 & Ch.144




26 dB Bandwidth

Test Mode: TM 3 & Ch.38

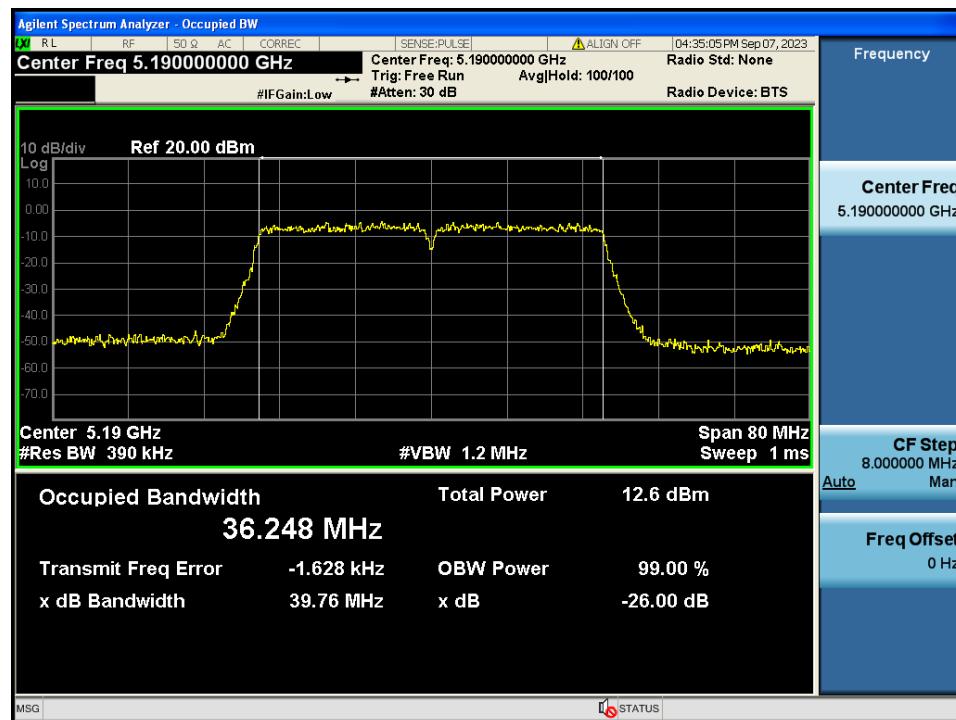

26 dB Bandwidth

Test Mode: TM 3 & Ch.46

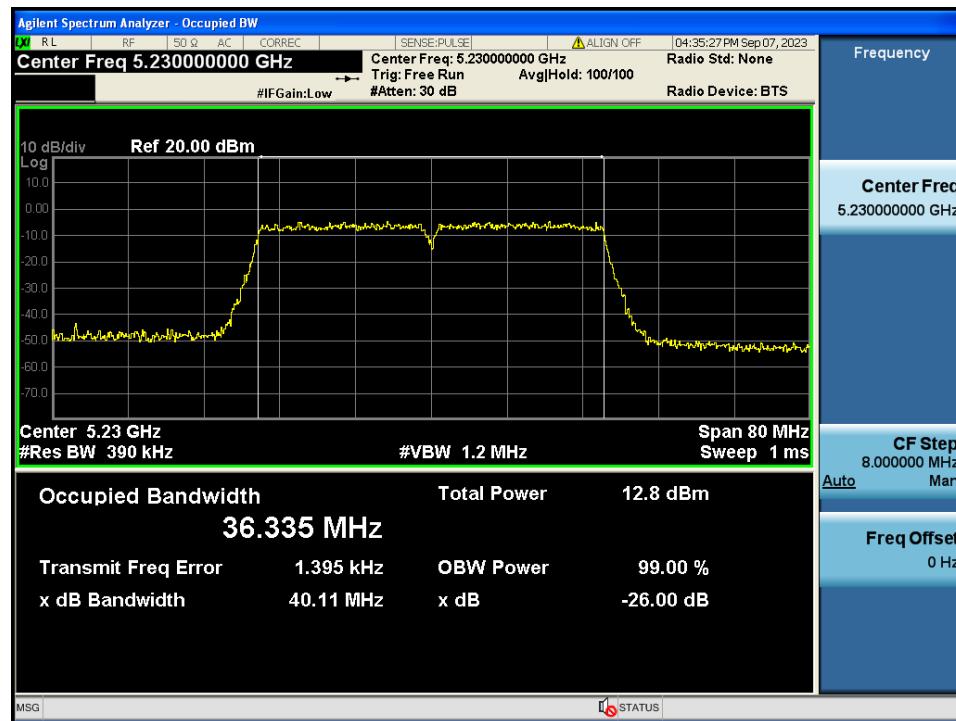


26 dB Bandwidth

Test Mode: TM 3 & Ch.54



26 dB Bandwidth

Test Mode: TM 3 & Ch.62

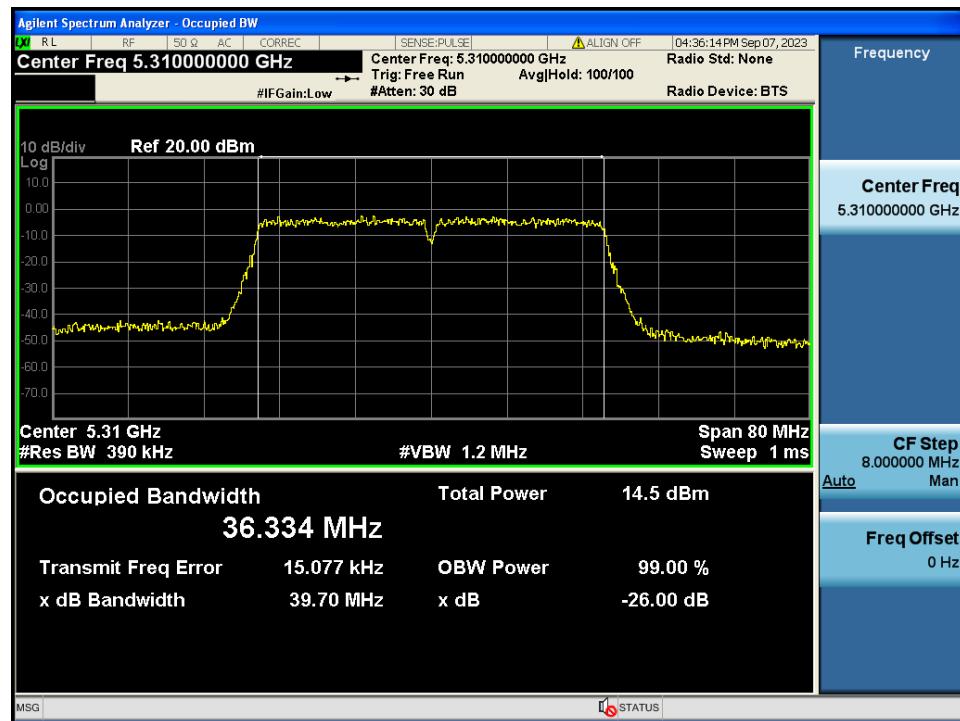


26 dB Bandwidth

Test Mode: TM 3 & Ch.102



26 dB Bandwidth

Test Mode: TM 3 & Ch.118

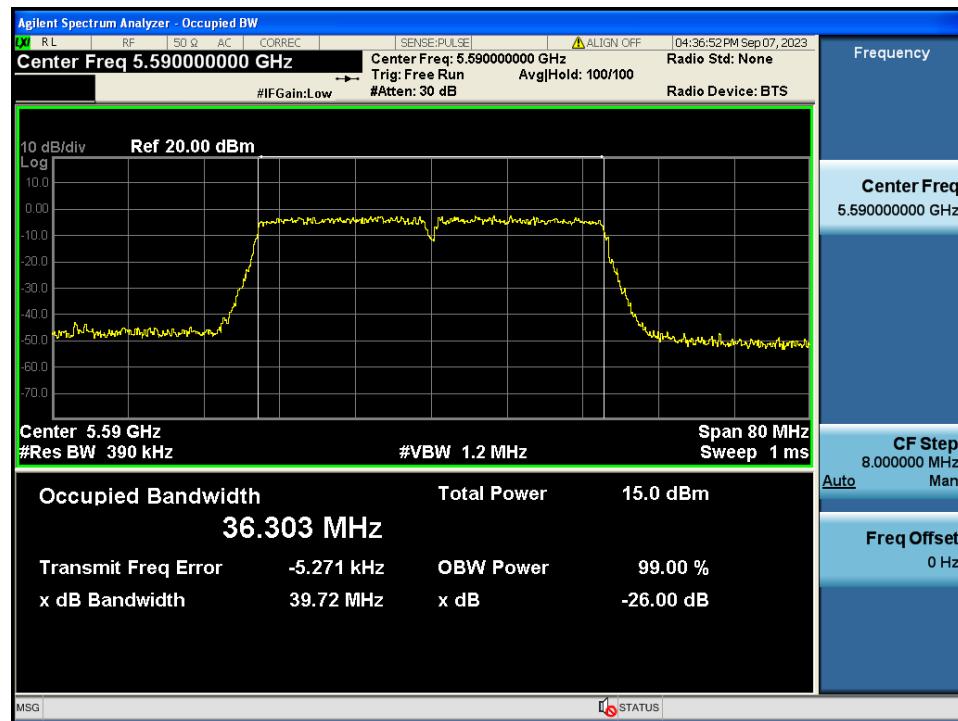

26 dB Bandwidth

Test Mode: TM 3 & Ch.142




26 dB Bandwidth

Test Mode: TM 4 & Ch.42



26 dB Bandwidth

Test Mode: TM 4 & Ch.58

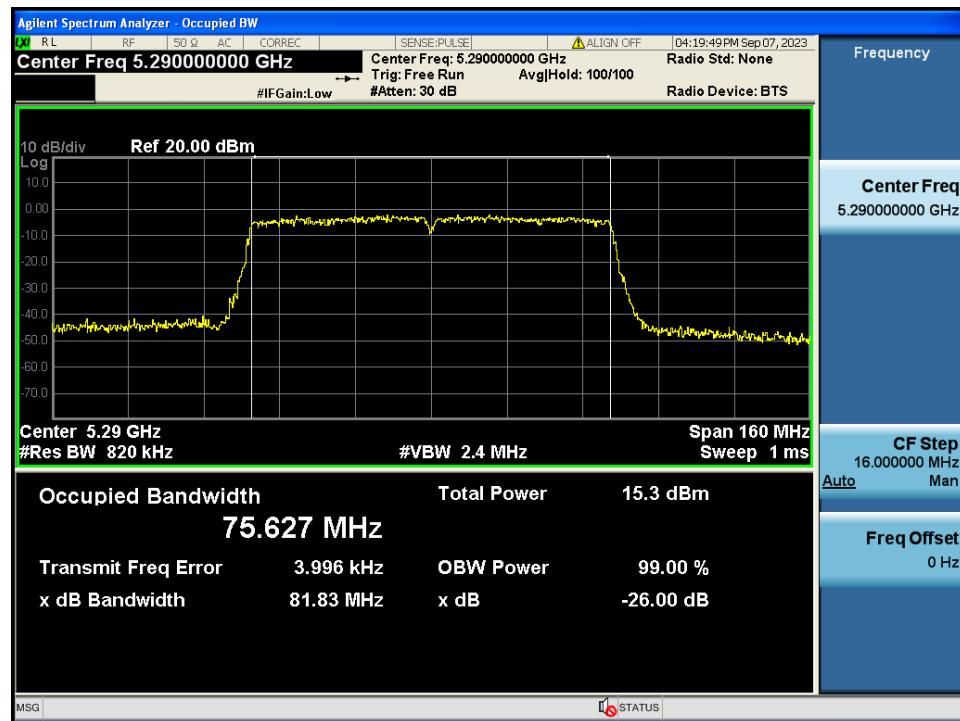


26 dB Bandwidth

Test Mode: TM 4 & Ch.106




26 dB Bandwidth

Test Mode: TM 4 & Ch.122

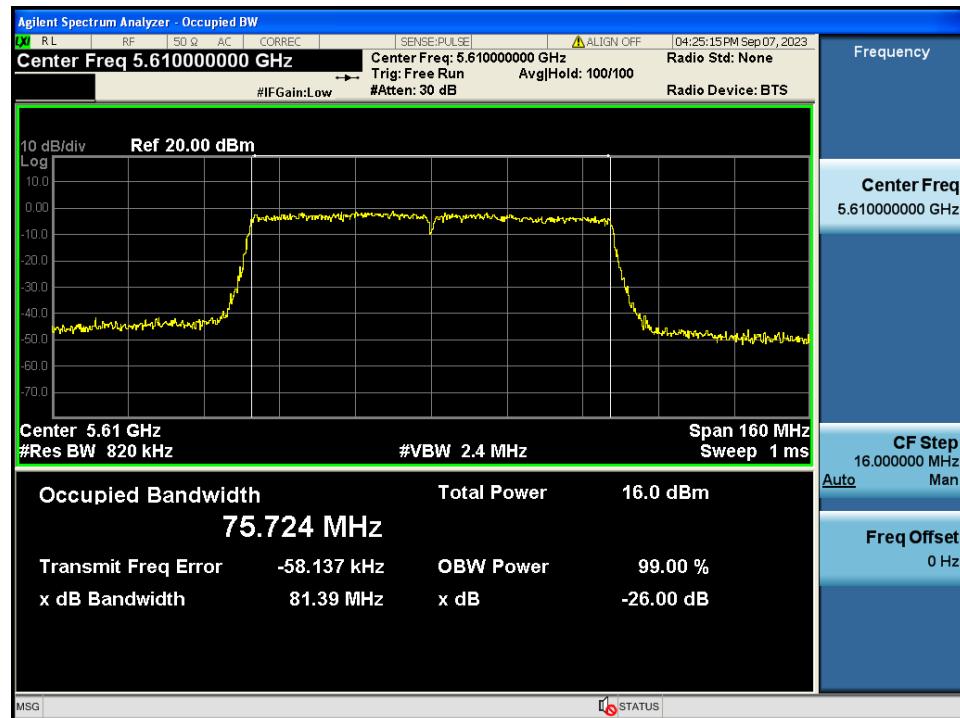

26 dB Bandwidth

Test Mode: TM 4 & Ch.138

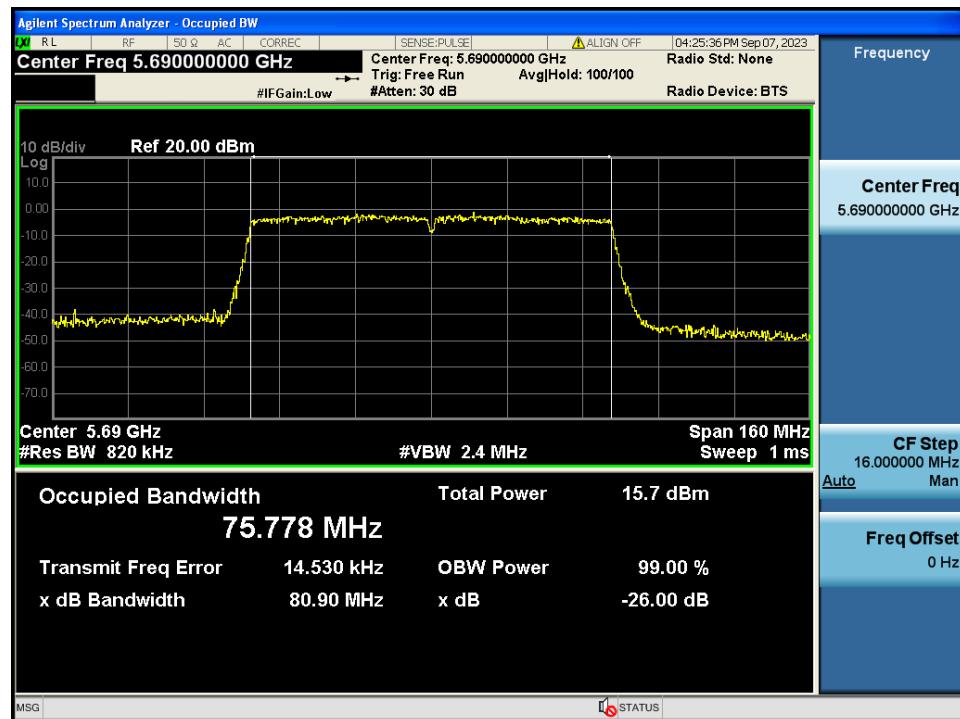

5.2. Minimum Emission Bandwidth (6 dB Bandwidth)

Test Requirements

- Emission Bandwidth (6 dB Bandwidth)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

Refer to the APPENDIX I.

Test Procedure

- Emission Bandwidth (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v02r01**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth $\geq 3 \times \text{RBW}$.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results: Comply

Test Mode	Band	Channel	Frequency(MHz)	6 dB BW(MHz)
TM 1	U-NII 3	149	5 745	16.45
		157	5 785	16.39
		165	5 825	16.35
TM 2	U-NII 3	149	5 745	17.63
		157	5 785	17.62
		165	5 825	17.64
TM 3	U-NII 3	151	5 755	36.13
		159	5 795	36.37
TM 4	U-NII 3	155	5 775	75.35


6 dB Bandwidth

Test Mode: TM 1 & Ch.149




6 dB Bandwidth

Test Mode: TM 1 & Ch.157

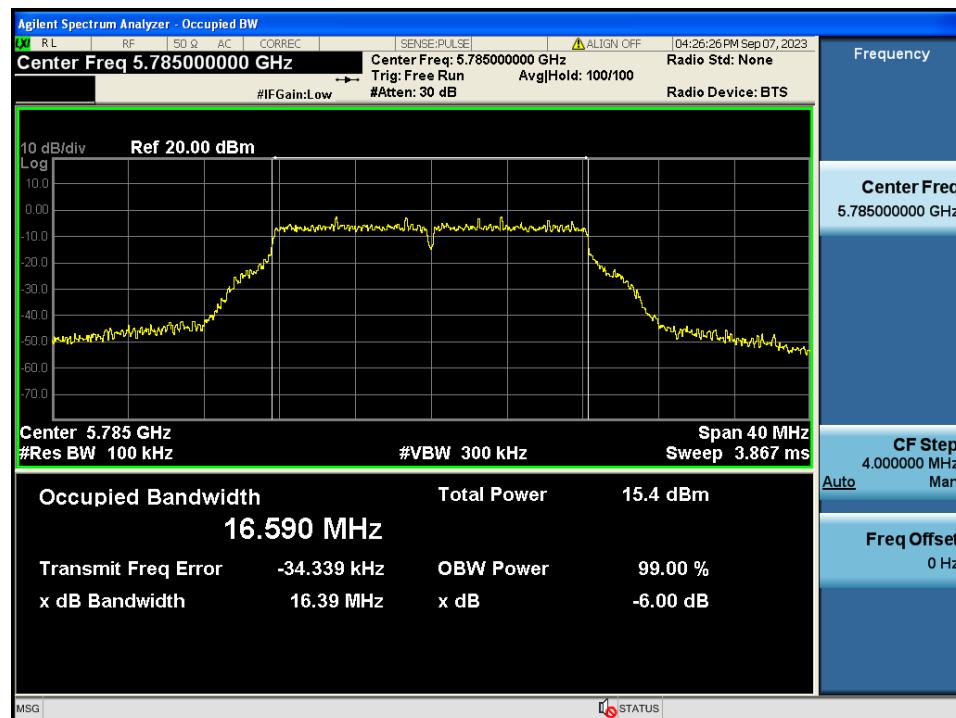


6 dB Bandwidth

Test Mode: TM 1 & Ch.165

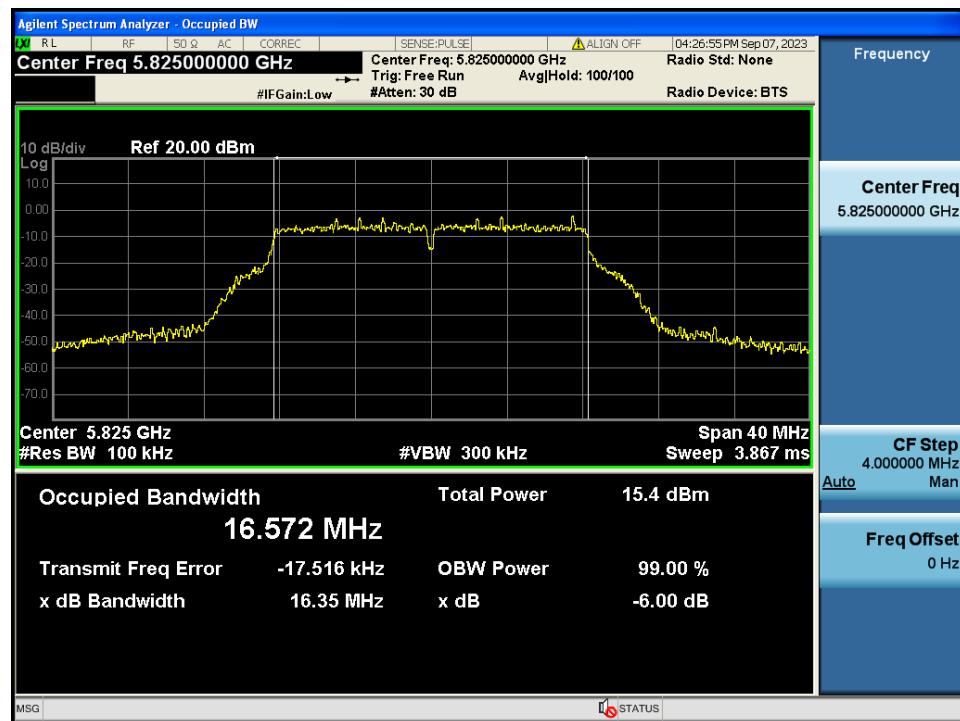


6 dB Bandwidth

Test Mode: TM 2 & Ch.149

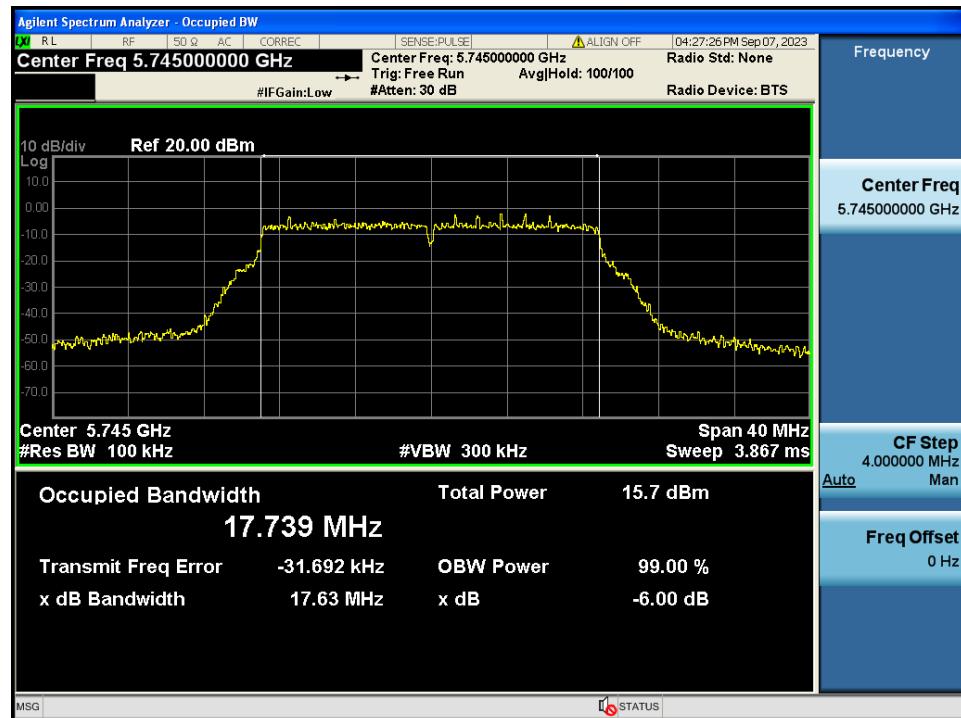


6 dB Bandwidth

Test Mode: TM 2 & Ch.157

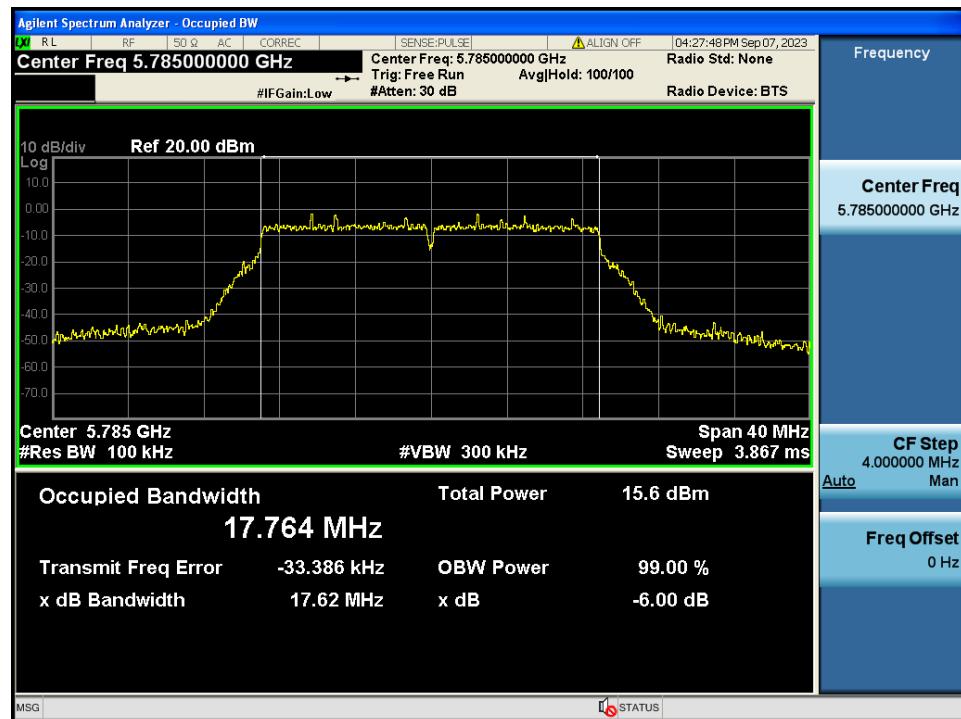


6 dB Bandwidth

Test Mode: TM 2 & Ch.165

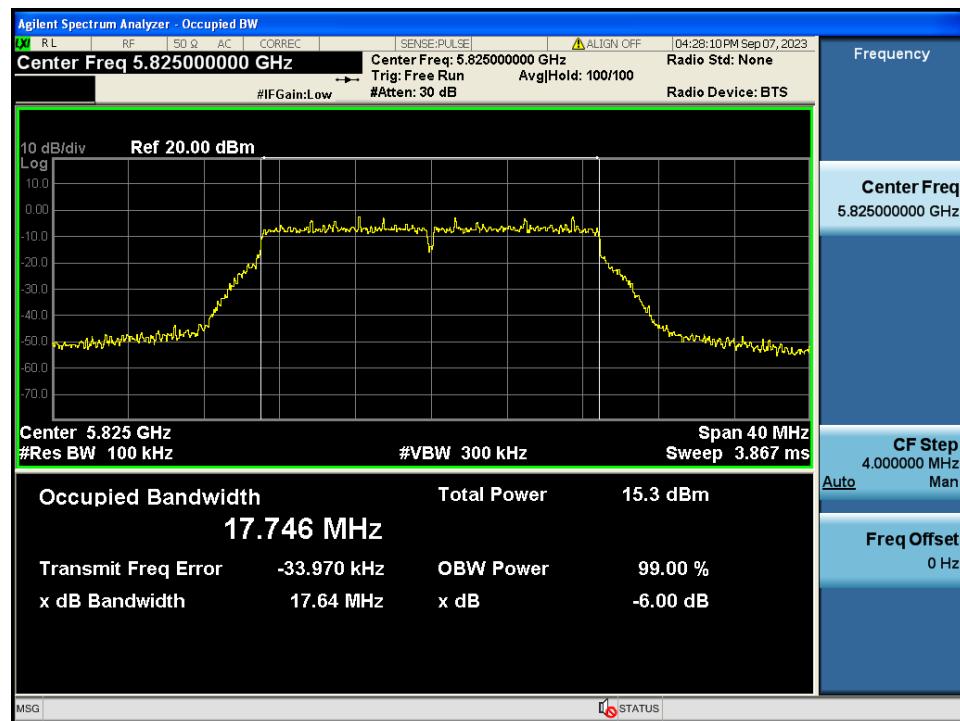


6 dB Bandwidth

Test Mode: TM 3 & Ch.151

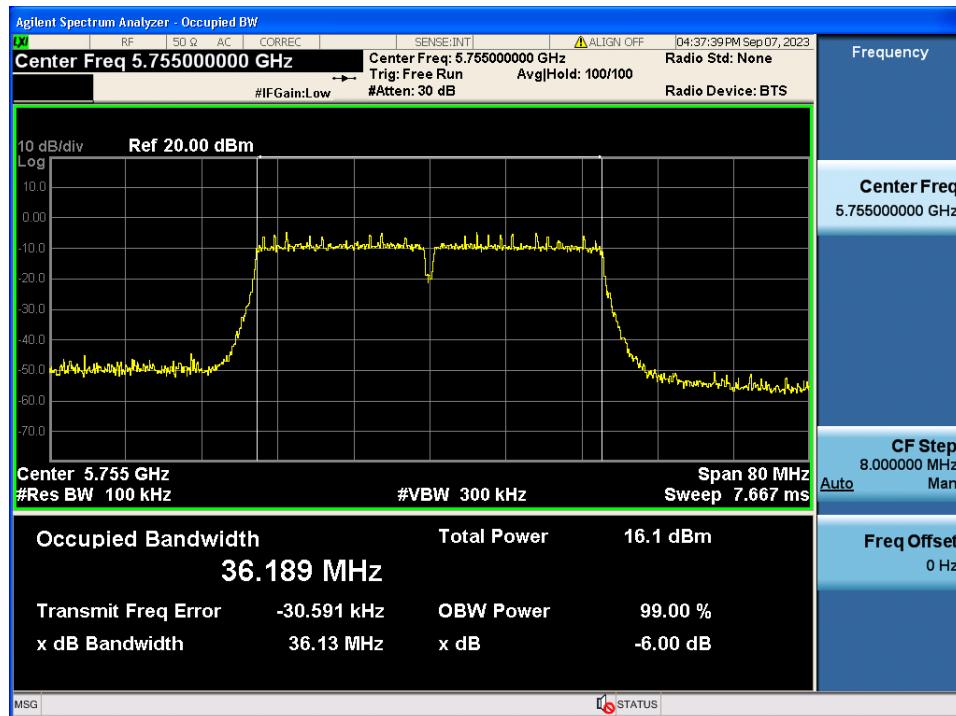


6 dB Bandwidth

Test Mode: TM 3 & Ch.159

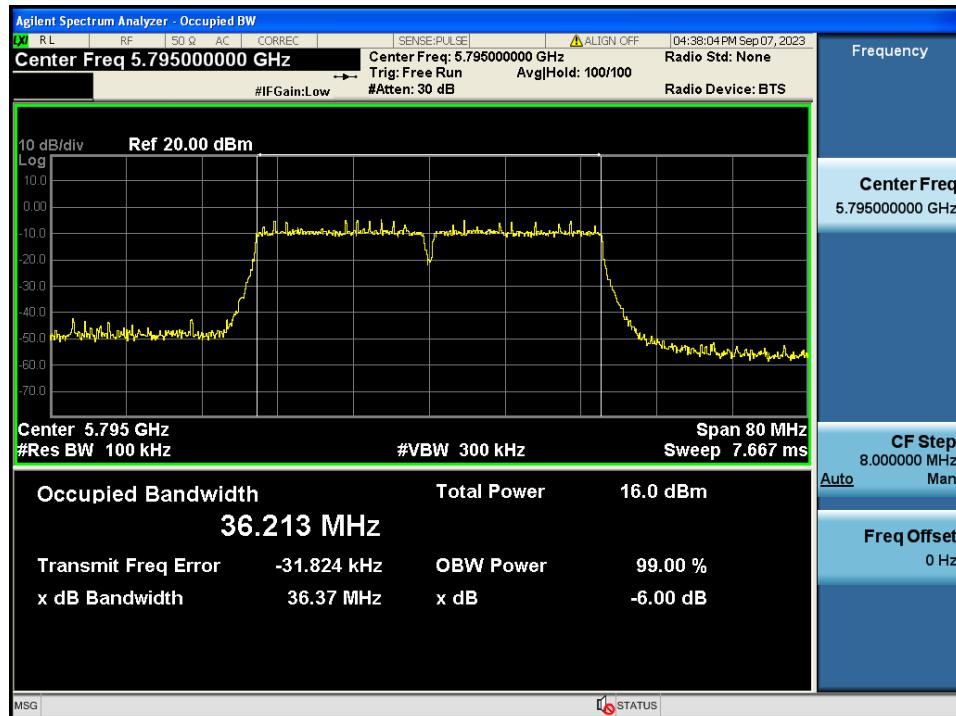

6 dB Bandwidth

Test Mode: TM 4 & Ch.155

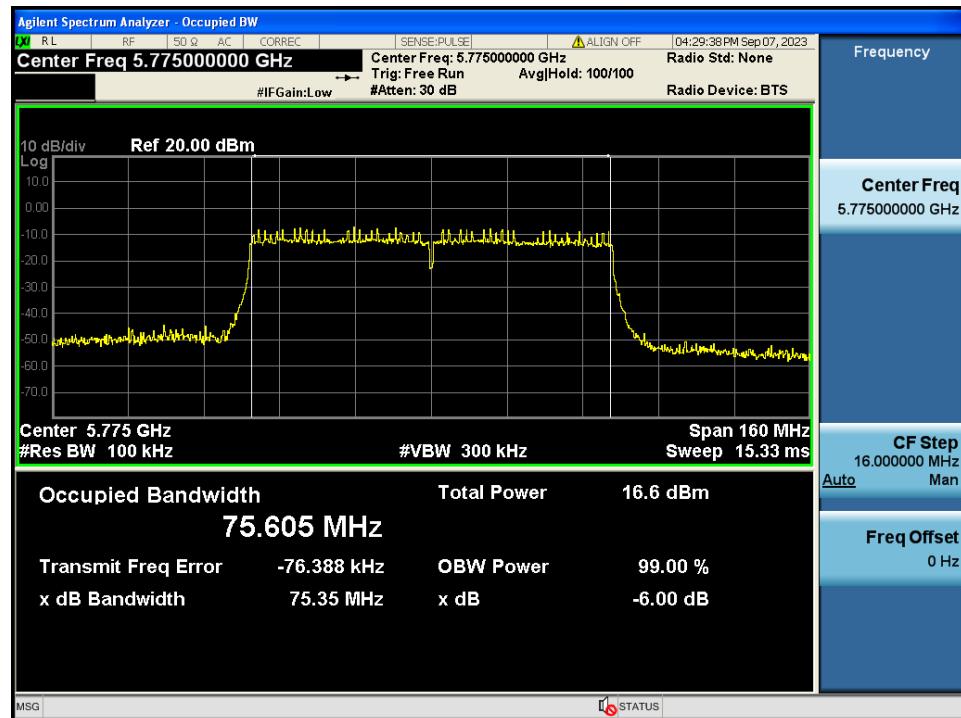

5.3. Maximum Conducted Output Power

■ Test Requirements

Part. 15.407(a)

(1) For the band 5.15 GHz - 5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15 GHz - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15 GHz - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- (2) For the 5.25 GHz - 5.35 GHz and 5.47 GHz - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725 GHz - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

□ Test Configuration

Method PM-G

□ Test Procedure**Method PM-G of KDB789033 D02v02r01**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Test Results: Comply

Mode	Band	Channel	Frequency (MHz)	Conducted Output Power(dBm)
802.11a	U-NII 1	36	5 180	7.23
		40	5 200	6.92
		48	5 240	7.03
	U-NII 2A	52	5 260	9.25
		60	5 300	9.21
		64	5 320	9.18
	U-NII 2C	100	5 500	9.62
		120	5 600	9.55
		144	5 720	9.63
	U-NII 3	149	5 745	9.91
		157	5 785	9.89
		165	5 825	9.86
802.11n (HT20)	U-NII 1	36	5 180	7.29
		40	5 200	7.04
		48	5 240	6.84
	U-NII 2A	52	5 260	9.02
		60	5 300	9.11
		64	5 320	9.05
	U-NII 2C	100	5 500	9.64
		120	5 600	9.63
		144	5 720	9.61
	U-NII 3	149	5 745	9.87
		157	5 785	9.81
		165	5 825	9.77
802.11ac (VHT20)	U-NII 1	36	5 180	6.86
		40	5 200	6.91
		48	5 240	7.13
	U-NII 2A	52	5 260	9.16
		60	5 300	9.04
		64	5 320	9.15
	U-NII 2C	100	5 500	9.59
		120	5 600	9.76
		144	5 720	9.63
	U-NII 3	149	5 745	9.86
		157	5 785	9.85
		165	5 825	9.78

Mode	Band	Channel	Frequency (MHz)	Conducted Output Power(dBm)
802.11n (HT40)	U-NII 1	38	5 190	7.59
		46	5 230	7.46
	U-NII 2A	54	5 270	9.28
		62	5 310	9.33
	U-NII 2C	102	5 510	9.64
		118	5 590	9.87
		142	5 710	9.89
	U-NII 3	151	5 755	9.91
		159	5 795	9.94
802.11ac (VHT40)	U-NII 1	38	5 190	7.52
		46	5 230	7.42
	U-NII 2A	54	5 270	9.38
		62	5 310	9.34
	U-NII 2C	102	5 510	9.78
		118	5 590	9.73
		142	5 710	9.71
	U-NII 3	151	5 755	9.93
		159	5 795	9.90
802.11ac (VHT80)	U-NII 1	42	5 210	7.58
	U-NII 2A	58	5 290	9.19
	U-NII 2C	106	5 530	9.66
		122	5 610	9.61
		138	5 690	9.70
	U-NII 3	155	5 775	9.93

5.4. Maximum Power Spectral Density

Test requirements

Part. 15.407(a)

- (1) For the band 5.15 GHz - 5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
 - (ii) For an indoor access point operating in the band 5.15 GHz - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
 - (iii) For fixed point-to-point access points operating in the band 5.15 GHz - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
 - (iv) For mobile and portable client devices in the 5.15 GHz - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}
- (2) For the 5.25 GHz - 5.35 GHz and 5.47 GHz - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}
- (3) For the band 5.725 GHz - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1,note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

Maximum Power Spectral Density is measured using Measurement Procedure of **KDB789033 D02v02r01**

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA - 1, SA - 2, SA - 3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) **If Method SA - 2 or SA - 2 Alternative was used, add $10 \log(1 / x)$, where x is the duty cycle, to the peak of the spectrum.**
 - b) If Method SA - 3 Alternative was used and the linear mode was used in step II.E.2.g (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15 GHz - 5.25 GHz, 5.25 GHz - 5.35 GHz, and 5.47 GHz - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a). For devices operating in the band 5.725 GHz - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1 / T$, where T is defined in section II.B.1.a). (Refer to Appendix II)
 - b) Set $VBW \geq 3 RBW$.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz} / RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW = 100 kHz is available on nearly all spectrum analyzers.

Test Results: Comply

Test Mode	Band	Channel	Frequency (MHz)	Reading (dBm)	TF <small>Note 1</small> (dB)	Power Spectral Density(dBm)
TM 1	U-NII 1	36	5 180	-5.66	0.83	-4.83
		40	5 200	-5.55	0.83	-4.72
		48	5 240	-5.96	0.83	-5.13
	U-NII 2A	52	5 260	-3.09	0.83	-2.26
		60	5 300	-2.89	0.83	-2.06
		64	5 320	-2.93	0.83	-2.10
	U-NII 2C	100	5 500	-2.70	0.83	-1.87
		120	5 600	-2.42	0.83	-1.59
		144	5 720	-2.44	0.83	-1.61
TM 2	U-NII 1	36	5 180	-6.23	0.88	-5.35
		40	5 200	-5.88	0.88	-5.00
		48	5 240	-6.07	0.88	-5.19
	U-NII 2A	52	5 260	-3.41	0.88	-2.53
		60	5 300	-3.35	0.88	-2.47
		64	5 320	-3.54	0.88	-2.66
	U-NII 2C	100	5 500	-3.07	0.88	-2.19
		120	5 600	-3.29	0.88	-2.41
		144	5 720	-2.86	0.88	-1.98
TM 3	U-NII 1	38	5 190	-9.08	1.62	-7.46
		46	5 230	-8.63	1.62	-7.01
	U-NII 2A	54	5 270	-6.94	1.62	-5.32
		62	5 310	-6.85	1.62	-5.23
	U-NII 2C	102	5 510	-6.48	1.62	-4.86
		118	5 590	-6.13	1.62	-4.51
		142	5 710	-6.44	1.62	-4.82
		142	5 710	-6.44	1.62	-4.82
TM 4	U-NII 1	42	5 210	-12.96	2.80	-10.16
	U-NII 2A	58	5 290	-11.22	2.80	-8.42
	U-NII 2A	106	5 530	-9.93	2.80	-7.13
	U-NII 2C	122	5 610	-10.00	2.80	-7.20
	U-NII 2C	138	5 690	-10.03	2.80	-7.23

Test Mode	Band	Channel	Frequency (MHz)	Reading (dBm/100kHz)	TF <small>Note 1</small> (dB)	Power Spectral Density (dBm/500kHz)
TM 1	U-NII 3	149	5 745	-11.01	7.82	-3.19
		157	5 785	-11.70	7.82	-3.88
		165	5 825	-11.67	7.82	-3.85
TM 2	U-NII 3	149	5 745	-11.37	7.87	-3.50
		157	5 785	-12.03	7.87	-4.16
		165	5 825	-12.14	7.87	-4.27
TM 3	U-NII 3	151	5 755	-15.05	8.61	-6.44
		159	5 795	-15.01	8.61	-6.40
TM 4	U-NII 3	155	5 775	-18.51	9.79	-8.72

Note 1: Power Spectral Density = Reading(Measurement Data) + TF

Note 2: "U-NII 1, 2A, 2C [TF] = DCCF"


"U-NII 3 [TF] = $10^{\log(500 \text{ kHz}/100 \text{ kHz})} + \text{DCCF}$ "

Where, TF = Total Factor, DCCF = Duty Cycle Correction Factor


For DCCF(Duty Cycle Correction Factor) please refer to appendix II.

Maximum Power Spectral Density

Test Mode: TM 1 & Ch.36

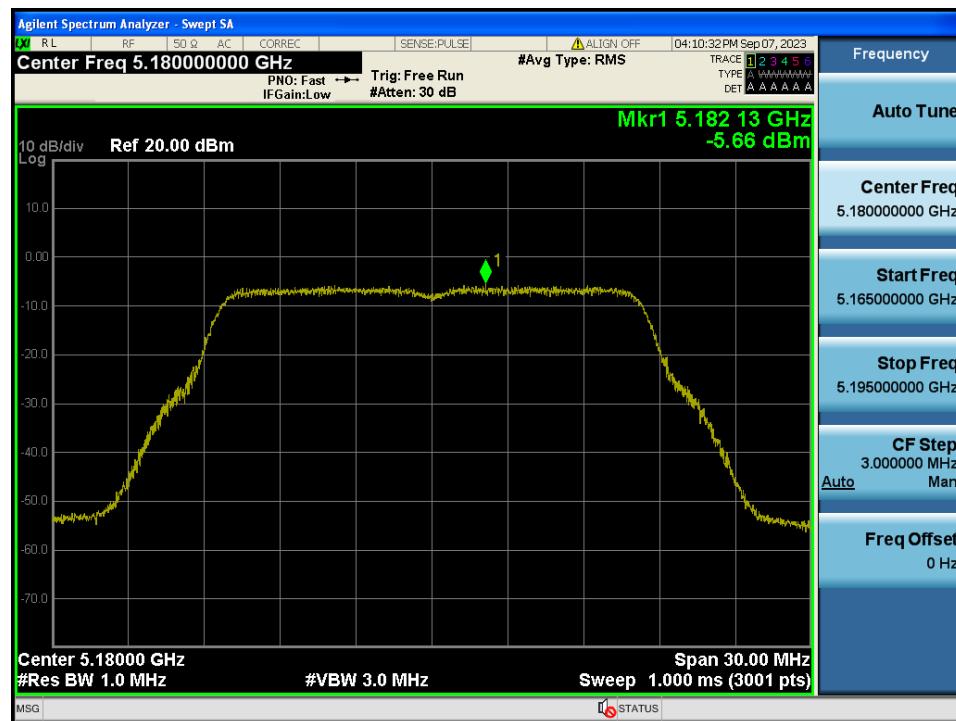
Maximum Power Spectral Density

Test Mode: TM 1 & Ch.40

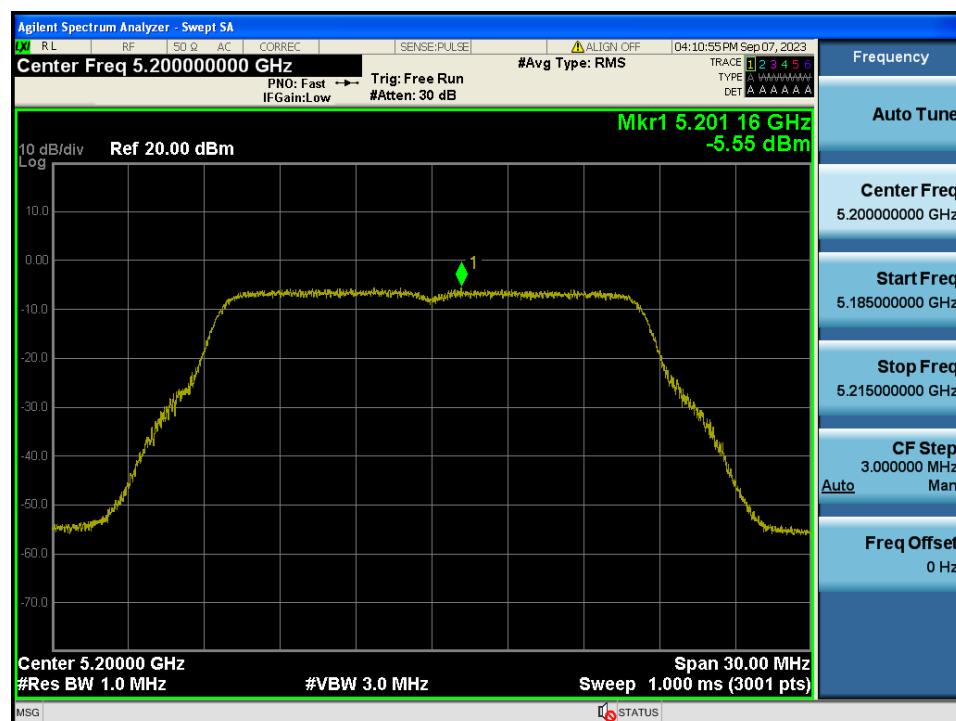


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.48




Maximum Power Spectral Density

Test Mode: TM 1 & Ch.52

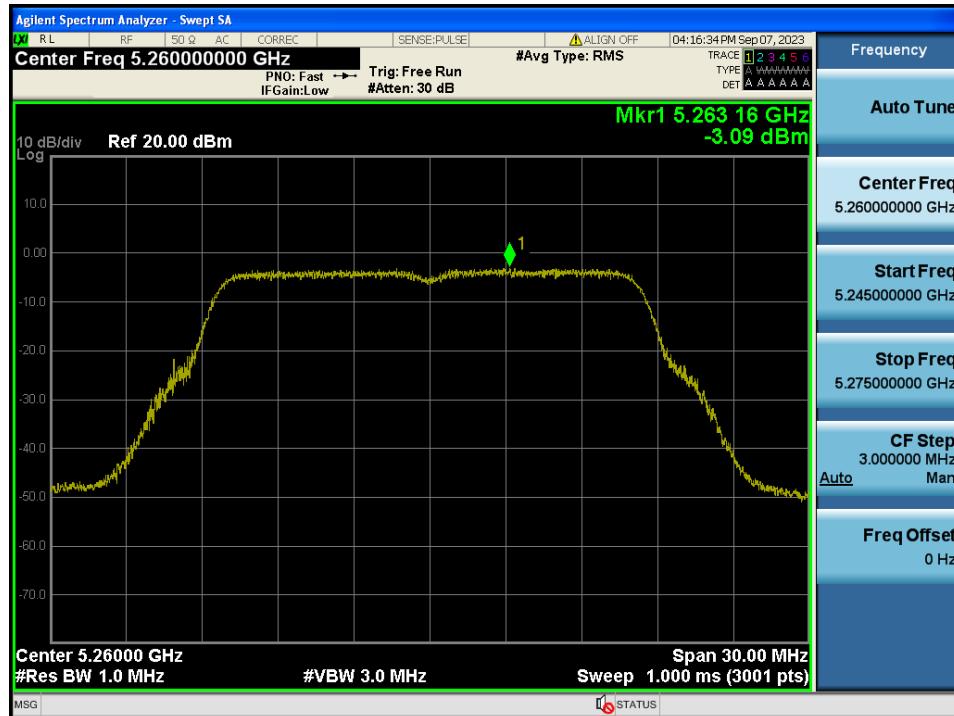

Maximum Power Spectral Density

Test Mode: TM 1 & Ch.60

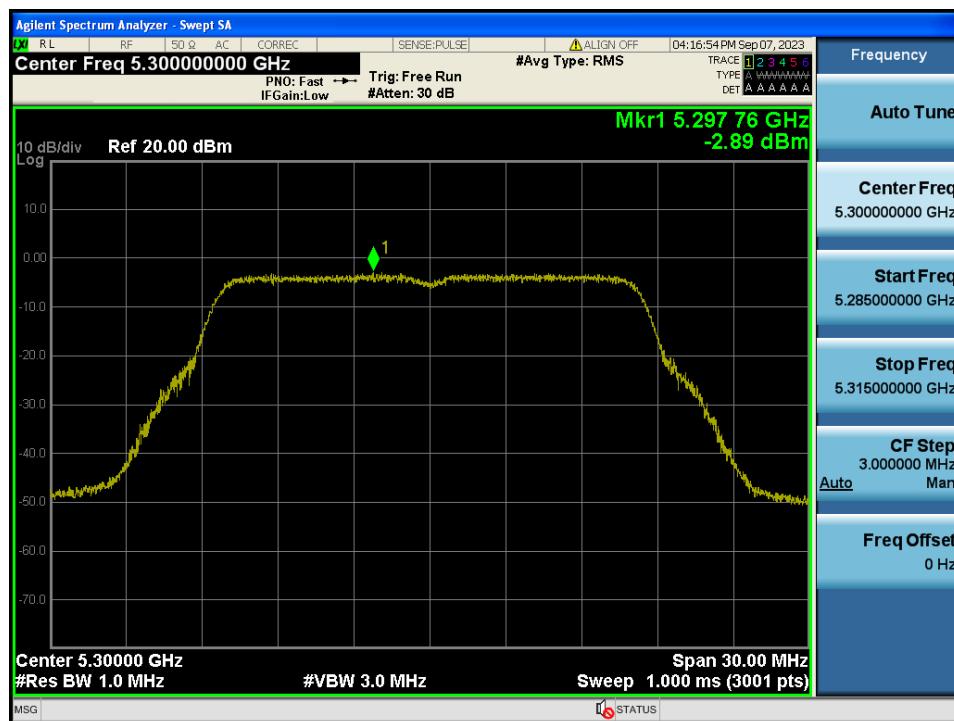


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.64




Maximum Power Spectral Density

Test Mode: TM 1 & Ch.100

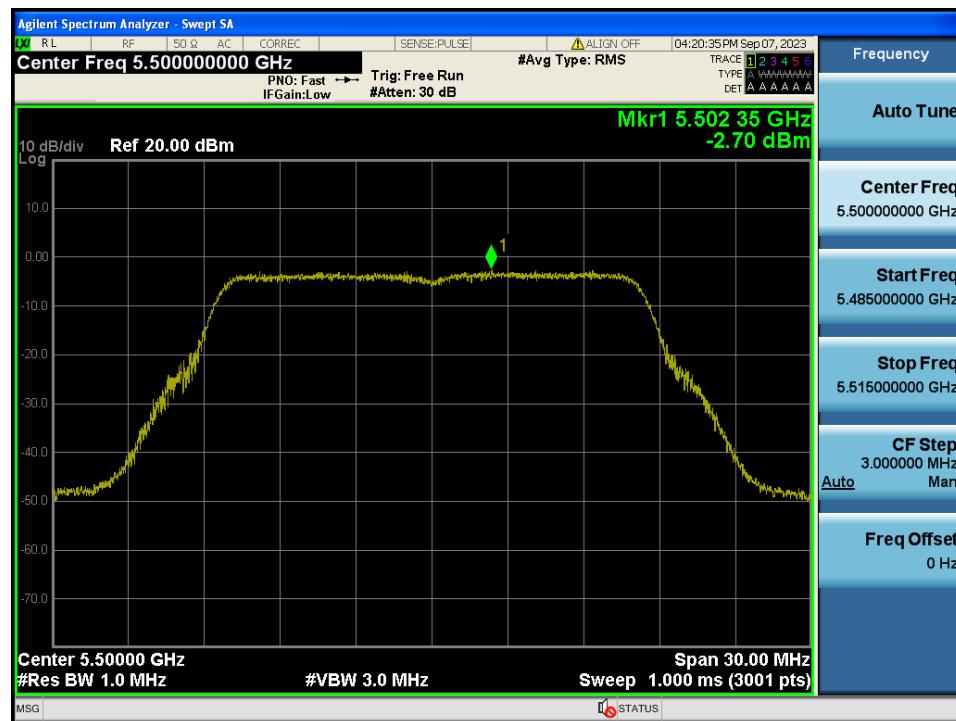


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.120

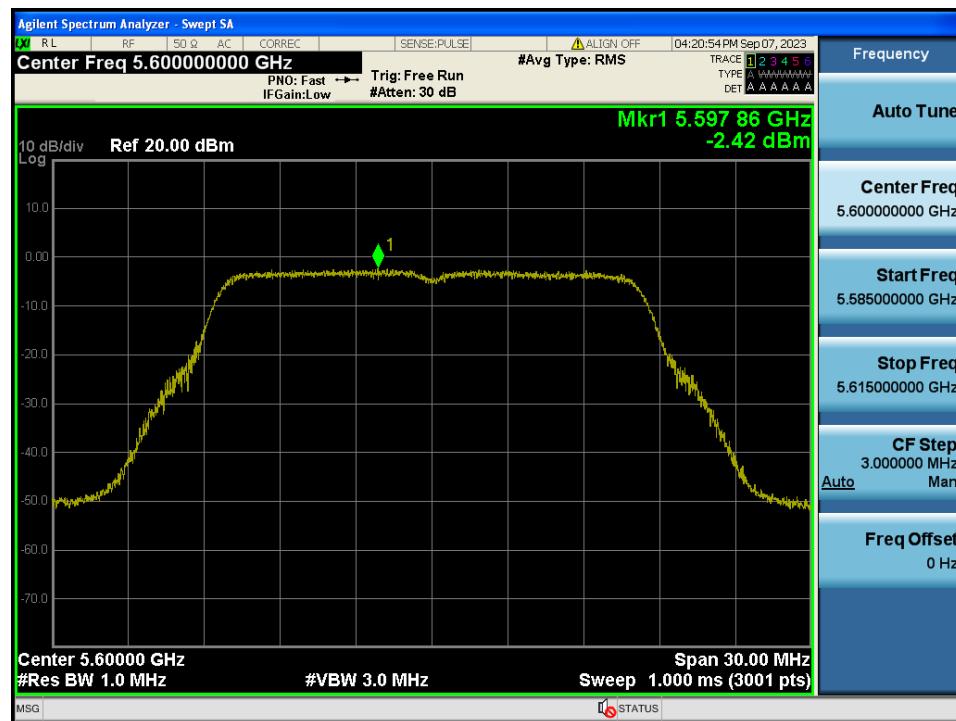


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.144

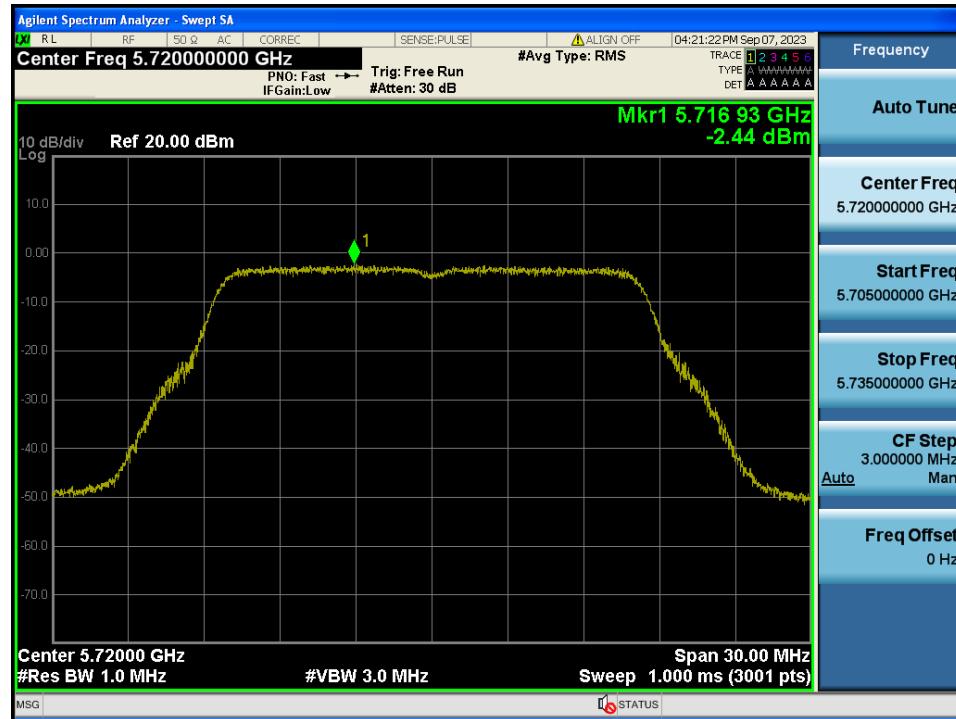


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.149

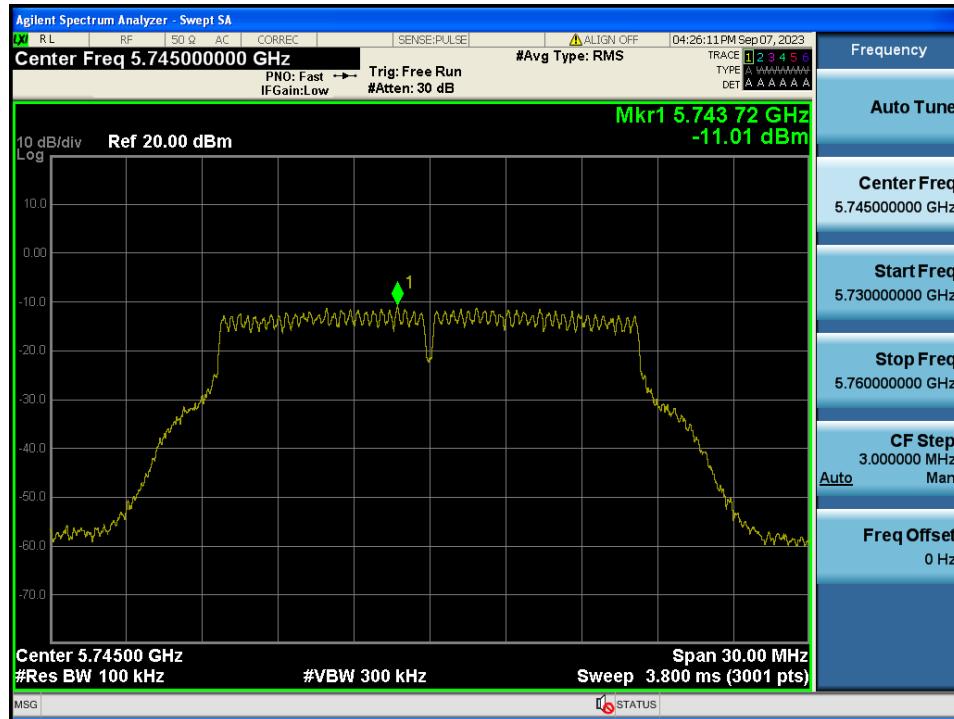


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.157

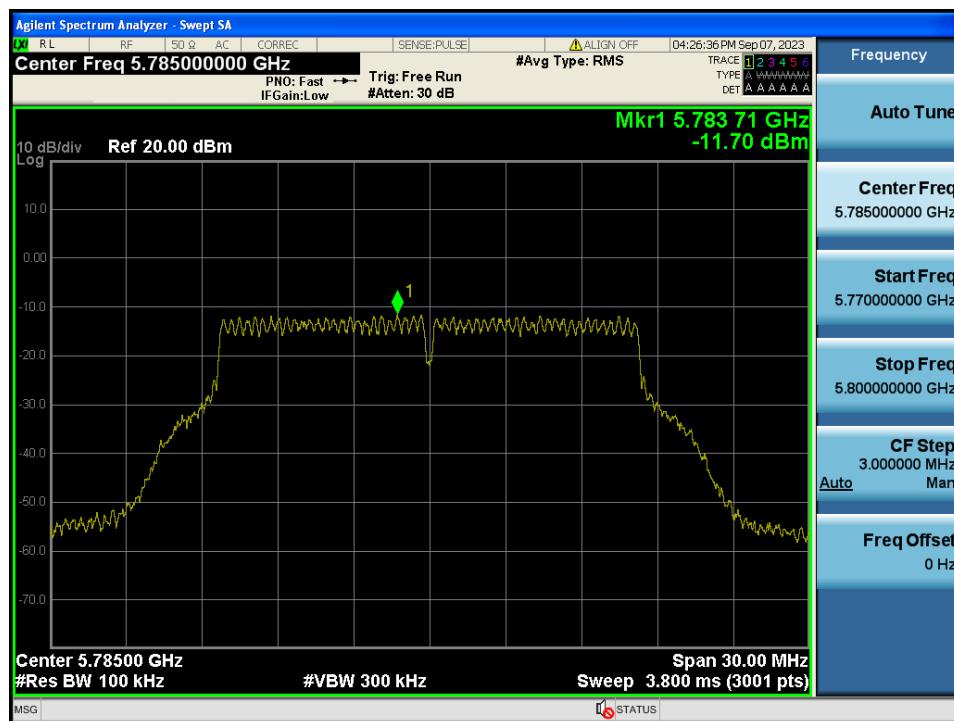


Maximum Power Spectral Density

Test Mode: TM 1 & Ch.165

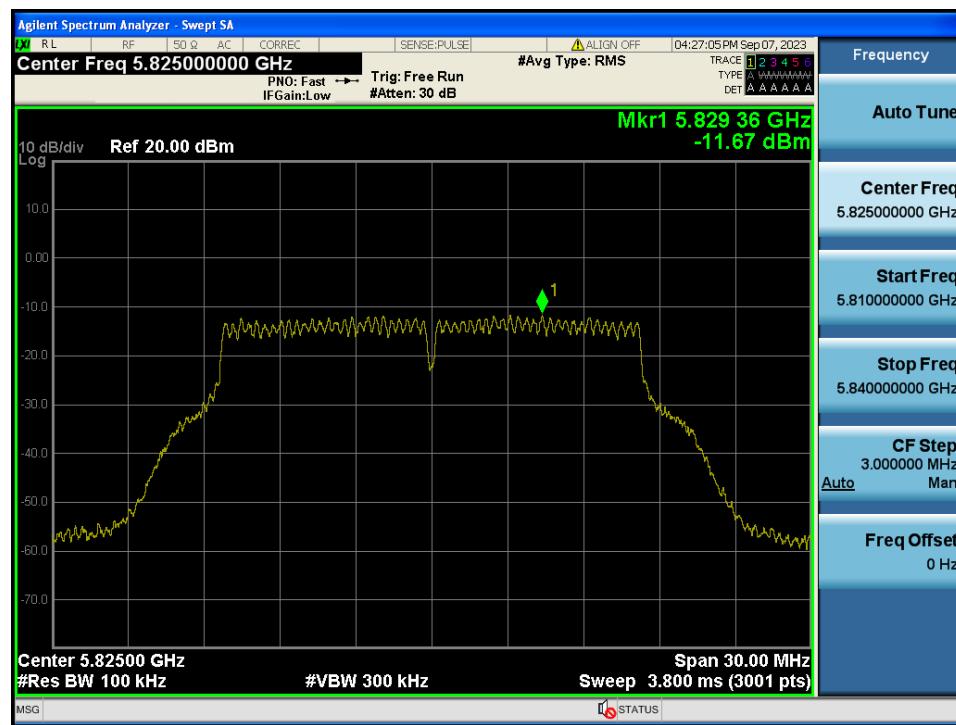

Maximum Power Spectral Density

Test Mode: TM 2 & Ch.36

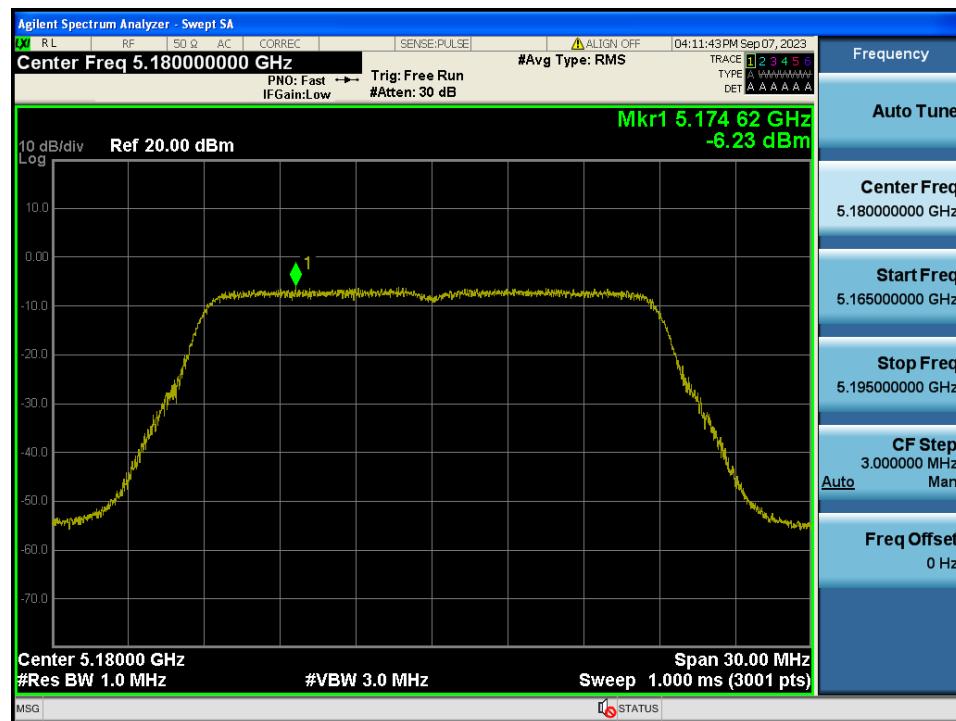

Maximum Power Spectral Density

Test Mode: TM 2 & Ch.40




Maximum Power Spectral Density

Test Mode: TM 2 & Ch.48




Maximum Power Spectral Density

Test Mode: TM 2 & Ch.52

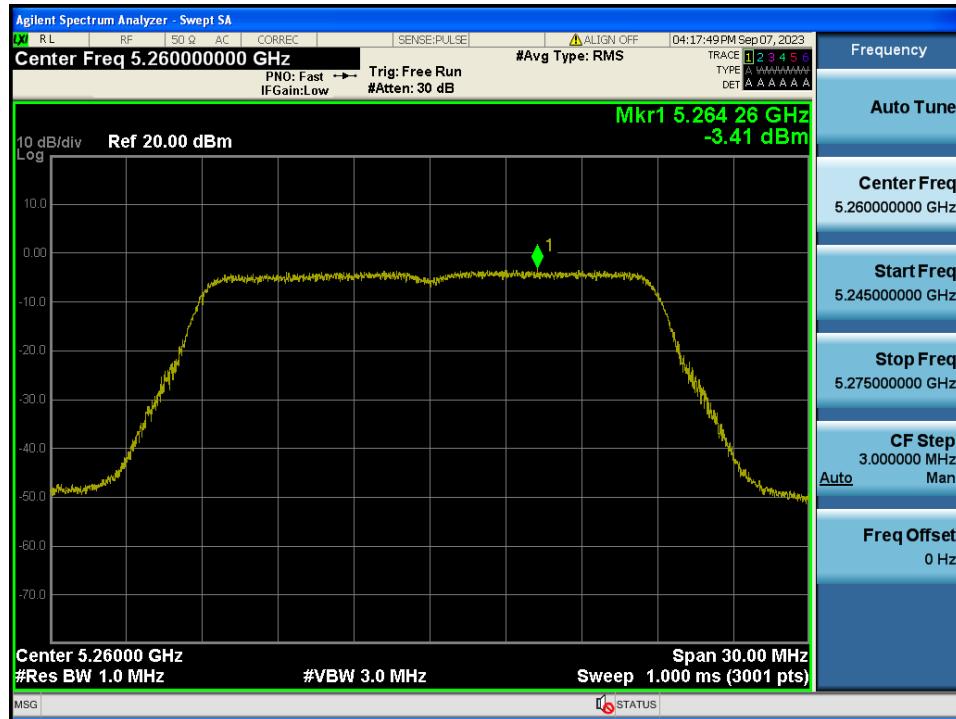


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.60

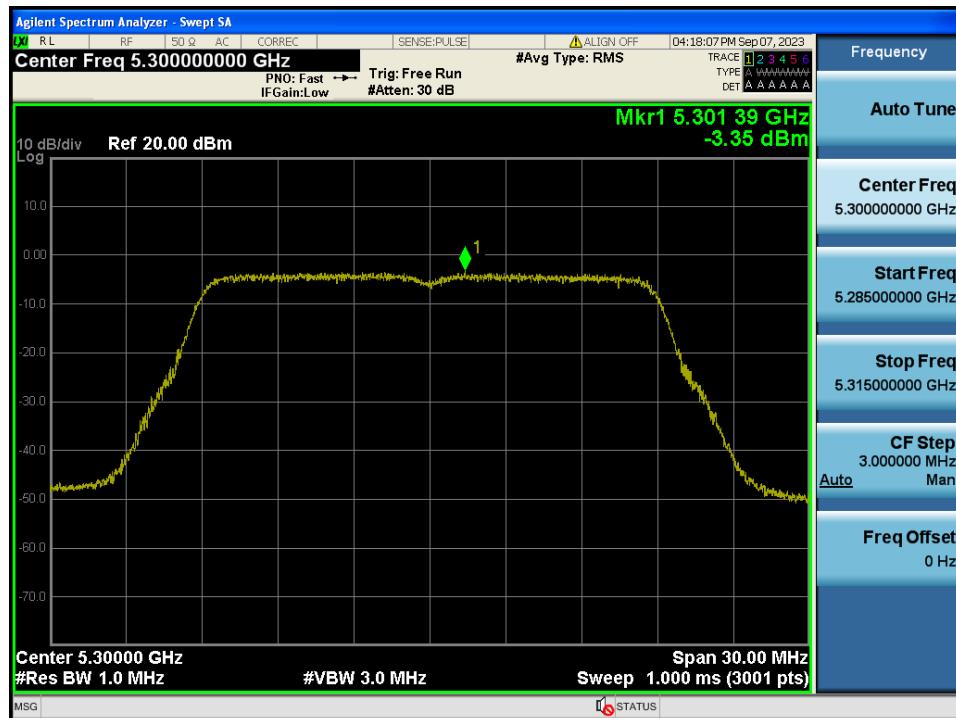


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.64

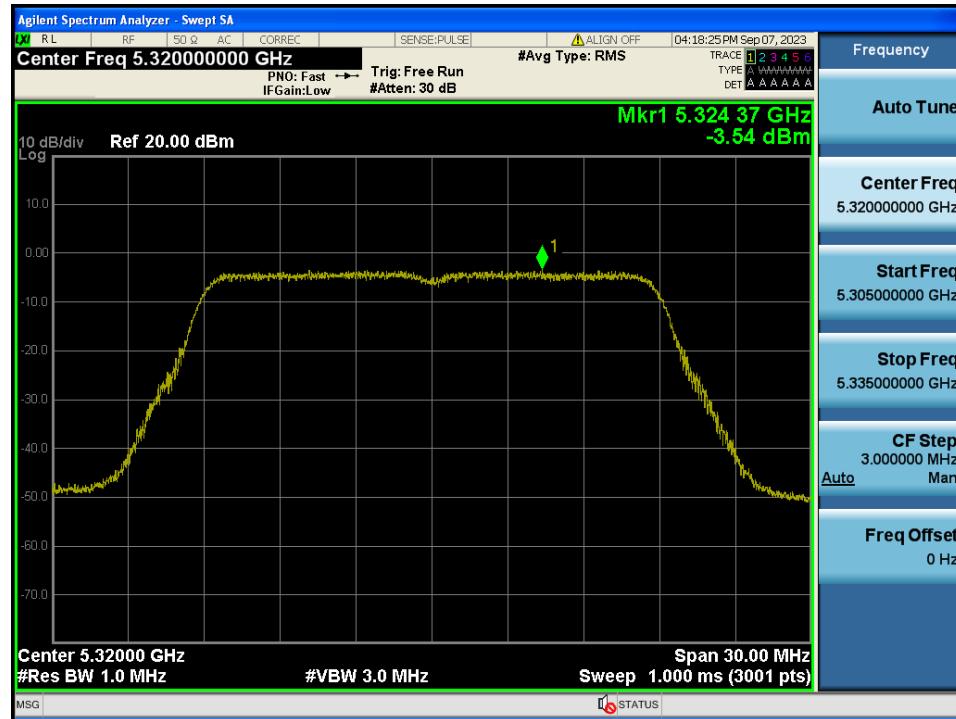


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.100

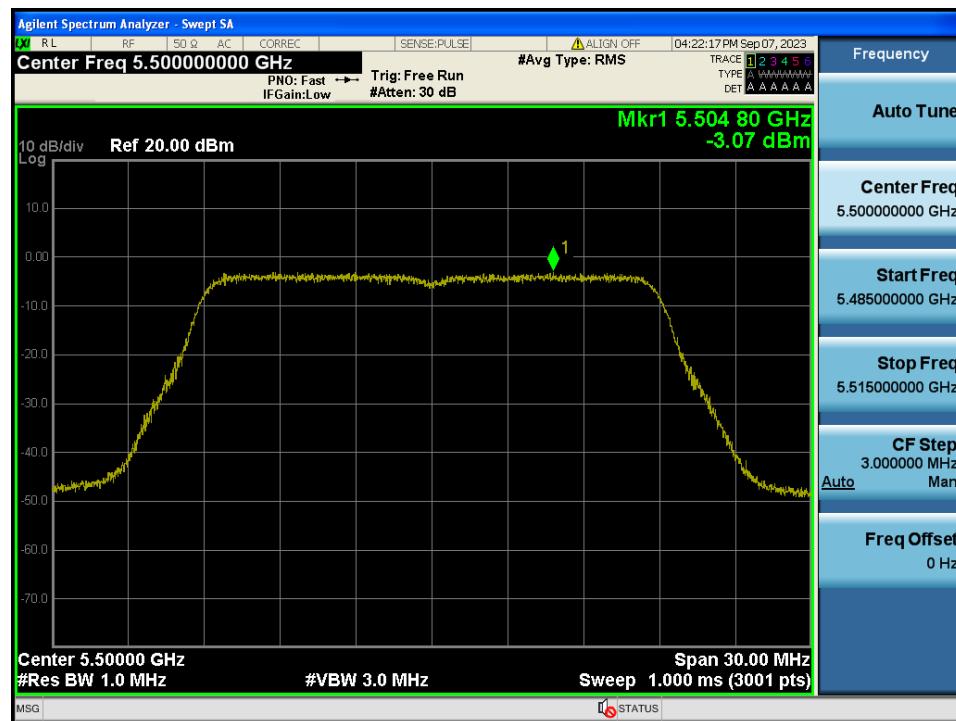


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.120

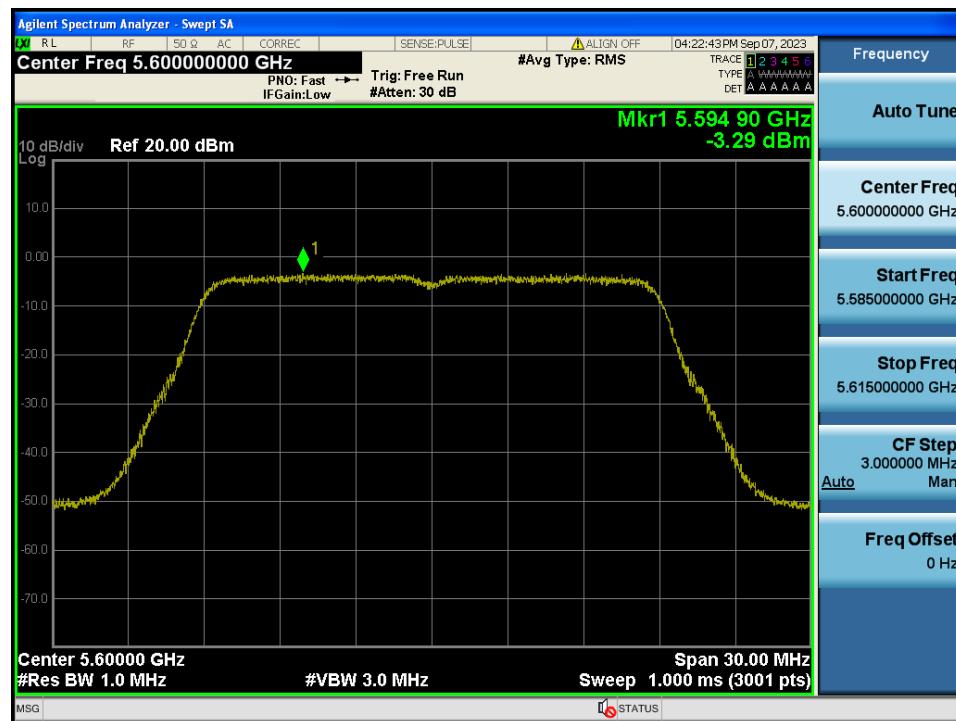


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.144

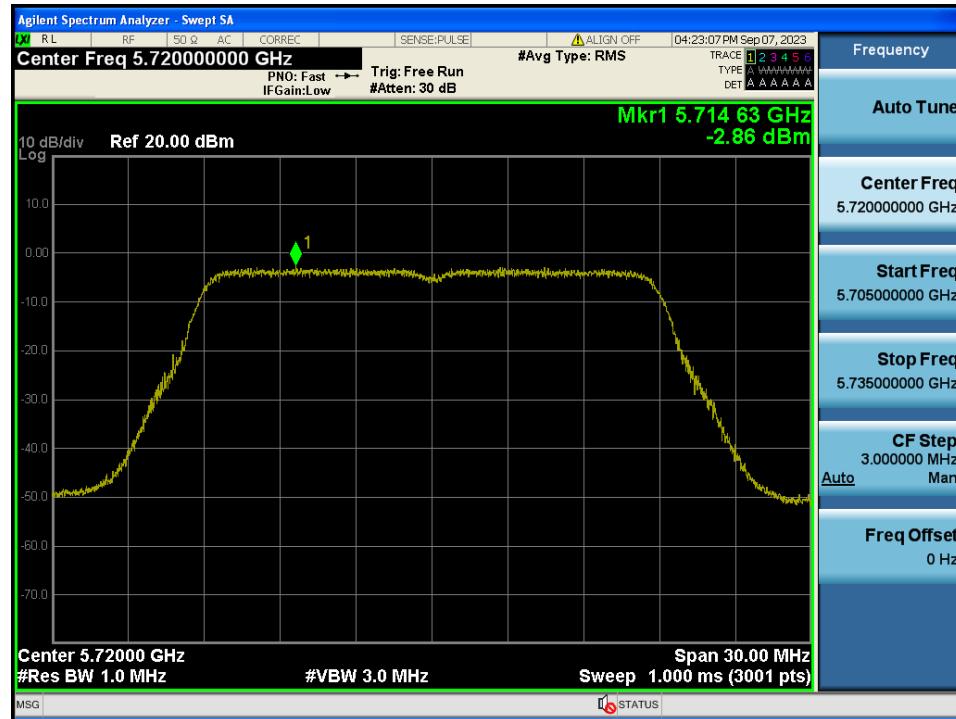


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.149

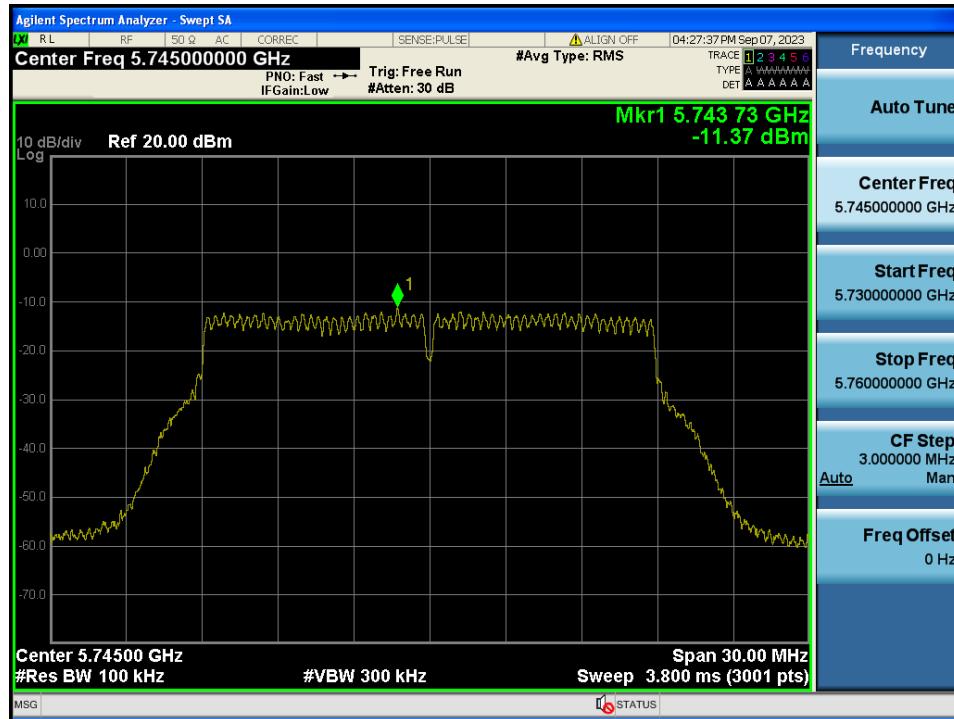

Maximum Power Spectral Density

Test Mode: TM 2 & Ch.157

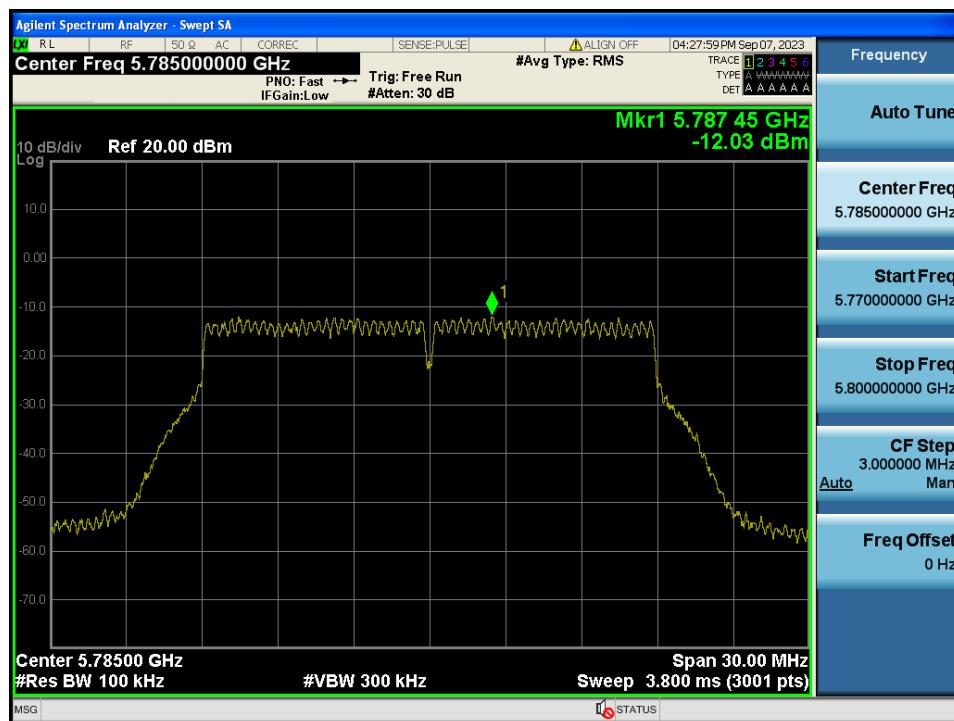


Maximum Power Spectral Density

Test Mode: TM 2 & Ch.165




Maximum Power Spectral Density

Test Mode: TM 3 & Ch.38

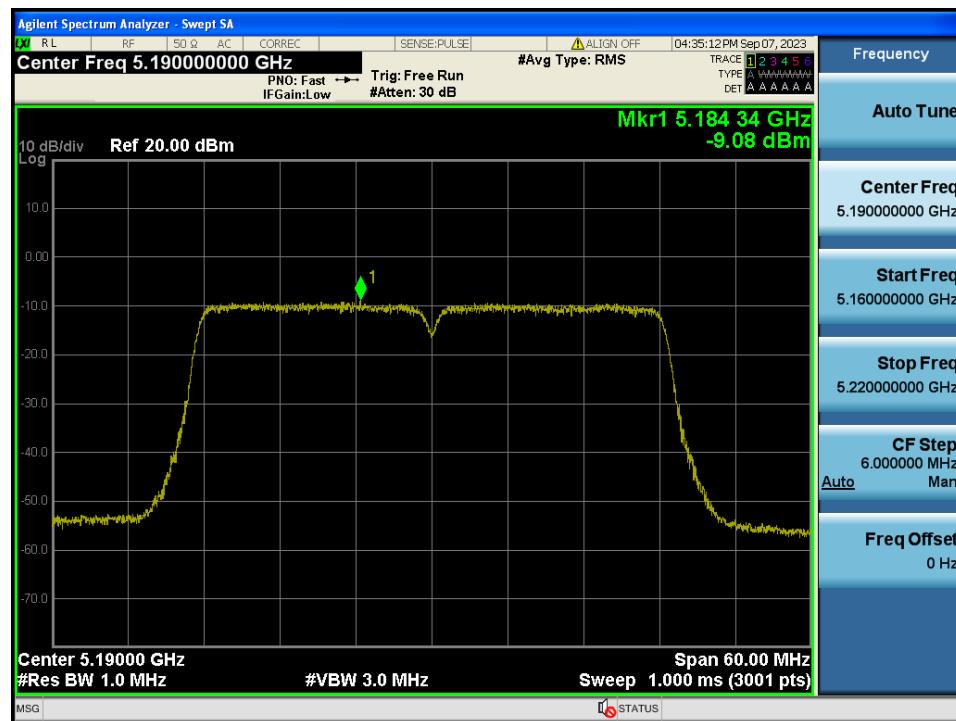

Maximum Power Spectral Density

Test Mode: TM 3 & Ch.46

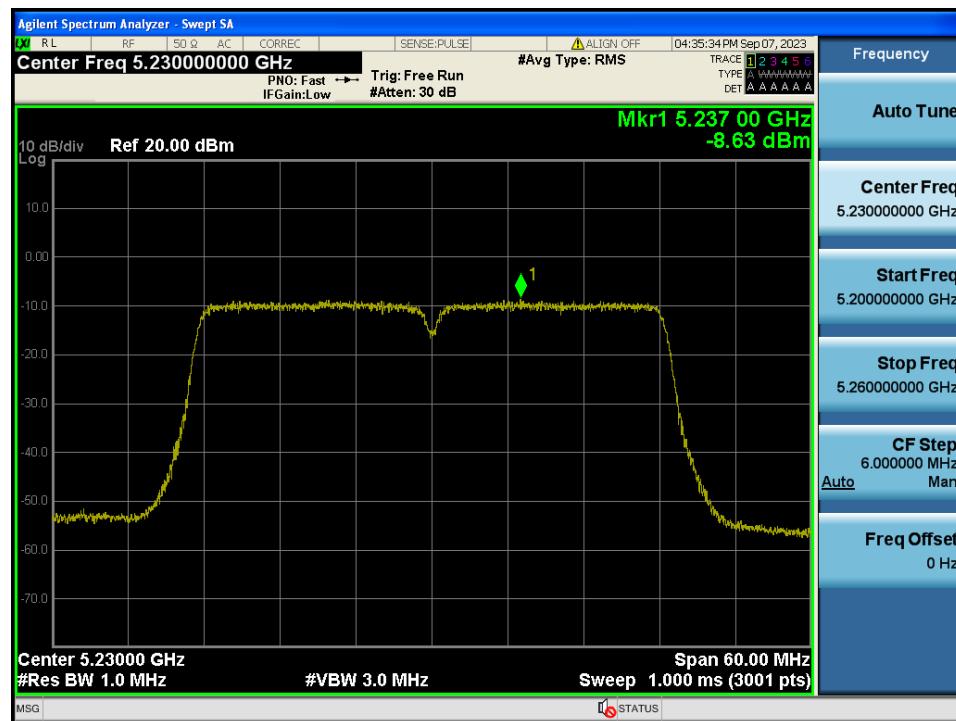


Maximum Power Spectral Density

Test Mode: TM 3 & Ch.54



Maximum Power Spectral Density

Test Mode: TM 3 & Ch.62

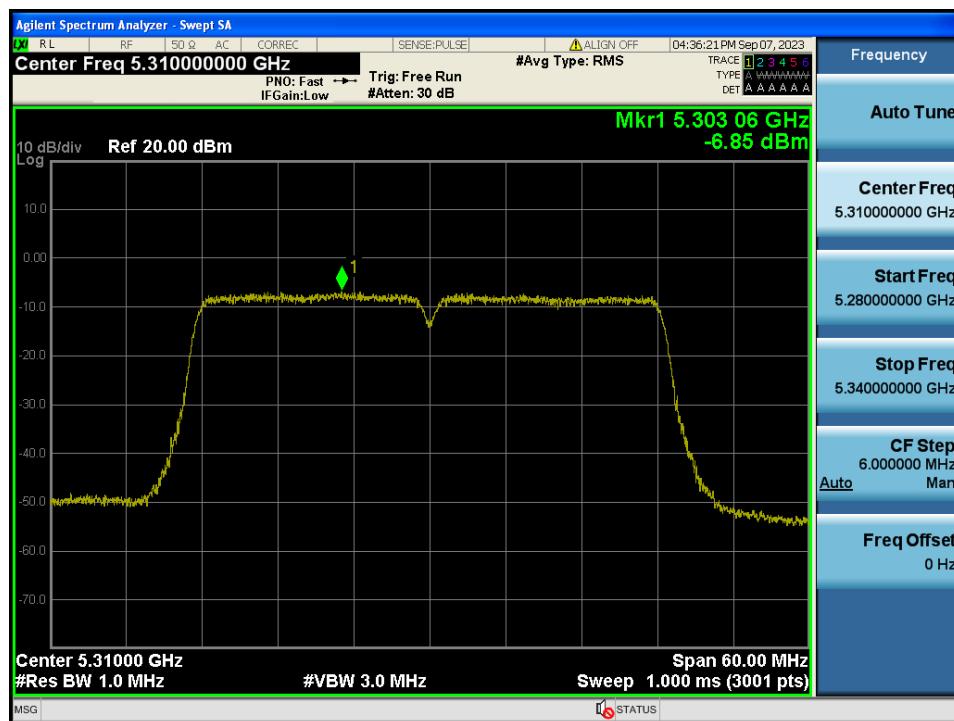


Maximum Power Spectral Density

Test Mode: TM 3 & Ch.102




Maximum Power Spectral Density

Test Mode: TM 3 & Ch.118

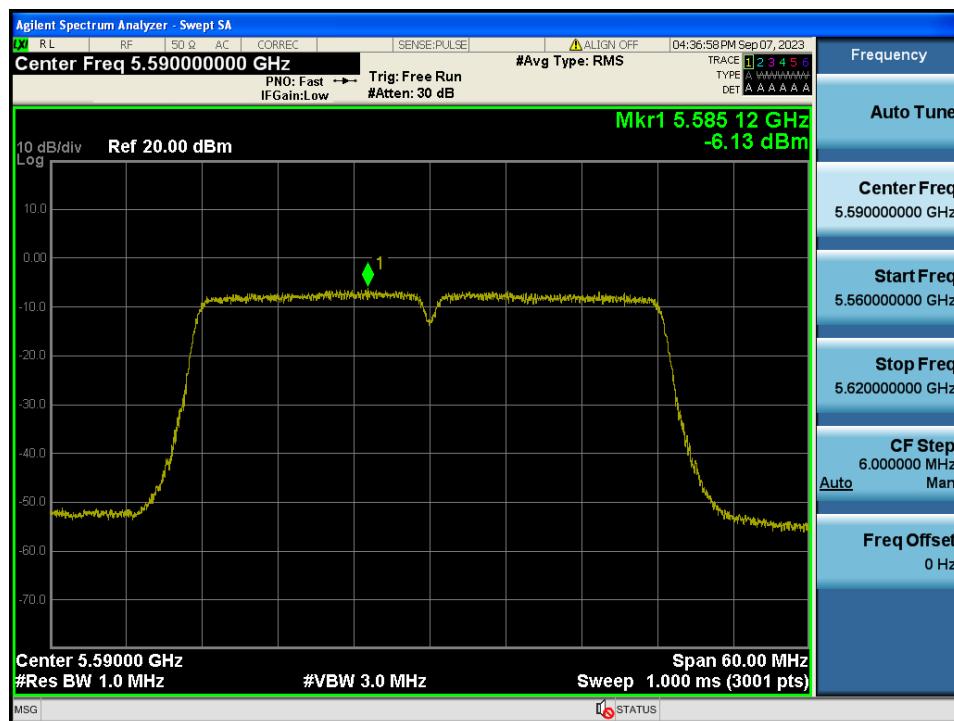

Maximum Power Spectral Density

Test Mode: TM 3 & Ch.142

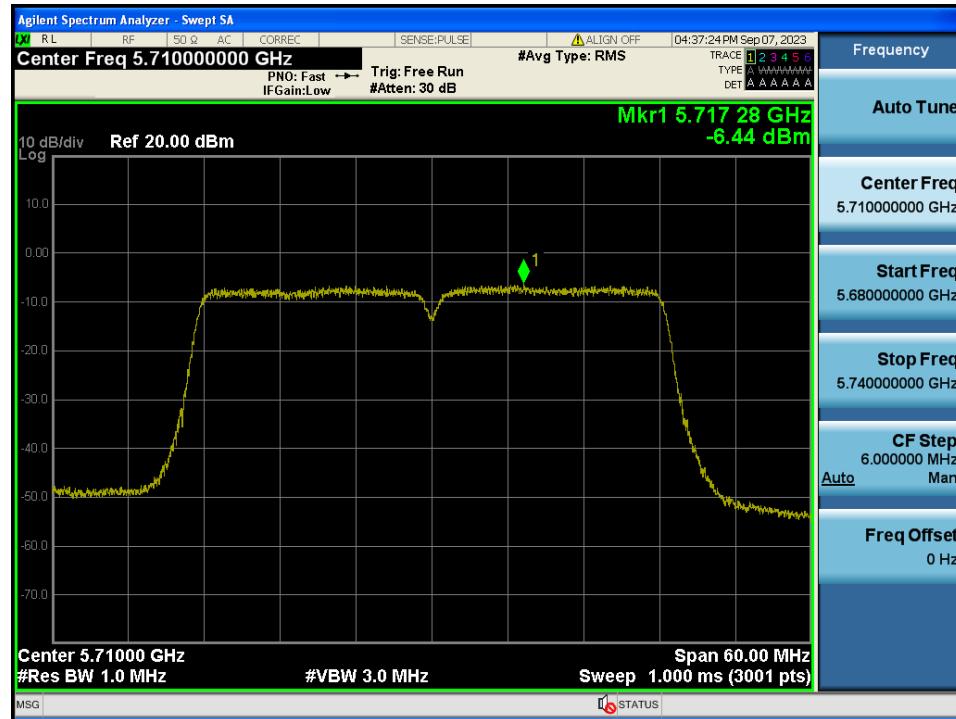


Maximum Power Spectral Density

Test Mode: TM 3 & Ch.151



Maximum Power Spectral Density

Test Mode: TM 3 & Ch.159

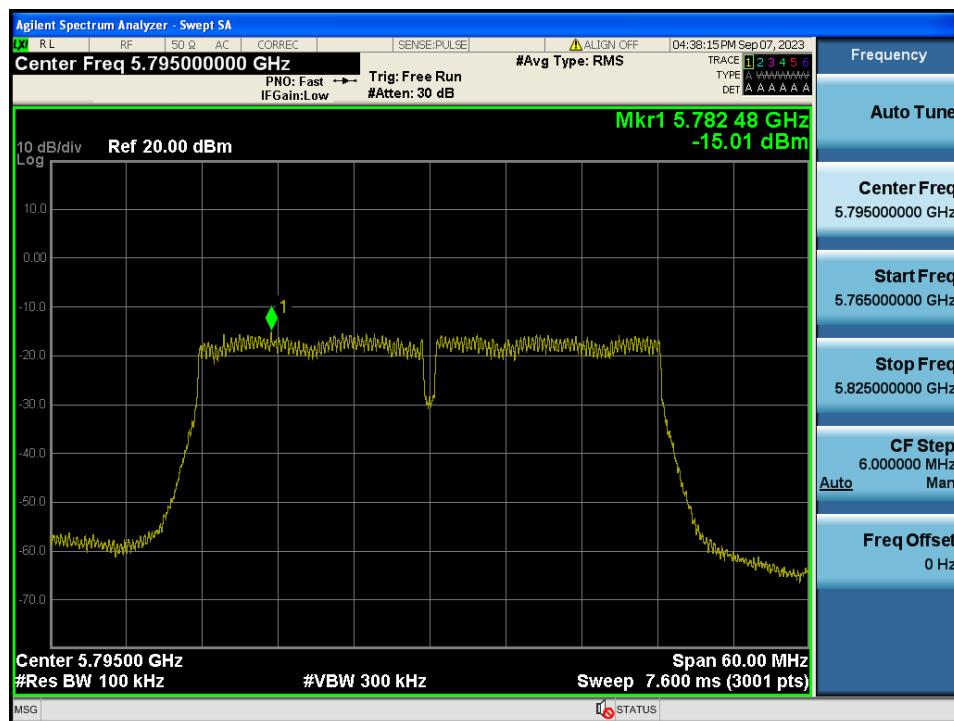


Maximum Power Spectral Density

Test Mode: TM 4 & Ch.42




Maximum Power Spectral Density

Test Mode: TM 4 & Ch.58

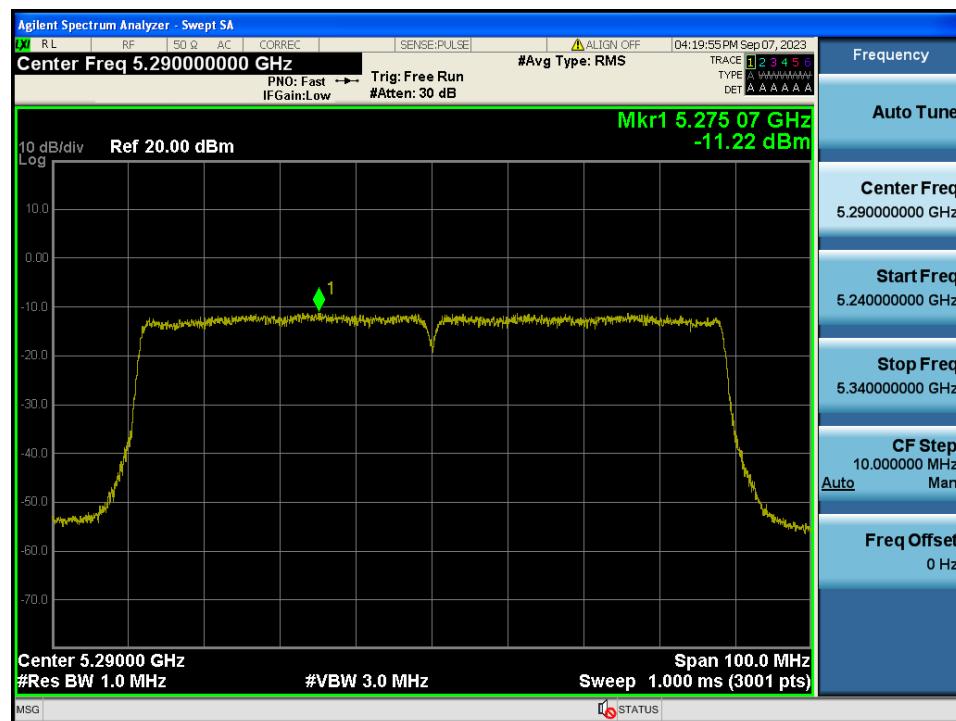


Maximum Power Spectral Density

Test Mode: TM 4 & Ch.106

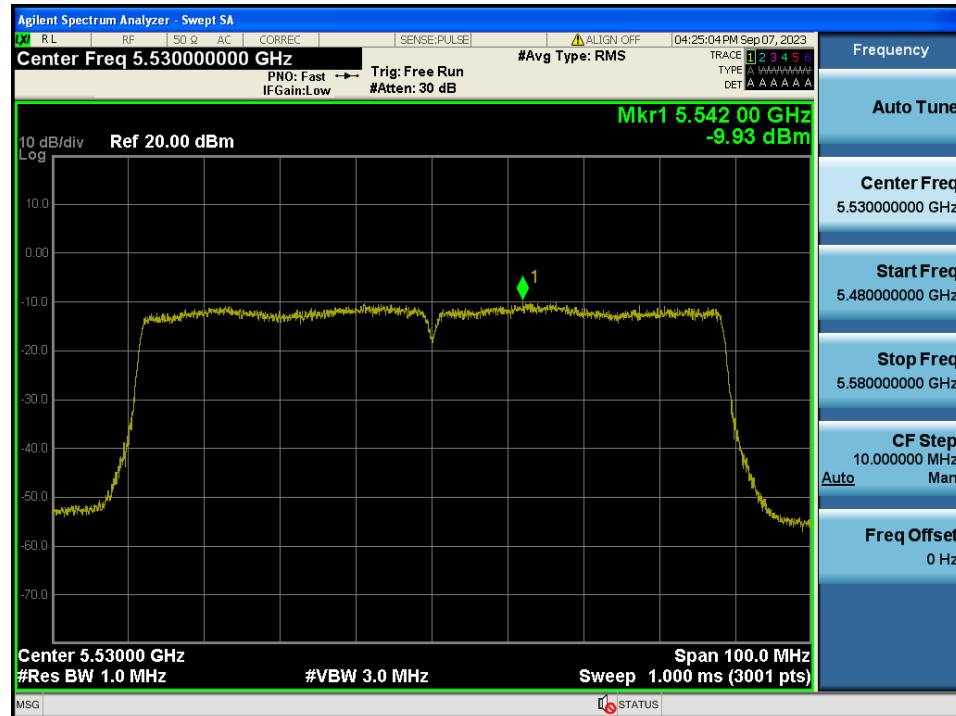


Maximum Power Spectral Density

Test Mode: TM 4 & Ch.122

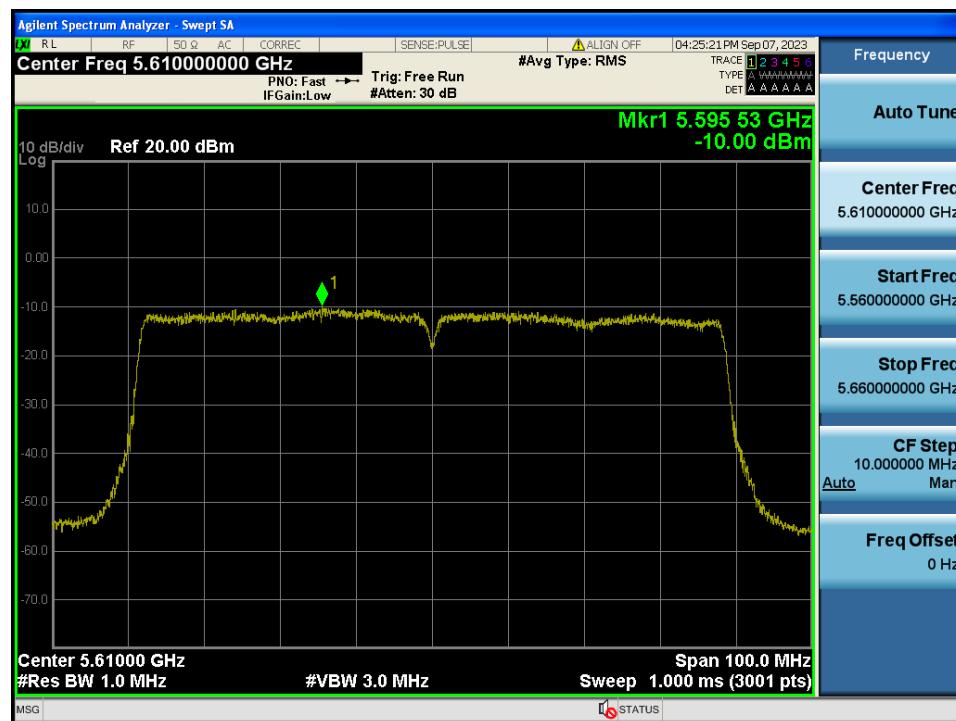


Maximum Power Spectral Density

Test Mode: TM 4 & Ch.138

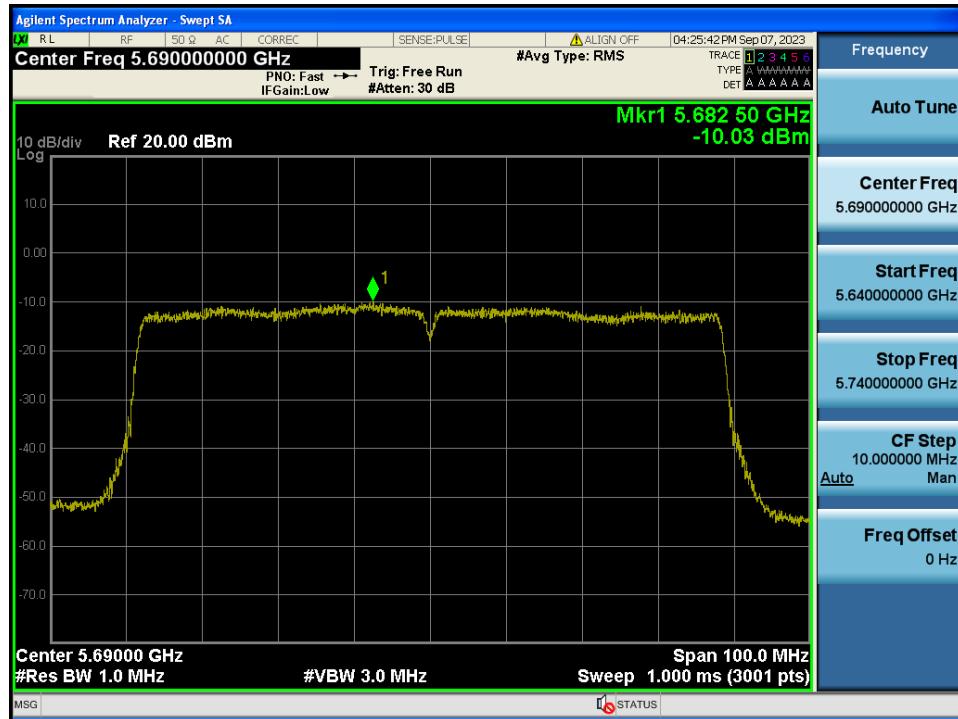

Maximum Power Spectral Density

Test Mode: TM 4 & Ch.155

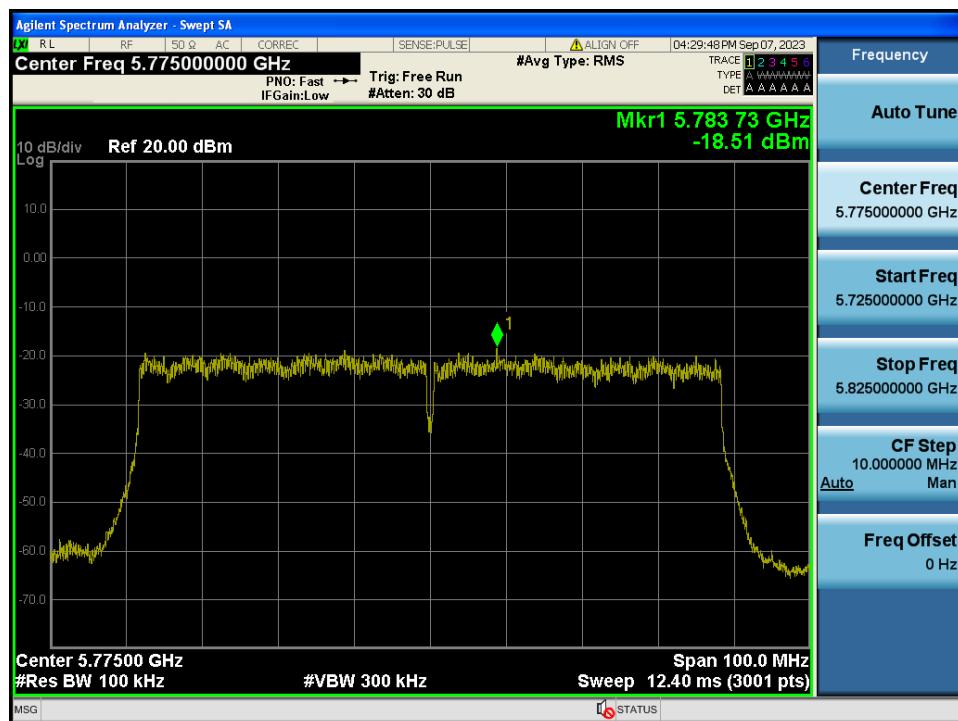

5.5. Unwanted Emissions

■ Test Requirements

- Part 15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the **5.15 GHz - 5.25 GHz band**: all emissions outside of the **5.15 GHz - 5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (2) For transmitters operating in the **5.25 GHz - 5.35 GHz band**: all emissions outside of the **5.15 GHz - 5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (3) For transmitters operating in the **5.47 GHz - 5.725 GHz band**: all emissions outside of the **5.47 GHz - 5.725 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (4) For transmitters operating in the **5.725 GHz - 5.85 GHz band**: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (5) Unwanted emissions **below 1 GHz** must comply with the general field strength limits set forth in **Section 15.209**.

Further, any U-NII devices using an **AC power line** are required to comply also with the conducted limits set forth in **Section 15.207**.

- Part 15.209: General requirements

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	300
0.490 – 1.705	24 000 / F (kHz)	30
1.705 – 30.0	30	30


Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.414 25 ~ 8.414 75	108 ~ 121.94	1 300 ~ 1 427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1 435 ~ 1 626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.173 5 ~ 2.190 5	12.519 75 ~ 12.520 25	149.9 ~ 150.05	1 645.5 ~ 1 646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.576 75 ~ 12.577 25	156.524 75 ~ 156.525 25	1 660 ~ 1 710	8.025 ~ 8.5	22.01 ~ 23.12
4.177 25 ~ 4.177 75	13.36 ~ 13.41	156.7 ~ 156.9	1 718.8 ~ 1 722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.207 25 ~ 4.207 75	16.42 ~ 16.423	162.012 5 ~ 167.17	2 200 ~ 2 300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 310 ~ 2 390	10.6 ~ 12.7	36.43 ~ 36.5
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 483.5 ~ 2 500	13.25 ~ 13.4	Above 38.6
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	2 655 ~ 2 900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 260 ~ 3 267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 332 ~ 3 339		
8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1240	3 345.8 ~ 3 358		
			3 600 ~ 4 400		

■ Test Configuration

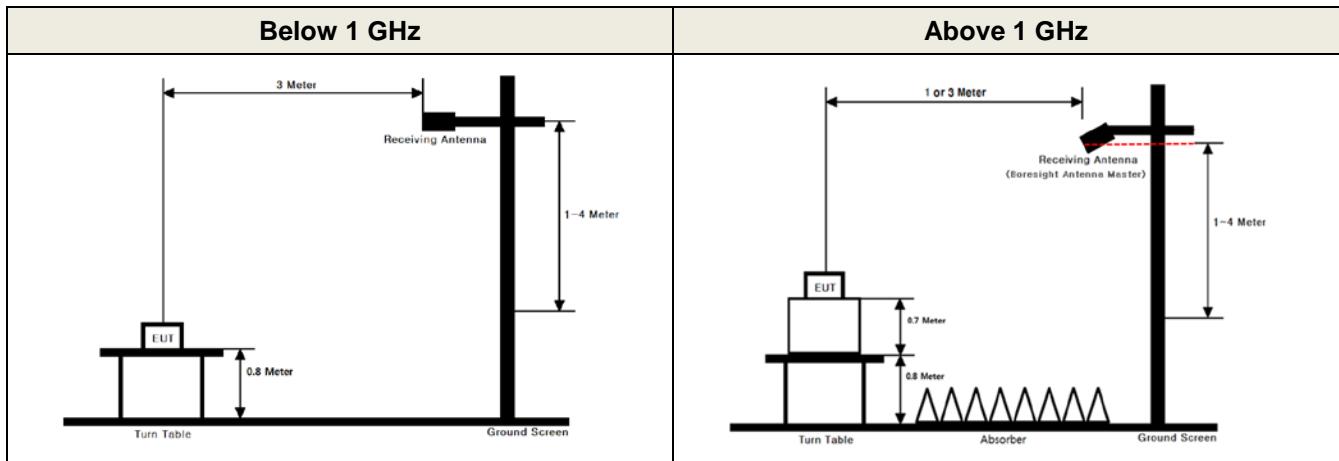

■ Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1 m or 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of **KDB789033 D02v02r01**

► General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

- EUT Duty Cycle
 - (1) The EUT shall be configured or modified to **transmit continuously** except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (**to no lower than 98 percent**) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
 - (2) If **continuous transmission (or at least 98 percent duty cycle) cannot be achieved** due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
 - (3) Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

► **Measurements below 1 000 MHz**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using **CISPR quasi-peak detection**; however, **peak detection** is permitted as an alternative to quasi-peak detection.

► **Measurements Above 1 000 MHz (Peak)**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".

b) Peak emission levels are measured by setting the analyzer as follows:

- (i) **RBW = 1 MHz**.
- (ii) **VBW \geq 3 MHz**.
- (iii) **Detector = Peak**.
- (iv) Sweep time = Auto.
- (v) Trace mode = Max hold.
- (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► **Measurements Above 1000 MHz (Method AD)**

- (i) **RBW = 1 MHz**.

- (ii) **VBW \geq 3 MHz**.

- (iii) **Detector = RMS**, if $\text{span} / (\# \text{ of points in sweep}) \leq \text{RBW} / 2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.

- (iv) Averaging type = power (i.e., RMS)

- As an alternative, the detector and averaging type may be set for linear voltage averaging. Some analyzers require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.

- (v) Sweep time = Auto.

- (vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces shall be averaged.

- (vii) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- **If power averaging (RMS) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle.** For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
- If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
- If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Duty Cycle Correction factor

Test Mode	Date rate	T_{on} (ms)	T_{on+off} (ms)	$x = T_{on} / (T_{on+off})$	DCCF = $10 \log(1/x)$ (dB)
TM 1	6 Mbps	1.428	1.729	0.825 9	0.83
TM 2	MCS 0	1.337	1.638	0.816 2	0.88
TM 3	MCS 0	0.665	0.966	0.688 2	1.62
TM 4	MCS 0	0.332	0.633	0.524 3	2.80

Note1: Where, T = Transmission duration / x = Duty cycle

Note2: Please refer to the appendix II for duty cycle plots.

Test Results

Test Notes

1. The radiated emissions below 1 GHz were investigated 9 kHz to 1 GHz and the worst case data was reported.

2. Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance factor is applied to the result.

- Calculation of distance correction factor

At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$

At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

3. Sample Calculation.

Margin = Limit - Result / Result = Reading + TF + DCCF + DCF / TF = AF + CL + HL + AL - AG

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss, AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

4. The limit is converted to field strength.



$E(\text{dBuV/m}) = \text{EIRP}(\text{dBm}) + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

Unwanted Emissions data(9 kHz ~ 1 GHz) : TM2

Band	Tested Frequency (MHz)	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	5 180	69.19	V	X	QPK	43.00	-10.09	N/A	N/A	32.91	40.00	7.09
		71.27	H	X	QPK	40.60	-10.39	N/A	N/A	30.21	40.00	9.79
		132.08	V	X	QPK	40.80	-7.40	N/A	N/A	33.40	43.52	10.12
		-	-	-	-	-	-	-	-	-	-	-
		-	-	-	-	-	-	-	-	-	-	-

TM2 & Lowest & X & Ver

Detector Mode : QPK

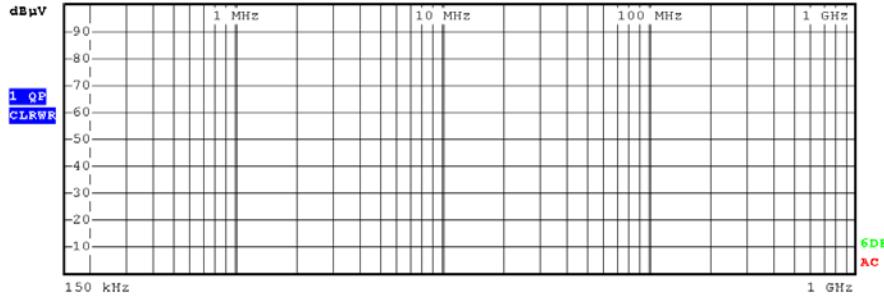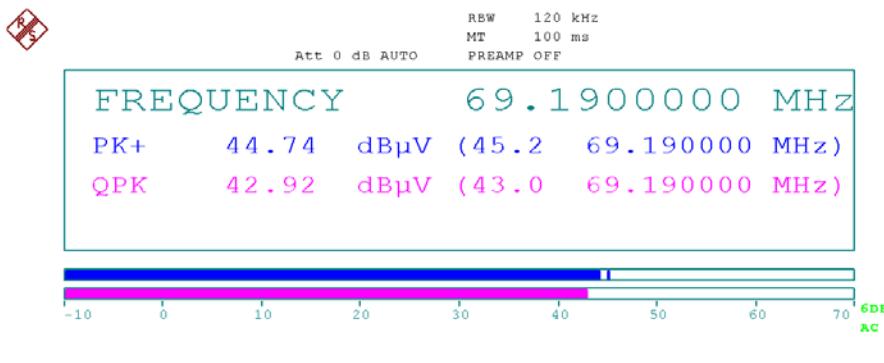

Test Notes

1. The radiated emissions above 1 GHz were investigated up to 40 GHz. And no other spurious and harmonic emissions were found below listed frequencies.

2. Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance factor is applied to the result.

- Calculation of distance correction factor

At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$

At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

3. Sample Calculation.

Margin = Limit – Result / Result = Reading + TF + DCCF + DCF / TF = AF + CL + HL + AL – AG

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss, AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

4. The limit is converted to field strength.

$$E(\text{dBuV/m}) = EIRP(\text{dBm}) + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Unwanted Emissions data(1 GHz ~ 40 GHz) : TM1

Band	Tested Frequency (MHz)	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
U-NII 1	5 180	5 149.99	H	X	PK	48.95	2.67	N/A	N/A	51.62	74.00	22.38	
		5 149.69	H	X	AV	39.57	2.67	0.83	N/A	43.07	54.00	10.93	
		10 359.92	H	X	PK	42.81	8.48	N/A	N/A	51.29	68.20	16.91	
	5 200	10 400.99	H	X	PK	43.68	8.44	N/A	N/A	52.12	68.20	16.08	
	5 240	10 481.24	H	X	PK	43.24	8.57	N/A	N/A	51.81	68.20	16.39	
U-NII 2A	5 300	5 260	10 521.23	H	X	PK	43.45	8.62	N/A	N/A	52.07	68.20	16.13
		10 599.60	H	X	PK	44.19	8.53	N/A	N/A	52.72	68.20	15.48	
		10 600.93	H	X	AV	34.15	8.53	0.83	N/A	43.51	54.00	10.49	
	5 320	5 354.94	H	X	PK	50.03	2.82	N/A	N/A	52.85	74.00	21.15	
		5 354.03	H	X	AV	39.11	2.82	0.83	N/A	42.76	54.00	11.24	
		10 641.26	H	X	PK	44.55	8.45	N/A	N/A	53.00	74.00	21.00	
		10 640.86	H	X	AV	33.55	8.46	0.83	N/A	42.84	54.00	11.16	
		5 459.84	H	X	PK	48.43	3.03	N/A	N/A	51.46	74.00	22.54	
U-NII 2C	5 500	5 459.92	H	X	AV	39.13	3.03	0.83	N/A	42.99	54.00	11.01	
		5 469.97	H	X	PK	49.38	3.06	N/A	N/A	52.44	68.20	15.76	
		10 999.13	H	X	PK	44.36	8.08	N/A	N/A	52.44	74.00	21.56	
		10 999.58	H	X	AV	34.57	8.08	0.83	N/A	43.48	54.00	10.52	
	5 600	11 199.10	H	X	PK	44.76	8.26	N/A	N/A	53.02	74.00	20.98	
		11 199.55	H	X	AV	34.37	8.26	0.83	N/A	43.46	54.00	10.54	
	5 720	11 440.54	H	X	PK	45.07	8.46	N/A	N/A	53.53	74.00	20.47	
		11 440.47	H	X	AV	34.75	8.46	0.83	N/A	44.04	54.00	9.96	
U-NII 3	5 745	5 637.95	H	X	PK	49.18	3.23	N/A	N/A	52.41	68.20	15.79	
		5 675.58	H	X	PK	49.62	3.24	N/A	N/A	52.86	87.13	34.27	
		11 490.50	H	X	PK	45.32	8.56	N/A	N/A	53.88	74.00	20.12	
		11 490.30	H	X	AV	34.80	8.56	0.83	N/A	44.19	54.00	9.81	
	5 785	11 569.03	H	X	PK	45.03	8.60	N/A	N/A	53.63	74.00	20.37	
		11 569.77	H	X	AV	33.99	8.60	0.83	N/A	43.42	54.00	10.58	
	5 825	5 896.75	H	X	PK	48.27	3.50	N/A	N/A	51.77	89.10	37.33	
		5 973.07	H	X	PK	48.92	4.14	N/A	N/A	53.06	68.20	15.14	
		11 648.83	H	X	PK	45.43	8.84	N/A	N/A	54.27	74.00	19.73	
		11 648.81	H	X	AV	34.84	8.84	0.83	N/A	44.51	54.00	9.49	

Unwanted Emissions data(1 GHz ~ 40 GHz) : TM2

Band	Tested Frequency (MHz)	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	5 180	5 147.91	H	X	PK	49.59	2.67	N/A	N/A	52.26	74.00	21.74
		5 146.93	H	X	AV	39.39	2.66	0.88	N/A	42.93	54.00	11.07
		10 358.17	H	X	PK	42.21	8.48	N/A	N/A	50.69	68.20	17.51
	5 200	10 399.14	H	X	PK	43.74	8.44	N/A	N/A	52.18	68.20	16.02
	5 240	10 480.71	H	X	PK	44.88	8.57	N/A	N/A	53.45	68.20	14.75
U-NII 2A	5 260	10 520.74	H	X	PK	42.56	8.62	N/A	N/A	51.18	68.20	17.02
	5 300	10 598.32	H	X	PK	44.14	8.54	N/A	N/A	52.68	68.20	15.52
		10 601.24	H	X	AV	34.19	8.53	0.88	N/A	43.60	54.00	10.40
	5 320	5 351.33	H	X	PK	48.95	2.81	N/A	N/A	51.76	74.00	22.24
		5 351.78	H	X	AV	39.23	2.82	0.88	N/A	42.93	54.00	11.07
		10 641.62	H	X	PK	43.82	8.45	N/A	N/A	52.27	74.00	21.73
		10 641.63	H	X	AV	33.44	8.45	0.88	N/A	42.77	54.00	11.23
U-NII 2C	5 500	5 459.50	H	X	PK	48.92	3.03	N/A	N/A	51.95	74.00	22.05
		5 459.96	H	X	AV	39.10	3.03	0.88	N/A	43.01	54.00	10.99
		5 462.73	H	X	PK	49.46	3.04	N/A	N/A	52.50	68.20	15.70
		10 999.29	H	X	PK	44.56	8.08	N/A	N/A	52.64	74.00	21.36
		10 999.78	H	X	AV	34.63	8.08	0.88	N/A	43.59	54.00	10.41
	5 600	11 198.63	H	X	PK	45.57	8.26	N/A	N/A	53.83	74.00	20.17
		11 198.74	H	X	AV	34.38	8.26	0.88	N/A	43.52	54.00	10.48
	5 720	11 439.75	H	X	PK	46.71	8.46	N/A	N/A	55.17	74.00	18.83
		11 439.33	H	X	AV	34.66	8.46	0.88	N/A	44.00	54.00	10.00
		5 640.10	H	X	PK	49.61	3.23	N/A	N/A	52.84	68.20	15.36
U-NII 3	5 745	5 657.55	H	X	PK	49.75	3.24	N/A	N/A	52.99	73.79	20.80
		11 490.13	H	X	PK	45.16	8.56	N/A	N/A	53.72	74.00	20.28
		11 490.48	H	X	AV	34.71	8.56	0.88	N/A	44.15	54.00	9.85
		11 570.94	H	X	PK	44.34	8.60	N/A	N/A	52.94	74.00	21.06
	5 785	11 571.22	H	X	AV	33.86	8.61	0.88	N/A	43.35	54.00	10.65
		5 885.09	H	X	PK	48.70	3.40	N/A	N/A	52.10	97.73	45.63
	5 825	5 959.75	H	X	PK	49.35	4.02	N/A	N/A	53.37	68.20	14.83
		11 650.09	H	X	PK	45.37	8.84	N/A	N/A	54.21	74.00	19.79
		11 650.25	H	X	AV	34.76	8.84	0.88	N/A	44.48	54.00	9.52

Unwanted Emissions data(1 GHz ~ 40 GHz) : TM3

Band	Tested Frequency (MHz)	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	5 190	5 148.54	H	X	PK	49.23	2.67	N/A	N/A	51.90	74.00	22.10
		5 148.87	H	X	AV	39.45	2.67	1.62	N/A	43.74	54.00	10.26
		10 381.04	H	X	PK	42.81	8.46	N/A	N/A	51.27	68.20	16.93
	5 230	10 461.03	H	X	PK	44.96	8.51	N/A	N/A	53.47	68.20	14.73
U-NII 2A	5 270	10 538.65	H	X	PK	43.22	8.62	N/A	N/A	51.84	68.20	16.36
		5 351.57	H	X	PK	50.40	2.81	N/A	N/A	53.21	74.00	20.79
	5 310	5 350.94	H	X	AV	39.07	2.81	1.62	N/A	43.50	54.00	10.50
		10 619.49	H	X	PK	43.90	8.50	N/A	N/A	52.40	74.00	21.60
		10 618.97	H	X	AV	33.72	8.50	1.62	N/A	43.84	54.00	10.16
U-NII 2C	5 510	5 458.17	H	X	PK	49.26	3.03	N/A	N/A	52.29	74.00	21.71
		5 458.28	H	X	AV	38.90	3.03	1.62	N/A	43.55	54.00	10.45
		5 467.62	H	X	PK	49.07	3.05	N/A	N/A	52.12	68.20	16.08
		11 019.13	H	X	PK	44.92	8.09	N/A	N/A	53.01	74.00	20.99
		11 018.88	H	X	AV	34.72	8.09	1.62	N/A	44.43	54.00	9.57
	5 590	11 179.21	H	X	PK	45.45	8.25	N/A	N/A	53.70	74.00	20.30
		11 178.92	H	X	AV	34.75	8.25	1.62	N/A	44.62	54.00	9.38
	5 710	11 419.48	H	X	PK	44.82	8.45	N/A	N/A	53.27	74.00	20.73
		11 419.62	H	X	AV	34.81	8.45	1.62	N/A	44.88	54.00	9.12
U-NII 3	5 755	5 649.00	H	X	PK	48.36	3.23	N/A	N/A	51.59	68.20	16.61
		5 670.43	H	X	PK	50.69	3.24	N/A	N/A	53.93	83.31	29.38
		11 510.38	H	X	PK	45.99	8.58	N/A	N/A	54.57	74.00	19.43
		11 510.87	H	X	AV	35.00	8.58	1.62	N/A	45.20	54.00	8.80
	5 795	5 900.28	H	X	PK	49.00	3.53	N/A	N/A	52.53	86.49	33.96
		5 942.04	H	X	PK	48.85	3.88	N/A	N/A	52.73	68.20	15.47
		11 591.71	H	X	PK	44.11	8.64	N/A	N/A	52.75	74.00	21.25
		11 591.52	H	X	AV	34.16	8.64	1.62	N/A	44.42	54.00	9.58

Unwanted Emissions data(1 GHz ~ 40 GHz) : TM4

Band	Tested Frequency (MHz)	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	5 210	5 147.52	H	X	PK	50.83	2.67	N/A	N/A	53.50	74.00	20.50
		5 147.05	H	X	AV	39.73	2.66	2.80	N/A	45.19	54.00	8.81
		10 419.56	H	X	PK	44.39	8.45	N/A	N/A	52.84	68.20	15.36
U-NII 2A	5 290	5 352.97	H	X	PK	49.44	2.82	N/A	N/A	52.26	74.00	21.74
		5 352.84	H	X	AV	39.03	2.82	2.80	N/A	44.65	54.00	9.35
		10 579.31	H	X	PK	44.96	8.57	N/A	N/A	53.53	68.20	14.67
U-NII 2C	5 530	5 459.54	H	X	PK	50.62	3.03	N/A	N/A	53.65	74.00	20.35
		5 459.05	H	X	AV	39.08	3.03	2.80	N/A	44.91	54.00	9.09
		5 469.10	H	X	PK	49.36	3.06	N/A	N/A	52.42	68.20	15.78
		11 060.24	H	X	PK	44.68	8.10	N/A	N/A	52.78	74.00	21.22
		11 060.97	H	X	AV	34.38	8.10	2.80	N/A	45.28	54.00	8.72
	5 610	11 219.00	H	X	PK	45.32	8.31	N/A	N/A	53.63	74.00	20.37
		11 218.86	H	X	AV	34.35	8.31	2.80	N/A	45.46	54.00	8.54
	5 690	11 378.49	H	X	PK	44.84	8.43	N/A	N/A	53.27	74.00	20.73
		11 378.49	H	X	AV	34.48	8.43	2.80	N/A	45.71	54.00	8.29
U-NII 3	5 775	5 649.23	H	X	PK	49.49	3.23	N/A	N/A	52.72	68.20	15.48
		5 685.68	H	X	PK	52.54	3.24	N/A	N/A	55.78	94.60	38.82
		5 889.60	H	X	PK	49.43	3.44	N/A	N/A	52.87	94.40	41.53
		5 966.48	H	X	PK	48.80	4.08	N/A	N/A	52.88	68.20	15.32
		11 550.67	H	X	PK	44.90	8.57	N/A	N/A	53.47	74.00	20.53
		11 550.08	H	X	AV	34.37	8.57	2.80	N/A	45.74	54.00	8.26

5.6. AC Power-Line Conducted Emissions

■ Test Requirements, §15.207

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5.0	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ Test Configuration

See test photographs for the actual connections between EUT and support equipment.

■ Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m x 3.5 m x 3.5 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) x 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

■ Test Results: Comply

See next pages for actual measured spectrum plots and data for worst case result.



AC Power-Line Conducted Emissions (Graph)

Test Mode: U-NII 1 & TM 1 & 5 180 MHz

Results of Conducted Emission

Date 2023-10-06

Order No.		Reference No.
Model No.	NFD-100	Power Supply
Serial No.		Temp/Humi.
Test Condition	WLAN 5.1G	Operator
Memo	802.11a_5180	S.M.GIL

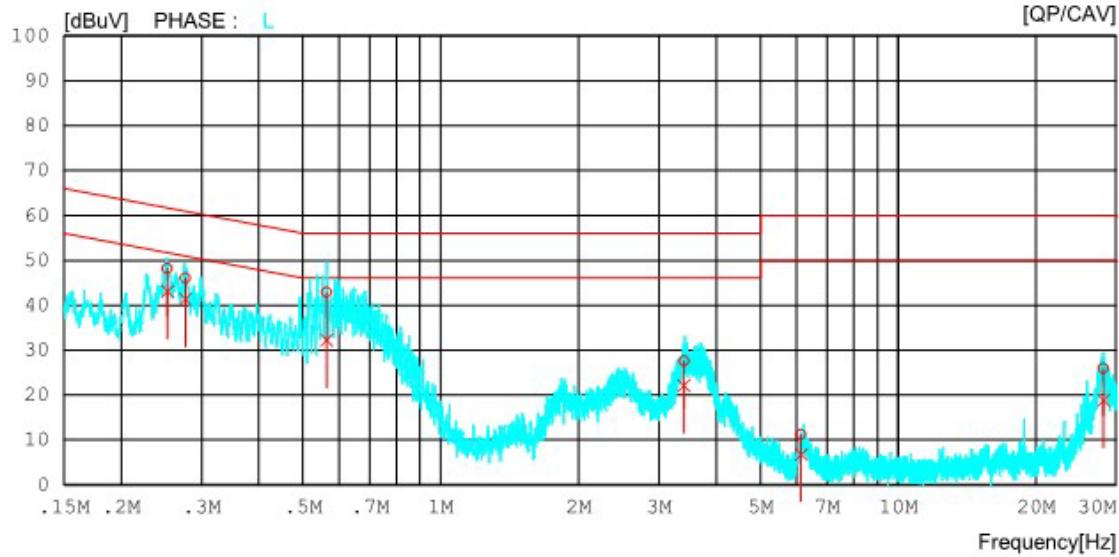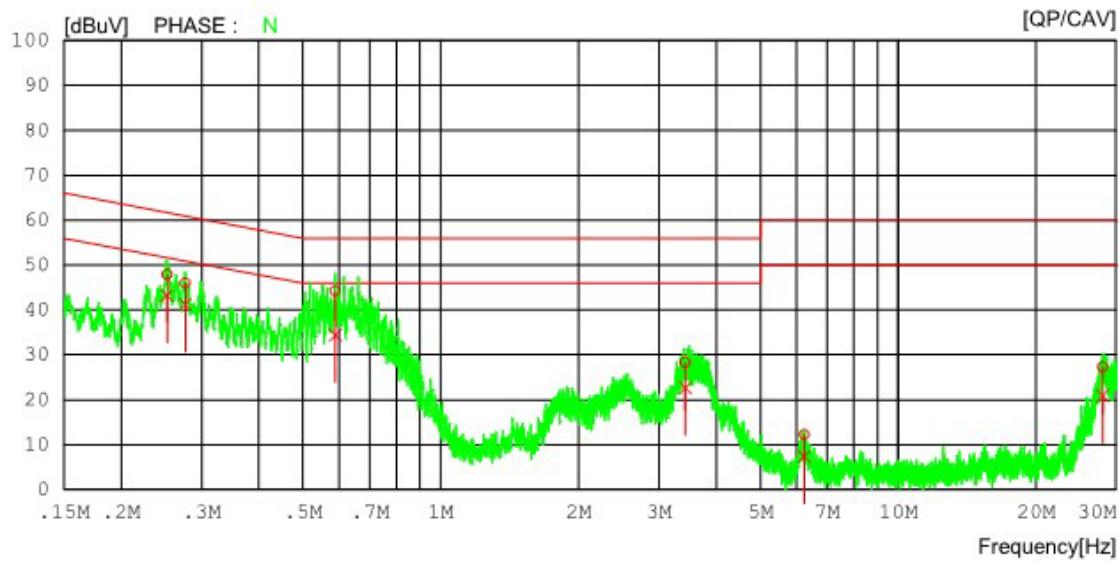LIMIT : FCC P15.207 AV
FCC P15.207 QP

AC Power-Line Conducted Emissions (Data List)

Test Mode: U-NII 1 & TM 1 & 5 180 MHz

Results of Conducted Emission

Date 2023-10-06

Order No.		Reference No.
Model No.	NFD-100	Power Supply
Serial No.		Temp/Humi.
Test Condition	WLAN 5.1G	Operator
Memo	802.11a_5180	S.M.GIL

LIMIT : FCC P15.207 AV
FCC P15.207 QP

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT [dBuV]		LIMIT [dBuV]		MARGIN [dBuV]	PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]		
1	0.25199	38.03	33.31	9.88	47.91	43.19	61.69	51.69	13.78	8.50
2	0.27598	36.07	31.35	9.89	45.96	41.24	60.94	50.94	14.98	9.70
3	0.58788	34.30	24.50	9.90	44.20	34.40	56.00	46.00	11.80	11.60
4	3.42400	18.27	12.71	9.96	28.23	22.67	56.00	46.00	27.77	23.33
5	6.22800	2.23	-2.64	10.03	12.26	7.39	60.00	50.00	47.74	42.61
6	27.99480	16.93	10.58	10.35	27.28	20.93	60.00	50.00	32.72	29.07
7	0.25251	38.26	33.21	9.88	48.14	43.09	61.67	51.67	13.53	8.58
8	0.27644	36.22	31.41	9.89	46.11	41.30	60.92	50.92	14.81	9.62
9	0.56277	32.95	22.30	9.90	42.85	32.20	56.00	46.00	13.15	13.80
10	3.39960	17.60	12.15	9.96	27.56	22.11	56.00	46.00	28.45	23.89
11	6.13740	1.21	-3.28	10.03	11.24	6.75	60.00	50.00	48.76	43.25
12	28.11260	15.64	8.46	10.35	25.99	18.81	60.00	50.00	34.01	31.19

AC Power-Line Conducted Emissions (Graph)

Test Mode: U-NII 2A & TM 1 & 5 260 MHz

Results of Conducted Emission



DTNC

Date 2023-10-06

Order No. NFD-100
Model No. NFD-100
Serial No.
Test Condition WLAN 5.3G

Reference No.
Power Supply
Temp/Humi.
Operator S.M.GIL

Memo 802.11a_5260

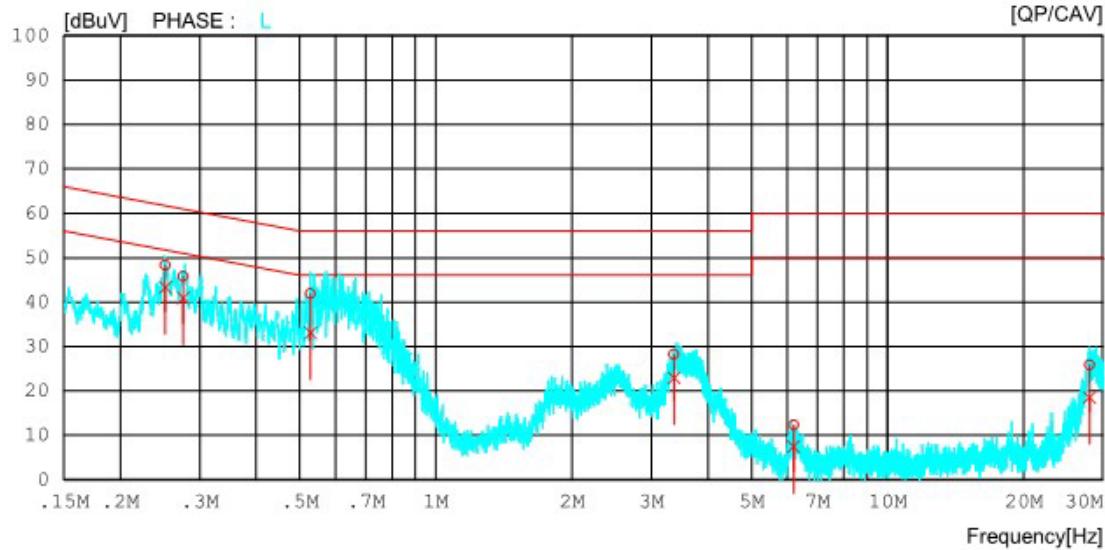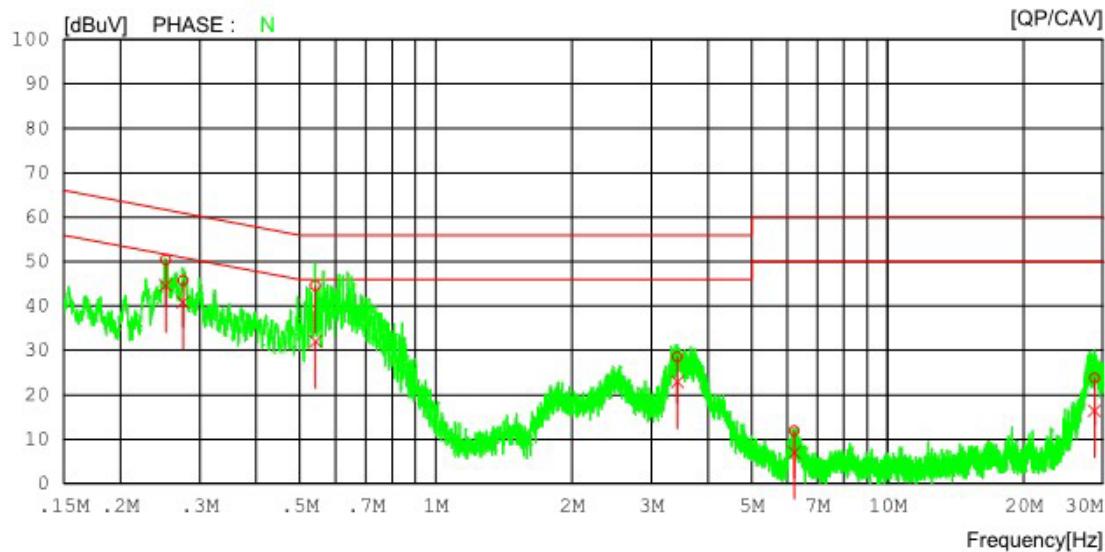LIMIT : FCC P15.207 AV
FCC P15.207 QP

AC Power-Line Conducted Emissions (Data List)

Test Mode: U-NII 2A & TM 1 & 5 260 MHz

Results of Conducted Emission

DTNC

Date 2023-10-06

Order No.		Reference No.
Model No.	NFD-100	Power Supply
Serial No.		Temp/Humi.
Test Condition	WLAN 5.3G	Operator
Memo	802.11a_5260	S.M.GIL

LIMIT : FCC P15.207 AV
FCC P15.207 QP

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN [dBuV]	PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]		
1	0.25205	40.45	34.78	9.88	50.33	44.66	61.69	51.69	11.36	7.03
2	0.27535	35.86	30.93	9.89	45.75	40.82	60.95	50.95	15.20	10.13
3	0.54099	34.65	22.13	9.90	44.55	32.03	56.00	46.00	11.45	13.97
4	3.42520	18.60	12.96	9.96	28.56	22.92	56.00	46.00	27.44	23.08
5	6.21760	1.82	-2.99	10.03	11.85	7.04	60.00	50.00	48.15	42.96
6	28.70340	13.41	6.08	10.35	23.76	16.43	60.00	50.00	36.24	33.57
7	0.25186	38.42	33.49	9.88	48.30	43.37	61.70	51.70	13.40	8.33
8	0.27573	35.85	31.01	9.89	45.74	40.90	60.94	50.94	15.20	10.04
9	0.52745	32.03	23.18	9.90	41.93	33.08	56.00	46.00	14.07	12.92
10	3.36600	18.29	12.97	9.96	28.25	22.93	56.00	46.00	27.75	23.07
11	6.19140	2.28	-2.58	10.03	12.31	7.45	60.00	50.00	47.69	42.55
12	28.00340	15.44	8.15	10.35	25.79	18.50	60.00	50.00	34.21	31.50

AC Power-Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & TM 1 & 5 500 MHz

Results of Conducted Emission



DTNC

Date 2023-10-06

Order No. **NFD-100**
Model No. **NFD-100**
Serial No.
Test Condition **WLAN 5.5G**
Memo **802.11a_5500**

Reference No.
Power Supply
Temp/Humi.
Operator **S.M.GIL**

LIMIT : FCC P15.207 AV
FCC P15.207 QP

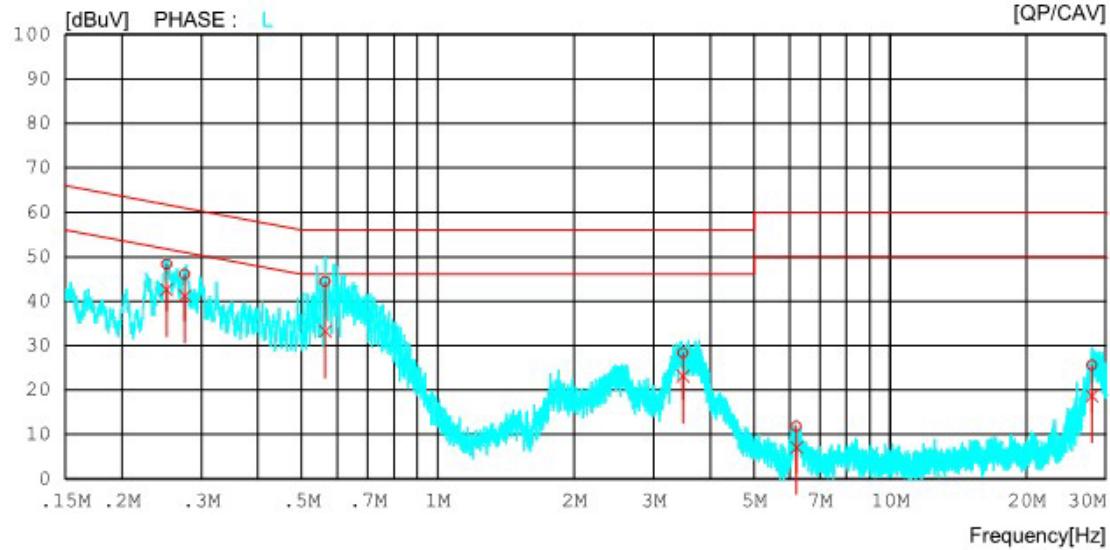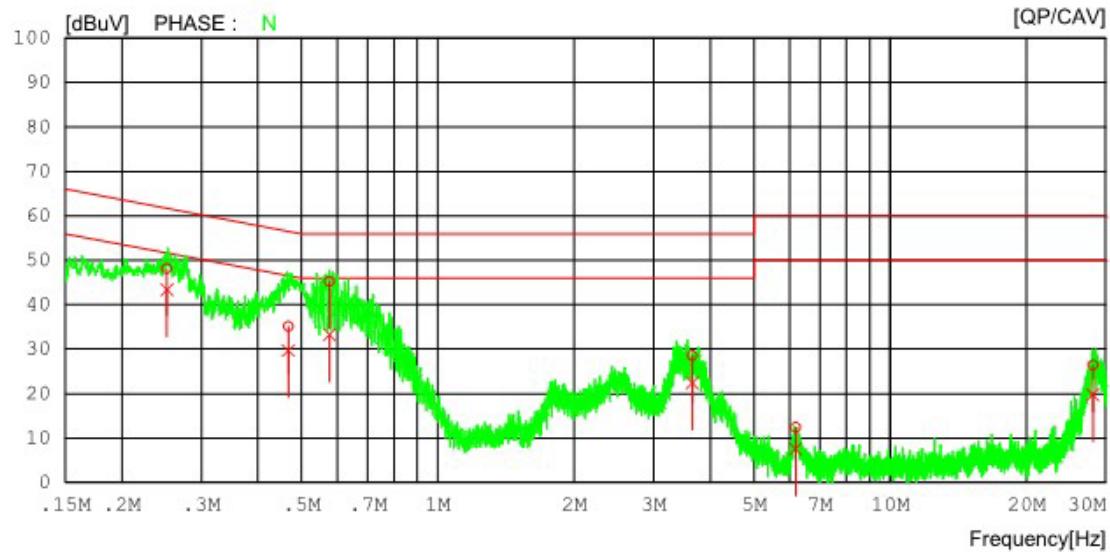

AC Power-Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & TM 1 & 5 500 MHz

Results of Conducted Emission

DTNC

Date 2023-10-06

Order No.		Reference No.
Model No.	NFD-100	Power Supply
Serial No.		Temp/Humi.
Test Condition	WLAN 5.5G	Operator
Memo	802.11a_5500	S.M.GIL

LIMIT : FCC P15.207 AV
FCC P15.207 QP

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT [dBuV] [dBuV]		LIMIT [dBuV] [dBuV]		MARGIN [dBuV] [dBuV]	PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]		
1	0.25189	38.25	33.54	9.88	48.13	43.42	61.69	51.69	13.56	8.27
2	0.46704	25.18	19.80	9.90	35.08	29.70	56.57	46.57	21.49	16.87
3	0.57607	35.34	23.33	9.90	45.24	33.23	56.00	46.00	10.76	12.77
4	3.65320	18.52	12.47	9.97	28.49	22.44	56.00	46.00	27.51	23.56
5	6.17820	2.33	-2.56	10.03	12.36	7.47	60.00	50.00	47.64	42.53
6	28.08700	16.10	9.38	10.35	26.45	19.73	60.00	50.00	33.55	30.27
7	0.25139	38.45	32.71	9.88	48.33	42.59	61.71	51.71	13.38	9.12
8	0.27591	36.23	31.24	9.89	46.12	41.13	60.94	50.94	14.82	9.81
9	0.56324	34.49	23.35	9.90	44.39	33.25	56.00	46.00	11.61	12.75
10	3.48640	18.44	13.12	9.96	28.40	23.08	56.00	46.00	27.60	22.92
11	6.20640	1.84	-2.93	10.03	11.87	7.10	60.00	50.00	48.13	42.90
12	27.92640	15.20	8.30	10.35	25.55	18.65	60.00	50.00	34.45	31.35

AC Power-Line Conducted Emissions (Graph)

Test Mode: U-NII 3 & TM 1 & 5 745 MHz

Results of Conducted Emission

DTNC

Date 2023-10-06

Order No.

Reference No.

Model No.

NFD-100

Power Supply

Serial No.

Temp/Humi.

Test Condition

Operator

WLAN 5.7G

21 °C / 41 %

Memo

802.11a_5745

S.M.GIL

LIMIT : FCC P15.207 AV
FCC P15.207 QP