

FCC Radio Test Report

FCC ID: 2AZ92-P1P2

The report concerns: Original Grant

Report Reference No.....: 22EFSS08012 07531

Date Sample(s) Received.....: 2022-08-15

Date of Tested.....: From 2022-08-15 to 2022-08-29

Date of issue.....: 2022-08-29

Testing Laboratory: DongGuanShuoXin Electronic Technology Co., Ltd.
 Zone A, 1F, No. 6, XinGang Road YuanGang Street,
 Address.....: XinAn District, ChangAn Town, DongGuan City,
 GuangDong, China

Applicant's name: ShenZhen MaiZhan Technology Co.,Ltd
 Room801, Building H, Chuangxin Yungu, No. 48, PaoTai
 Address.....: Road, LiSongLang No.1 Industrial Zone, GongMing Street,
 GuangMing District, ShenZhen

Manufacturer.....: ShenZhen MaiZhan Technology Co.,Ltd

Equipment.....: WIRELESS CHARGING PENCIL-BOX

Trade Mark: N/A

Model: P1,P2,P3,P5,P6,P7,P8,P9

Ratings.....: I/P: DC 5V/1A
 O/P: 5V/0.2A+1.5W

Test Engineer:

Blue Qiu

Responsible Engineer :

Smile Wang

Authorized Signatory:

King Wang

Table of Contents	Page
1 . TEST REPORT DECLARE	3
2 . SUMMARY OF TEST RESULTS	4
2.1 MEASUREMENT UNCERTAINTY	5
3 . GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	8
3.4 SUPPORT UNITS	8
3.5 TEST ENVIRONMENT CONDITIONS	8
4 .AC POWER LINE CONDUCTED EMISSIONS TEST	9
4.1 LIMIT	9
4.2 TEST PROCEDURE	9
4.3 MEASUREMENT INSTRUMENTS LIST	9
4.4 TESTSETUP	10
4.5 EUT OPERATING CONDITIONS	10
4.6 TEST RESULTS	11
5 . RADIATED EMISSION TEST	15
5.1 LIMIT	15
5.2 TEST PROCEDURE	16
5.3 MEASUREMENT INSTRUMENTS LIST	17
5.4 TESTSETUP	17
5.5 EUT OPERATING CONDITIONS	18
5.6 TEST RESULT- 9KHZ TO 30MHZ	19
5.7 TEST RESULT- 30MHZ TO 1000MHZ	23

1. TEST REPORT DECLARE

Applicant	ShenZhen MaiZhan Technology Co.,Ltd
Address	Room801, Building H, Chuangxin Yungu, No. 48, PaoTai Road, LiSongLang No.1 Industrial Zone, GongMing Street, GuangMing District, ShenZhen
Manufacturer	ShenZhen MaiZhan Technology Co.,Ltd
Address	Room801, Building H, Chuangxin Yungu, No. 48, PaoTai Road, LiSongLang No.1 Industrial Zone, GongMing Street, GuangMing District, ShenZhen
Factory	ShenZhen MaiZhan Technology Co.,Ltd
Address	Room801, Building H, Chuangxin Yungu, No. 48, PaoTai Road, LiSongLang No.1 Industrial Zone, GongMing Street, GuangMing District, ShenZhen
Equipment Name	WIRELESS CHARGING PENCIL-BOX
Model No.	P1,P2,P3,P5,P6,P7,P8,P9
Trade Mark	N/A
Standard	FCC Part15, Subpart C

We Declare:

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

2. SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section		Test Item	Judgment	Remark
FCC	ISED			
15.207	-	AC Power Line Conducted Emissions	PASS	-----
15.209(a)	-	Radiated Emissions	PASS	-----
15.203	-	Antenna Requirement	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	± 0.048 kHz
Uncertainty for conducted RF Power	± 0.32 dB

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIRELESS CHARGING PENCIL-BOX	
Brand Name	N/A	
Test Model	P1/P2	
Series Model	P1,P2,P3,P5,P6,P7,P8,P9	
Model Difference(s)	The P1、P3、P5、P7 is without battery, The P2、P6、P8、P9 is with battery.	
Hardware Version	V1.0	
Software Version	V1.0	
PowerSource	5V/1A	
Operation Frequency	110.5kHz-205kHz	
Modulation Technology	FSK	
Antenna Information	Antenna Type:Coil	Maximum Peak Gain: 0dBi

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	Charging


Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	Charging(AC 120V/60Hz)

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 1	Charging

Conducted test	
Final Test Mode	Description
Mode 1	Charging

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

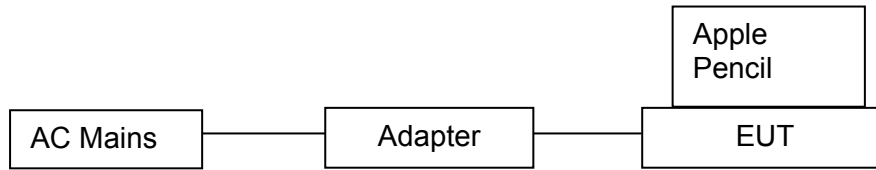

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Apple Pencil	Apple	/	/

Item	Cable Type	Shielded Type	Ferrite Core	Length
/	/	/	/	/

3.5 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	DC 5V
Radiated Emissions-9K-30MHz	25°C	60%	DC 5V
Radiated Emissions-30 MHz to 1GHz	24°C	68%	DC 5V

4.AC POWER LINE CONDUCTED EMISSIONS TEST

4.1LIMIT

Frequency of Emission (MHz)	Limit (dBµV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.2TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

4.3MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/19/2022
2	EMI Test Receiver	R&S	ESCI	101308	12/17/2022
3	LISN	AFJ	LS16	16011103219	05/26/2023
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/17/2022
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

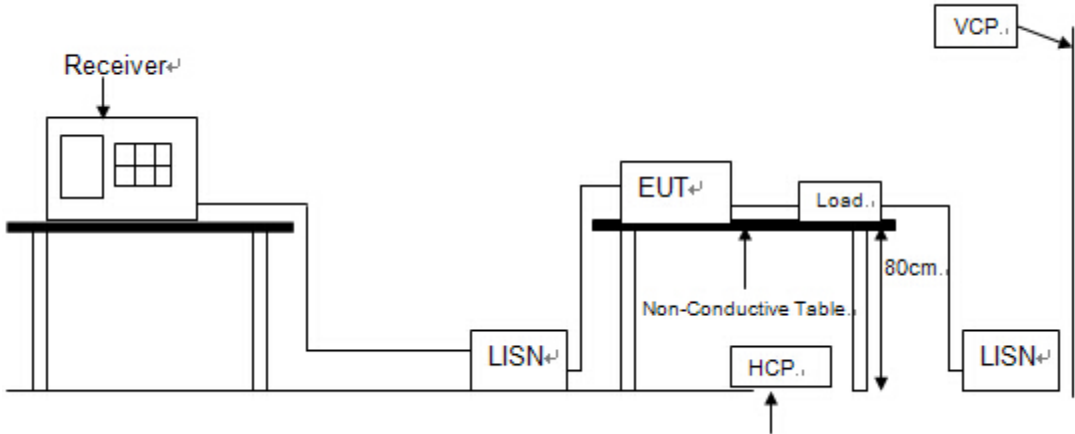4.4 TEST SETUP**4.5 EUT OPERATING CONDITIONS**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Test Mode: P2 Charging(AC 120V/60Hz)

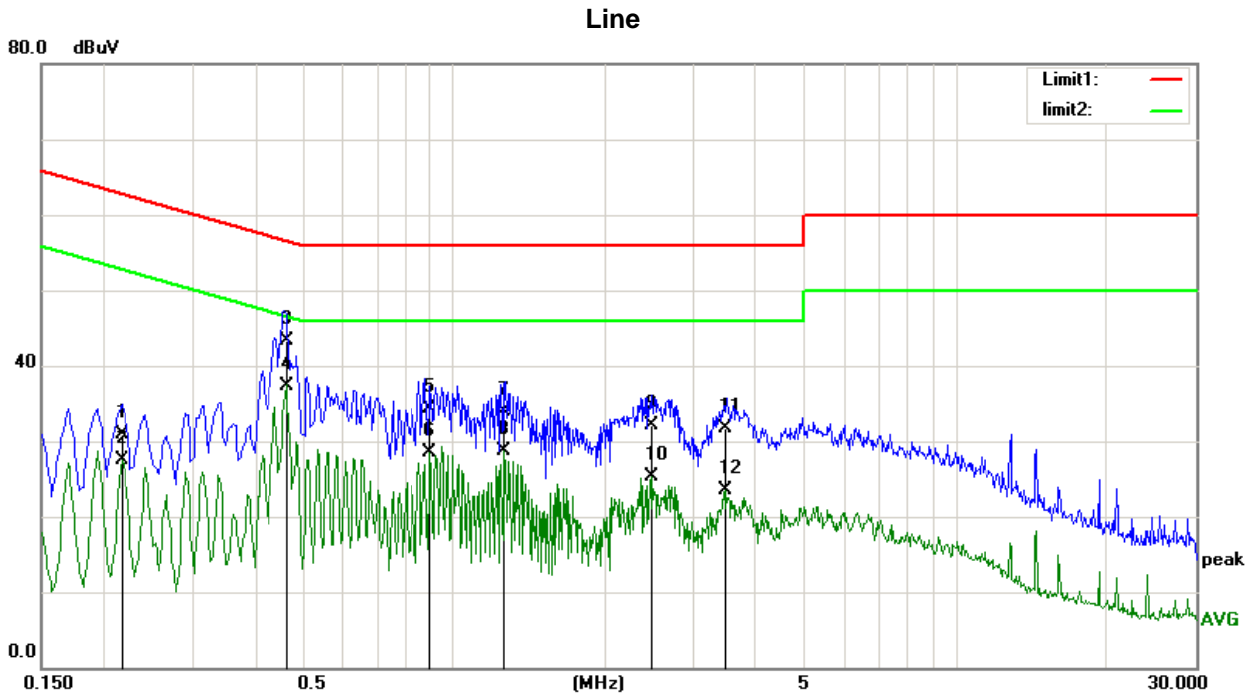


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2180	19.98	10.85	30.83	62.89	-32.06	QP
2	0.2180	16.72	10.85	27.57	52.89	-25.32	AVG
3	0.4620	32.46	10.84	43.30	56.66	-13.36	QP
4	0.4620	26.56	10.84	37.40	46.66	-9.26	AVG
5	0.8980	23.46	10.77	34.23	56.00	-21.77	QP
6	0.8980	17.77	10.77	28.54	46.00	-17.46	AVG
7	1.2620	23.21	10.66	33.87	56.00	-22.13	QP
8	1.2620	18.12	10.66	28.78	46.00	-17.22	AVG
9	2.4780	21.34	10.80	32.14	56.00	-23.86	QP
10	2.4780	14.47	10.80	25.27	46.00	-20.73	AVG
11	3.4740	21.00	10.70	31.70	56.00	-24.30	QP
12	3.4740	12.76	10.70	23.46	46.00	-22.54	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Power by AC 120V 60Hz.


Test Mode: P2 Charging(AC 120V/60Hz)

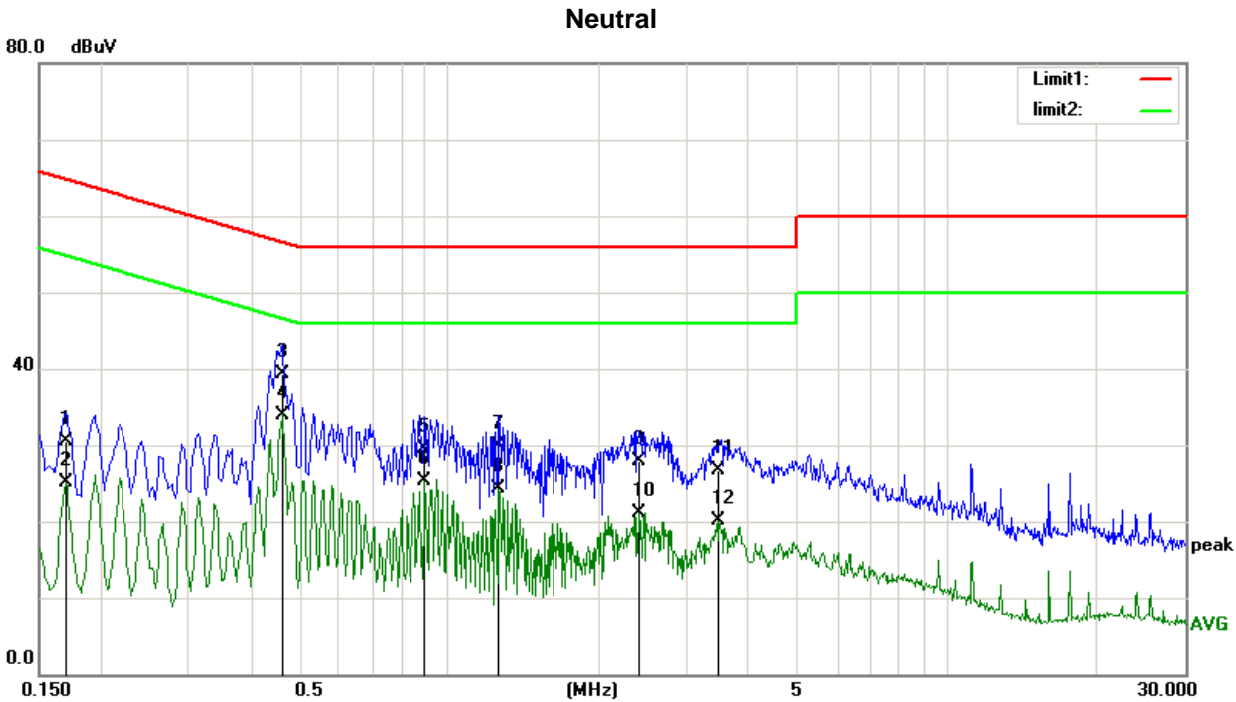

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1700	19.85	10.71	30.56	64.96	-34.40	QP
2	0.1700	14.40	10.71	25.11	54.96	-29.85	AVG
3	0.4620	28.48	10.84	39.32	56.66	-17.34	QP
4	0.4620	23.16	10.84	34.00	46.66	-12.66	AVG
5	0.8980	18.79	10.77	29.56	56.00	-26.44	QP
6	0.8980	14.60	10.77	25.37	46.00	-20.63	AVG
7	1.2620	19.18	10.66	29.84	56.00	-26.16	QP
8	1.2620	13.56	10.66	24.22	46.00	-21.78	AVG
9	2.4060	17.03	10.79	27.82	56.00	-28.18	QP
10	2.4060	10.34	10.79	21.13	46.00	-24.87	AVG
11	3.4740	16.08	10.70	26.78	56.00	-29.22	QP
12	3.4740	9.45	10.70	20.15	46.00	-25.85	AVG

Remarks:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.
 (3) Power by AC 120V 60Hz.

Test Mode: P1 Charging(AC 120V/60Hz)

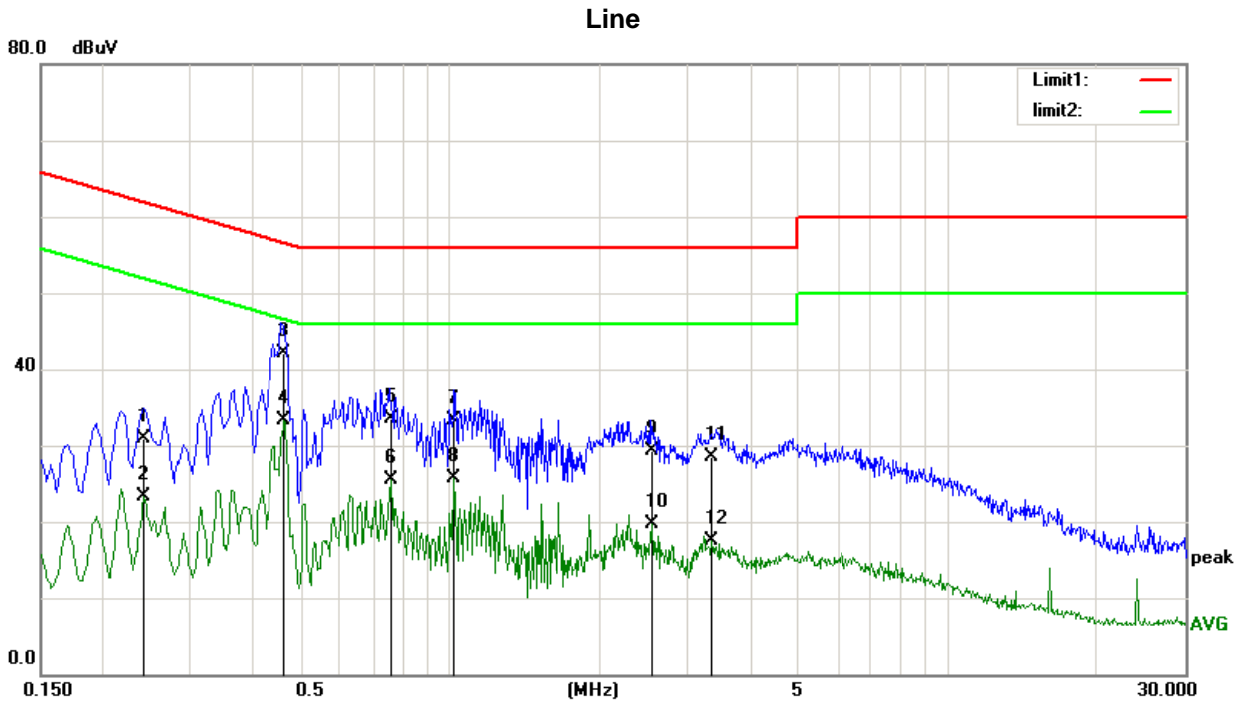


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2420	20.23	10.69	30.92	62.02	-31.10	QP
2	0.2420	12.70	10.69	23.39	52.02	-28.63	AVG
3	0.4660	31.20	10.83	42.03	56.58	-14.55	QP
4	0.4660	22.45	10.83	33.28	46.58	-13.30	AVG
5	0.7620	22.83	10.74	33.57	56.00	-22.43	QP
6	0.7620	14.85	10.74	25.59	46.00	-20.41	AVG
7	1.0180	22.80	10.53	33.33	56.00	-22.67	QP
8	1.0180	15.25	10.53	25.78	46.00	-20.22	AVG
9	2.5420	18.45	10.80	29.25	56.00	-26.75	QP
10	2.5420	8.83	10.80	19.63	46.00	-26.37	AVG
11	3.3500	17.86	10.70	28.56	56.00	-27.44	QP
12	3.3500	6.75	10.70	17.45	46.00	-28.55	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Power by AC 120V 60Hz.

Test Mode: P1 Charging(AC 120V/60Hz)

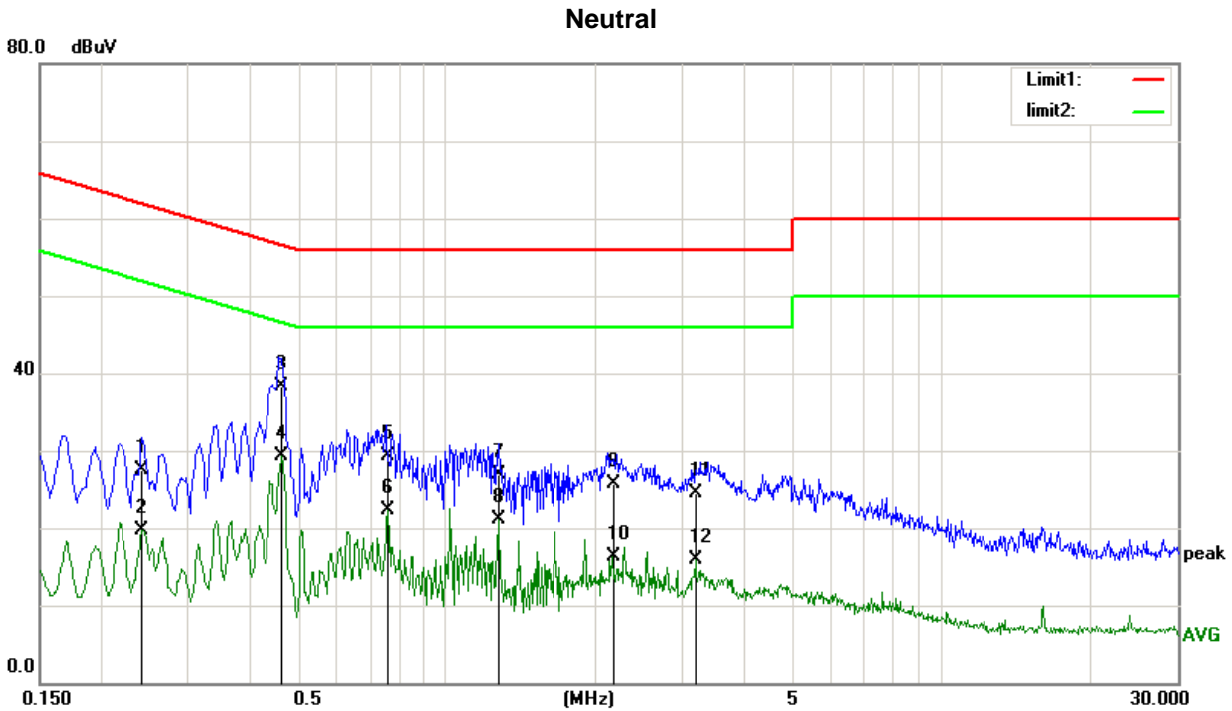

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2420	16.91	10.69	27.60	62.02	-34.42	QP
2	0.2420	9.08	10.69	19.77	52.02	-32.25	AVG
3	0.4620	27.42	10.84	38.26	56.66	-18.40	QP
4	0.4620	18.50	10.84	29.34	46.66	-17.32	AVG
5	0.7620	18.60	10.74	29.34	56.00	-26.66	QP
6	0.7620	11.50	10.74	22.24	46.00	-23.76	AVG
7	1.2700	16.17	10.66	26.83	56.00	-29.17	QP
8	1.2700	10.42	10.66	21.08	46.00	-24.92	AVG
9	2.1580	14.89	10.78	25.67	56.00	-30.33	QP
10	2.1580	5.61	10.78	16.39	46.00	-29.61	AVG
11	3.1740	13.87	10.70	24.57	56.00	-31.43	QP
12	3.1740	5.18	10.70	15.88	46.00	-30.12	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Power by AC 120V 60Hz.

5. RADIATED EMISSION TEST

5.1 LIMIT

In case the emission fall within the restricted band specified onn the 15.209(a) in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-30 MHz)

Frequency (MHz)	Magnetic field strength (H-Field) (μA/m)	Measurement Distance (meters)
0.009-0.490	6.37/F(kHz)	300
0.490-1.705	6.37/F(kHz)	30
1.705-30.0	0.08	30

LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000MHz)

Frequency (MHz)	Field Strength (μV/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. Measurement Value = Reading Level + Correct Factor.
Margin Level = Measurement Value - Limit Value.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	12/19/2022
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/16/2022
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	12/14/2022
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	08/05/2022
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/18/2023
6	Preamplifier Amplifier	HP	8447F	3113A05680	12/19/2022
7	PRE-AMPLIFIER	EMEC	EM01G26G	60679	04/18/2023
8	RF Cable	R&S	Test Cable 4	4	12/19/2022
9	RF Cable	R&S	Test Cable 5	5	12/19/2022
10	RF Cable	R&S	Test Cable 9	9	04/18/2023
11	RF Cable	R&S	Test Cable 10	10	12/19/2022
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A


5.4 TEST SETUP

9 kHz-30 MHz

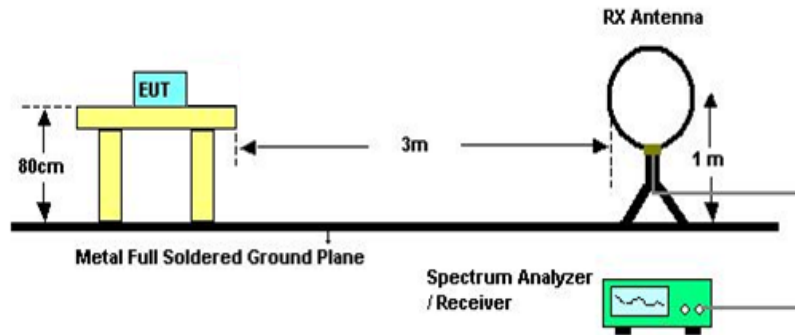

30 MHz to 1 GHz

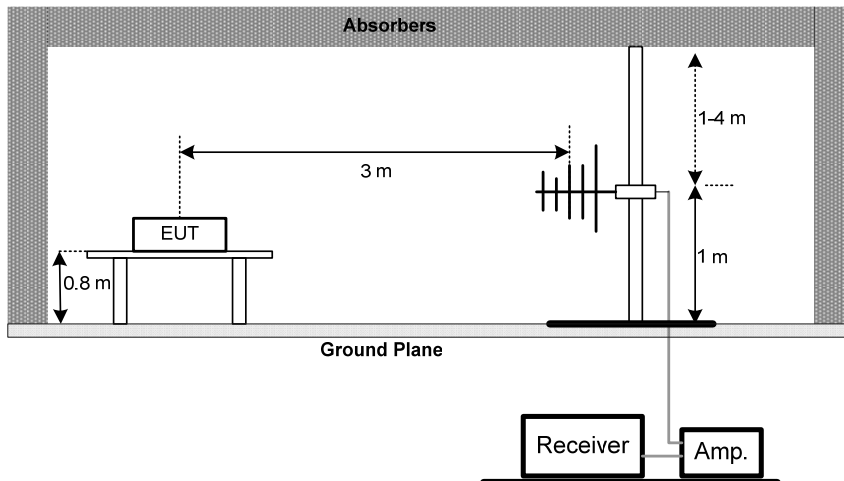

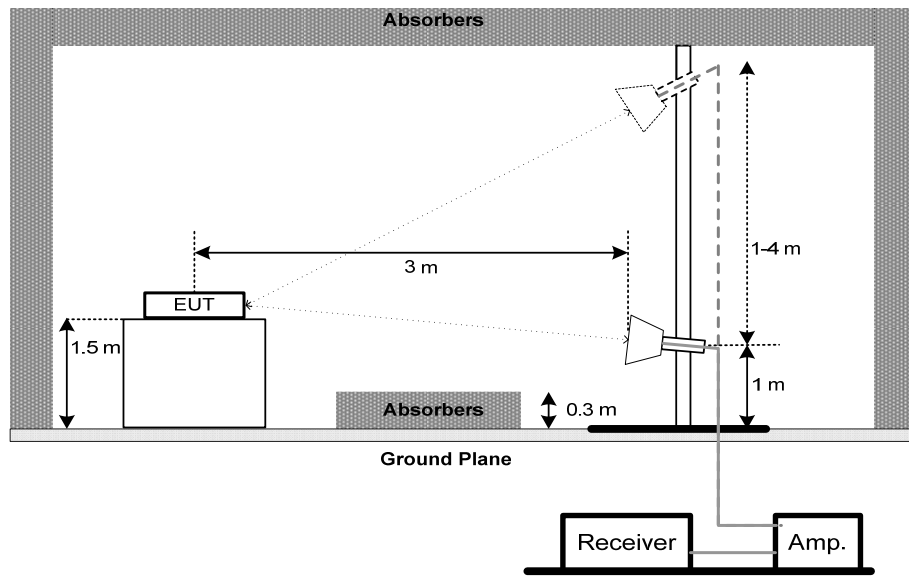Above 1 GHz**5.5 EUT OPERATING CONDITIONS**


The EUT was programmed to be in continuously transmitting mode.

Remark: The test result is calculated as the following:

- (1) Result = Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
- (3) Margin = Result - Limit

5.6 TEST RESULT- 9kHz TO 30MHz

Test Mode : P2 TX Mode Ant 0°

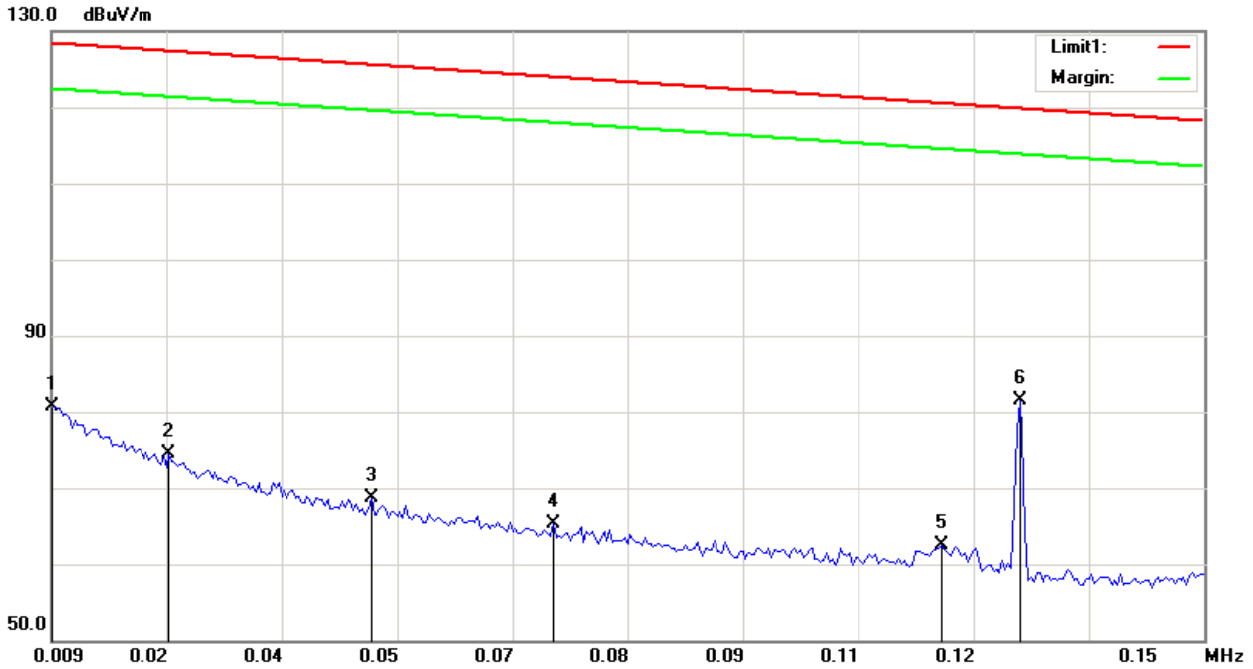


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0090	60.00	20.80	80.80	128.48	-47.68	peak
2	0.0235	53.96	20.45	74.41	127.43	-53.02	peak
3	0.0480	48.25	20.39	68.64	125.66	-57.02	peak
4	0.0703	44.51	20.80	65.31	124.06	-58.75	peak
5	0.1179	41.78	20.65	62.43	120.63	-58.20	peak
6	0.1274	61.50	20.08	81.58	119.94	-38.36	peak

Note:

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor

Test Mode : P2 TX Mode Ant 0°

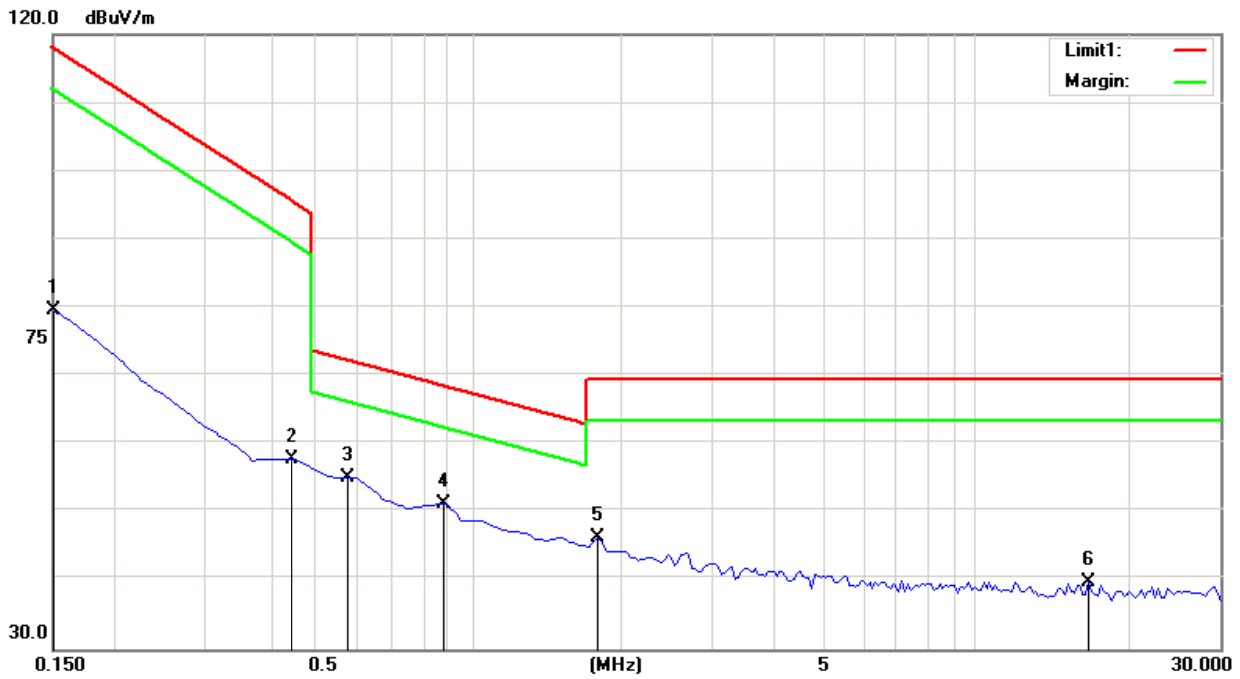


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1500	58.99	20.72	79.71	118.31	-38.60	peak
2	0.4485	37.13	20.72	57.85	96.79	-38.94	peak
3	0.5715	34.32	20.75	55.07	73.07	-18.00	peak
4	0.8961	30.41	20.84	51.25	70.16	-18.91	peak
5	1.7917	25.32	20.97	46.29	69.50	-23.21	peak
6	16.6420	19.67	20.05	39.72	69.50	-29.78	peak

Note:

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

Test Mode : P1 TX Mode Ant 0°

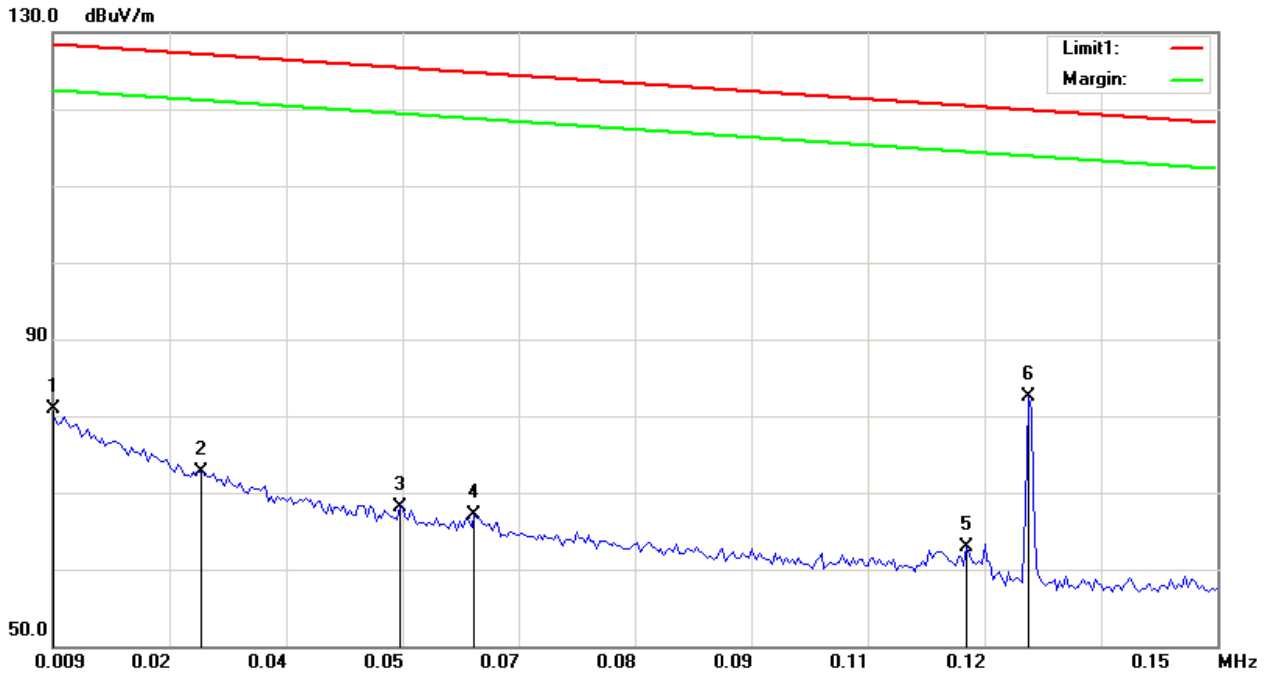


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0090	60.04	20.80	80.84	128.48	-47.64	peak
2	0.0269	52.40	20.37	72.77	127.19	-54.42	peak
3	0.0509	47.71	20.42	68.13	125.46	-57.33	peak
4	0.0601	46.52	20.60	67.12	124.79	-57.67	peak
5	0.1197	42.28	20.54	62.82	120.50	-57.68	peak
6	0.1270	62.39	20.10	82.49	119.97	-37.48	peak

Note:

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

Test Mode : P1 TX Mode Ant 0°

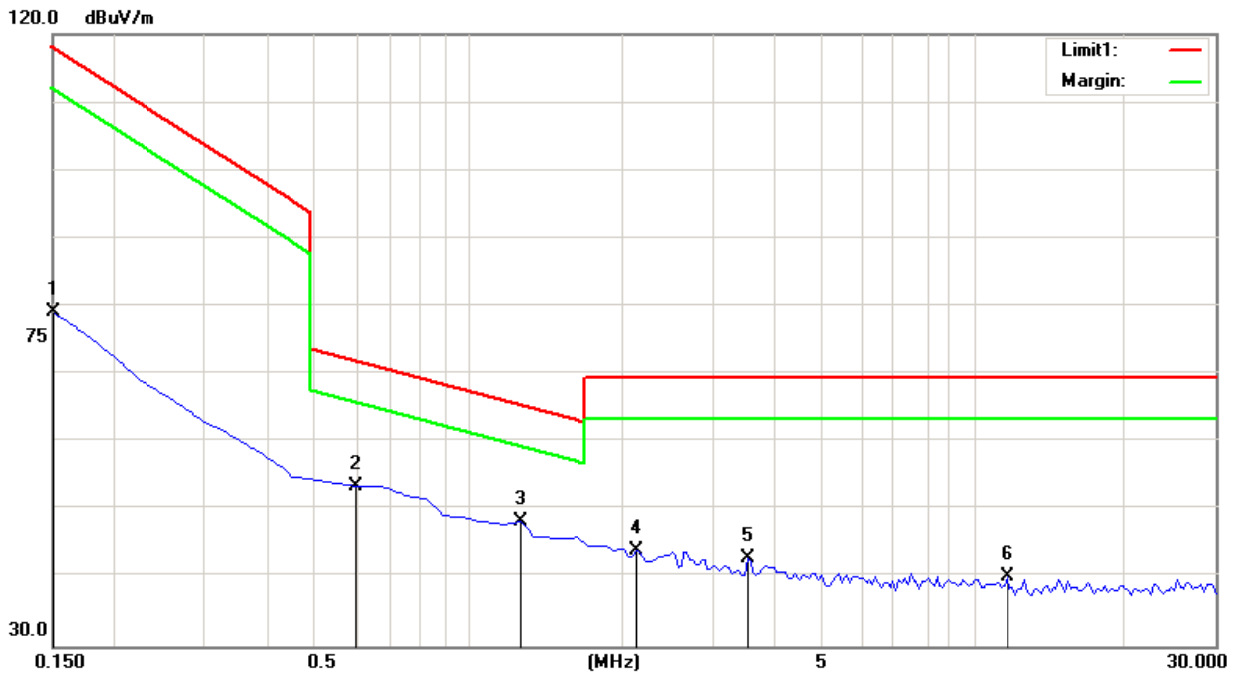

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1500	58.41	20.72	79.13	118.31	-39.18	peak
2	0.5977	32.77	20.76	53.53	72.83	-19.30	peak
3	1.2694	27.43	20.91	48.34	66.81	-18.47	peak
4	2.1648	22.99	21.02	44.01	69.50	-25.49	peak
5	3.5826	21.94	21.11	43.05	69.50	-26.45	peak
6	11.5676	19.65	20.63	40.28	69.50	-29.22	peak


Note:

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

5.7 TEST RESULT- 30MHz TO 1000MHz


Test Mode : P2 TX Mode

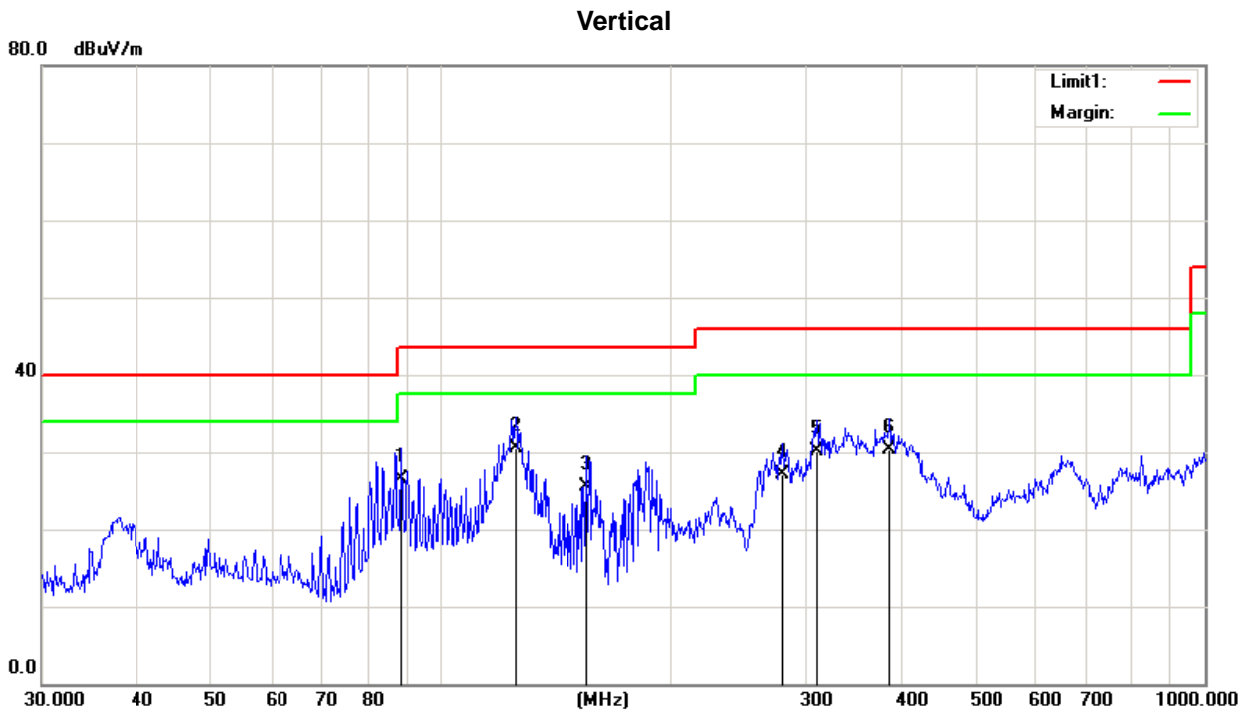

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	88.3421	42.63	-16.15	26.48	43.50	-17.02	QP
2	125.0066	43.86	-13.37	30.49	43.50	-13.01	QP
3	155.3642	39.68	-14.12	25.56	43.50	-17.94	QP
4	279.0436	35.09	-7.96	27.13	46.00	-18.87	QP
5	309.9977	38.92	-8.73	30.19	46.00	-15.81	QP
6	386.6338	37.56	-7.21	30.35	46.00	-15.65	QP

Test Mode : P2 TX Mode


Horizontal

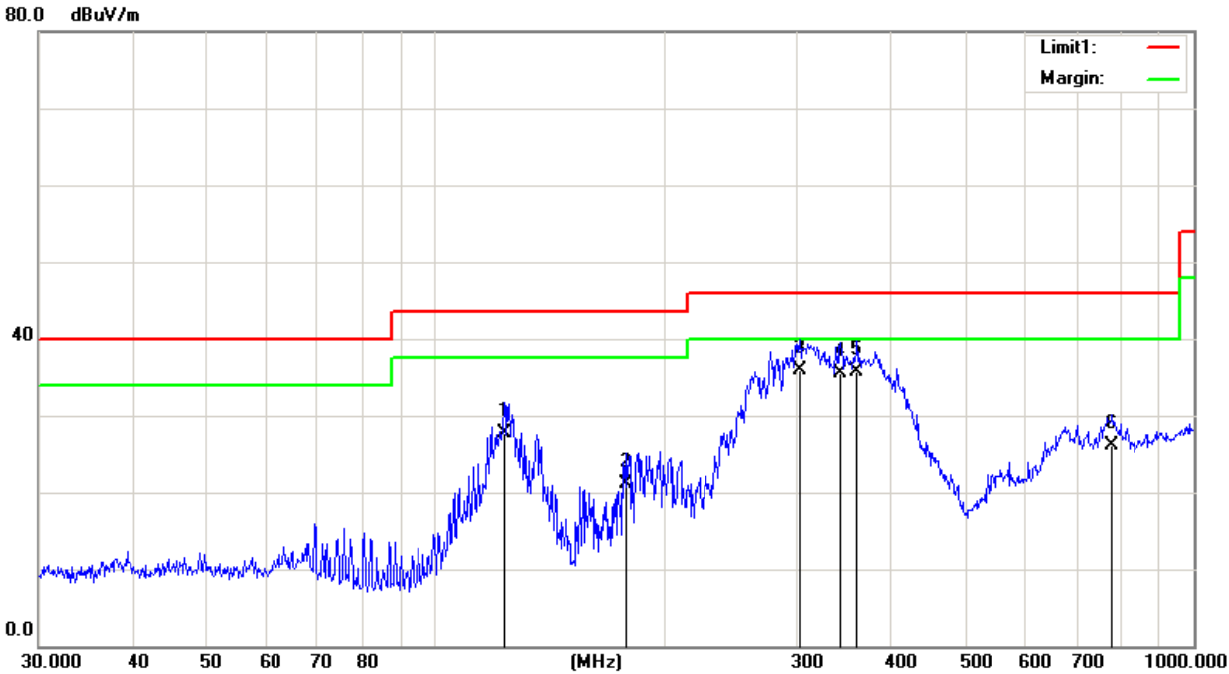

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	123.2655	42.47	-14.71	27.76	43.50	-15.74	QP
2	178.7582	33.07	-11.94	21.13	43.50	-22.37	QP
3	302.4812	44.20	-8.21	35.99	46.00	-10.01	QP
4	341.9786	44.84	-9.34	35.50	46.00	-10.50	QP
5	360.4476	44.73	-8.95	35.78	46.00	-10.22	QP
6	779.6068	27.26	-1.21	26.05	46.00	-19.95	QP


Test Mode : P1 TX Mode

Vertical

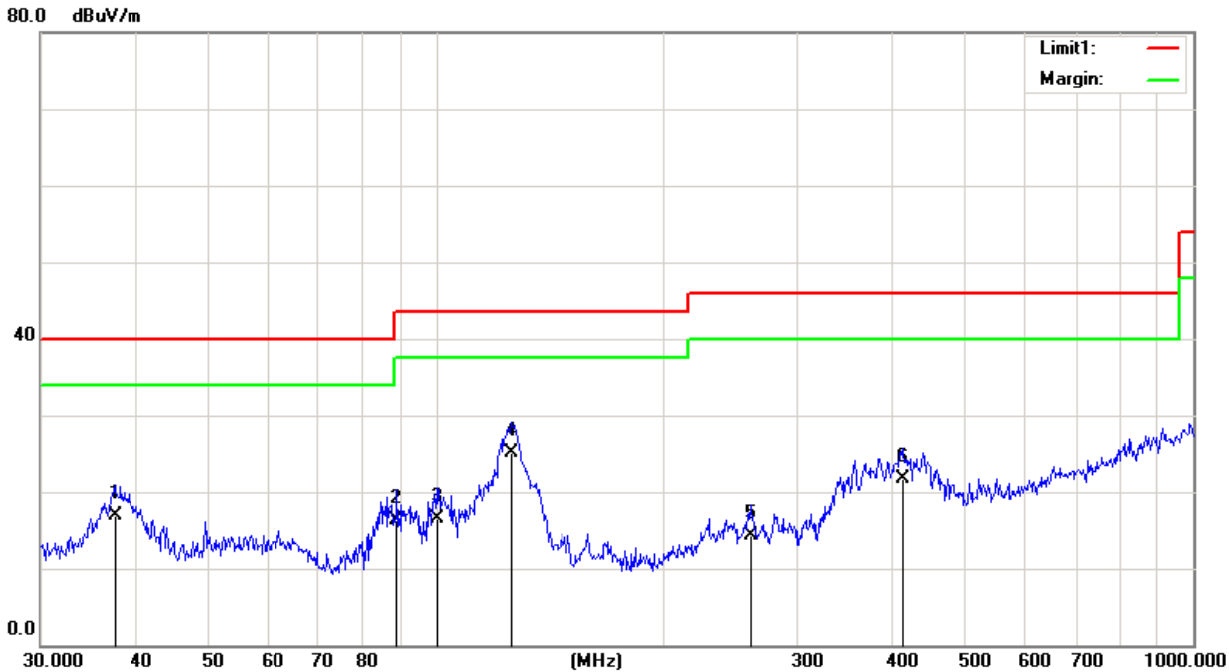

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.5479	30.01	-13.15	16.86	40.00	-23.14	QP
2	88.6524	32.52	-16.20	16.32	43.50	-27.18	QP
3	100.2286	32.20	-15.69	16.51	43.50	-26.99	QP
4	125.4457	38.39	-13.33	25.06	43.50	-18.44	QP
5	260.1444	21.50	-7.26	14.24	46.00	-31.76	QP
6	413.2706	28.43	-6.76	21.67	46.00	-24.33	QP

Test Mode : P1 TX Mode

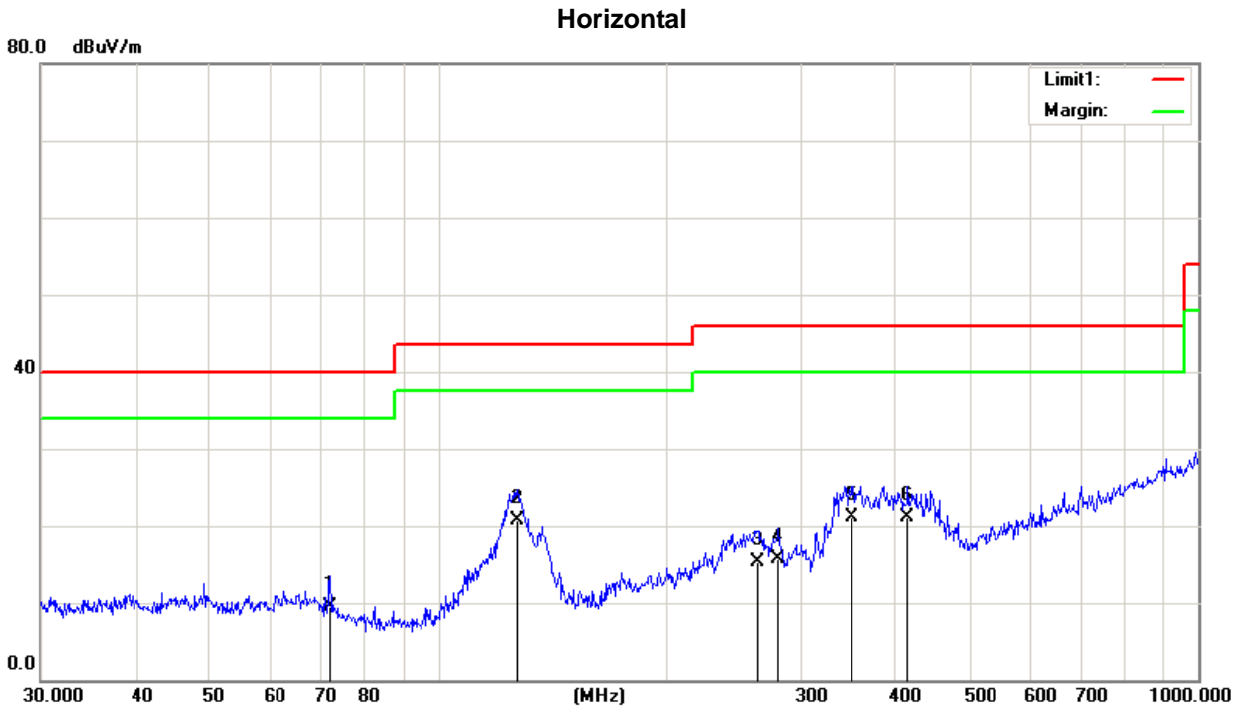

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	72.0841	26.01	-16.43	9.58	40.00	-30.42	QP
2	126.7723	35.49	-14.72	20.77	43.50	-22.73	QP
3	262.8955	21.42	-6.04	15.38	46.00	-30.62	QP
4	280.0237	22.12	-6.36	15.76	46.00	-30.24	QP
5	350.4768	30.45	-9.26	21.19	46.00	-24.81	QP
6	414.7223	28.91	-7.75	21.16	46.00	-24.84	QP

END OF TEST REPORT