



# FCC TEST REPORT

For

Shenzhen Delanda technology co., LTD

CHILDRENS TOY WALKIE TALKIE

Test Model: D25

Prepared for : Shenzhen Delanda technology co., LTD  
Address : 6th Floor, Building B, Hezhou Zhongkenuo Industrial Park, Hezhou Community, Hangcheng Street, Baoan District, Shenzhen

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 27, 2023  
Sample No. : A061923073-1, A061923073-2  
Number of tested samples : 2  
Serial number : Prototype  
Date of Test : June 27, 2023 ~ July 10, 2023  
Date of Report : July 11, 2023





**FCC TEST REPORT  
FCC CFR 47 PART 95**

**Report Reference No.** ..... : **LCSA061923073EA**  
**Date of Issue**..... : July 11, 2023

**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**  
**Address**..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
**Testing Location/ Procedure**..... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name**..... : **Shenzhen Delanda technology co., LTD**  
**Address**..... : 6th Floor, Building B, Hezhou Zhongkenuo Industrial Park, Hezhou Community, Hangcheng Street, Baoan District, Shenzhen

**Test Specification**  
**Standard**..... : FCC CFR 47 PART 95  
**Test Report Form No**..... : LCSEMC-1.0  
**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.  
**Master TRF**..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**  
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**EUT Description**..... : **CHILDRENS TOY WALKIE TALKIE**  
**Trade Mark**..... : N/A  
**Test Model**..... : D25  
**Ratings**..... : Input: DC 5V, 1A  
DC 3.7V by Rechargeable Li-ion Battery, 400mAh  
**Result** ..... : **Positive**

**Compiled by:**

Diamond Lu/ Administrator

**Supervised by:**

Cary Luo/ Technique principal

**Approved by:**

Gavin Liang/ Manager





### FCC -- TEST REPORT

|  |                                       |
|--|---------------------------------------|
| <b>Test Report No. :</b> LCSA061923073EA | <u>July 11, 2023</u><br>Date of issue |
|--|---------------------------------------|

Test Model..... : D25

EUT..... : CHILDRENS TOY WALKIE TALKIE

**Applicant..... : Shenzhen Delanda technology co., LTD**

Address..... : 6th Floor, Building B, Hezhou Zhongkenuo Industrial Park, Hezhou  
Community, Hangcheng Street, Baoan District, Shenzhen

Telephone..... : /

Fax..... : /

**Manufacturer..... : Shenzhen Delanda technology co., LTD**

Address..... : 6th Floor, Building B, Hezhou Zhongkenuo Industrial Park, Hezhou  
Community, Hangcheng Street, Baoan District, Shenzhen

Telephone..... : /

Fax..... : /

**Factory..... : Shenzhen Delanda technology co., LTD**

Address..... : 6th Floor, Building B, Hezhou Zhongkenuo Industrial Park, Hezhou  
Community, Hangcheng Street, Baoan District, Shenzhen

Telephone..... : /

Fax..... : /

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





### Revision History

| Report Version | Issue Date    | Revision Content | Revised By |
|----------------|---------------|------------------|------------|
| 000            | July 11, 2023 | Initial Issue    | ---        |
|                |               |                  |            |
|                |               |                  |            |





# TABLE OF CONTENTS

| Description.....                                    | Page      |
|---|-----------|
| <b>1. GENERAL INFORMATION .....</b>                 | <b>6</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT) .....              | 6         |
| 1.2. SUPPORT EQUIPMENT LIST .....                   | 7         |
| 1.3. EXTERNAL I/O CABLE .....                       | 7         |
| 1.4. DESCRIPTION OF TEST FACILITY .....             | 7         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY ..... | 7         |
| 1.6. MEASUREMENT UNCERTAINTY .....                  | 7         |
| 1.7. DESCRIPTION OF TEST MODES .....                | 8         |
| <b>2. TEST METHODOLOGY .....</b>                    | <b>9</b>  |
| 2.1. TEST STANDARDS .....                           | 9         |
| 2.2. EUT CONFIGURATION .....                        | 9         |
| 2.3. EUT EXERCISE .....                             | 9         |
| 2.4. GENERAL TEST PROCEDURES .....                  | 9         |
| 2.5. TEST SAMPLE .....                              | 9         |
| <b>3. SYSTEM TEST CONFIGURATION .....</b>           | <b>10</b> |
| 3.1. JUSTIFICATION .....                            | 10        |
| 3.2. EUT EXERCISE SOFTWARE .....                    | 10        |
| 3.3. SPECIAL ACCESSORIES .....                      | 10        |
| 3.4. BLOCK DIAGRAM/SCHEMATICS .....                 | 10        |
| 3.5. EQUIPMENT MODIFICATIONS .....                  | 10        |
| 3.6. TEST SETUP .....                               | 10        |
| <b>4. SUMMARY OF TEST RESULTS .....</b>             | <b>11</b> |
| <b>5. MEASUREMENT RESULTS .....</b>                 | <b>12</b> |
| 5.1. MAXIMUM TRANSMITTER POWER .....                | 12        |
| 5.2. OCCUPIED BANDWIDTH AND EMISSION MASK .....     | 14        |
| 5.3. MODULATION CHARACTERISTIC .....                | 16        |
| 5.4. FREQUENCY STABILITY .....                      | 21        |
| 5.5. TRANSMITTER RADIATED SPURIOUS EMISSION .....   | 23        |
| <b>6. SUMMARY OF TEST EQUIPMENT .....</b>           | <b>25</b> |
| <b>7. TEST SETUP PHOTOGRAPHS OF EUT .....</b>       | <b>26</b> |
| <b>8. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>     | <b>26</b> |
| <b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>     | <b>26</b> |





## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : CHILDRENS TOY WALKIE TALKIE  
Test Model : D25  
Power Supply : Input: DC 5V, 1A  
DC 3.7V by Rechargeable Li-ion Battery, 400mAh  
Hardware Version : /  
Software Version : /

#### CHILDRENS TOY WALKIE TALKIE

Frequency Range : 462.550MHz~462.7250MHz (2.0W)  
467.5625MHz~467.7125MHz (0.5W)  
Channel Number : 22  
Test Channel : Channel 1, 11 and 22  
Channel Spacing : 12.5KHz  
Modulation Type : FM  
Emission Type : F3E  
Rate Power : 0.5W/2.0W  
(It was fixed by the manufacturer, any individual can't  
arbitrarily change it.)  
Antenna Description : Internal Antenna, 0dBi (Max.)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 1.2. Support equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| ---          | ---         | ---   | ---           | ---         |

## 1.3. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| Type-C USB Port      | 1        | N/A   |

## 1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

| Test Item                                  | Uncertainty | Note |
|--|-------------|------|
| Frequency error                            | 30 Hz       | (1)  |
| Transmitter power conducted                | 0.62 dB     | (1)  |
| Transmitter power Radiated                 | 2.67 dB     | (1)  |
| Conducted spurious emission 9KHz-12.75 GHz | 1.88 dB     | (1)  |
| Conducted Emission 9KHz-30MHz              | 1.63 dB     | (1)  |
| Radiated spurious emission 30~1000MHz      | 4.65 dB     | (1)  |
| Radiated spurious emission 1~18GHz         | 3.89 dB     | (1)  |
| Radiated spurious emission 18-40GHz        | 3.90 dB     | (1)  |
| Occupied Bandwidth                         | N/A         | N/A  |
| Emission Mask                              | N/A         | N/A  |
| Modulation Characteristic                  | N/A         | N/A  |
| Transmitter Frequency Behavior             | N/A         | N/A  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





### 1.7. Description of Test Modes

The EUT has been tested under typical operating condition. As, test modes selected as below by the technical parameters of the EUT:

| Operation Mode | Modulation | Channel Separation | Condition |
|----------------|------------|--------------------|-----------|
| TM1            | FM         | 12.5KHz            | TX        |

#### Frequency list:

| Channel   | Frequency(MHz)  | Type       | Power |
|-----------|-----------------|------------|-------|
| <b>1</b>  | <b>462.5625</b> | <b>FRS</b> | 2.0W  |
| 2         | 462.5875        | FRS        |       |
| 3         | 462.6125        | FRS        |       |
| 4         | 462.6375        | FRS        |       |
| 5         | 462.6625        | FRS        |       |
| 6         | 462.6875        | FRS        |       |
| 7         | 462.7125        | FRS        |       |
| 8         | 467.5625        | FRS        | 0.5W  |
| 9         | 467.5875        | FRS        |       |
| 10        | 467.6125        | FRS        |       |
| <b>11</b> | <b>467.6375</b> | <b>FRS</b> |       |
| 12        | 467.6625        | FRS        |       |
| 13        | 467.6875        | FRS        |       |
| 14        | 467.7125        | FRS        | 2.0W  |
| 15        | 462.5500        | FRS        |       |
| 16        | 462.5750        | FRS        |       |
| 17        | 462.6000        | FRS        |       |
| 18        | 462.6250        | FRS        |       |
| 19        | 462.6500        | FRS        |       |
| 20        | 462.6750        | FRS        |       |
| 21        | 462.7000        | FRS        |       |
| <b>22</b> | <b>462.7250</b> | <b>FRS</b> |       |

**Note1:** In section 15.31(m), regards to the operating frequency range less than 1MHz, only one point centered in the frequency range of operation selected to measure.

**Note2:** The line display in grey was the channel selected for test.







## 2. TEST METHODOLOGY

### 2.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 95](#): PERSONAL RADIO SERVICES.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[ANSI C63.26: 2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[ANSI C63.4: 2014](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

### 2.2. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.3. EUT Exercise

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 2.4. General Test Procedures

#### 2.4.1 Conducted Emissions

N/A

#### 2.4.2 Radiated Emissions

The EUT is placed on a turntable, which is directly placed on the ground. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 2.5. Test Sample

The application provides 1 samples to meet requirement;

| Sample Number          | Description                           |
|------------------------|---------------------------------------|
| Sample 1(A061923073-1) | Engineer sample – continuous transmit |
| Sample 2(A061923073-2) | Normal sample – Intermittent transmit |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

N/A

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.





### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 95                         |                                      |             |           |        |
|---|--------------------------------------|-------------|-----------|--------|
| FCC Rules   | Description of Test                  | Test Sample | Result    | Remark |
| FCC Part 2.1046<br>FCC Part 95.567                    | Maximum Transmitter Power            | Sample 1    | Compliant | Note 1 |
| FCC Part 2.1047<br>FCC Part 95.575                    | Modulation Characteristic            | Sample 1    | Compliant | Note 1 |
| FCC Part 2.1049<br>FCC Part 95.573<br>FCC Part 95.579 | Occupied Bandwidth and Emission Mask | Sample 1    | Compliant | Note 1 |
| FCC Part 2.1053<br>FCC Part 95.579                    | Radiated Spurious Emission           | Sample 1    | Compliant | Note 1 |
| FCC Part 2.1055 (d)<br>FCC Part 95.565                | Frequency Stability                  | Sample 1    | Compliant | Note 1 |
| FCC Part 2.1093                                       | RF Exposure                          | Sample 1    | Compliant | Note 2 |

**Remark:**



1. Note 1 – Test results inside test report;
2. Note 2 – Test results in other test report (SAR Report);



## 5. MEASUREMENT RESULTS

### 5.1. Maximum Transmitter Power

#### 5.1.1 Block Diagram of Test Setup

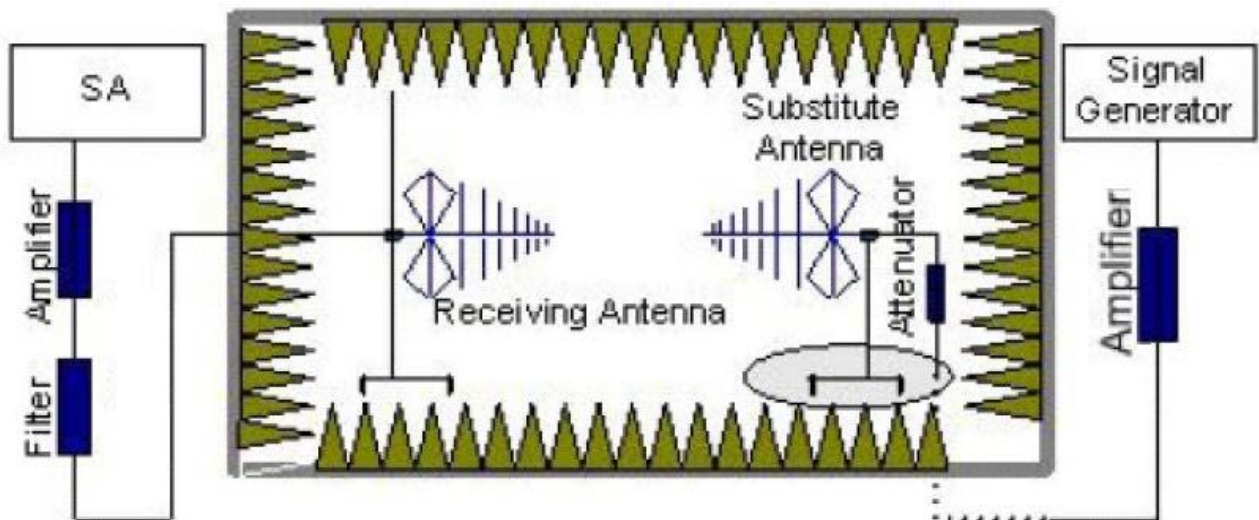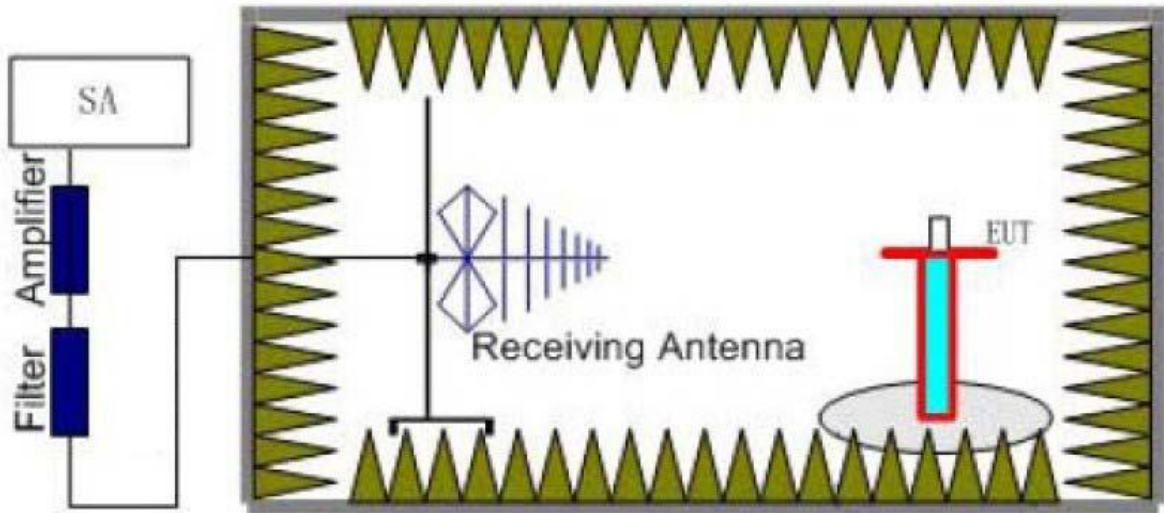

#### 5.1.2 Limit

##### According to FCC Part 95.567:

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

#### 5.1.3 Test Procedure

1. EUT was placed on a 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all test transmit frequencies were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the





EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (P<sub>r</sub>).
- The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P<sub>r</sub>). The power of signal source (P<sub>Mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- An amplifier may be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P<sub>cl</sub>), the Substitution Antenna Gain (G<sub>a</sub>) and the Amplifier Gain (P<sub>Ag</sub>) should be recorded after test.  
The measurement results are obtained as described below:  
Power (EIRP) = P<sub>Mea</sub> + P<sub>Ag</sub> - P<sub>cl</sub> + G<sub>a</sub>
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

5.1.4 Test Results

|               |          |              |                |
|---------------|----------|--------------|----------------|
| Temperature   | 23.4°C   | Humidity     | 53.7%          |
| Test Engineer | Joker Hu | Test Voltage | Normal Voltage |

| Test Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain (dBi) | Correction (dB) | P <sub>Ag</sub> (dB) | ERP (dBm) | ERP (W) | Polarization | Limit (W) |
|----------------------|------------------------|----------------------|-----------------------------------|-----------------|----------------------|-----------|---------|--------------|-----------|
| 462.5625             | -11.23                 | 2.08                 | 7.69                              | 2.15            | 34.59                | 23.43     | 0.2203  | V            | 2.0       |
| 462.5625             | -11.25                 | 2.08                 | 7.69                              | 2.15            | 34.59                | 23.41     | 0.2193  | H            | 2.0       |
| 467.6375             | -11.18                 | 2.08                 | 7.69                              | 2.15            | 34.59                | 23.48     | 0.2228  | V            | 0.5       |
| 467.6375             | -11.20                 | 2.08                 | 7.69                              | 2.15            | 34.59                | 23.46     | 0.2218  | H            | 0.5       |
| 462.7250             | -11.21                 | 2.08                 | 7.69                              | 2.15            | 34.59                | 23.45     | 0.2213  | V            | 2.0       |
| 462.7250             | -11.22                 | 2.08                 | 7.69                              | 2.15            | 34.59                | 23.44     | 0.2208  | H            | 2.0       |

Remark:

- EIRP=P<sub>Mea</sub>(dBm) +P<sub>Ag</sub>(dB) -P<sub>cl</sub>(dB) +G<sub>a</sub>(dBi)
- ERP = EIRP – 2.15dBi as EIRP by subtracting the gain of the dipole.
- The field strength of radiation emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis and receiver antenna at vertical polarization was reported.







### 5.2. Occupied Bandwidth and Emission Mask

#### 5.2.1 Limit

**According to FCC 95.573:**


Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5kHz.

**According to FCC 95.579:**

Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) 43 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

#### 5.2.2 Block Diagram of Test Setup

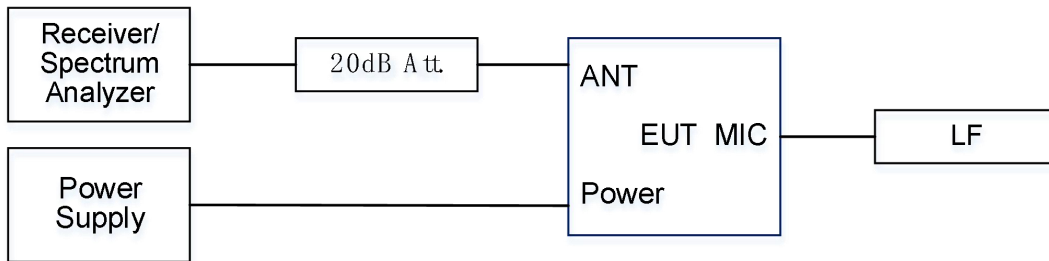

#### 5.2.3 Test Procedure

- 1. The EUT was modulated by 2.5 KHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing).
- 2. Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 3. Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.

#### 5.2.4 Test Results

|               |          |              |                |
|---------------|----------|--------------|----------------|
| Temperature   | 23.4°C   | Humidity     | 54.3%          |
| Test Engineer | Joker Hu | Test Voltage | Normal Voltage |

**Occupied Bandwidth:**

| Emission Type | Frequency (MHz) | 99% OBW (kHz) | 26dB bandwidth (kHz) | Limit (KHz) | Result |
|---------------|-----------------|---------------|----------------------|-------------|--------|
| F3E           | 462.5625        | 9.871         | 11.05                | 12.5        | Pass   |
| F3E           | 467.6375        | 9.741         | 11.09                | 12.5        | Pass   |
| F3E           | 462.7250        | 9.714         | 11.06                | 12.5        | Pass   |

Emission Designator

Per CFR 47 §2.201& §2.202, BW = 2M + 2D for FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11K0

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

**Please refer to following page.**



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com



Scan code to check authenticity





### Test Plot of Occupied Bandwidth and Emission Mask

#### Occupied Bandwidth



#### Emission Mask

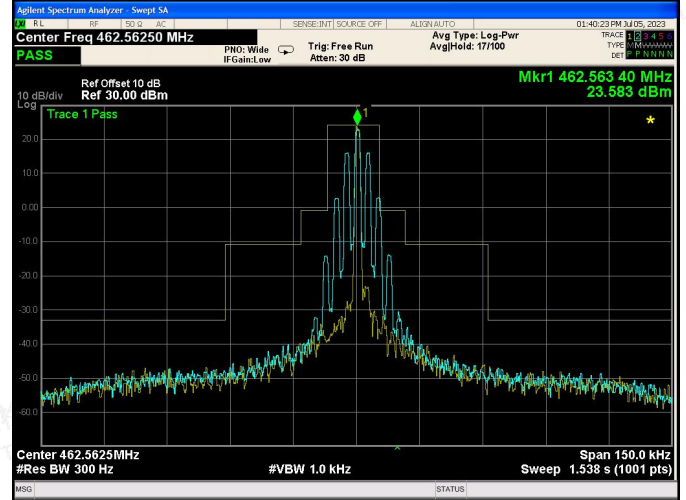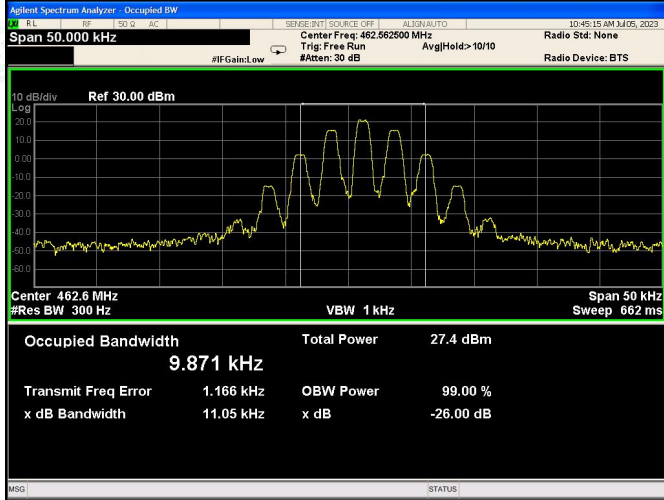

Channel 1: 462.5625MHz

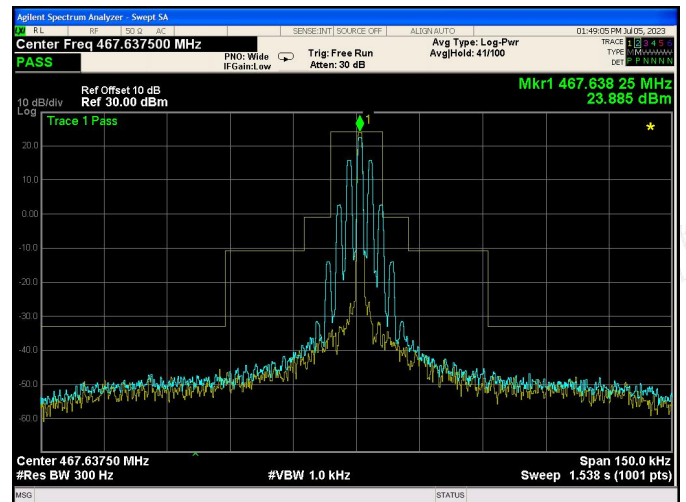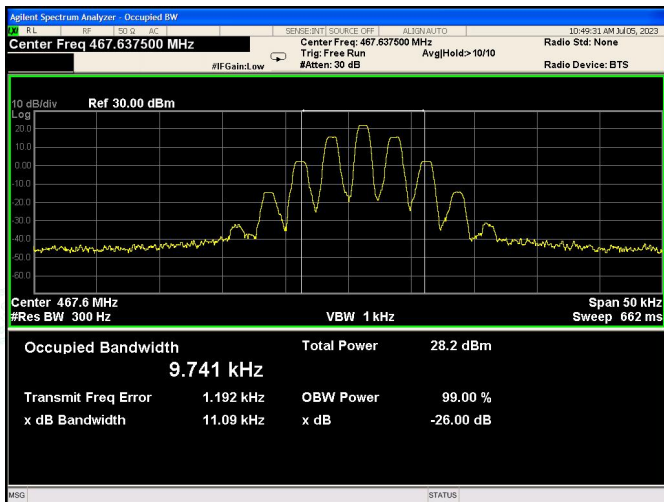

Channel 11: 467.6375MHz

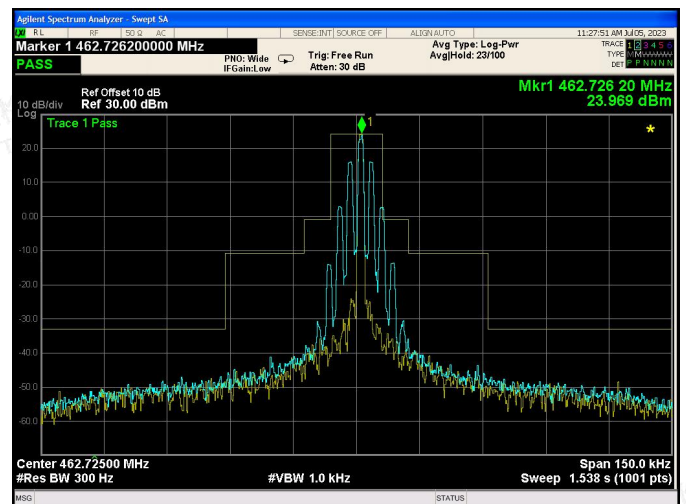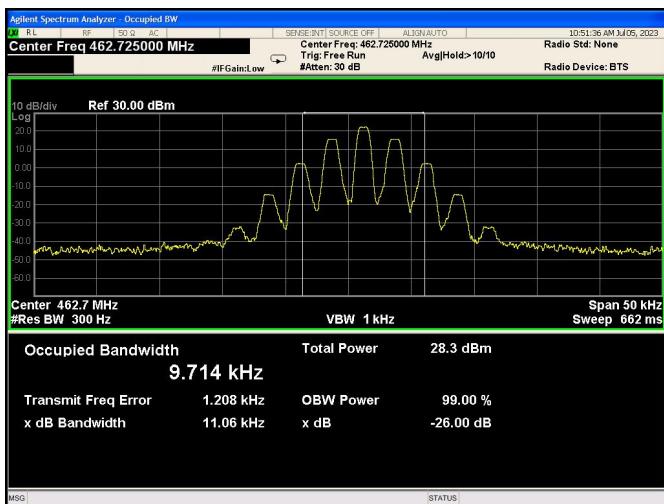

Channel 22: 462.7250MHz







### 5.3. Modulation Characteristic


#### 5.3.1 Limit

According to CFR47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

**According to FCC 95.575:**

Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

#### 5.3.2 Block Diagram of Test Setup

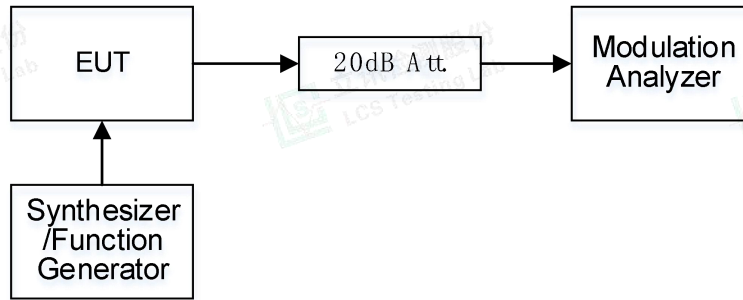

#### 5.3.3 Test Procedure

According to ANSI/TIA-603-E-2016






5.3.4 Test Results

|               |          |              |                |
|---------------|----------|--------------|----------------|
| Temperature   | 23.3°C   | Humidity     | 53.4%          |
| Test Engineer | Joker Hu | Test Voltage | Normal Voltage |


Modulation Limit:

| Channel 1: 462.5625MHz |                                     |                                      |                                      |                                      |                                      |
|------------------------|-------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Modulation Level (dB)  | Peak Freq. Deviation At 300Hz (KHz) | Peak Freq. Deviation At 1004Hz (KHz) | Peak Freq. Deviation At 1500Hz (KHz) | Peak Freq. Deviation At 2500Hz (KHz) | Peak Freq. Deviation At 3000Hz (KHz) |
| -20                    | 0.23                                | 0.18                                 | 0.41                                 | 0.72                                 | 0.57                                 |
| -15                    | 0.13                                | 0.35                                 | 0.55                                 | 0.38                                 | 0.66                                 |
| -10                    | 0.49                                | 0.59                                 | 0.38                                 | 0.94                                 | 0.92                                 |
| -5                     | 0.57                                | 0.73                                 | 0.43                                 | 1.06                                 | 1.46                                 |
| 0                      | 0.77                                | 0.77                                 | 1.45                                 | 1.50                                 | 2.12                                 |
| +5                     | 0.85                                | 1.22                                 | 1.42                                 | 1.79                                 | 2.43                                 |
| +10                    | 1.19                                | 1.79                                 | 2.38                                 | 1.99                                 | 2.18                                 |
| +15                    | 1.45                                | 1.41                                 | 2.35                                 | 2.11                                 | 2.14                                 |
| +20                    | 1.81                                | 1.97                                 | 2.46                                 | 2.18                                 | 2.36                                 |

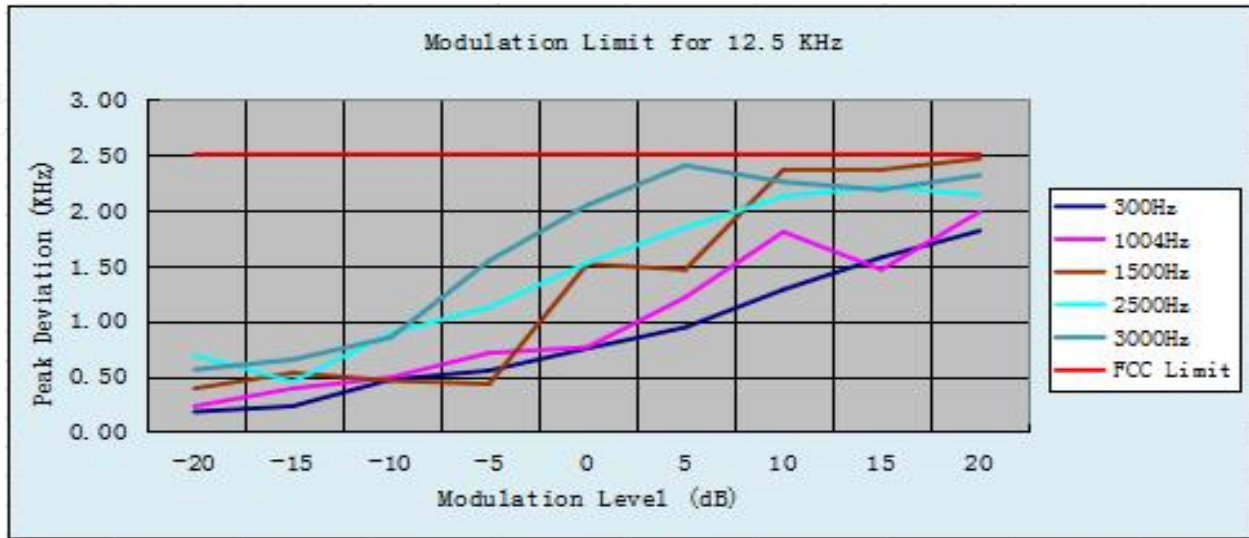



| Channel 11: 467.6375MHz |                                     |                                      |                                      |                                      |                                      |
|-------------------------|-------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Modulation Level (dB)   | Peak Freq. Deviation At 300Hz (KHz) | Peak Freq. Deviation At 1004Hz (KHz) | Peak Freq. Deviation At 1500Hz (KHz) | Peak Freq. Deviation At 2500Hz (KHz) | Peak Freq. Deviation At 3000Hz (KHz) |
| -20                     | 0.45                                | 0.18                                 | 0.43                                 | 0.22                                 | 0.58                                 |
| -15                     | 0.41                                | 0.27                                 | 0.30                                 | 0.29                                 | 0.37                                 |
| -10                     | 0.42                                | 0.64                                 | 0.60                                 | 0.69                                 | 0.70                                 |
| -5                      | 0.50                                | 0.62                                 | 0.34                                 | 1.09                                 | 1.33                                 |
| 0                       | 0.48                                | 0.68                                 | 1.38                                 | 1.66                                 | 2.12                                 |
| +5                      | 0.69                                | 1.18                                 | 1.44                                 | 1.71                                 | 2.20                                 |
| +10                     | 1.38                                | 1.28                                 | 2.43                                 | 2.03                                 | 2.29                                 |
| +15                     | 1.63                                | 1.37                                 | 2.40                                 | 2.20                                 | 2.19                                 |
| +20                     | 1.60                                | 2.27                                 | 2.41                                 | 2.21                                 | 2.35                                 |


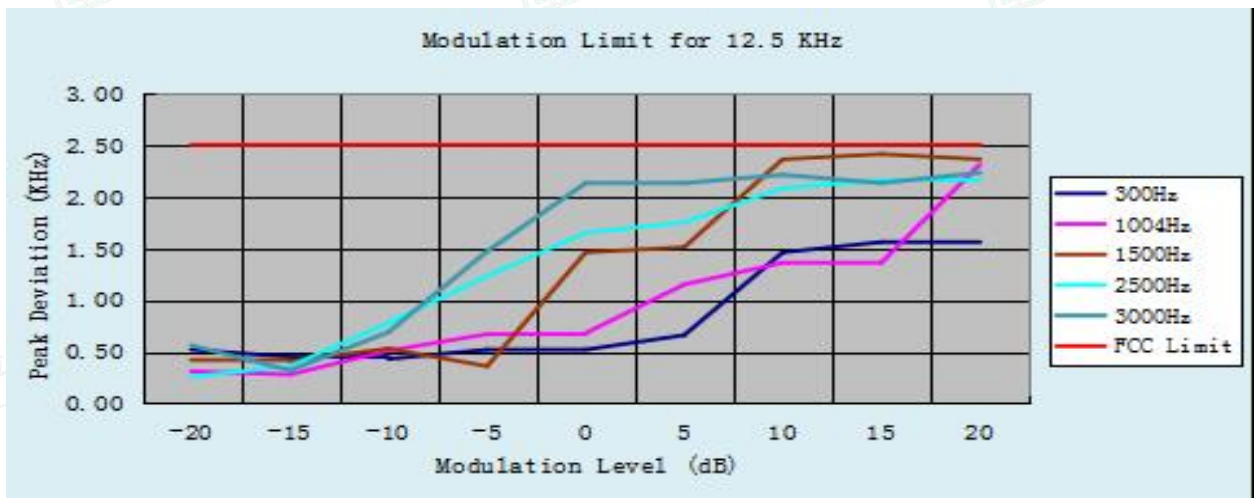




**Audio Frequency Response:**



Channel 1: 462.5625MHz

| Modulation Frequency (Hz) | Peak Freq. Deviation (KHz) | Audio Frequency Response (dB) | Limit (KHz) |
|---------------------------|----------------------------|-------------------------------|-------------|
| 100                       | 0.17                       | -22.14                        | 3.125       |
| 200                       | 0.28                       | -22.14                        | 3.125       |
| 300                       | 0.28                       | -11.66                        | 3.125       |
| 400                       | 0.48                       | -10.33                        | 3.125       |
| 500                       | 0.65                       | -8.82                         | 3.125       |
| 600                       | 0.40                       | -6.54                         | 3.125       |
| 700                       | 0.97                       | -5.71                         | 3.125       |
| 800                       | 0.41                       | -3.50                         | 3.125       |
| 900                       | 1.04                       | -2.48                         | 3.125       |
| 1000                      | 1.22                       | -1.55                         | 3.125       |
| 1200                      | 1.47                       | 0.85                          | 3.125       |
| 1400                      | 1.59                       | 1.69                          | 3.125       |
| 1600                      | 1.16                       | 2.57                          | 3.125       |
| 1800                      | 1.79                       | 4.23                          | 3.125       |
| 2000                      | 2.38                       | 5.22                          | 3.125       |
| 2200                      | 2.60                       | 5.85                          | 3.125       |
| 2400                      | 2.57                       | 6.46                          | 3.125       |
| 2600                      | 2.46                       | 7.37                          | 3.125       |
| 2700                      | 2.61                       | 7.86                          | 3.125       |
| 2800                      | 2.50                       | 8.14                          | 3.125       |
| 3000                      | 1.37                       | 8.53                          | 3.125       |
| 3500                      | 1.82                       | 9.62                          | 3.125       |
| 4000                      | 0.98                       | -20.28                        | 3.125       |
| 4500                      | 0.69                       | -21.06                        | 3.125       |
| 5000                      | 0.29                       | -22.87                        | 3.125       |

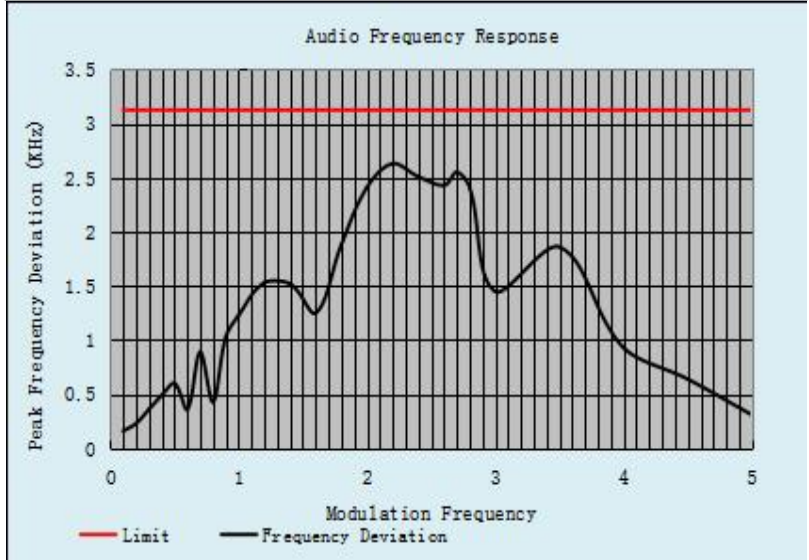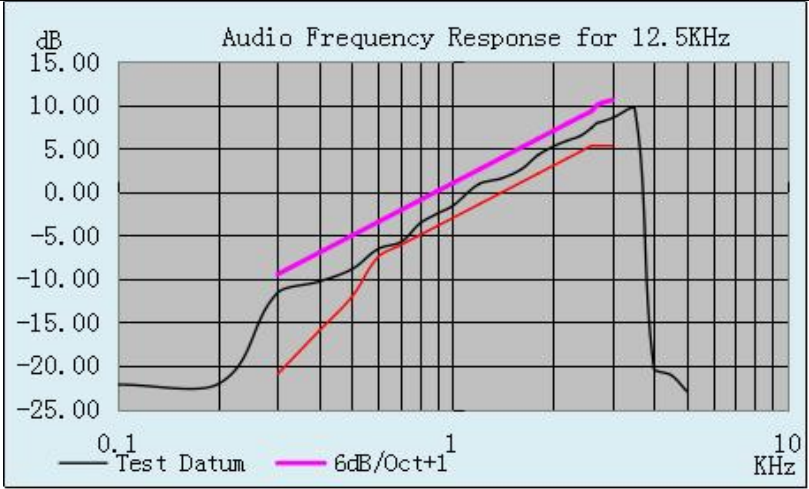



| Channel 11: 467.6375MHz   |                            |                               |             |
|---------------------------|----------------------------|-------------------------------|-------------|
| Modulation Frequency (Hz) | Peak Freq. Deviation (KHz) | Audio Frequency Response (dB) | Limit (KHz) |
| 100                       | 0.13                       | -22.10                        | 3.125       |
| 200                       | 0.12                       | -22.09                        | 3.125       |
| 300                       | 0.37                       | -11.43                        | 3.125       |
| 400                       | 0.55                       | -10.26                        | 3.125       |
| 500                       | 0.43                       | -8.29                         | 3.125       |
| 600                       | 0.46                       | -6.64                         | 3.125       |
| 700                       | 0.89                       | -5.46                         | 3.125       |
| 800                       | 0.43                       | -3.67                         | 3.125       |
| 900                       | 1.17                       | -2.42                         | 3.125       |
| 1000                      | 1.19                       | -1.68                         | 3.125       |
| 1200                      | 1.27                       | 0.79                          | 3.125       |
| 1400                      | 1.45                       | 1.41                          | 3.125       |
| 1600                      | 1.55                       | 2.55                          | 3.125       |
| 1800                      | 1.80                       | 4.30                          | 3.125       |
| 2000                      | 2.57                       | 5.18                          | 3.125       |
| 2200                      | 2.57                       | 5.93                          | 3.125       |
| 2400                      | 2.51                       | 6.27                          | 3.125       |
| 2600                      | 2.62                       | 7.80                          | 3.125       |
| 2700                      | 2.41                       | 7.87                          | 3.125       |
| 2800                      | 2.36                       | 8.11                          | 3.125       |
| 3000                      | 1.65                       | 8.45                          | 3.125       |
| 3500                      | 1.67                       | 9.42                          | 3.125       |
| 4000                      | 0.88                       | -20.43                        | 3.125       |
| 4500                      | 0.70                       | -21.40                        | 3.125       |
| 5000                      | 0.32                       | -22.86                        | 3.125       |

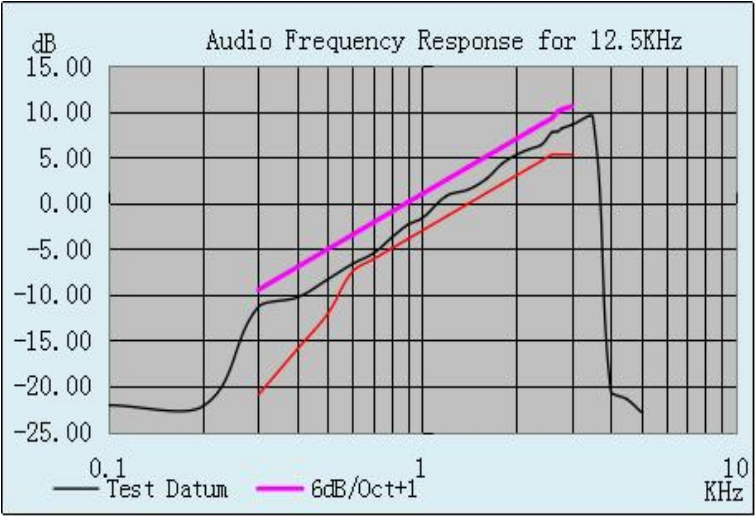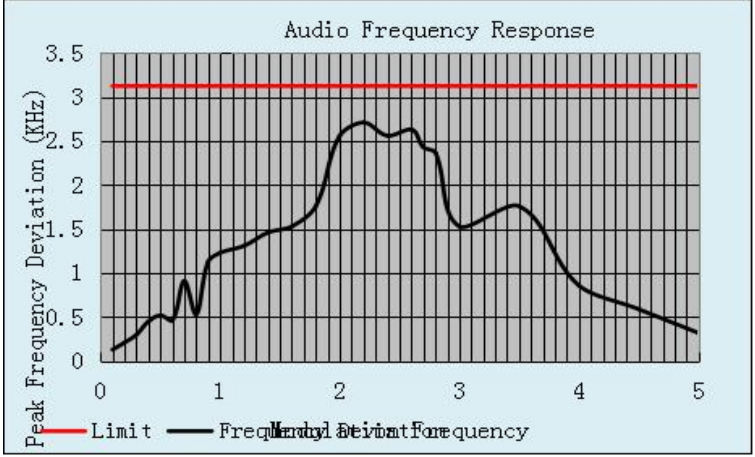

Note: All the modes had been tested, but only the worst data recorded in the report.








### 5.4. Frequency Stability

#### 5.4.1 Limit

**According to FCC 95.565**

Each FRS transmitter type must be designed such that the carrier frequencies remain within  $\pm 2.5$  parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

#### 5.4.2 Block Diagram of Test Setup

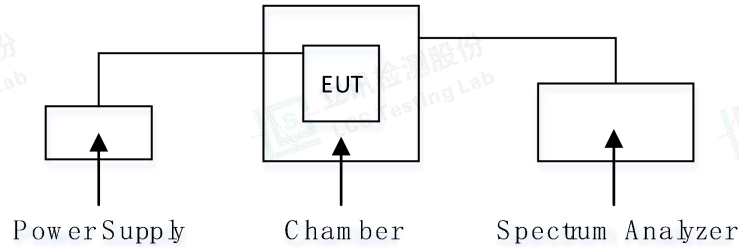

#### 5.4.3 Test Procedure

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

#### 5.4.4 Test Results

|               |          |              |                |
|---------------|----------|--------------|----------------|
| Temperature   | 22.6°C   | Humidity     | 52.9%          |
| Test Engineer | Joker Hu | Test Voltage | Normal Voltage |

| Reference Frequency: 462.5625MHz |                  |                      |                         |           |        |
|----------------------------------|------------------|----------------------|-------------------------|-----------|--------|
| Voltage (V)                      | Temperature (°C) | Frequency error (Hz) | Frequency Tolerance (%) | Limit (%) | Result |
| 3.7                              | -30              | 546                  | 0.000118                | 0.00025%  | Pass   |
|                                  | -20              | 279                  | 0.000060                |           |        |
|                                  | -10              | 230                  | 0.000050                |           |        |
|                                  | 0                | 502                  | 0.000109                |           |        |
|                                  | 10               | 566                  | 0.000122                |           |        |
|                                  | 20               | 391                  | 0.000085                |           |        |
|                                  | 30               | 384                  | 0.000083                |           |        |
|                                  | 40               | 424                  | 0.000092                |           |        |
| 50                               | 598              | 0.000129             |                         |           |        |
| 3.33                             | 25               | 421                  | 0.000091                |           |        |
| 4.07                             | 25               | 524                  | 0.000113                |           |        |





| Reference Frequency: 467.6375MHz |                  |                      |                         |           |        |
|----------------------------------|------------------|----------------------|-------------------------|-----------|--------|
| Voltage (V)                      | Temperature (°C) | Frequency error (Hz) | Frequency Tolerance (%) | Limit (%) | Result |
| 3.7                              | -30              | 361                  | 0.000077                | 0.00025%  | Pass   |
|                                  | -20              | 375                  | 0.000080                |           |        |
|                                  | -10              | 366                  | 0.000078                |           |        |
|                                  | 0                | 478                  | 0.000102                |           |        |
|                                  | 10               | 374                  | 0.000080                |           |        |
|                                  | 20               | 201                  | 0.000043                |           |        |
|                                  | 30               | 577                  | 0.000123                |           |        |
|                                  | 40               | 552                  | 0.000118                |           |        |
| 50                               | 496              | 0.000106             |                         |           |        |
| 3.33                             | 25               | 303                  | 0.000065                |           |        |
| 4.07                             | 25               | 525                  | 0.000112                |           |        |

| Reference Frequency: 462.7250MHz |                  |                      |                         |           |        |
|----------------------------------|------------------|----------------------|-------------------------|-----------|--------|
| Voltage (V)                      | Temperature (°C) | Frequency error (Hz) | Frequency Tolerance (%) | Limit (%) | Result |
| 3.7                              | -30              | 535                  | 0.000116                | 0.00025%  | Pass   |
|                                  | -20              | 470                  | 0.000102                |           |        |
|                                  | -10              | 483                  | 0.000104                |           |        |
|                                  | 0                | 357                  | 0.000077                |           |        |
|                                  | 10               | 430                  | 0.000093                |           |        |
|                                  | 20               | 472                  | 0.000102                |           |        |
|                                  | 30               | 539                  | 0.000117                |           |        |
|                                  | 40               | 409                  | 0.000088                |           |        |
| 50                               | 267              | 0.000058             |                         |           |        |
| 3.33                             | 25               | 545                  | 0.000118                |           |        |
| 4.07                             | 25               | 237                  | 0.000051                |           |        |






## 5.5. Transmitter Radiated Spurious Emission

### 5.5.1 Limit

According to FCC section 95.579, At least  $43 + 10 \log(\text{Transmit Power})$  dB on any frequency band removed from the channel center frequency by more than 31.25 kHz.

### 5.5.2 Block Diagram of Test Setup

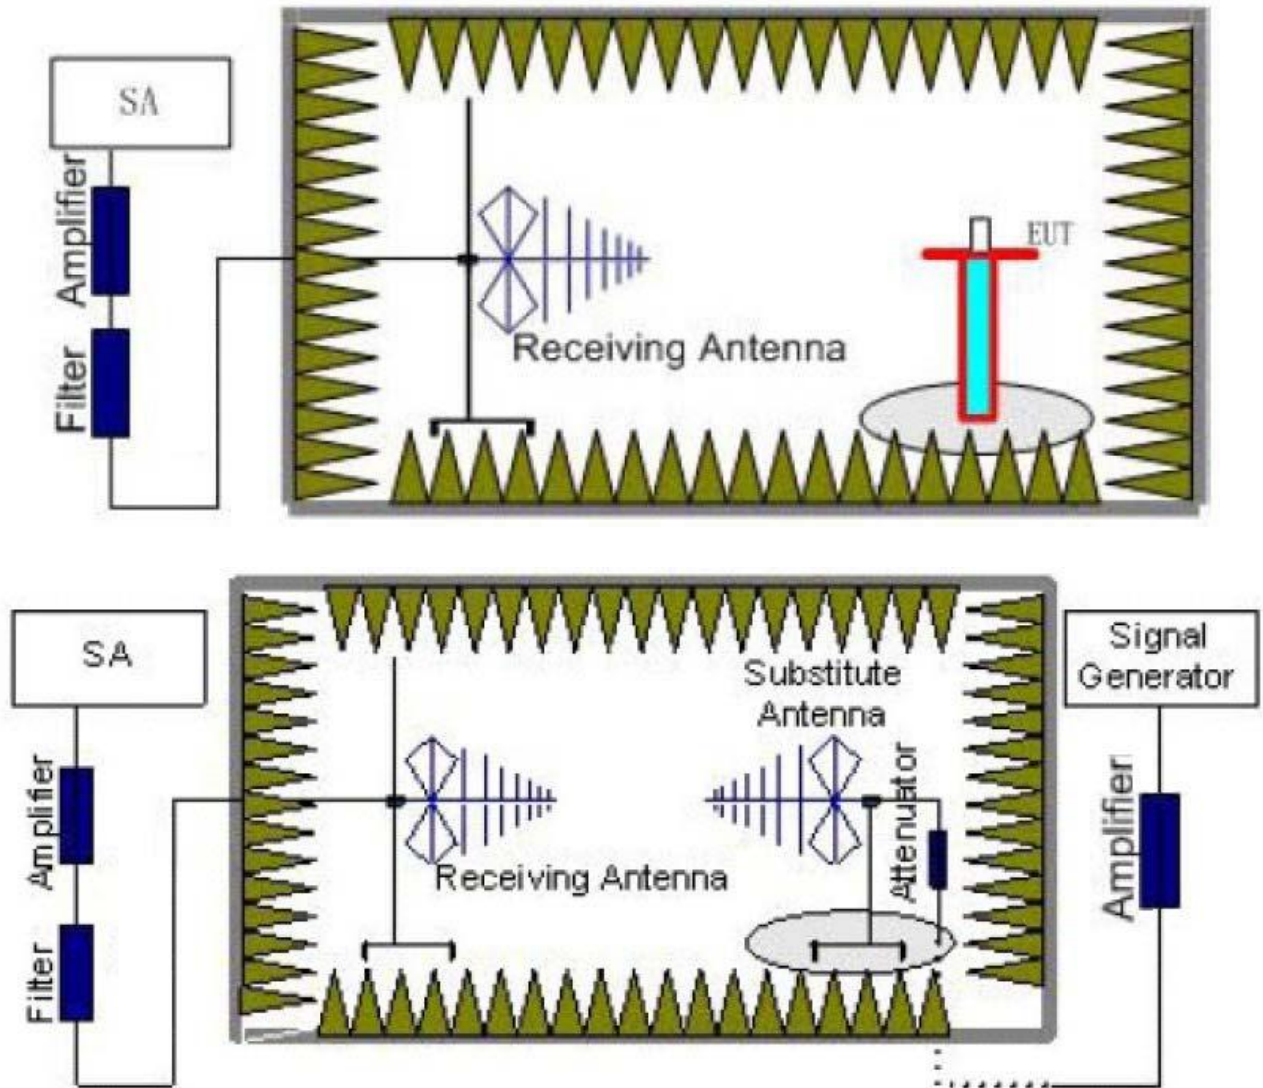

### 5.5.3 Test Procedure

- EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through  $360^\circ$  and adjusting the receiving antenna polarization. The radiated emission measurements of all test transmit frequencies were measured with peak detector.
- A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.





- c. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum 100 kHz below 1GHz and 1MHz above 1GHz, Sweep from 30MHz to the 10th harmonic of the fundamental frequency; and recorded the level of the concerned spurious emission point as (P<sub>r</sub>).
- d. The EUT then replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P<sub>r</sub>). The power of signal source (P<sub>Mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization. The measurement results are obtained as described below:  
 Power (EIRP) = P<sub>Mea</sub> - P<sub>cl</sub> + G<sub>a</sub>  
 Where;  
 P<sub>Mea</sub> is the recorded signal generator level  
 P<sub>cl</sub> is the cable loss connect between instruments  
 G<sub>a</sub> Substitution Antenna Gain
- e. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.
- f. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.
- g. Test site anechoic chamber refer to ANSI C63.10.

5.5.4 Test Results

|               |          |              |                |
|---------------|----------|--------------|----------------|
| Temperature   | 24.6°C   | Humidity     | 52.6%          |
| Test Engineer | Joker Hu | Test Voltage | Normal Voltage |

| Test Frequency (MHz) | Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | Distance (m) | G <sub>a</sub> Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Pol. |
|----------------------|-----------------|------------------------|----------------------|--------------|----------------------------------|-----------------|-------------|-------------|------|
| 462.5625             | 925.12          | -34.89                 | 3.54                 | 3.00         | 12.87                            | -25.56          | -13.00      | 12.56       | V    |
|                      | 1387.68         | -31.30                 | 4.21                 | 3.00         | 15.48                            | -20.03          | -13.00      | 7.03        | V    |
|                      | 1850.25         | -34.08                 | 4.52                 | 3.00         | 17.32                            | -21.28          | -13.00      | 8.28        | V    |
|                      | 2312.81         | -40.03                 | 5.24                 | 3.00         | 18.76                            | -26.51          | -13.00      | 13.51       | V    |
| 462.5625             | 925.12          | -35.22                 | 3.54                 | 3.00         | 12.87                            | -25.89          | -13.00      | 12.89       | H    |
|                      | 1387.68         | -33.09                 | 4.21                 | 3.00         | 15.48                            | -21.82          | -13.00      | 8.82        | H    |
|                      | 1850.25         | -34.94                 | 4.52                 | 3.00         | 17.32                            | -22.14          | -13.00      | 9.14        | H    |
|                      | 2312.81         | -39.15                 | 5.24                 | 3.00         | 18.76                            | -25.63          | -13.00      | 12.63       | H    |

| Test Frequency (MHz) | Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | Distance (m) | G <sub>a</sub> Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Pol. |
|----------------------|-----------------|------------------------|----------------------|--------------|----------------------------------|-----------------|-------------|-------------|------|
| 467.6375             | 935.33          | -33.68                 | 3.54                 | 3.00         | 12.87                            | -24.35          | -13.00      | 11.35       | V    |
|                      | 1402.78         | -30.93                 | 4.21                 | 3.00         | 15.48                            | -19.66          | -13.00      | 6.66        | V    |
|                      | 1870.25         | -36.80                 | 4.52                 | 3.00         | 17.32                            | -24.00          | -13.00      | 11.00       | V    |
|                      | 2338.36         | -43.17                 | 5.24                 | 3.00         | 18.76                            | -29.65          | -13.00      | 16.65       | V    |
| 467.6375             | 935.33          | -35.74                 | 3.54                 | 3.00         | 12.87                            | -26.41          | -13.00      | 13.41       | H    |
|                      | 1402.78         | -33.40                 | 4.21                 | 3.00         | 15.48                            | -22.13          | -13.00      | 9.13        | H    |
|                      | 1870.25         | -36.89                 | 4.52                 | 3.00         | 17.32                            | -24.09          | -13.00      | 11.09       | H    |
|                      | 2338.36         | -43.57                 | 5.24                 | 3.00         | 18.76                            | -30.05          | -13.00      | 17.05       | H    |

Remark:

1.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
2.  $Margin = Limit - EIRP$
3. The Report only recorded the worst result ( 462.5625MHz and 467.6375MHz ).
4. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency, and only recorded worst spurious emissions.





## 6. SUMMARY OF TEST EQUIPMENT

| Item | Equipment                | Manufacturer      | Model No.   | Serial No.                 | Cal Date   | Due Date   |
|------|--------------------------|-------------------|-------------|----------------------------|------------|------------|
| 1    | Power Meter              | R&S               | NRVS        | 100444                     | 2023-06-15 | 2024-06-14 |
| 2    | Power Sensor             | R&S               | NRV-Z81     | 100458                     | 2023-06-15 | 2024-06-14 |
| 3    | Power Sensor             | R&S               | NRV-Z32     | 10057                      | 2023-06-15 | 2024-06-14 |
| 4    | Test Software            | Tonscend          | JS1120-2    | /                          | N/A        | N/A        |
| 5    | RF Control Unit          | Tonscend          | JS0806-2    | N/A                        | 2022-10-29 | 2023-10-28 |
| 6    | MXA Signal Analyzer      | Agilent           | N9020A      | MY50510140                 | 2022-10-29 | 2023-10-28 |
| 7    | DC Power Supply          | Agilent           | E3642A      | N/A                        | 2022-10-29 | 2023-10-28 |
| 8    | EMI Test Software        | AUDIX             | E3          | /                          | N/A        | N/A        |
| 9    | 3m Semi Anechoic Chamber | SIDT<br>FRANKONIA | SAC-3M      | 03CH03-HY                  | 2023-06-15 | 2024-06-14 |
| 10   | Positioning Controller   | Max-Full          | MF7802BS    | MF780208586                | N/A        | N/A        |
| 11   | Active Loop Antenna      | SCHWARZBECK       | FMZB 1519B  | 00005                      | 2021-08-29 | 2024-08-28 |
| 12   | By-log Antenna           | SCHWARZBECK       | VULB9163    | 9163-470                   | 2021-09-12 | 2024-09-11 |
| 13   | By-log Antenna           | SCHWARZBECK       | VULB9163    | 9163-471                   | 2021-09-12 | 2024-09-11 |
| 14   | Horn Antenna             | SCHWARZBECK       | BBHA 9120D  | 9120D-1925                 | 2021-09-05 | 2024-09-04 |
| 15   | Horn Antenna             | SCHWARZBECK       | BBHA 9120D  | 9120D-1926                 | 2021-09-05 | 2024-09-04 |
| 16   | Broadband Horn Antenna   | SCHWARZBECK       | BBHA 9170   | 791                        | 2021-08-29 | 2024-08-28 |
| 17   | Broadband Horn Antenna   | SCHWARZBECK       | BBHA 9170   | 792                        | 2021-08-29 | 2024-08-28 |
| 18   | Broadband Preamplifier   | SCHWARZBECK       | BBV9719     | 9719-025                   | 2023-06-15 | 2024-06-14 |
| 19   | EMI Test Receiver        | R&S               | ESR 7       | 101181                     | 2023-06-15 | 2024-06-14 |
| 20   | RS SPECTRUM ANALYZER     | R&S               | FSP40       | 100503                     | 2022-10-29 | 2023-10-28 |
| 21   | Broadband Preamplifier   | /                 | BP-01M18G   | P190501                    | 2023-06-15 | 2024-06-14 |
| 22   | 6dB Attenuator           | /                 | 100W/6dB    | 1172040                    | 2023-06-15 | 2024-06-14 |
| 23   | 3dB Attenuator           | /                 | 2N-3dB      | /                          | 2022-10-29 | 2023-10-28 |
| 24   | EMI Test Receiver        | R&S               | ESPI        | 101940                     | 2022-08-18 | 2023-08-17 |
| 25   | Artificial Mains         | R&S               | ENV216      | 101288                     | 2023-06-15 | 2024-06-14 |
| 26   | 10dB Attenuator          | SCHWARZBECK       | MTS-IMP-136 | 261115-001-0032            | 2023-06-15 | 2024-06-14 |
| 27   | EMI Test Software        | Farad             | EZ          | /                          | N/A        | N/A        |
| 28   | Audio Analyzer           | R&S               | UPV         | 1146.2003K02-10<br>1721-UW | 2023-06-15 | 2024-06-14 |
| 29   | Signal Generator         | Agilent           | E4438C      | MY49072627(3G)             | 2023-06-15 | 2024-06-14 |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

## 9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----

