



File reference No.: 2021-11-04

Applicant: TECHNOFASHION INC.

Product: DRONE

Model No.: NTDR01

Trademark: NAUTICA

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: November 04, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2021-11-04



Page 2 of 37

## **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

## **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2021-11-04



## Test Report Conclusion

## Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure	10
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit	12
6.5	Test Result	13
7.0	Band Edge	21
7.1	Test Method and Test Procedure	21
7.2	Radiated Test Setup.	21
7.3	Configuration of the EUT	21
7.4	EUT Operating Condition.	21
7.5	Band Edge Limit.	21
7.6	Band Edge Test Result.	22
8.0	Antenna Requirement.	26
9.0	20dB bandwidth measurement	27
10.0	FCC ID Label	30
11.0	Photo of Test Setup and EUT View	31

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-11-04



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

### 1.2 Applicant Details

Applicant: TECHNOFASHION INC.

Address: 127, Kingsland Ave, Clifton, NJ, USA, 07014

Telephone: +1 (973) 866 7373

Fax: --

## 1.3 Description of EUT

Product: DRONE

Manufacturer: TECHNOFASHION INC.

Address: 127, Kingsland Ave, Clifton, NJ, USA, 07014

Trademark: NAUTICA

Additional Trademark: N/A

Model Number: NTDR01
Additional Model Name N/A
Hardware Version: V1.5

Software Version: V1.3

Serial No.: NTDR01202107 Rating: Input: DC4.5V

Battery: 3pc DC1.5V AA battery

Modulation Type: GFSK

Operation Frequency: 2420MHz, 2440MHz, 2460MHz

Antenna Designation Integral antenna with gain 0dBi (Declared by the applicant)

### 1.4 Submitted Sample: 3 pc

## 1.5 Test Duration

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-11-04



Page 5 of 37

2021-10-21 to 2021-11-04

## 1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 37

Report No.: TW2110126-01E

Date: 2021-11-04



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-02
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2021-01-16	2022-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	1	2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

## 2.2 Automation Test Software

## For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

## For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 37

Report No.: TW2110126-01E

Date: 2021-11-04



### 3.0 Technical Details

## 3.1 Summary of test results

The EUT has	been tested	l according to	o the foll	owing s	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Antenna Reqirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	N/A
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2021-11-04



#### 5. Power Line Conducted Emission Test

### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

## 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

#### Block diagram of Test setup

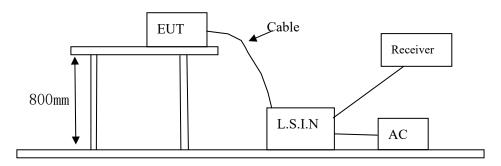

## 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID
DRONE	TECHNOFASHION INC.	NTDR01	2AZBO-N00014

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2110126-01E Page 9 of 37

Date: 2021-11-04



#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

## C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (c	lB μ V)			
(MHz)	Quasi-peak Level	Average Level			
0.15 ~ 0.50	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results:

N/A

Note: EUT powered by AA battery, this test item not applicable.

Report No.: TW2110126-01E Page 10 of 37

Date: 2021-11-04




#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**


For radiated emissions from 9kHz to 30MHz

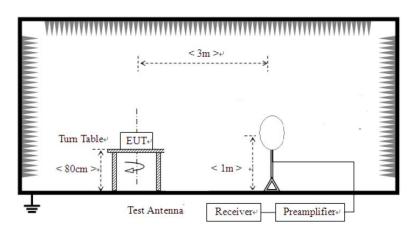


Date: 2021-11-04



For radiated emissions from 30MHz to1GHz

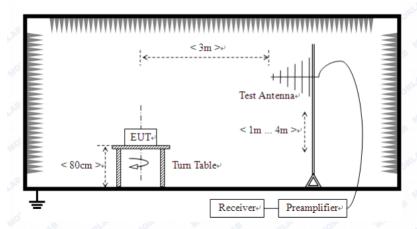

For radiated emissions above 1GHz

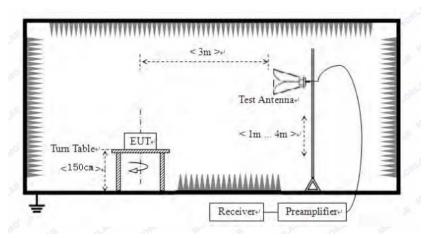

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.

Report No.: TW2110126-01E Page 12 of 37

Date: 2021-11-04



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

## A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	Field Strength of Fundamental (3m)			trength of Harmo	nics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

## B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 6. New batteries were used during the radiated emission test

Report No.: TW2110126-01E Page 13 of 37

Date: 2021-11-04




## 6.5 Test result

## A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2420MHz

## Horizontal

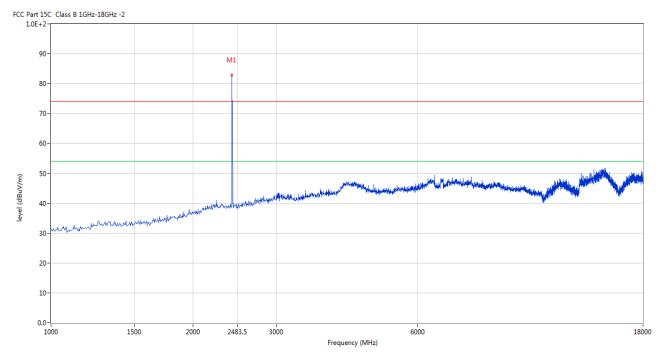


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2419.145	82.88	-3.57	114.0	-31.12	Peak	280.00	100	Horizontal	Pass

Report No.: TW2110126-01E Page 14 of 37

Date: 2021-11-04



## Vertical

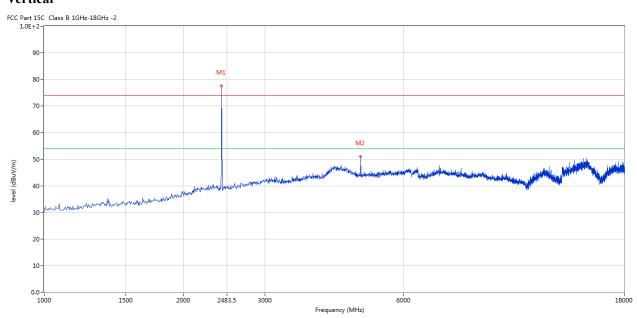

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2419.145	77.65	-3.57	114.0	-36.35	Peak	248.00	100	Vertical	Pass
2	4841.040	51.11	3.16	74.0	-22.89	Peak	164.00	100	Vertical	Pass


Report No.: TW2110126-01E Page 15 of 37

Date: 2021-11-04



Please refer to the following test plots for details: Middle Channel-2440MHz

#### Horizontal

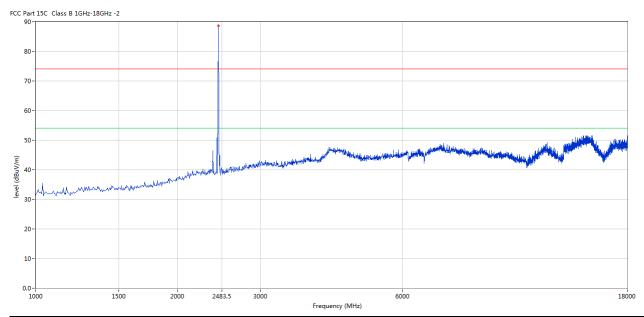


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	88.61	-3.57	114.0	-25.39	Peak	94.00	100	Horizontal	Pass

Report No.: TW2110126-01E Page 16 of 37

Date: 2021-11-04



## Vertical

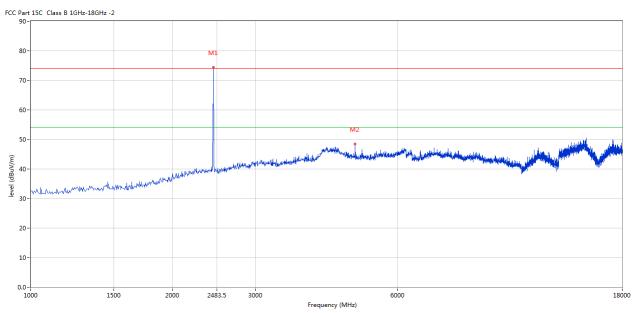

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	74.35	-3.57	114.0	-39.65	Peak	37.00	100	Vertical	Pass
2	4879.280	48.43	3.20	74.0	-25.57	Peak	280.00	100	Vertical	Pass


Report No.: TW2110126-01E Page 17 of 37

Date: 2021-11-04



Please refer to the following test plots for details: High Channel-2460MHz

#### Horizontal

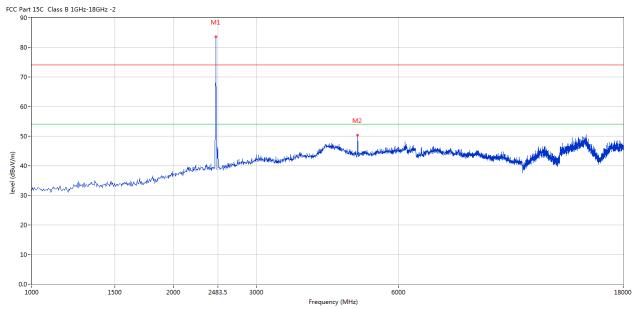

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2461.635	83.49	-3.57	114.0	-30.51	Peak	275.00	100	Horizontal	Pass
2	4917.521	50.36	3.26	74.0	-23.64	Peak	355.00	100	Horizontal	Pass


Page 18 of 37

Report No.: TW2110126-01E

Date: 2021-11-04



#### Vertical

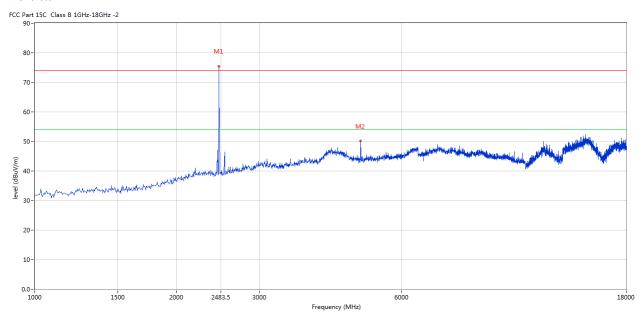

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2461.635	75.50	-3.57	114.0	-38.50	Peak	1.00	100	Vertical	Pass
2	4917.521	50.11	3.26	74.0	-23.89	Peak	286.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2110126-01E Page 19 of 37

Date: 2021-11-04




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

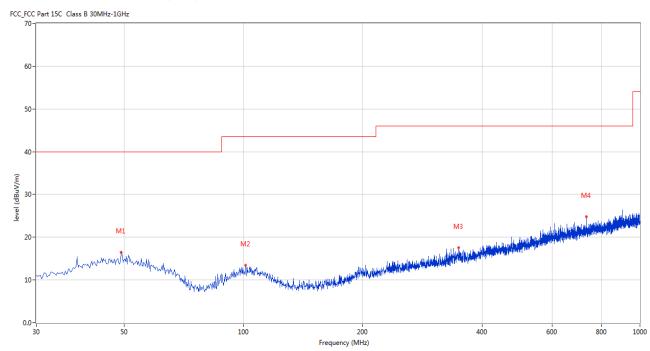

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	49.153	16.50	-11.24	40.0	-23.50	Peak	139.00	100	Horizontal	Pass
2	101.277	13.49	-13.45	43.5	-30.01	Peak	360.00	100	Horizontal	Pass
3	348.565	17.56	-9.44	46.0	-28.44	Peak	17.00	100	Horizontal	Pass
4	732.104	24.80	-3.66	46.0	-21.20	Peak	105.00	100	Horizontal	Pass

Report No.: TW2110126-01E Page 20 of 37

Date: 2021-11-04




## Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

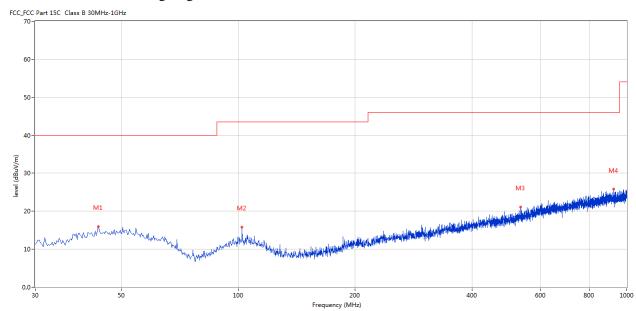

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	43.577	16.01	-11.49	40.0	-23.99	Peak	258.00	100	Vertical	Pass
2	102.247	15.81	-13.42	43.5	-27.69	Peak	134.00	100	Vertical	Pass
3	532.819	21.15	-6.38	46.0	-24.85	Peak	117.00	100	Vertical	Pass
4	925.086	25.78	-1.71	46.0	-20.22	Peak	292.00	100	Vertical	Pass

Date: 2021-11-04




## 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

## 7. 2 Radiated Test Setup

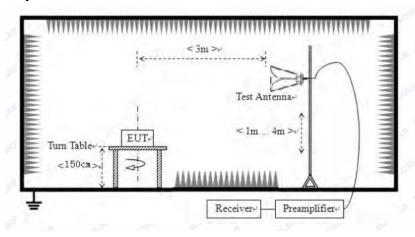

For the actual test configuration, please refer to the related items – Photos of Testing

## 7.3 Configuration of The EUT

Same as section 5.3 of this report

## 7.4 EUT Operating Condition

Same as section 5.4 of this report.

## 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TW2110126-01E Page 22 of 37

Date: 2021-11-04



### 7.6 Test Result

Product:	DRONE	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC4.5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

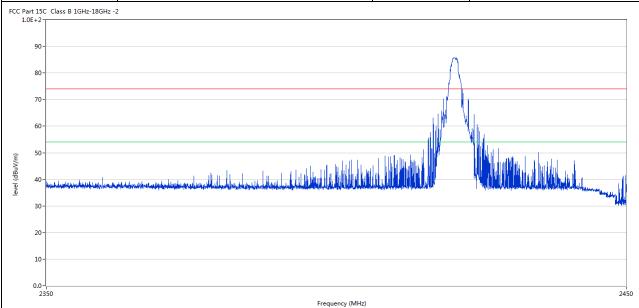

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2400.587	46.85	-3.57	74.0	-27.15	Peak	71.00	100	Horizontal	Pass
3	2391.715	42.86	-3.54	74.0	-31.14	Peak	80.00	100	Horizontal	Pass

Report No.: TW2110126-01E Page 23 of 37



P	Product:		DRON	NE	I	Detector		Ver	tical	
	Mode	Ke	eping Trai	nsmitting	Te	st Voltage		DC	4.5V	
Ter	nperature		24 deg	. C,	F	Humidity		56%	6 RH	
Tes	st Result:		Pass	S						
C Part 15	6C Class B 1GHz-18GHz -2									
90										
90										
80	1						Λ			
70							1			
70							√ No.			
60						J.J.	/ N <sub>4</sub>			
60	-									
60	-							Albander († 1	nal n	
60	-	danamahi an perioda mendelahasakan perioda	- sadou - Landando	والمستوعد ووروا والمتاري	الاستاب التعاليدا					4) May 1
60		ela-generalis de de la frança de	wantania Jugawa Johann	والمعادية بدون والمبارئة والمادية	Land March Land Miles					4.Mag <u>u</u>
50		el nyerinn hi sin qirki isi meta kishi isini uga siba.	wandonia Jumpa da banga	وروان والمعروب والمعروب المعروب المعروب المعروب والمعروب والمعروب والمعروب والمعروب والمعروب والمعروب والمعروب	الألمستدل والمتعادمة					**************************************
60 50 40 30 20		elwynauwh was ga t i i wang a lipha ing ang maha	washirin Jugaran dalaga	والمراجعة						**************************************
60 50 40 30 20		els, genera, hi i in aprili in sembra labba saybang marka,	wantania Jugatan dabaga	ور المعارضة في المعارضة المعار						4.184.4 <u>4.1</u> 1
60 50 40 30 20		il nyaatuu ki siin ja kiisi samitulii kusi inta suu siku	wandania Juwatan dabaga	rozinia kirikacan anabala	equency (MHz)					2450
60 50 40 30 20 10	- metally surface, land of the surface of the surfa	Results	Factor	Fre Limit	equency (MHz)  Over Limit	Detector	Table	Height	ANT	1
60 50 40 30 20 10	and how and the second	Results (dBuV/m)	Factor (dB)	1	1	Detector	Table (o)	Height (cm)	ANT	1
60 50 40 30 20	Frequency			Limit	Over Limit	Detector			ANT	2450 Verdid

Report No.: TW2110126-01E Page 24 of 37



Product:	]	DRONE		Polarity		Н	orizontal	
Mode	Keepin	ng Transmitting		Test Voltaș	ge	Γ	C4.5V	
Temperature	2	24 deg. C,		Humidity	7	5	6% RH	
Test Result:		Pass						
CC Part 15C Class B 1GHz-18GHz -	2		•		•			
70-								
50 - 40 - 40 - 20 - 10 - 10 -			Addibilitable beds			dd aday dalah	history and should be taken be to	Add App Los
(E) 40 - 40 - 30 - 20 - 20 -		Fr.	equency (MHz)	248	3.5	del ades de la lace	history and should be taken be to	2500
30 - 20 - 10 - 0.0	Results Fact	1	equency (MHz)	248:	3.5 Table	Height	ANT	2500 Verdid
30 - 20 - 2450	Results Fact (dBuV/m) (dB)	ctor Limit	1	T		Height (cm)	ANT	1

Page 25 of 37

Report No.: TW2110126-01E

Date: 2021-11-04



P	roduct:		DRON	ΙE	D	etector		Ve	rtical	
	Mode	K	eeping Tran	smitting	Tes	t Voltage		DC	4.5V	
Ten	nperature		24 deg.	C,	H	umidity		56%	% RH	
Tes	st Result:		Pass							
90- 80-	C Class B 1GHz-18GHz -	2								
70-										
60-			1							
50-								APPROPRIENT HALL	n, bayyah, dan jabah bakhah jabah kan ja	
50-								LONG LAL	a, sagrir sagala di di sagang d	44
50- 40- 30-								interpretation of the second o	e, bezert samble iterholament	es de la constitución de la cons
50- 40- 30- 20-				Frequ	uency (MHz)	2483.5		intelletatelletatelletannessania	n, bezeri, sazabi ilir kulangeri	2500
50- 40- 30- 20- 10- 2450	Frequency	Results	Factor	Frequ	uency (MHz)  Over Limit	2483.5 Detector	Table	Height	ANT	2500 Verdic
50- 40- 30- 20-		Results (dBuV/m)	Factor (dB)	1	1	Т	Table (o)	Height (cm)	ANT	1

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. New batteries were used during the test

Date: 2021-11-04



Page 26 of 37

## 8.0 Antenna Requirement

## **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a Integral antenna with gain 0dBi Max. It fulfills the requirement of this section.

Test Result: Pass

Page 27 of 37

Report No.: TW2110126-01E



Product:	DRONE				est Mode:	Keep transmitting			
Mode	Keeping Transmitting				est Voltage	DC4.5V			
Temperature		24 deg. C,		]	Humidity 56% RH		56% RH		
Test Result:		Pass			Detector	PK		<u> </u>	
0dB Bandwidth	1.112MHz								
Ŕ	Marker 1 [T1 ndB]			BW	30 kI	Hz RF Att		20 dB	
Ref Lvl	ndB	20.00		BW	100 k				
10 dBm	BW :	1.11222445	MHz S	WT	8.5 ms	s Ur	nit	dBm	
10					<b>v</b> <sub>1</sub>	[T1]	-6	.30 dBm	I
							2.41994	890 GHz	
0			1		ndB		20	.00 dB	ì
			Ā		BW ▼⊤1		1.11222	445 MHz	ì
-10					V T I	[T1]	2.41938	.78 dBm 978 GHz	1
		Mad a	W Jam	m.	$ abla_{\mathrm{T}2}$	[T1]	-26	.27 dBm	ì
-20		1/2/		~			2.42050	200 GHz	ì
1MAX	T	· · ·			V (T2				11
-30									ı
	n								1
-40	My Many					<del></del>	NC all		ì
	/ W V						" Wy	a da	ı
-50							Wh	<del>May hy</del>	ì
								·	1
-60									1
									1
-70									1
									1
-80									1
									1
-90									1
Center 2.4	2 GHz		300 kHz/				Spa	n 3 MHz	

Page 28 of 37

Report No.: TW2110126-01E



Product:	]	DRONE		Test Mode:	Keep transmitting		
Mode	Keepin	g Transmitting	Т	est Voltage	DC4.5V		
Temperature	2	4 deg. C,		Humidity	56% RH PK		
Test Result:		Pass		Detector			
20dB Bandwidth	1.	.124MHz					
		1 [T1 ndB]	RBW	30 kHz		20 dB	
Ref Lvl 10 dBm	ndB BW 1	20.00 dB L.12424850 MHz	VBW SWT	100 kHz 8.5 ms	: Unit	dBm	
10				<b>V</b> 1 [	n1 1	E0 4Pm	
				, T [.	[1] -1 2.43994	.58 dBm A 890 GHz	
0				ndB	20	.00 dB	
		1		BW	1.12424	850 MHz	
-10		<del>                                     </del>		$\nabla_{\mathrm{Tl}}$	[T1] -2°	1.59 dBm	
		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		$ abla_{\mathrm{T}2}$	2.43938	377 GHz	
-20		Maryll 10.	1 mil	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	[T1] -27 2.44050	.60 dBm	
1MAX	T.			W MC 2	2.44030	1MA	
-30				<del>                                     </del>			
	الم				d		
-40				V	W WY		
-50 Million	0				<u> </u>	<del> <sup>™</sup>≈∥⁴п∬<sub>М</sub></del>	
-60							
-70							
-80							
-90							
Center 2.	44 GHz	300	kHz/		Spa	ın 3 MHz	
Date: 27	.OCT.2021 15	:14:49					

Page 29 of 37

Report No.: TW2110126-01E



Product:	DRONE				Test Mode:		Keep transmitting		
Mode	Keeping Transmitting				Test Voltage		DC4.5V		
Temperature	24 deg. C,				Humidity		56% RH		
Test Result:	Pass				Detector		PK		
20dB Bandwidth	1.118MHz								
(S)	Marker	1 [T1 ndB]		RBW	30 kH	Iz RI	7 Att	20 dB	
Ref Lvl 10 dBm	ndB BW	20.00 dE L.11823647 MH		/BW SWT	100 kH 8.5 ms		nit	dBm	ı
10									Ī
					1	[T1]	-2 2.45994	.98 dBm 890 GHz	A
0			<del>1</del>		ndB		20	.00 dB	
					BW ∇ <sub>T1</sub>		1.11823	647 MHz	
-10		1	1	Μ,	V T1	[T1]	-23 2.45938	.16 dBm 978 GHz	
2.0			Cyc	٠٠.	V <sub>T2</sub>	[T1]	-22	.92 dBm	
-20 1MAX	Y	W .			Ÿ		2.46050	802 GHz	1MA
-30									
-40	my my					<u>, M</u>	ol~\ak		
	<b>V</b>					-γ <sub>ν</sub> , ω	Wh.	~\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
-50							•		
-60									
-70									
9.0									
-80									
-90									
Center 2			0 kHz/	/			Spa	ın 3 MHz	
Date: 27	7.OCT.2021 15	:27:38							

Report No.: TW2110126-01E Page 30 of 37

Date: 2021-11-04



### 10.0 FCC ID Label

#### FCC ID: 2AZBO-N00014

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### **Mark Location:**




Date: 2021-11-04



#### 11.0 Photo of testing

#### 11.1 Conducted test View-N/A Radiated emission test view



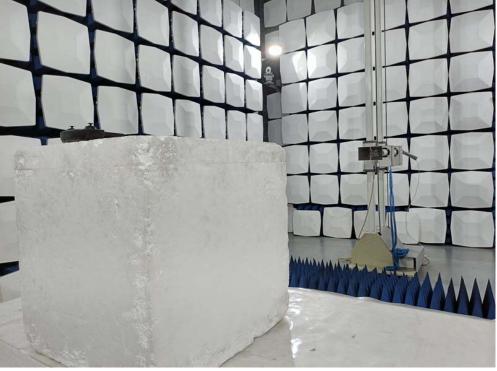

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-11-04



#### 11.2 Photographs-EUT

#### Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-11-04



## Photographs-EUT

## Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-11-04



## Photographs-EUT

### Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2021-11-04



Photographs-EUT

Inside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Date: 2021-11-04



Photographs-EUT

Inside View

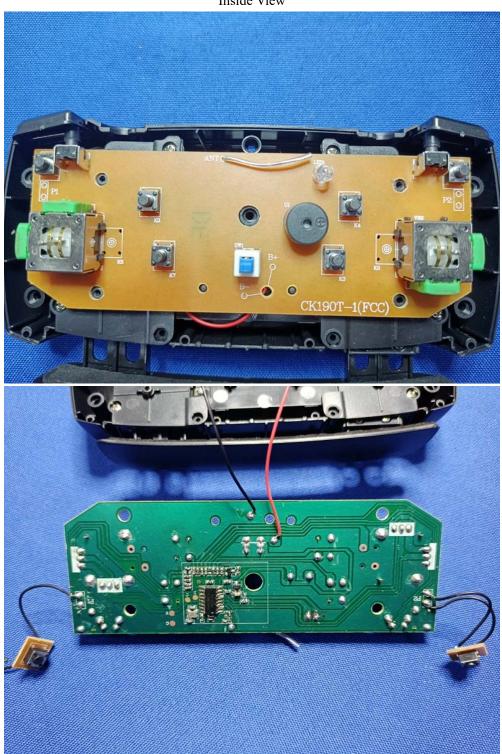

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Date: 2021-11-04



## Photographs-EUT

### Inside View

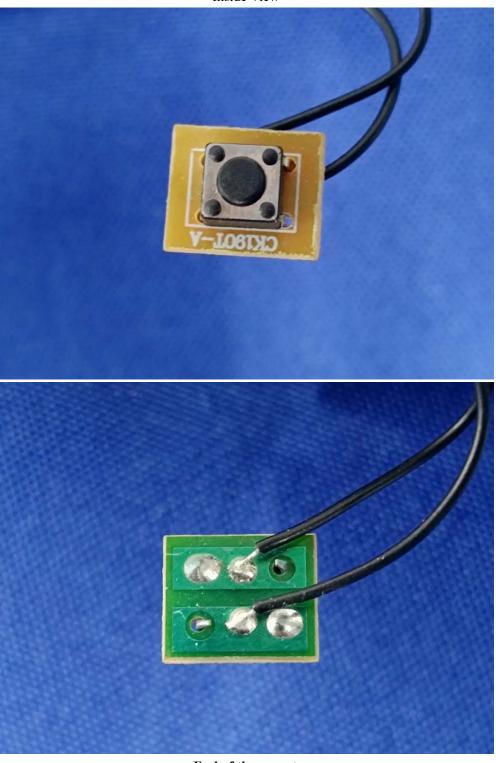

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.