


Wireless HDMI adapter

Manual

V1.0


Receiver (RX) connection method :

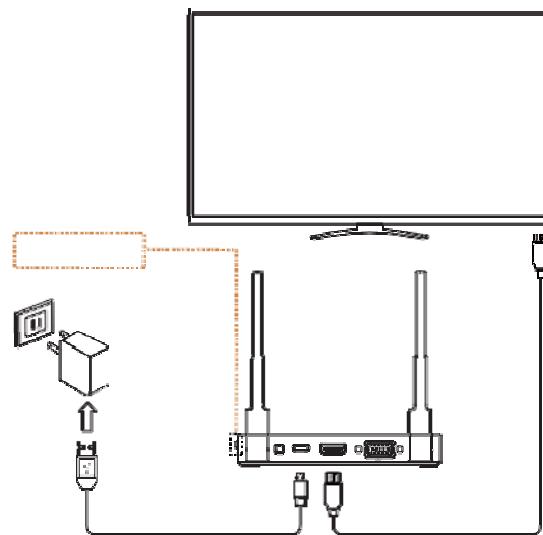

(Picture 1)

1. Insert the HD cable in the accessory into the HD port of the receiver (RX), and connect the other end HD cable input port of the large screen display terminal (TV or other equipment).
2. Insert the Type-C port of the power cable in the accessory into the power supply port of the receiver (RX), and plug the other end into the adapter or USB power supply port. (Voltage : 5V/1A)
3. Adjust the HD signal source of the TV to the corresponding HD port until the receiver's startup screen displays and the startup is successful.


Transmitter (RX) connection method :

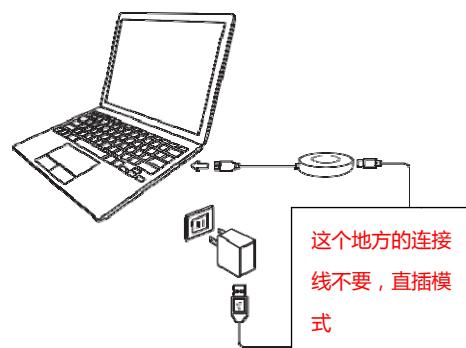

(Picture2)

1. Insert the transmitter (TX) HD cable into the computer HD output port. After waiting for ten seconds, you can project the laptop screen to the big screen and complete the projection. (Please ensure that the computer is fully charged)


2. If the computer's power supply is insufficient or the HD port cannot be powered, please connect as follows:

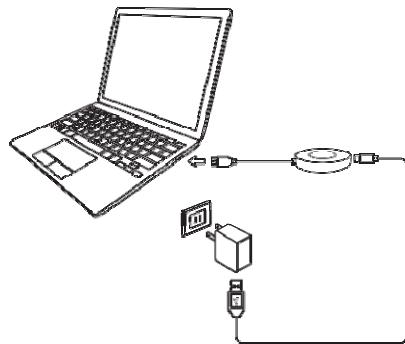

(Picture 2)

3. Plug the transmitter' s power supply into the adapter or USB power port (voltage : 5V/1A), and then the transmitter' s HD interface.


2. Insert the HD interface of the laptop, wait for ten seconds to transfer the screen projection of the laptop to the big screen.

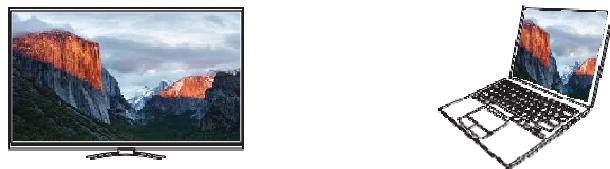

(Picture3) connection succeeded

Transmitter (TX) - Receiver (RX) Device pairing instructions :

Note: This product is one-to-one pairing OK when it leaves the factory. This step is to prevent improper operation or other emergencies during the use of the customer, causing pairing to fail, and then to restore and re-pair the device..

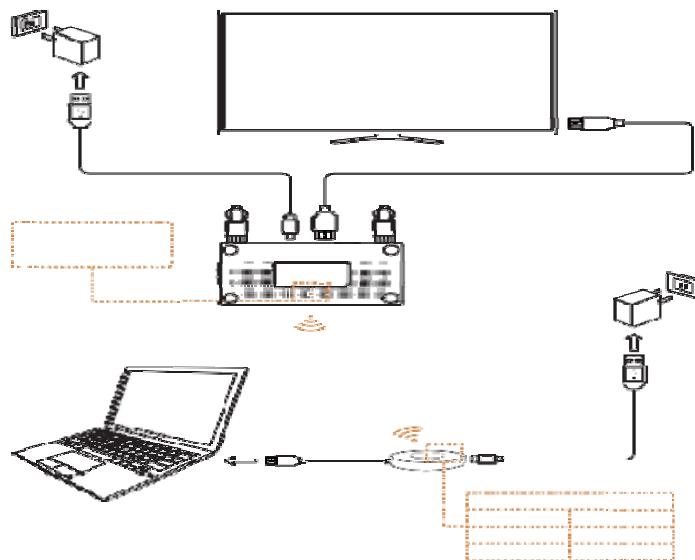

(Picture4)

1. The receiver is connected to the screen and the standby interface is displayed.
2. Insert the HD cable of the transmitter into the HD port behind the receiver, use the tool to press and hold the button on the bottom of the receiver for more than 3 seconds, and wait for the receiver to enter the pairing mode.
3. Prompt on the interface : Release the button to pair with EZCast TX , Press and hold the button on the transmitter for more than 3 seconds. The TX indicator is always on to indicate a successful connection

Steps to directly connect the phone to the screen

Android system :

1. Open phone settings : All sharecast /SmartView/Multi-screen/Mirroring
2. Search RX-XXXX device and connect.

Different brand mobile phone/tablet wireless projection function setting path :

Huawei:Drop-down menu-Multi-screen

Xiaomi:Set up-Connect and share-Cast

Samsung:Drop-down menu-SmartView.....

iOS system connection :

- Click WiFi on the phone settings page, find the hotspot of RX-XXXX and connect. E.g: RX-XXXX
- Enter password:*****



Swipe the screen to enter the Apple device control center, click Screen mirroring, Check "RX-XXXX" .



Be careful when using wireless HD transmission equipment :

- Be careful when using wireless HD transmission equipment.
- Do not use and operate this device during a storm.
- Do not place the device in a humid and high temperature environment for a long time.
- Do not disassemble or repair this equipment privately.

Warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

NOTE: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter