

## Nano-ant Product Specification

# Internal antenna

## YING GUAN YG420-TP 2.4G/5.8GWIFI

**Manufacturer: Shenzhen Nano-ant communication Techology Co., Ltd.**

**Address: No.2, 1st Floor, Building B, Defengsheng Building, No.41 Dabao  
Road, Xin'an Street, Bao'an District, Shenzhen**

APPROVED BY	SIGNATURE	DATE
Mechanical Engineer:	Zhou Yang	2021-02-23
RF Engineer:	Li Guodong	2021-02-23
Engineering Manager:	Ri Jae-il	2021-02-23
Approved By Customer (as required):		

**1.0 DESCRIPTIONS AND PART NUMBER:**

1.1 DESCRIPTION;

The antenna mounts to the housing of the projector. And after that, the feed point on the prolongation of metal plate should firmly touch the contact provided on the PCB in the respective area.

1.2 PART NUMBER

Part number	Frequency Band	HH Part Number
SZ6023L		

**2.0 ELECTRICAL SPECIFICATIONS:**

2.1 FREQUENCY BAND

YG420-TP 2.4G/5.8GWIFI

2.2 IMPEDANCE - Nominal impedance: 50Ω

2.3 ACTIVE TEST REPORT

Test equipment

E5071C Network Analyzer




SG24 microwave anechoic chamber



1. Antenna matching circuit , Matching circuit No changes

2. Antenna S11

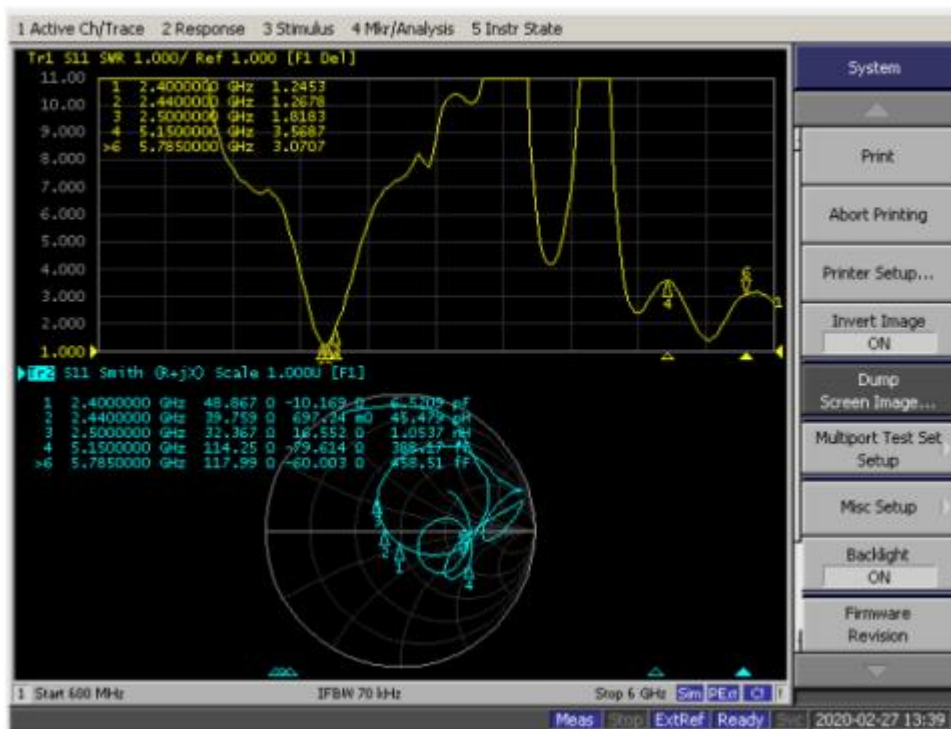

3. Passive test data Passive result


The following figure shows the efficiency of 2.4G 5G antenna


Gain&Efficiency			
frequency (Hz)	gain (dB)	efficiency (dB)	efficiency
2400M	3.5	-2.82	47.24%
2410M	3.71	-2.73	48.32%
2420M	4.1	-2.6	50%
2430M	4.28	-2.31	53.70%
2440M	4.27	-2.27	54.33%
2450M	4.67	-2.02	58.77%
2460M	4.58	-2	59.15%
2470M	4.53	-1.89	59.69%
2480M	4.73	-1.84	59.39%
2490M	4.59	-1.91	58.46%
2500M	4.38	-1.96	58.70%

Gain&Efficiency			
frequency (Hz)	gain (dB)	efficiency (dB)	efficiency
5100M	4.85	-2.14	56.06%
5135M	4.6	-2.49	51.41%
5170M	4.77	-2.31	53.77%
5205M	4.96	-2.11	56.57%
5240M	4.65	-2.42	52.26%
5275M	4.65	-2.34	53.30%
5310M	4.47	-2.38	52.84%
5345M	5.32	-1.92	59.22%
5380M	5.26	-2.3	53.90%
5415M	5.83	-2.23	54.78%
5450M	5.61	-2.5	51.28%
5485M	5.28	-2.31	53.74%
5520M	5.33	-2.31	53.74%
5555M	5.09	-2.61	49.82%
5590M	5.29	-2.49	51.36%
5625M	5.16	-2.68	49%
5660M	5.4	-2.21	55.06%
5695M	5.32	-2.33	48.51%
5730M	5.21	-2.26	54.45%
5765M	4.61	-2.53	51.87%
5800M	4.55	-2.26	55.39%

4. The following figure shows the Pattern of 2.4G 5G antenna

**H Theta=90 freq=2440MHz      V Phi=90 freq=2440MHz**

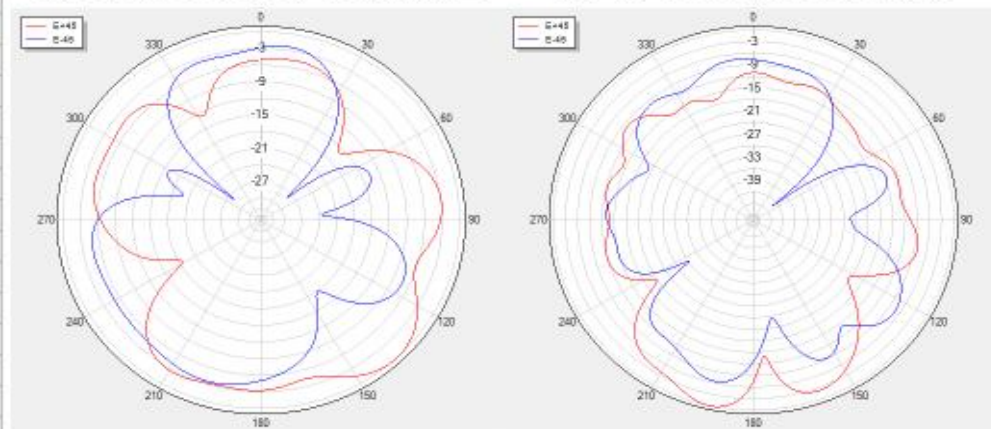

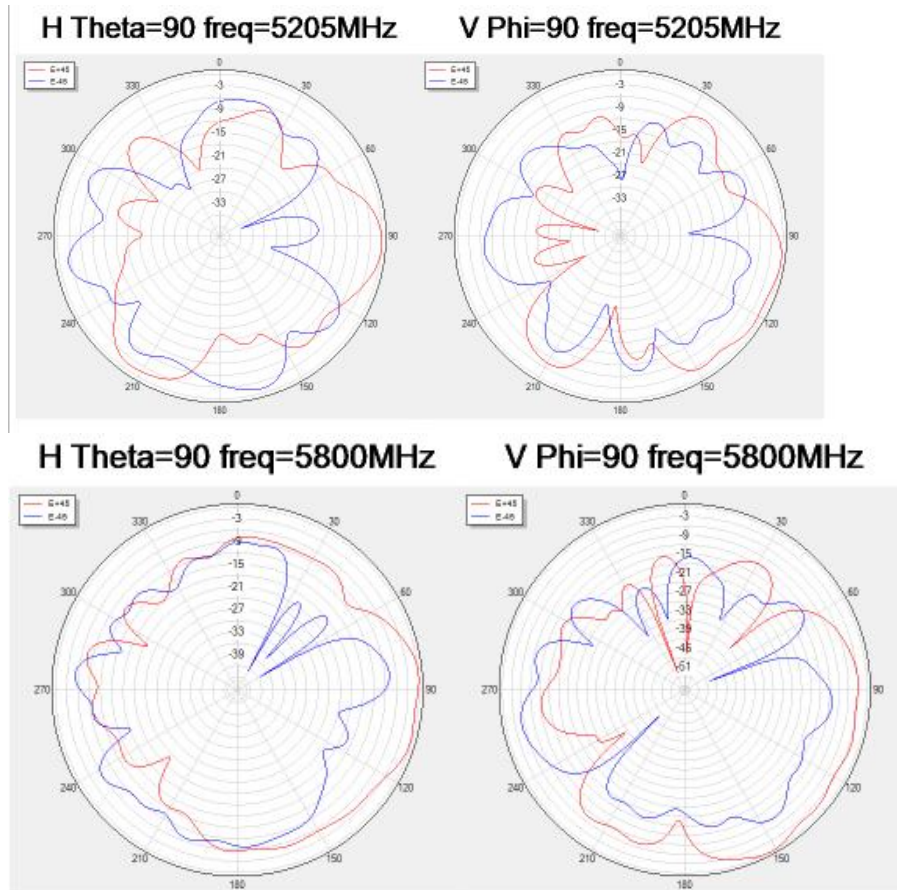

### 3.0 MECHANICAL SPECIFICATIONS:

#### 3.1 MECHANICAL CONFIGURATION

The appearance of the antenna is in accordance with drawing 6023L

#### 3.2 CONNECTOR TYPE

The connector type is an embedded type

### 4.0 ENVIRONMENTAL SPECIFICATIONS

#### 4.1 TEMPERATURE

Operating Temperature Range:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Storage Temperature Range:  $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$

#### 4.2 SALT SPRAY TEST

Antenna be exposed in a  $35^{\circ}\text{C}$ , 5% salt fog chamber for 24 hours then check the appearance and performance against the specifications in normal temperature.

#### 4.3 STATIC HUMIDITY TEST

The antenna is subjected to the following test:

Temperatures:  $+70^{\circ}\text{C}$  and 90%--95%RH


Test Duration: 24 Hours

The antenna should not undergo any structural or functional change and remain within the electrical/mechanical specification.

### 5.0 PACKAGING

The antennas will be packed in bags, There are 100 or 200 antennas per bag. The bags are packed in corrugated fibreboard over box Drawing

Drawing :

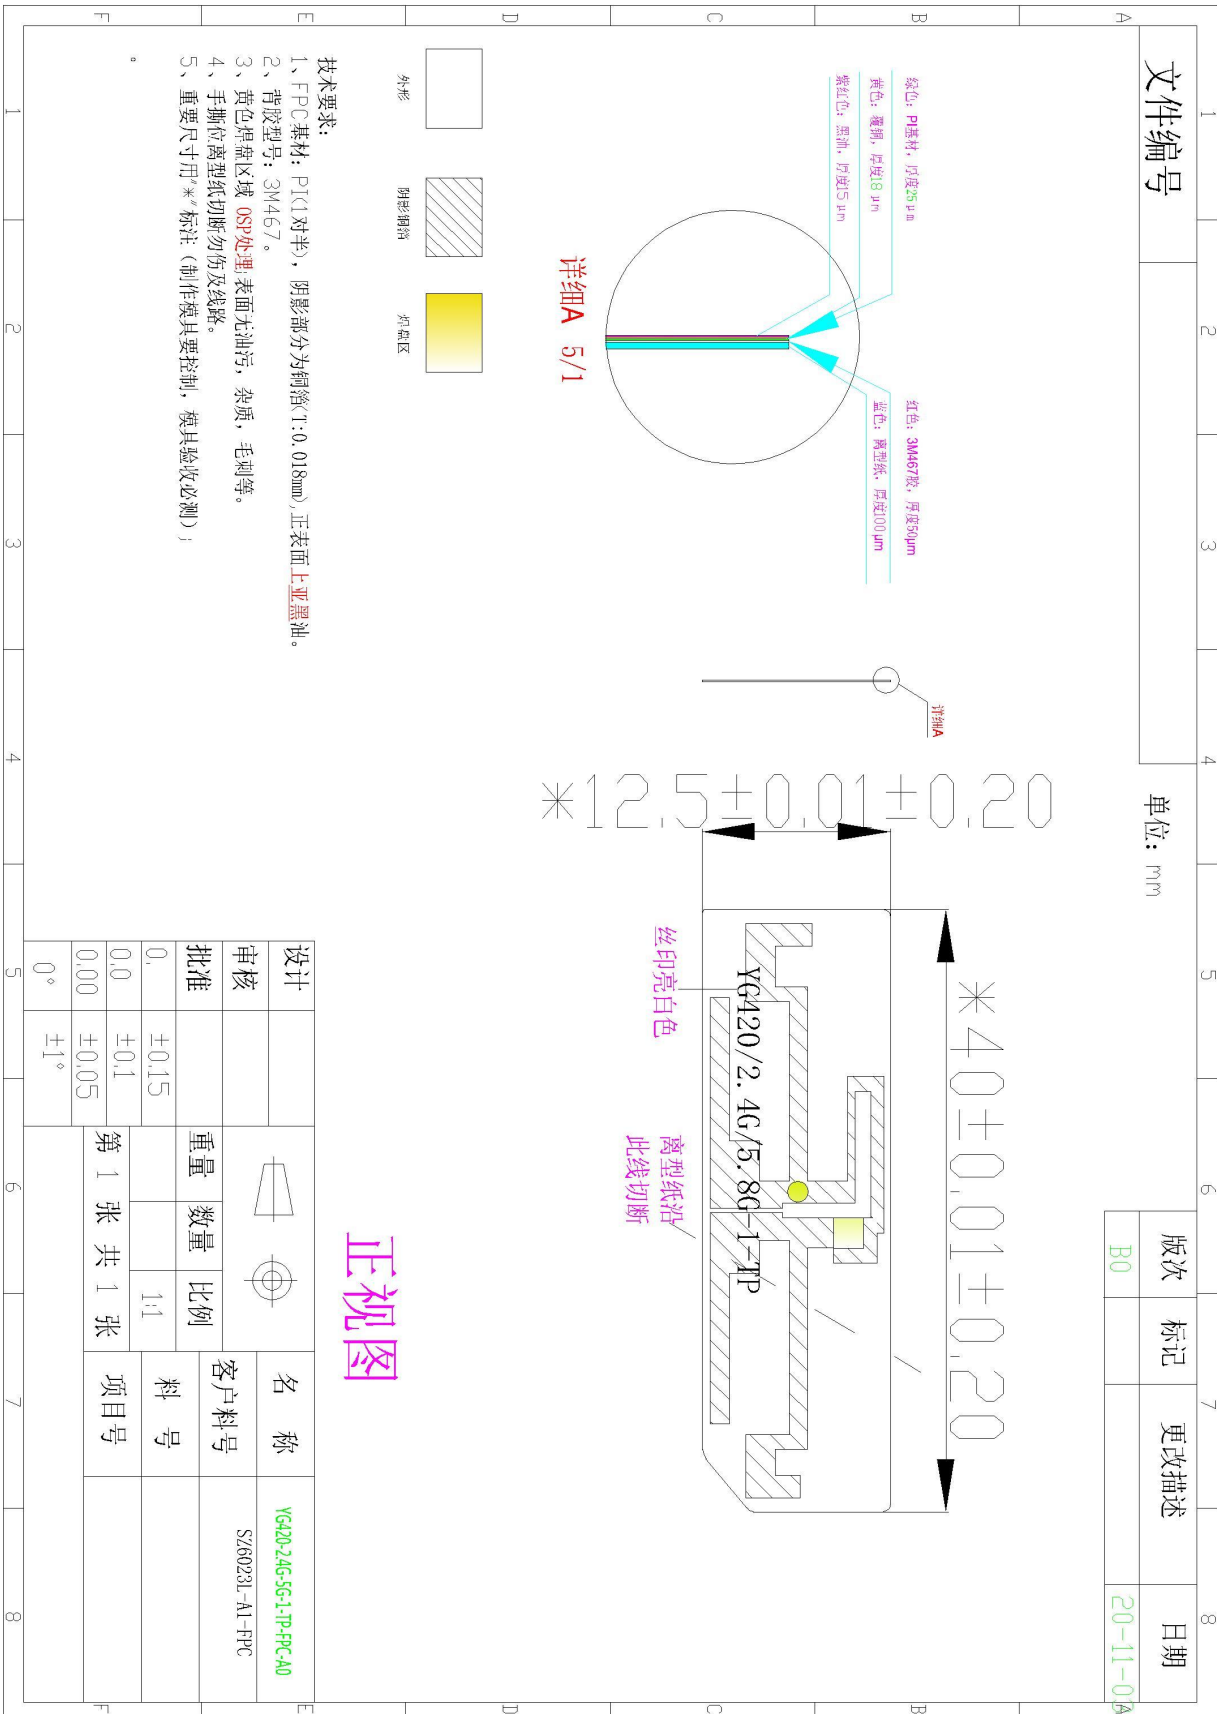

- 技术要求:
- 1、FPC基材: PI(1对半), 阴影部分为铜箔(1:0.018mm)正表面上亚黑油。
  - 2、背胶型号: 3M467。
  - 3、黄色焊盘区域 OSP处理,表面无油污,杂质,毛刺等。
  - 4、手撕位离型纸切断勿伤及线路。
  - 5、重要尺寸用\*标注(制作模具要控制,模具验收必测)。

设计							
审核							
批准		重量	数量	比例	客户料号	项目号	
		±0.15		1:1			
		±0.1					
		±0.05	第 1 张	共 1 张			
		0°					