

# Testing Report


Customer Name: SHENZHEN KERUI SMART TECHNOLOGY CO.,  
LTD

Product Name: antenna

Sample Model: T0712O167P

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2022.11.23

Engineer: Jackson	Date: 2022.11.23	
Auditor: Eason	Date: 2022.11.23	
Approver: Amora	Date: 2022.11.23	

### Version

Version No.	Date	Description	Formulate	Approval
A0	2022.11.23	For the first time, formulate	Jackson	Eason

### Contents


1.General Information.....	3
1.1 General information of testing institutions.....	3
1.2 Testing principle.....	3
1.3 Test equipment.....	4
1.4 Test environment.....	4
1.5 Statement.....	4
2.Sample Information.....	5
2.1 Client information.....	5
2.2 Description of EUT(S).....	5
2.3 EUT appearance.....	6
2.4 DUT setup photo of free space OTA testing.....	6
3.Test Results.....	7
3.1 Test standard.....	7
3.2 Test uncertainty.....	7
3.3 Test data.....	8
3.3.1 Typical free space efficiency and gain.....	8
3.3.2 Typical free space radiation pattern.....	8
(The following is blank).....	10

# 1. General Information

## 1.1 General information of testing institutions

<b>Name</b>	Shenzhen RFI-LAB Communication Technology Co., Ltd.
<b>Address</b>	10/F A, Lingyun Bld, Liufang Road, Baoan District, Shenzhen
<b>Tel</b>	13682621346
<b>E-mail</b>	rfi-lab@tech-now.com
<b>Equipment</b>	All the equipment used in the report is fixed in Zone B, West Side of I/F, Building 1, Tingwei Industrial Park, No.6 Liufang Road, Bao 'an District, Shenzhen

## 1.2 Testing principle

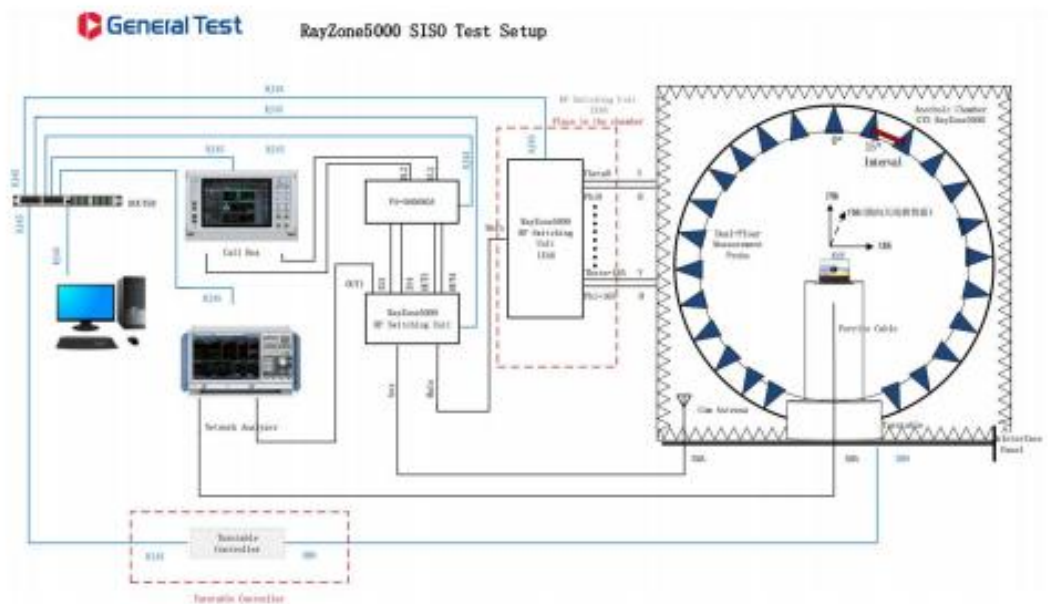

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
OTA Test System	RayZone-5000	RFI-LAB-RF-D00	GTS	2021.3.15	2023.3.14
Network Analyzer	E5071C	RFI-LAB-RF-D01	KEYSIGHT	2022.5.13	2023.5.12

### 1.4 Test environment

Temperature	23.8℃
Humidity	59%RH
Pressure	100.13kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information


### 2.1 Client information

<b>Name</b>	SHENZHEN KERUI SMART TECHNOLOGY CO., LTD
<b>Address</b>	Room 1501, T2, Jinlitong Building, No. 1100, Xingye Road, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
<b>Contacts</b>	/
<b>Tel</b>	/
<b>E-mail</b>	/


### 2.2 Description of EUT(S)

<b>Product Name</b>	antenna
<b>Sample Model</b>	T0712O167P
<b>Size</b>	/
<b>Serial No.</b>	/
<b>Test Item</b>	Antenna gain; Efficiency; Radiation pattern
<b>Frequency Range</b>	428-438MHz
<b>Received Date</b>	2022.11.4
<b>Test Date</b>	2022.11.7
<b>Remark</b>	The length of the RF cable is 90mm

### 2.3 EUT appearance

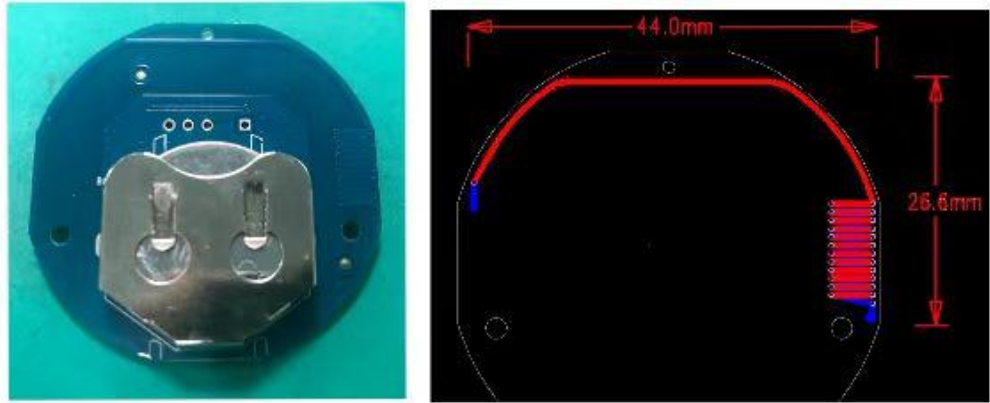

### 2.4 DUT setup photo of free space OTA testing

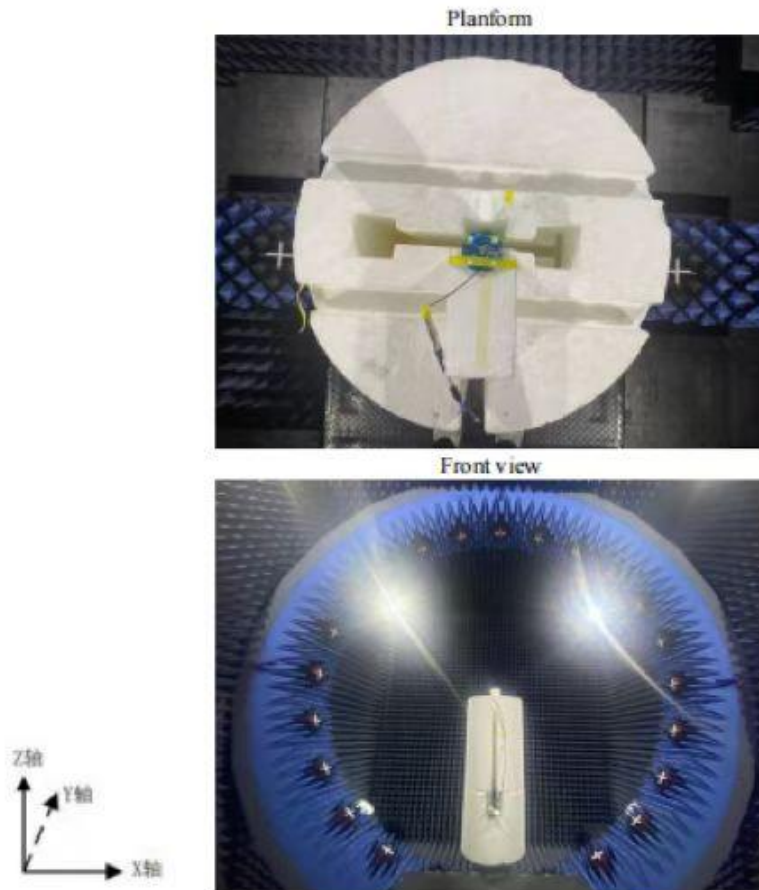

### 3. Test Results

#### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	Antenna gain	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Radiation pattern		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		

#### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.


Item	Uncertainty
Antenna gain	$\pm 0.72$ dB
Radiation efficiency	$\pm 0.72$ dB

### 3.3 Test data

#### 3.3.1 Typical free space efficiency and gain


Frequency/MHz	428	429	430	431	432	433	434	435	436	437	438
Peak Gain/dBi	-8.76	-8.84	-8.93	-9.02	-9.13	-9.21	-9.27	-9.37	-9.42	-9.47	-9.54
Efficiency/%	4.40	4.40	4.41	4.38	4.37	4.39	4.37	4.37	4.42	4.46	4.49

#### 3.3.2 Typical free space radiation pattern

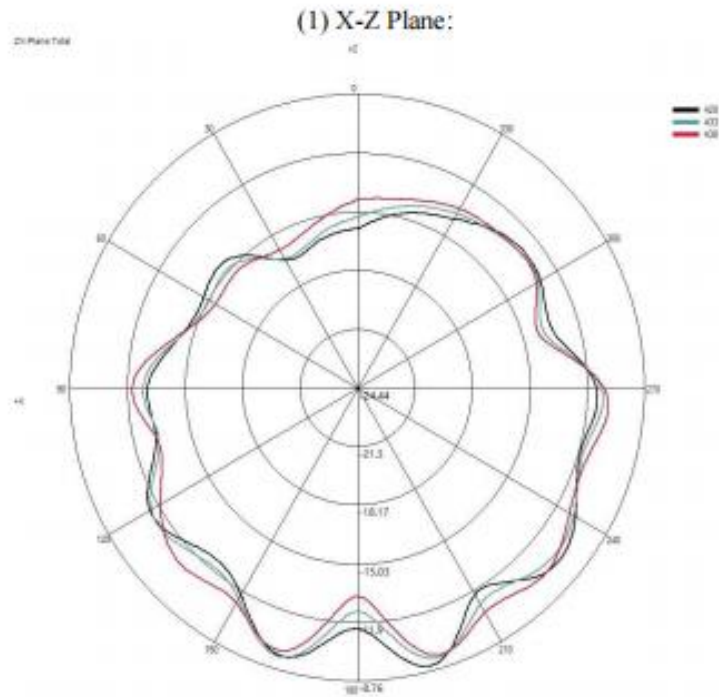





(2) Y-Z Plane:

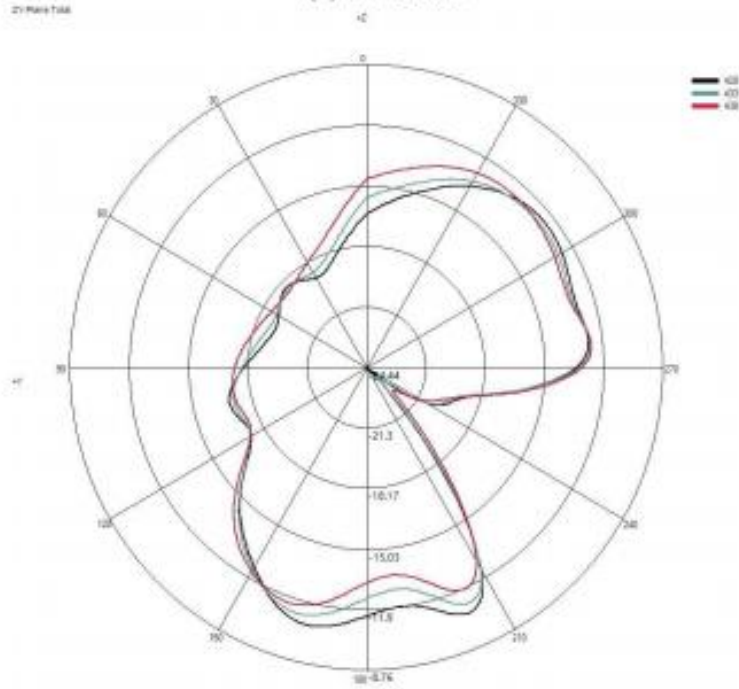

(3) X-Y Plane:

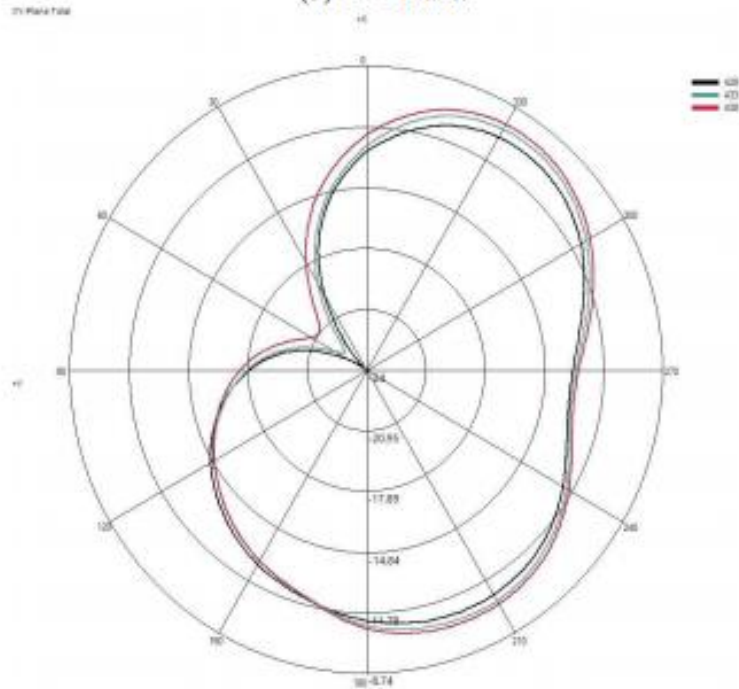

(4) Typical Free Space 3D Radiation Pattern at 433MHz:

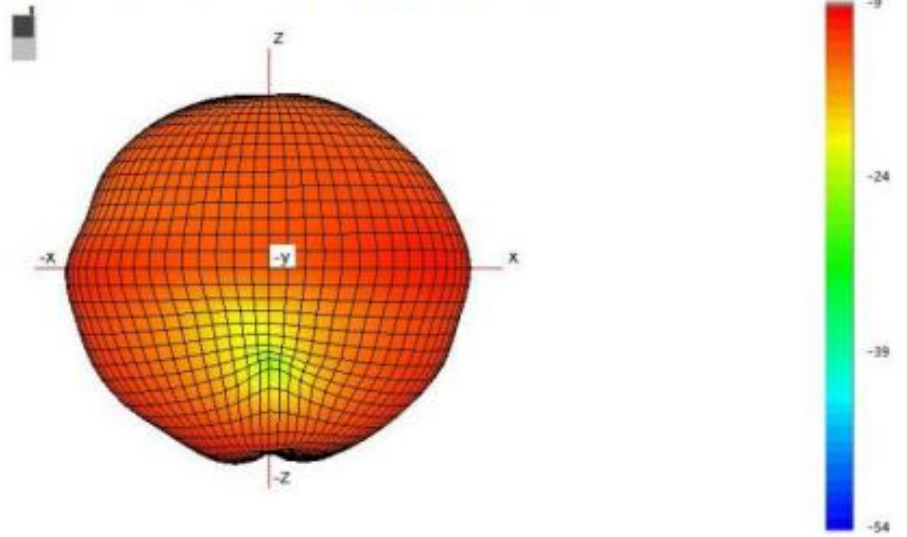

End

(The following is blank)