


# ETHERNET AIR application manual

## Appearance:

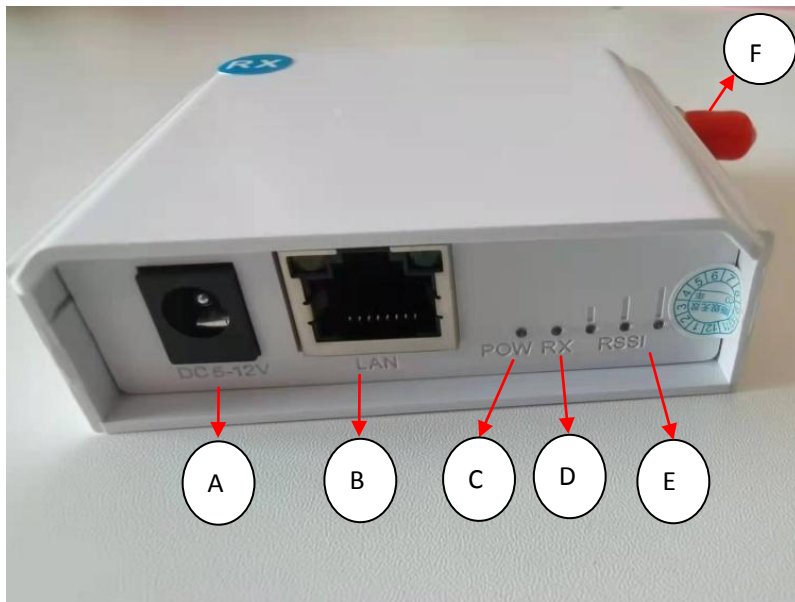

### Remarks:

A: Power input 5~12Vdc; B: Network port; C: Power indicator;  
D: Receive/transmit indicator; E: Signal strength indicator; F: Antenna;

## Application guide:

1. Connect the antenna to the SMA antenna connector.
2. When the power adapter is connected to the DC port and power on, the five indicator lights will flash for 3 seconds to enter the self-test. When the power light and RX light are always on, the device is the receiving device; if the RX light is not on, the device is the transmitting device.
3. Connect video monitoring: RX device is connected with NVR or computer through network cable, and TX device is connected with IPC camera through network cable to realize remote video monitoring.
4. WIFI coverage expansion: the TX device is connected to the LAN port of the router through the network cable, and the RX device is connected to the WAN port of the router through the network cable to realize remote WIFI coverage.

## **5. FCC Statement**

**6.** 1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

7. (1) This device may not cause harmful interference.

8. (2) This device must accept any interference received, including interference that may cause undesired operation.

9. 2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

10. NOTE:

11. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

12. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

13. Reorient or relocate the receiving antenna.

14. Increase the separation between the equipment and receiver.

15. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

16. Consult the dealer or an experienced radio/TV technician for help.