

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER): 轩宏达 科 技 有 限 公 司
XuanHongDaTechnologyLimited

客户料号 (CUSTOMER P/N) :

品名 (DESCRIPTION): DATE:2021/6/11

规格 (SPECIFICATION): G43.8开槽+背胶 40长
REV.NO.:A0
Slotted + back adhesive 40 long

鸿日昇威科技承认签核、盖章

Hongri Shengwei technology admitted to sign, seal

部门 Department	确认/日期 Confirmation/Date	审核/日期 Audit/Date	批准/日期 Approval/Date	(盖公司 公章) (Seal)
品质 Quality	董晚红 Wanhong Dong	吕惠 Hui Lv	韦函满 Hanman We	
工程 engineering	何伟华 Weihua he	韦立红 Lihong Wei	韦立红 Lihong Wei	

备注:

承认签核、盖章


Acknowledge, sign and seal

部门 Department	确认/日期 Confirmation/Date	审核/日期 Audit/Date	批准/日期 Approval/Date	(盖公司 公章) (Seal of
------------------	----------------------------	---------------------	------------------------	----------------------------


开发工程 development engineering				
采购 procurement				
品质 Quality				
备注： Remarks				
深圳市鸿日昇威科 技 有 限 公 司 HRSW ELECTRONICS CO.,LTD ADD: 深圳市龙华新区观澜环观中路48号 1栋2楼 2nd Floor, Building 1, No. 48 Huanguan Middle Road, Guanlan, Longhua New District, Shenzhen TEL: +86-15112254520 FAX: +86-0755-28015170 page:1/3				

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

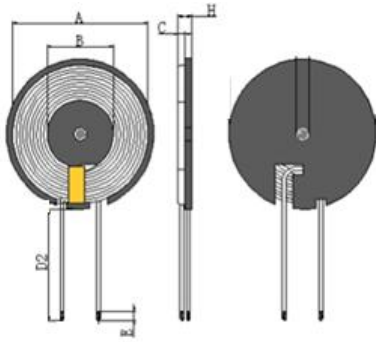

2. SCHEMATICS:



A	B	C	D2	E	H				I
40±0.2	20.5±0.5	0.5±0.05	40±2	3±1.5	1.7MAX				

3.WINDING: 1.1底部印字/Bottom print100

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	热风线/hot-wire anemometer Ø 0.08*24*2 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值	HI-POT
TEST	线圈加磁片/Coil and diskette	S-F	独线圈/Individual coil		
COND	100KHz, 0.25V	AT 25℃	100KHz, 0.25V		
SPEC	6.3uH±10%	60mΩ Max	3.8uH±15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	0.08*24*2 热风线/hot-wire anemometer	0.08*24*2 热风线/hot-wire anemometer	NANJINGJINNINGCO,LTD	
2	无铅锡条/ECO SOLDER BAR	无铅锡条/ECO SOLDER BAR	QIAODO	
3	磁片/magnetic sheet	Ø 44*0.8 锰锌硬磁片开L槽/Manganese zinc hard disk with L slot	TAIYI CO.,LTD	
4	胶水/Glue	黄胶/Yellow Adhesive9999	LIANCHENG CO.,LTD	
5	高温胶纸/high-temperature adhesive tape	8mm宽高温胶纸/Wide high temperature adhesive paper	CUDAK CO.,LTD	
6	背胶/application of gum	Ø 41.5*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.8开槽+背胶/Grooving + backing glue
DRAWN BY		CHECKED BY	APPROVED BY
何伟华/WeiHua He		韦立红/LiHong Wei	韦立红/LiHong Wei

SPECIFICATION FOR APPROVAL

6. SAMPLE TEST DATA									
6. 1DIMENSION TEST (UNIT:mm)									
TEST ITEM	A	B	C	D	E	H			
SPEC	40±1.0	20.5±0.5	0.5±0.05	40±2	3±2	1.7MAX			
1	40.1	20.5	0.51	40.1	3.50	1.60			
2	40	20.58	0.53	40.2	3.60	1.47			
3	39.8	20.52	0.51	41	3.70	1.49			
4	39.7	20.6	0.55	39.8	3.80	1.46			
5	40	20.58	0.54	39.7	4.00	1.50			
6									
7									
8									
9									
10									
MAX	40.14	20.60	0.55	41.00	4.00	1.60			
MIN	39.70	20.50	0.51	39.70	3.50	1.46			
AVERAGE	39.92	20.56	0.52	40.20	3.72	1.50			
6. 2ELECTRICAL TEST									
TEST ITEM	L		DCR	IDC		Q	HI-POT		
	S-F		S-F						
TEST COND	100KHz/0.25v		AT 25℃						
SPEC	6.3uH ±10%		60mΩ (Max)						
1	6.35		42.00						
2	6.34		42.30						
3	6.31		42.50						
4	6.35		42.10						
5	6.35		42.35						
6									
7									
8									
9									
10									
MAX	6.35		42.50						
MIN	6.31		42.00						
AVERAGE	6.34		42.25						
HRSW ELECTRONICS CO.,LTD					PART NO		G43. 8开槽+背胶		
					TITLE				
DRAWN BY			CHECKED BY				APPROVED BY		
何伟华/WeiHua He			韦立红/LiHong Wei				韦立红/LiHong Wei		