

Test Report

Report No.: MTi231116001-02E2

Date of issue: 2023-12-18

Applicant: Nimble For Good,PBC

Product: ChargeShot Wireless

Model(s): NB-WRLS-15W5K, W15

FCC ID: 2AZIONBWRLS15W5K

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	6
3	Test facilities and accreditations	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Test result	9
5.2	Test setup	10
5.3	Test Procedures	11
5.4	Equipment Approval Considerations	12
5.5	Test results	13
5.6	Test results	13
Photographs of the Test Setup		20
Photographs of the EUT		20

Test Result Certification

Applicant:	Nimble For Good,PBC
Address:	1008 Briosso Dr., Costa Mesa, CA 92627
Manufacturer:	Alecter International Limited
Address:	3-5 floor, Unit B, Building 3, Cosmo smart city industrail area Fenggang town Dongguan China
Product description	
Product name:	ChargeShot Wireless
Trademark:	N/A
Model name:	NB-WRLS-15W5K
Series Model:	W15
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 D01 v04
Date of Test	
Date of test:	2023-11-27 to 2023-12-15
Test result:	Pass

Test Engineer : Letter Lan.

(Letter Lan)

Reviewed By: Leon Chen

(Leon Chen)

Approved By: Tom Xue

(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	ChargeShot Wireless
Model name:	NB-WRLS-15W5K
Series Model:	W15
Model difference:	All the models are the same circuit and module, except the model name and colour.
Electrical rating:	Battery: 3.7V/ 5000mAh USB-C Input/ Output: 5V=3A, 9V=2.22A, 12V=1.67A Wireless Charger: 5W/7.5W/10W/15W
Accessories:	N/A
Hardware version:	2.0
Software version:	2.0
RF specification:	
Operation frequency:	115-205KHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	charging+Wireless Output(5W)
Mode2	Wireless Output(5W)
Mode3	Wireless Output(7.5W)
Mode4	Wireless Output(10W)
Mode5	Wireless Output(15W)
Mode6	Stand by

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	Find X3	Bf6e6b3b	OPPO
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	±18.6%
Electric field measurements (9kHz~30MHz)	±18.6%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	202308/15	202608/14

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz



* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

For portable exposure conditions:

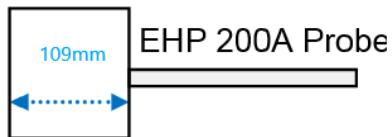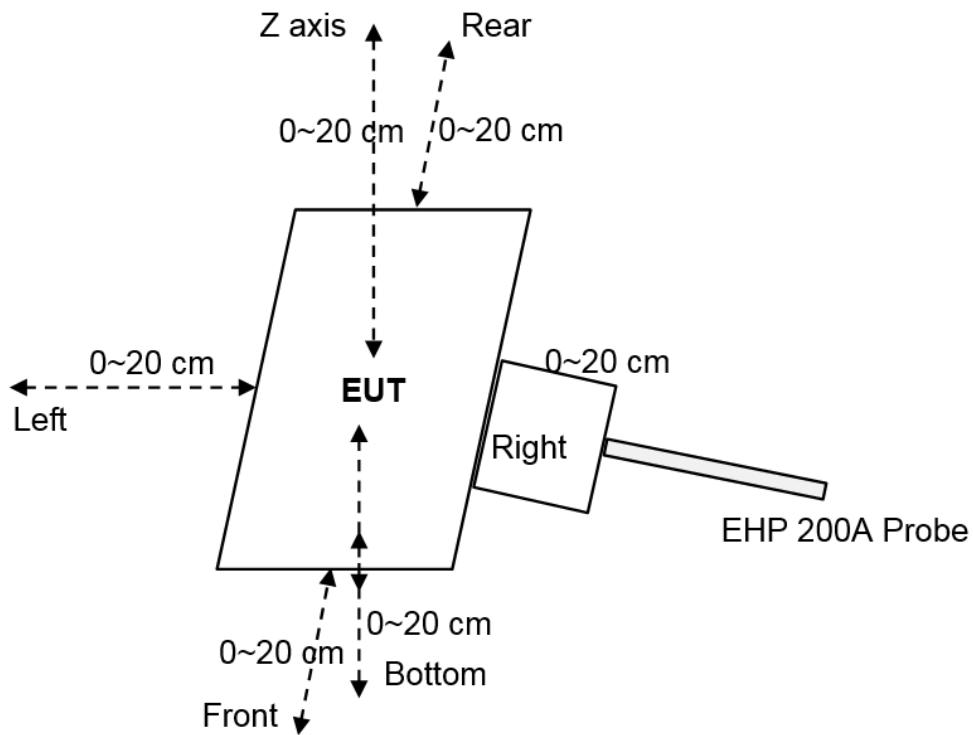

Notes: The EHP 200A Probe has a diameter of 10.9cm and a radius of 5.45cm.

5.3 Test Procedures

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- c. The highest emission level was recorded and compared with limit.

Notes: The EUT was setted to transmit continuously with the duty cycle of 100%.

5.4 Equipment Approval Considerations


Requirement	Device
1. The power transfer frequency is below 1 MHz.	Yes. The operating frequencies: 115-205KHz
2. The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes. The maximum output power is: 15W Max
3. A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes. The client device is placed directly in contact with the transmitter.
4. Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	No. The EUT has portable exposure condition.
5. The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a $1/d$ (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes. See the test result in item 5.5.
6. For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.	Yes. The EUT has a radiating structure and all scenarios have been tested.

5.5 Test results

5.6 Test results

For portable exposure condition: Note:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) 20-2cm is the actual test value, and 0 cm is the estimated value.
- (4) Perform H-field/E-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

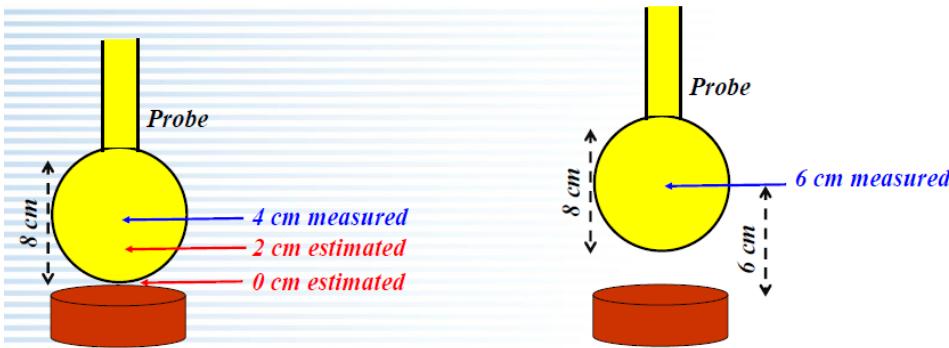


*Example of probe measurements in points close to the device surface:
 estimates compared with measurements at 4 and 6 cm provide validation*

According to Calibration information and specification about EHP-200A, The Probe EHP-200A's sensitive elements center are 8mm below the external surface, and the dimensions is 92x92x109mm. so the actual 0cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please below). And the result of test distance 2cm~20cm was measured value.

Probe	Length	Width	Height
	109mm	92mm	92mm



Note: EUT is a loop/coil emitting structure, so E-field not required. Just recorded the H-field value.

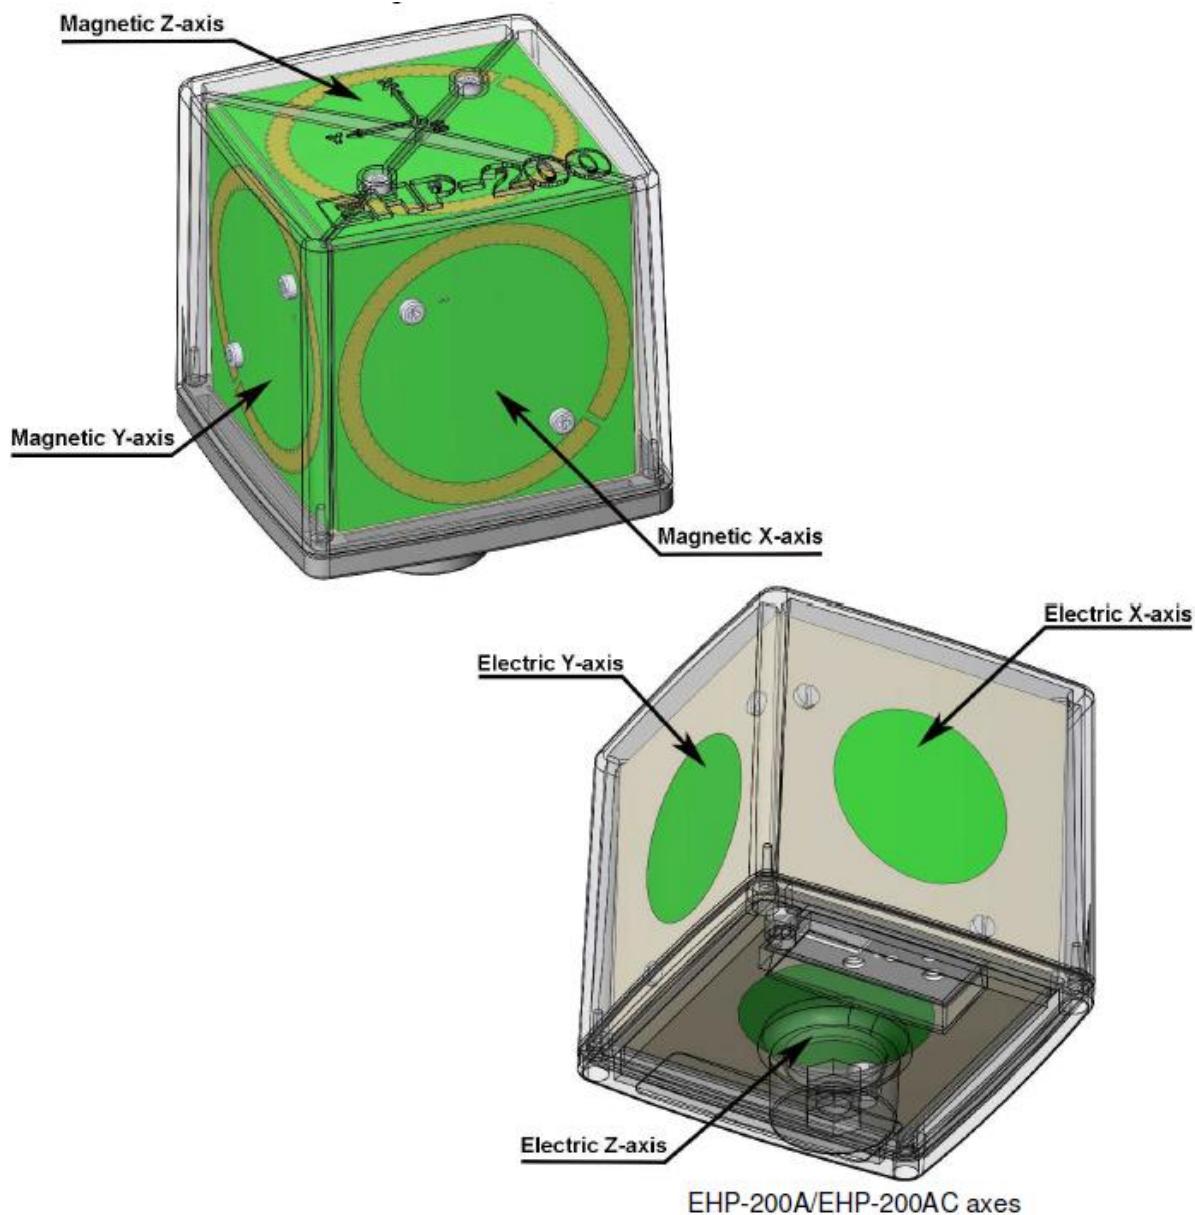


The sensitive elements are located approximately 8 mm below the external surface


(5) Estimated method for portable RF Exposure condition:

We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

Top & Bottom Side:

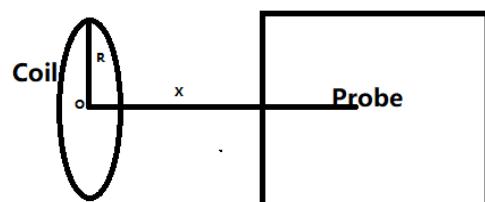

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

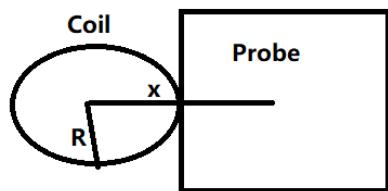Front, left, right & rear Side:


$$B = \frac{\mu_0 * I * N}{2 * x}$$

B: means H-field value;

μ_0 is space permeability; $\mu_0=4\pi*10^{-7}$;

I: A current element passing through a coil;

R: means the Radius of coil(According to provided Antenna specification: We can get the minimum $R=40/2=20\text{mm}=0.02\text{m}$

Test Distance: The distance from the sensing element of the probe to the edge of the device surface.

x: means the center of the coil to the sensing elements of the probe. (For top & bottom side: $x=\text{test distance}$; For other side: $x=\text{test distance}+R$)

N: Number of turns, according to providing "Antenna specification" files: $N=10$.

(6) For validation purposes: If the value to show a **30% agreement** between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note: The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

Validation:

Magnetic Field Emissions							
Test Distance(cm)	Top	Left	Right	Front	Rear	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement -2cm	29.97	25.11	27.58	19.59	29.08	29.66	Compliance (Within 30%)
2cm(estimated)	0.1976	0.1188	0.1151	0.1121	0.1087	0.1874	
2cm(measured)	0.1461	0.0923	0.0872	0.0921	0.0811	0.139	

Test condition 1: Mode 5 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.4132	1.63	45.30%
	Left	0.7384		
	Right	0.6976		
	Front	0.7368		
	Rear	0.6488		
	Bottom	0.3932		

Test condition 2: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1461	1.63	8.96%
	Left	0.0923		
	Right	0.0872		
	Front	0.0921		
	Rear	0.0811		
	Bottom	0.1390		

Test condition 3: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 4cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0500	1.63	3.07%
	Left	0.0352		
	Right	0.0341		
	Front	0.0332		
	Rear	0.0322		
	Bottom	0.0474		

Test condition 4: Mode 4 operating mode with client device (1 % battery status of client device)

- Test distance 6cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0500	1.63	3.07%
	Left	0.0351		
	Right	0.0322		
	Front	0.0320		
	Rear	0.0412		
	Bottom	0.0472		

Test condition 5: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 8cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0492	1.63	3.02%
	Left	0.0350		
	Right	0.0321		
	Front	0.0318		
	Rear	0.0411		
	Bottom	0.0470		

Test condition 6: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 10cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0490	1.63	3.01%
	Left	0.0348		
	Right	0.0320		
	Front	0.0317		
	Rear	0.0411		
	Bottom	0.0466		

Test condition 7: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 12cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0491	1.63	3.01%
	Left	0.0345		
	Right	0.0317		
	Front	0.0316		
	Rear	0.0410		
	Bottom	0.0465		

Test condition 8: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 14cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0489	1.63	3.00%
	Left	0.0343		
	Right	0.0313		
	Front	0.0311		
	Rear	0.0408		
	Bottom	0.0466		

Test condition 9: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 16cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0488	1.63	2.99%
	Left	0.0340		
	Right	0.0312		
	Front	0.0313		
	Rear	0.0407		
	Bottom	0.0460		

Test condition 10: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 18cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0486	1.63	2.98%
	Left	0.0335		
	Right	0.0310		
	Front	0.0311		
	Rear	0.0406		
	Bottom	0.0458		

Test condition 11: Mode 5 operating mode with client device (1 % battery status of client device)

- Test distance 20cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0484	1.63	2.97%
	Left	0.0332		
	Right	0.0310		
	Front	0.0305		
	Rear	0.0404		
	Bottom	0.0453		

Photographs of the Test Setup

MPE



Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----