



FCC TEST REPORT

FCC ID: 2AZKV-IP

On Behalf of

Shenzhen Xinsilu Smart Home Co., Ltd.

Video door phone

Model No.: IP-1024B, IP-1024A, IP-7024B, IP-7024T, IP-7024K,
IP-7024A, IP-MSA

Prepared for : Shenzhen Xinsilu Smart Home Co., Ltd.
Address : 5 floor No.18 Langkou Industrial Park Langkou Community Dalang
street, Longhua District, Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2408108-C01-R06
Date of Receipt : August 20, 2024
Date of Test : August 20, 2024- October 22, 2024
Date of Report : October 22, 2024
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results -----	5
1.1. Description of Standards and Results -----	5
2. General Information -----	6
2.1. Description of Device (EUT) -----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details -----	7
2.4. Block Diagram of connection between EUT and simulators -----	7
2.5. Test Mode Description-----	8
2.6. Test Conditions-----	9
2.7. Test Facility-----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
3. Spurious Emission -----	11
3.1. Test Limits -----	11
3.2. Test Procedure -----	14
3.3. Test Setup -----	14
3.4. Test Results -----	15
4. Power line Conducted Emission -----	40
4.1. Test Limits -----	40
4.2. Test Procedure -----	40
4.3. Test Setup -----	40
4.4. Test Results -----	40
5. Conducted Maximum Output Power -----	49
5.1. Test limits -----	49
5.2. Test Procedure -----	49
5.3. Test Setup -----	49
5.4. Test Results -----	49
6. Peak Power Spectral Density -----	50
6.1. Test limits -----	50
6.2. Test Procedure -----	50
6.3. Test Setup -----	50
6.4. Test Results -----	51
7. Bandwidth -----	58
7.1. Test limits -----	58
7.2. Test Procedure -----	58
7.3. Test Setup -----	58
7.4. Test Results -----	58
8. Band Edge Check -----	72
8.1. Test limits -----	72
8.2. Test Procedure -----	72
8.3. Test Setup -----	72
8.4. Test Results -----	72
9. Antenna Requirement -----	83
9.1. Standard Requirement -----	83
9.2. Antenna Connected Construction -----	83
9.3. Results -----	83
10. Test setup photo -----	84
10.1. Photos of Radiated emission -----	84
10.2. Photos of Conducted Emission test -----	85

TEST REPORT DECLARATION

Applicant : Shenzhen Xinsilu Smart Home Co., Ltd.
Address : 5 floor No.18 Langkou Industrial Park Langkou Community Dalang street, Longhua District, Shenzhen, China
Manufacturer : Shenzhen Xinsilu Smart Home Co., Ltd.
Address : 5 floor No.18 Langkou Industrial Park Langkou Community Dalang street, Longhua District, Shenzhen, China
EUT Description : Video door phone
(A) Model No. : IP-1024B, IP-1024A, IP-7024B, IP-7024T, IP-7024K, IP-7024A, IP-MSA
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer

Yannis Wen

Approved by (name + signature).....: Jack Xu
Project Manager

Jack Xu

Date of issue.....: October 22, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 22, 2024	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207	P
6dB Bandwidth	FCC PART 15:15.247(a)(2)	P
Output Power	FCC Part 15: 15.247(b)(3)	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d)	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d)	P
Power Spectral Density	FCC PART 15:15.247(e)	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d)	P
Antenna Requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

1. Pass: The EUT complies with the essential requirements in the standard.
2. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name : Video door phone

Model No. : IP-1024B, IP-1024A, IP-7024B, IP-7024T, IP-7024K, IP-7024A, IP-MSA

DIFF. : There is no difference except the shape and color of the shell. All tests are made with the IP-1024B model.

Power supply : DC 44-57V from Lan port(POE power supply)

Radio Technology	: 2.4GWIFI
Frequency Range	: 2412MHz-2462MHz for IEEE 802.11 b, g, n20 2422MHz-2452MHz for IEEE 802.11 n40
Channel Number	: 802.11b/802.11g /802.11n(HT20): 11CH 802.11n(HT40): 7CH
Modulation Type	: IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: Internal Antenna, max gain 1.68 dBi (Antenna information is provided by applicant.)
Software version	: V1.0
Hardware version	: V1.0
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : N/A
Manufacturer : N/A
Model : N/A
INPUT : N/A
OUTPUT : N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Power adapter	Pulian Technology Co., LTD	T535122-2X1	/	/
2	100 Mbit POE switch	Pulian Technology Co., LTD	TL-SF1010P	/	/

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Duty cycle :100%Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.			

Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		
For IEEE 802.11 n/HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. SPURIOUS EMISSION

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands ^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8

6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

3.2. Test Procedure


The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz. The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation. The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured


If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test setup, please see the test setup photo.


3.3. Test Setup

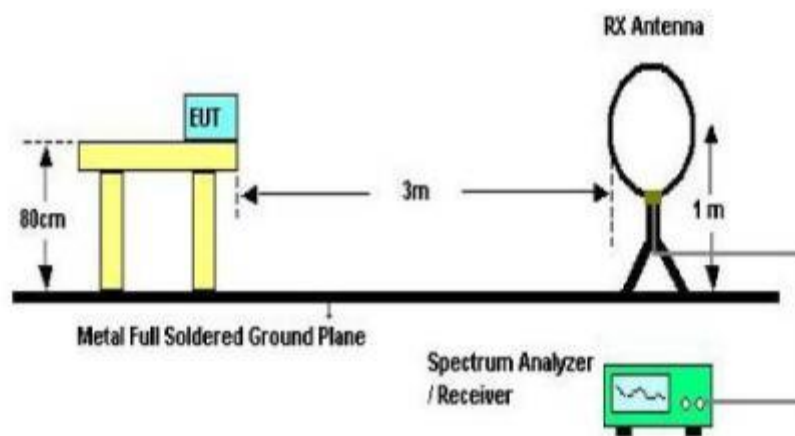

Below 30MHz Test Setup

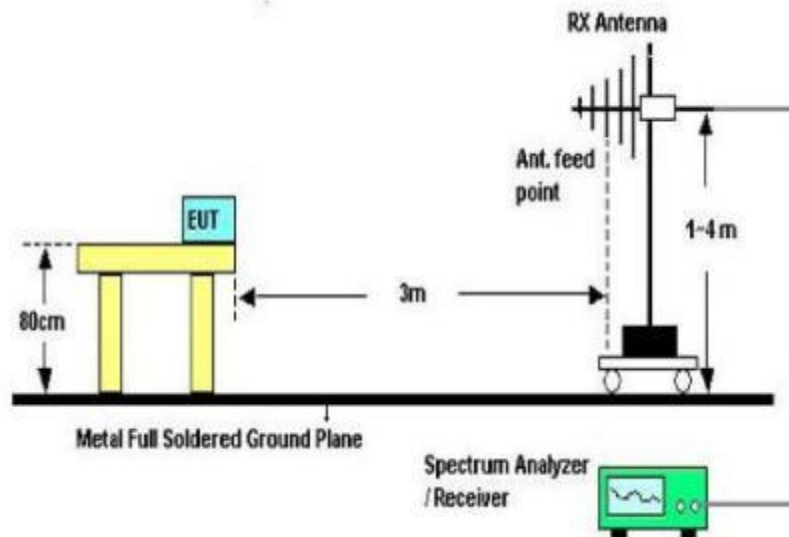

Above 30MHz Test Setup

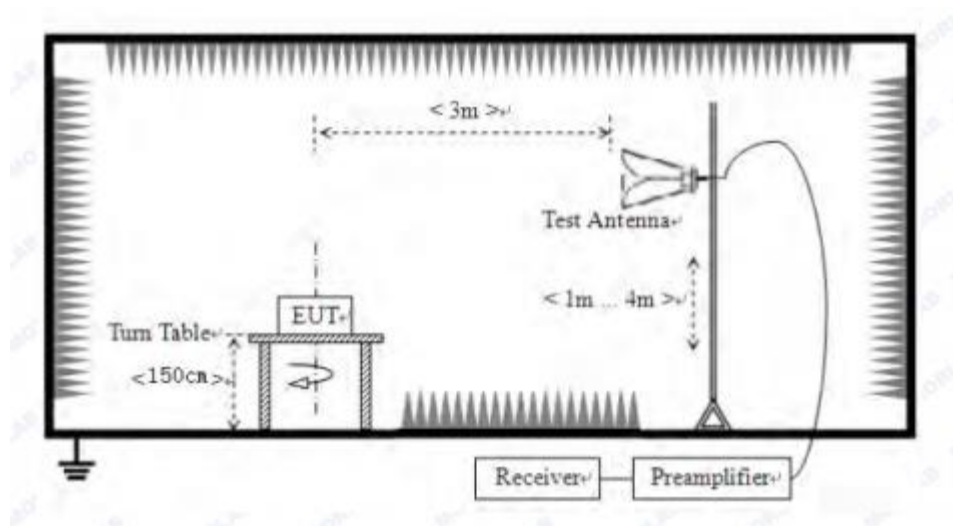

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: 1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS


Model: IP-1024B

Vertical:

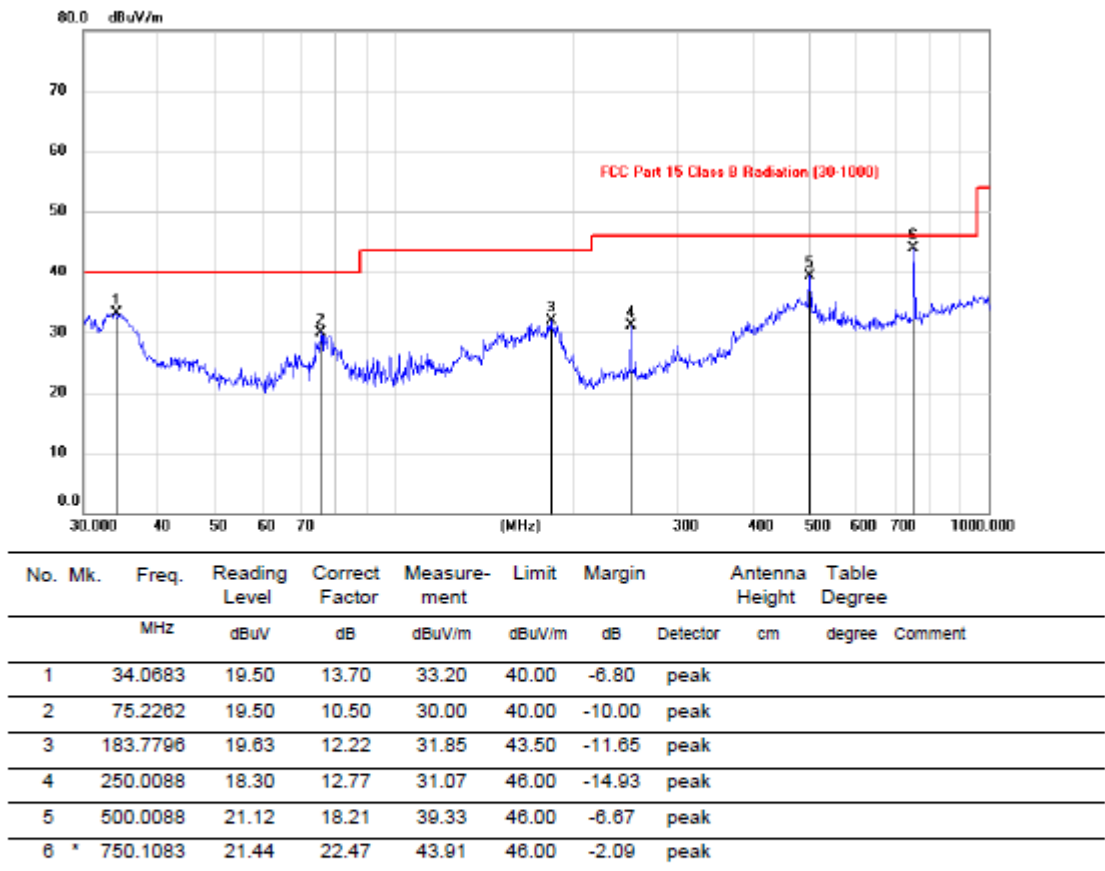

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

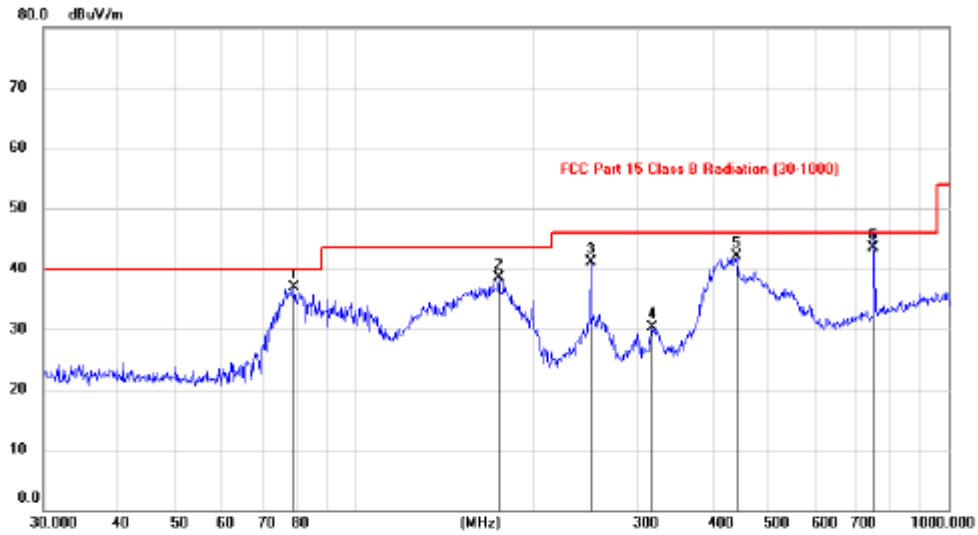
Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		79.2704	27.06	9.89	36.95	40.00	-3.05	peak		
2		175.4669	25.25	13.31	38.56	43.50	-4.94	peak		
3		250.0088	28.40	12.77	41.17	46.00	-4.83	peak		
4		318.4446	15.70	14.58	30.28	46.00	-15.72	peak		
5		440.9172	24.82	17.34	42.16	46.00	-3.84	peak		
6	*	750.0190	21.10	22.47	43.57	46.00	-2.43	QP		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Model: IP-7024B

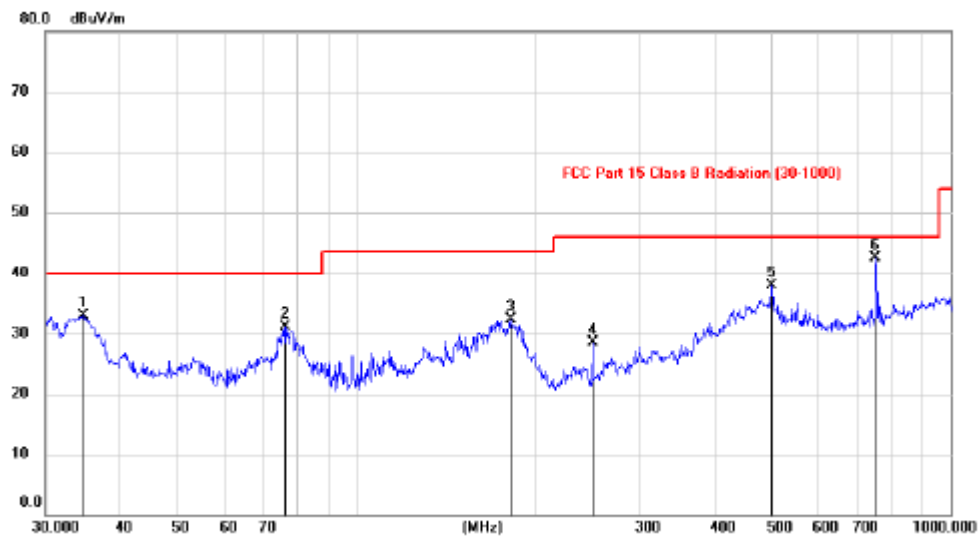Vertical:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		34.8008	19.24	13.73	32.97	40.00	-7.03	peak		
2		76.1105	20.60	10.47	31.07	40.00	-8.93	peak		
3		182.3246	19.90	12.40	32.30	43.50	-11.20	peak		
4		250.0087	15.80	12.77	28.57	46.00	-17.43	peak		
5		500.0087	19.62	18.21	37.83	46.00	-8.17	peak		
6	*	750.1082	19.94	22.47	42.41	46.00	-3.59	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

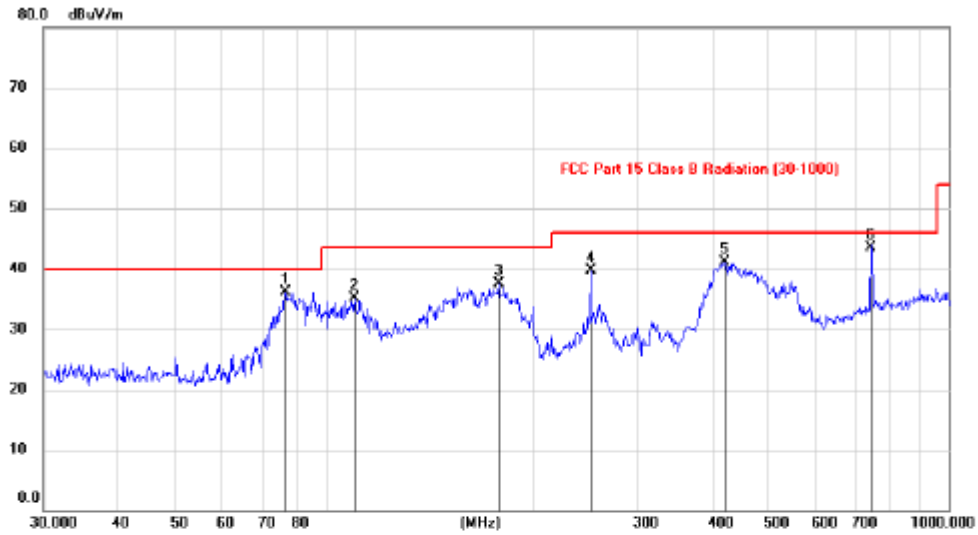
Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		76.7269	25.88	10.28	36.16	40.00	-3.84	peak		
2		99.9945	24.24	10.85	35.09	43.50	-8.41	peak		
3		175.4669	24.25	13.31	37.56	43.50	-5.94	peak		
4		250.0087	26.90	12.77	39.67	46.00	-6.33	peak		
5		420.3344	24.30	16.74	41.04	46.00	-4.96	peak		
6	*	741.9116	21.22	22.29	43.51	46.00	-2.49	QP		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Model: IP-7024K

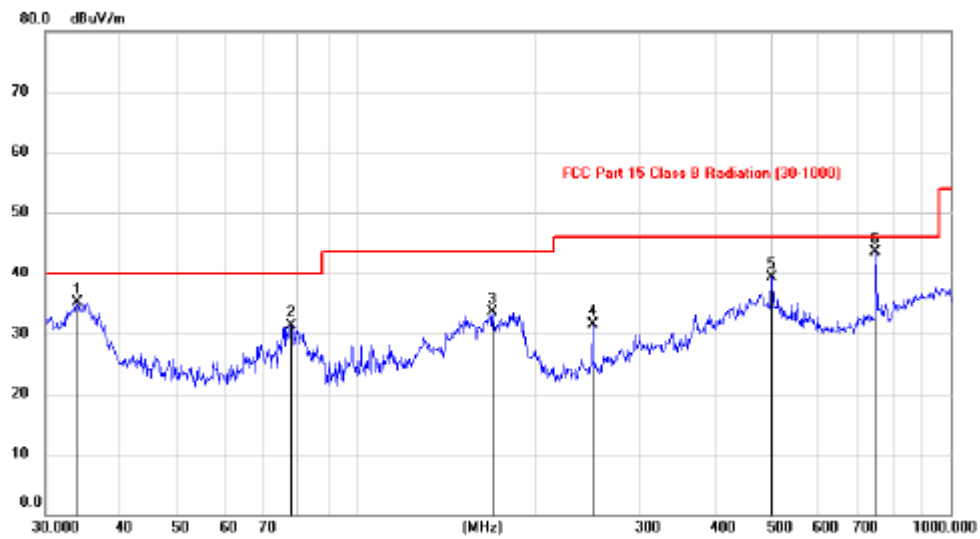Vertical:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		33.9847	21.37	13.70	35.07	40.00	-4.93	peak		
2		77.8015	21.10	10.20	31.30	40.00	-8.70	peak		
3		169.9759	19.44	14.08	33.52	43.50	-9.98	peak		
4		250.0087	18.80	12.77	31.57	46.00	-14.43	peak		
5		500.0086	21.12	18.21	39.33	46.00	-6.67	peak		
6	*	750.1082	20.94	22.47	43.41	46.00	-2.59	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

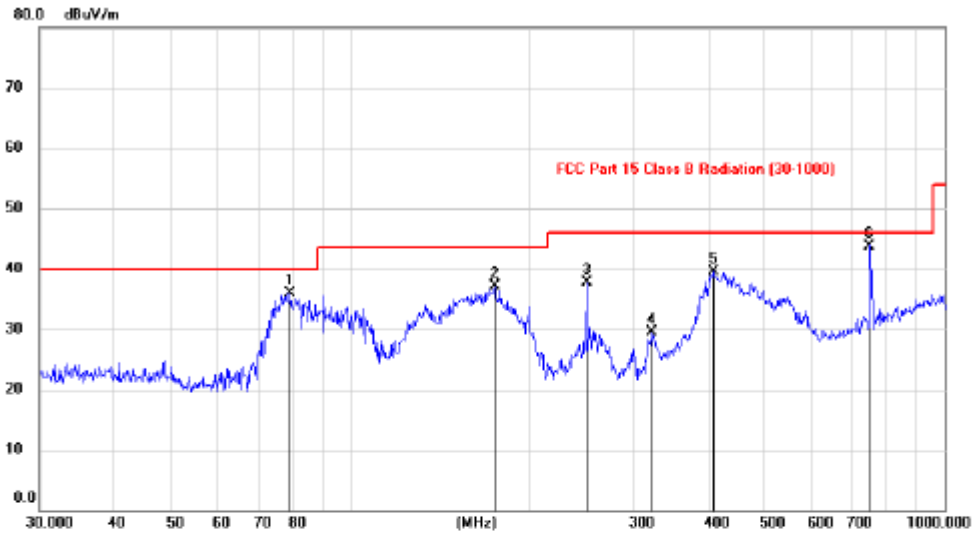
Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		79.2703	26.06	9.89	35.95	40.00	-4.05	peak		
2		175.4669	23.75	13.31	37.06	43.50	-6.44	peak		
3		250.0087	24.90	12.77	37.67	46.00	-8.33	peak		
4		321.8874	14.77	14.67	29.44	46.00	-16.56	peak		
5		408.3727	23.02	16.45	39.47	46.00	-6.53	peak		
6	*	750.0203	21.32	22.47	43.79	46.00	-2.21	QP		

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Model: IP-7024T

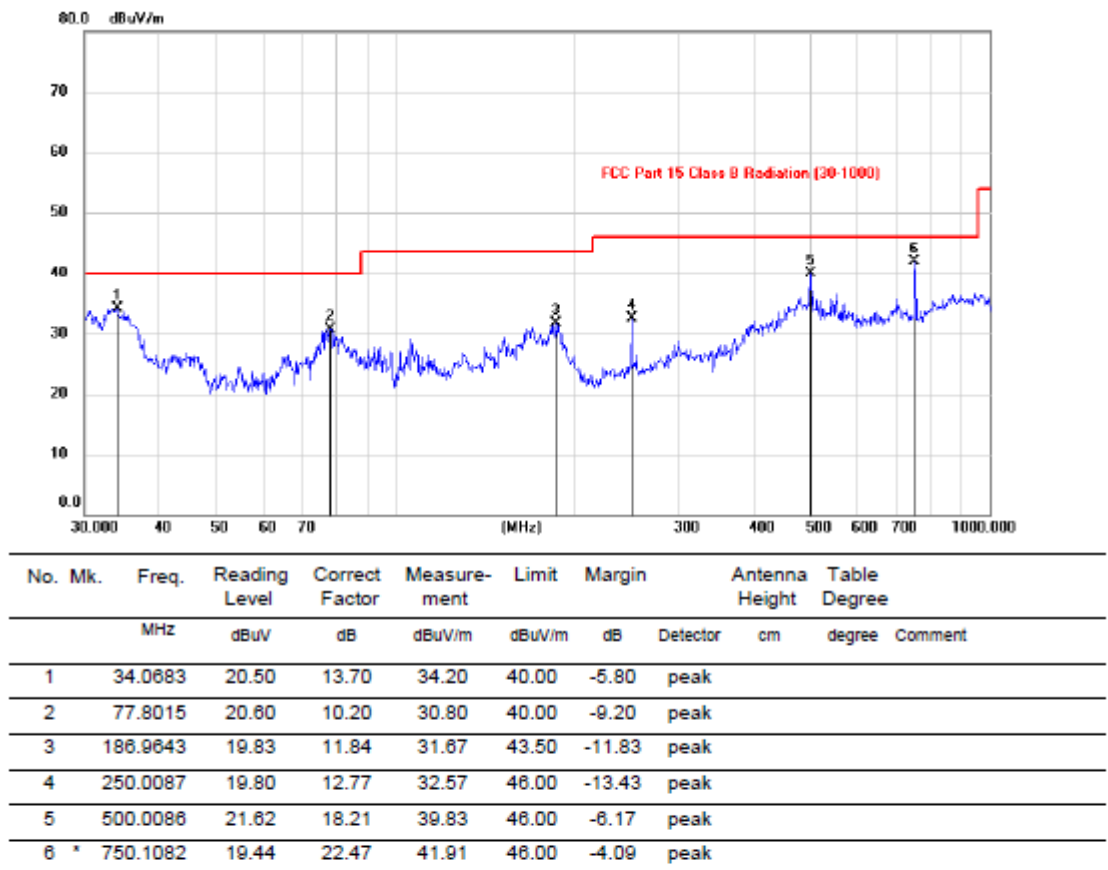Vertical:

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

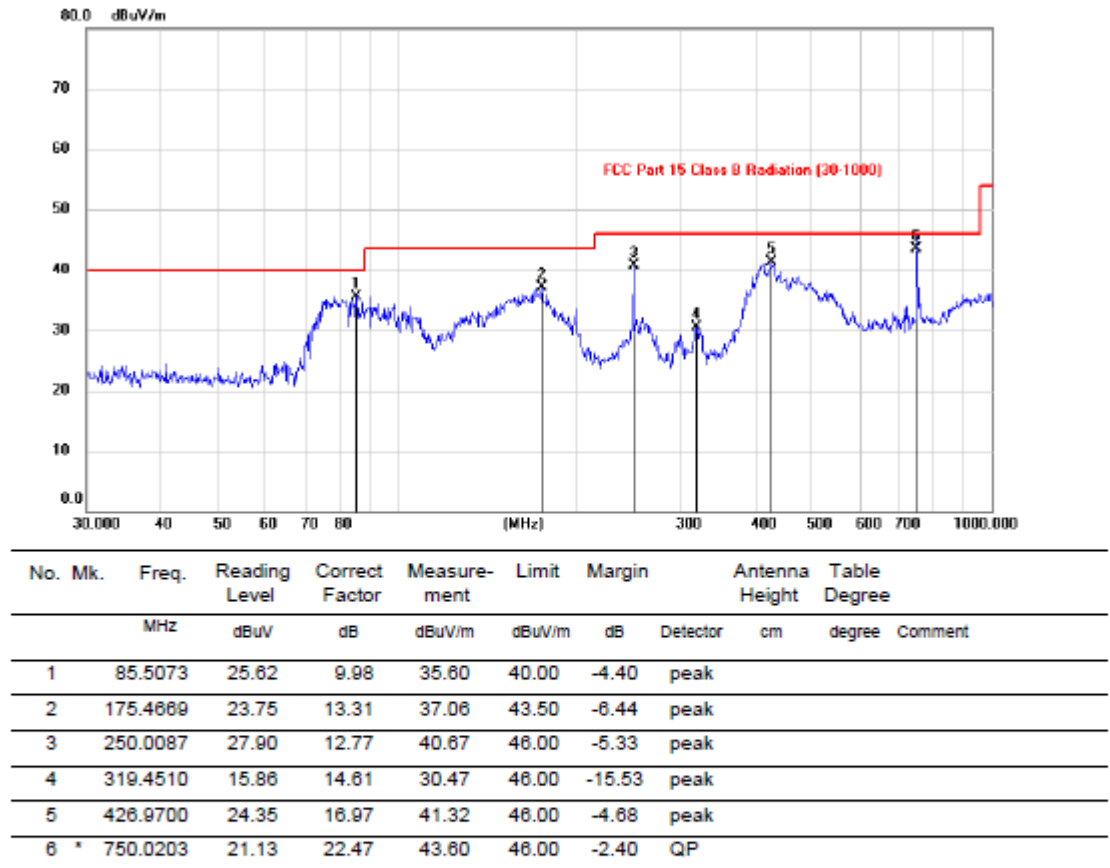Horizontal:

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of b mode, Channel 2412MHz was listed in this report.

From 1G-25GHz

Test Mode: IEEE 802.11b TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	45.03	V	33.95	10.18	34.26	54.90	74	-19.10	PK
4824	35.40	V	33.95	10.18	34.26	45.27	54	-8.73	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	43.93	H	33.95	10.18	34.26	53.80	74	-20.20	PK
4824	36.63	H	33.95	10.18	34.26	46.50	54	-7.50	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	44.12	V	33.93	10.2	34.29	53.96	74	-20.04	PK
4874	33.39	V	33.93	10.2	34.29	43.23	54	-10.77	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	47.90	H	33.93	10.2	34.29	57.74	74	-16.26	PK
4874	32.96	H	33.93	10.2	34.29	42.80	54	-11.20	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX High									
4924	45.40	V	33.98	10.22	34.25	55.35	74	-18.65	PK
4924	37.69	V	33.98	10.22	34.25	47.64	54	-6.36	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	47.49	H	33.98	10.22	34.25	57.44	74	-16.56	PK
4924	34.25	H	33.98	10.22	34.25	44.20	54	-9.80	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Note:

$$1, \text{ Result} = \text{Read level} + \text{Antenna factor} + \text{cable loss-Amp factor}$$


2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: IEEE 802.11n HT40 TX Low									
Freq (MHz)	Read Level (dBUV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
4844	46.05	V	33.95	10.18	34.26	55.92	74	-18.08	PK
4844	33.53	V	33.95	10.18	34.26	43.40	54	-10.60	AV
7266	/	/	/	/	/	/	/	/	/
9688	/	/	/	/	/	/	/	/	/
4844	43.47	H	33.95	10.18	34.26	53.34	74	-20.66	PK
4844	35.71	H	33.95	10.18	34.26	45.58	54	-8.42	AV
7266	/	/	/	/	/	/	/	/	/
9688	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT40 TX Mid									
4874	44.77	V	33.93	10.2	34.29	54.61	74	-19.39	PK
4874	32.07	V	33.93	10.2	34.29	41.91	54	-12.09	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	45.85	H	33.93	10.2	34.29	55.69	74	-18.31	PK
4874	34.75	H	33.93	10.2	34.29	44.59	54	-9.41	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT40 TX High									
4904	45.09	V	33.98	10.22	34.25	55.04	74	45.09	PK
4904	35.95	V	33.98	10.22	34.25	45.90	54	35.95	AV
7356	/	/	/	/	/	/	/	/	/
9808	/	/	/	/	/	/	/	/	/
4904	49.22	H	33.98	10.22	34.25	59.17	74	49.22	PK
4904	33.51	H	33.98	10.22	34.25	43.46	54	33.51	AV
7356	/	/	/	/	/	/	/	/	/
9808	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Note: 1. All models have been tested, and the report only shows the data of the main test model (IP-1024B)

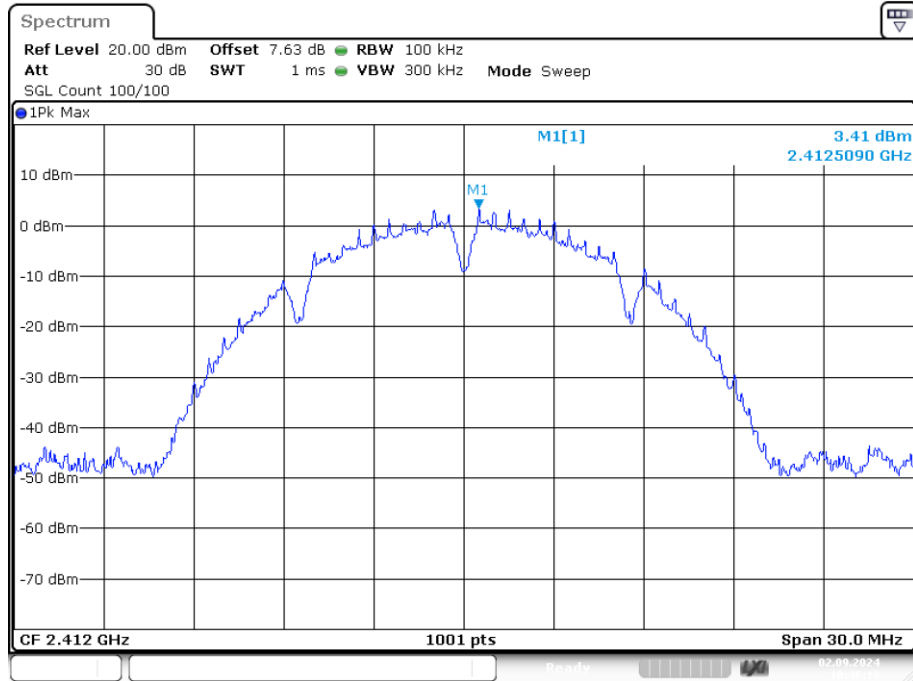
Conducted RF Spurious Emission**Tx. Spurious NVNT b 2412MHz Ant1 Ref**

Date: 2.SEP.2024 10:46:19

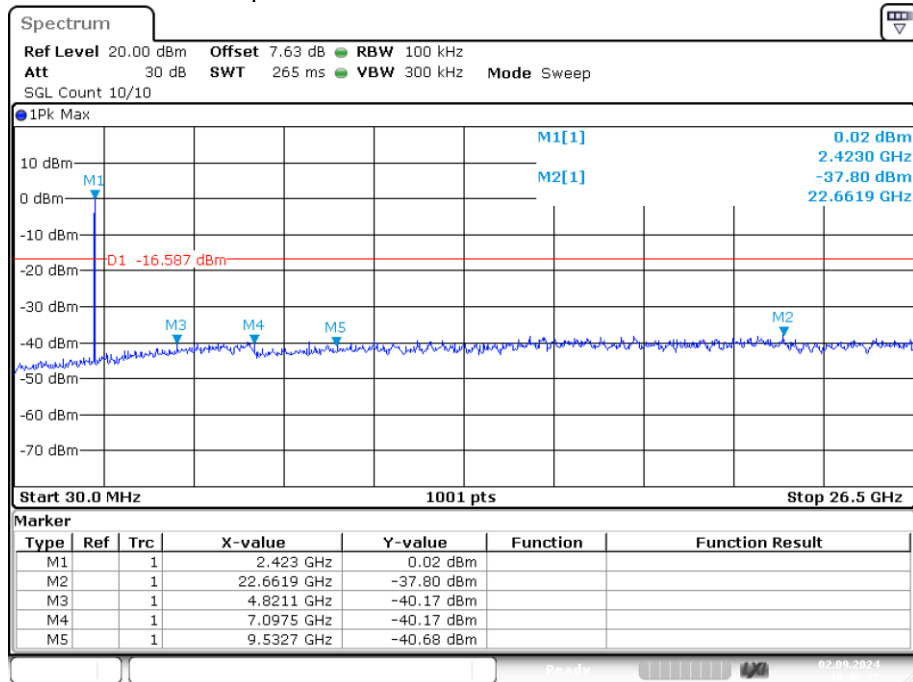
Tx. Spurious NVNT b 2412MHz Ant1 Emission

Date: 2.SEP.2024 10:46:37


Tx. Spurious NVNT b 2437MHz Ant1 Ref

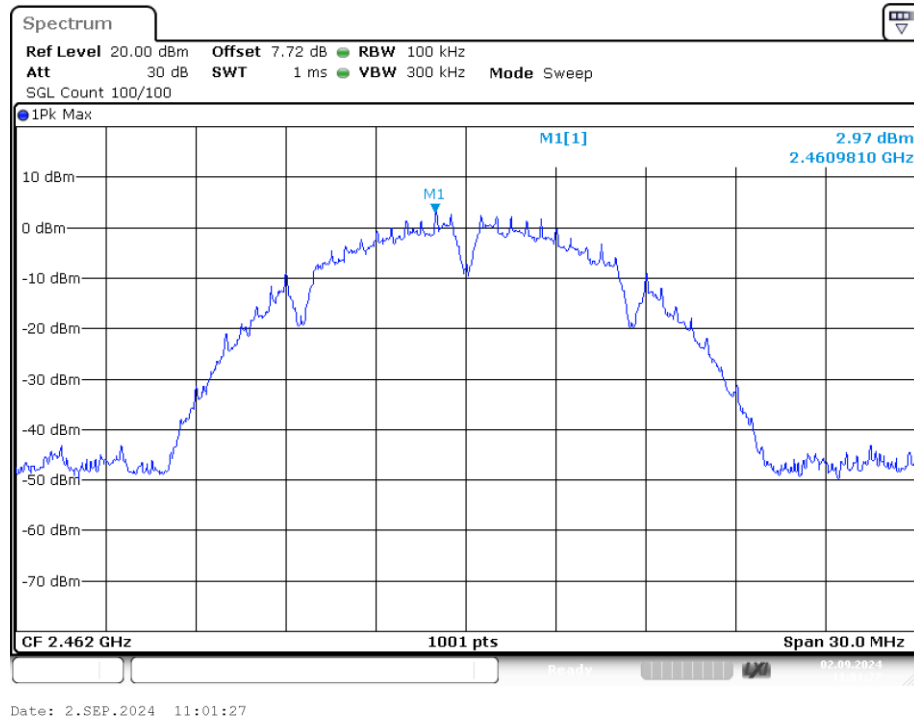


Tx. Spurious NVNT b 2462MHz Ant1 Emission

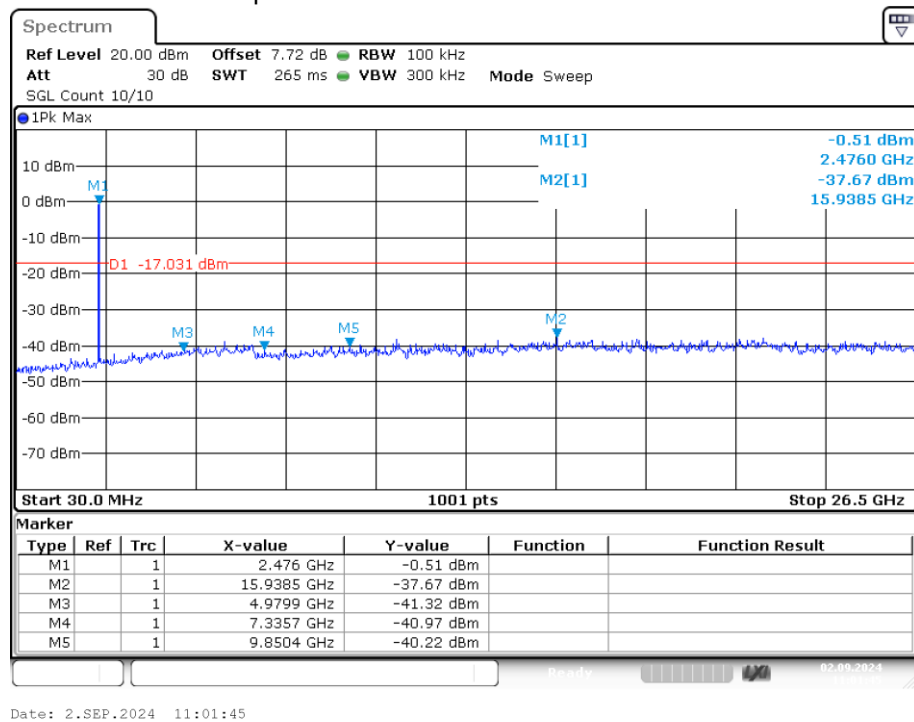


Tx. Spurious NVNT g 2412MHz Ant1 Ref

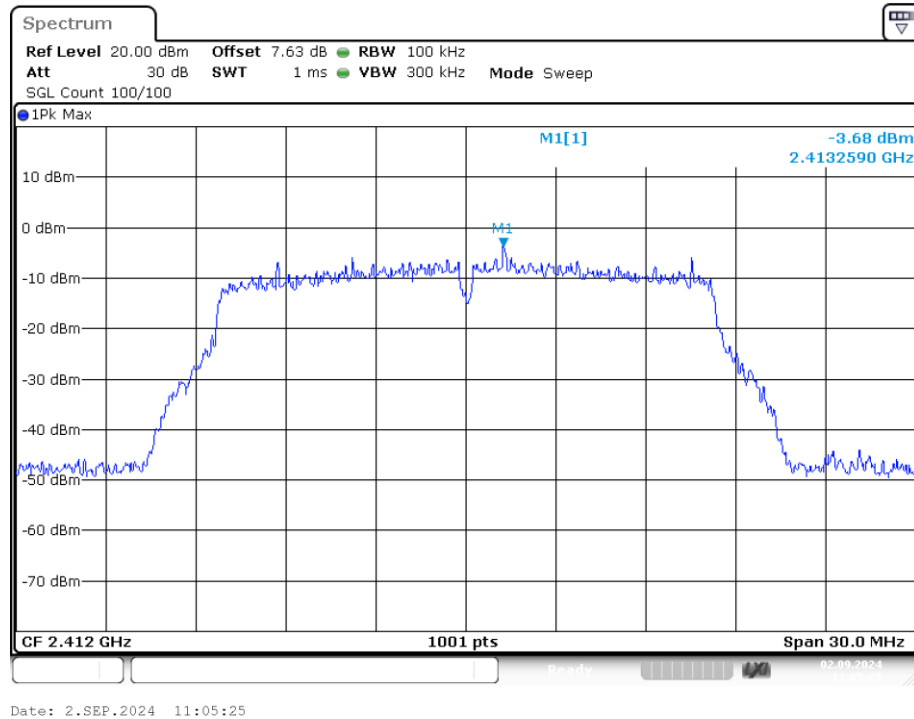


Tx. Spurious NVNT g 2412MHz Ant1 Emission

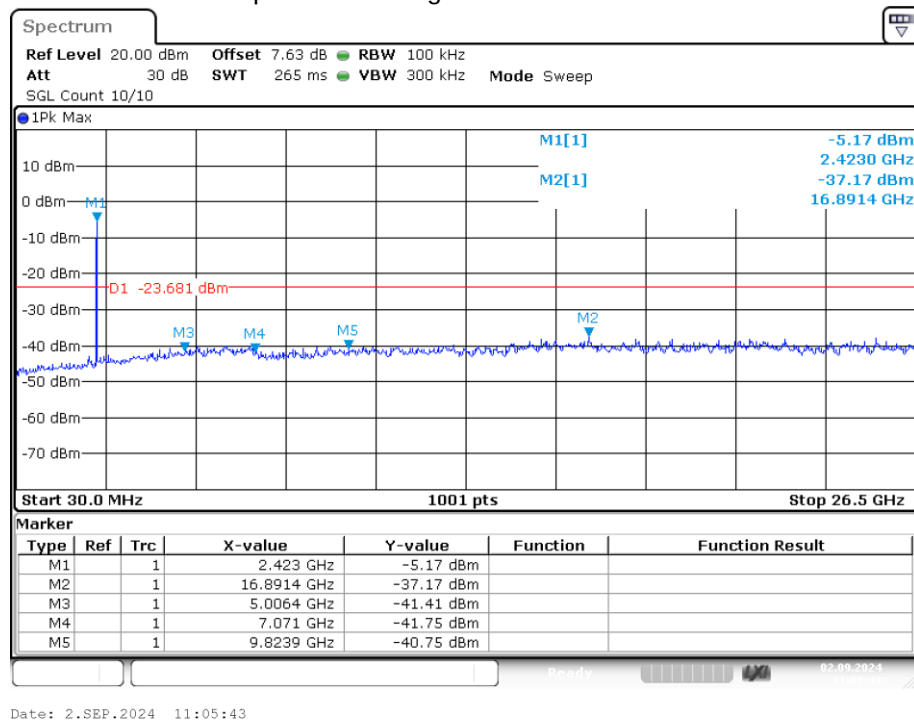


Tx. Spurious NVNT g 2437MHz Ant1 Ref

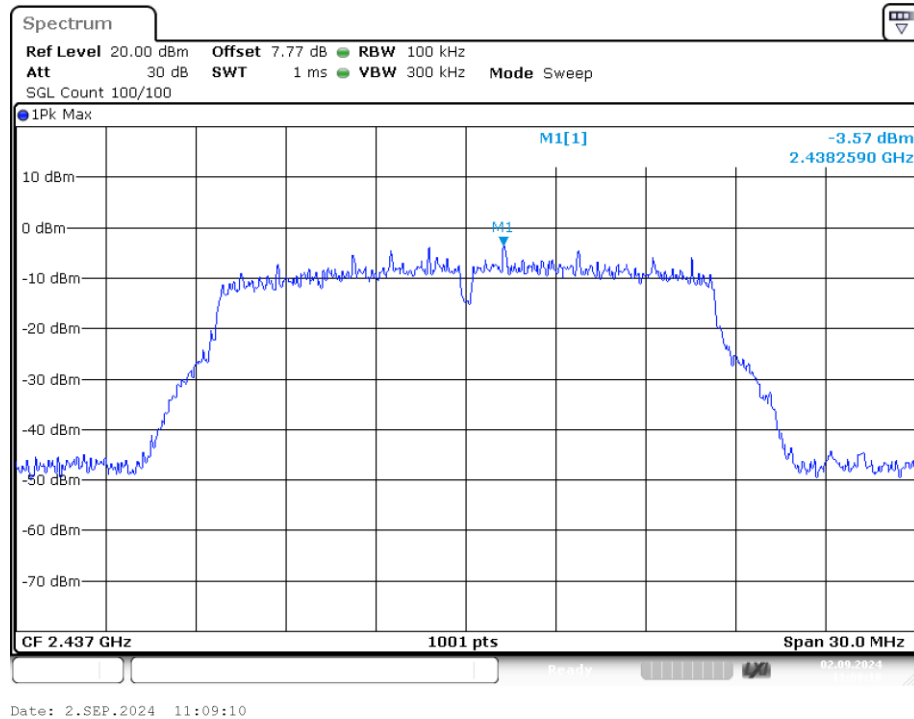


Tx. Spurious NVNT g 2437MHz Ant1 Emission

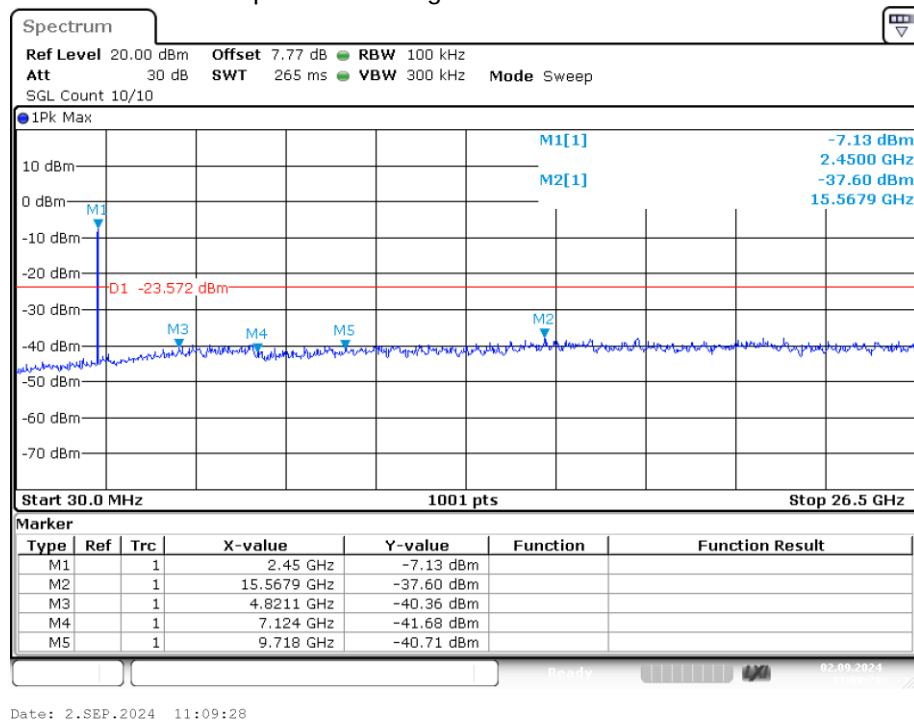


Tx. Spurious NVNT g 2462MHz Ant1 Ref

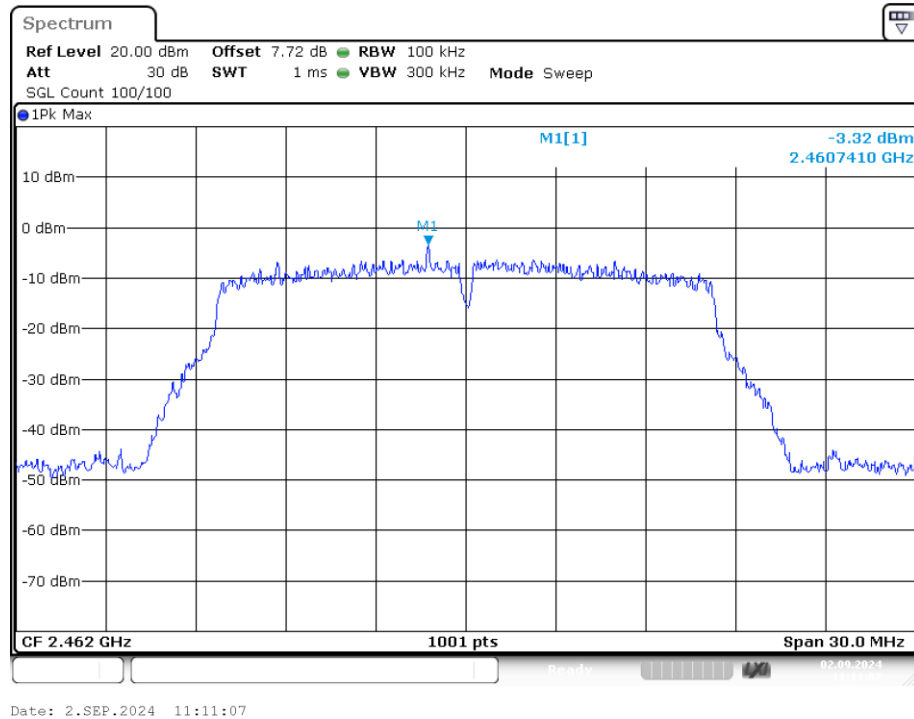


Tx. Spurious NVNT g 2462MHz Ant1 Emission

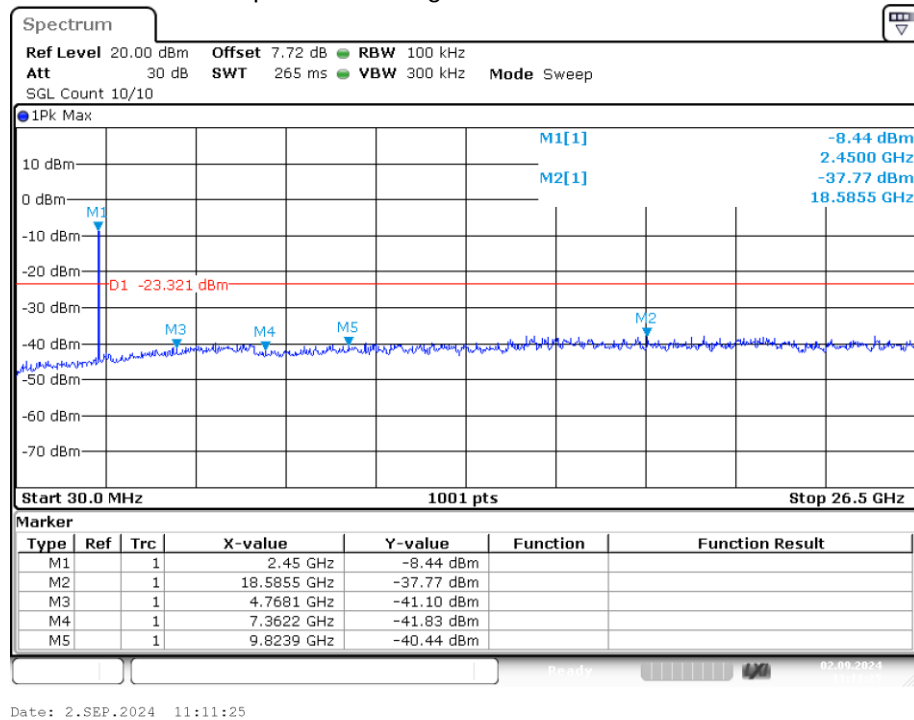


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

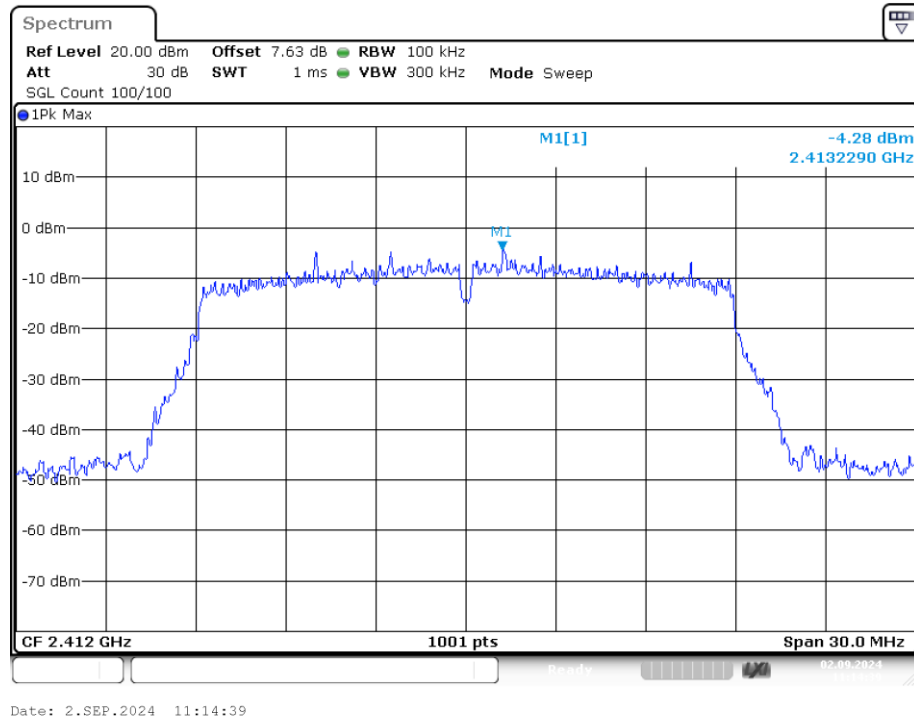


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

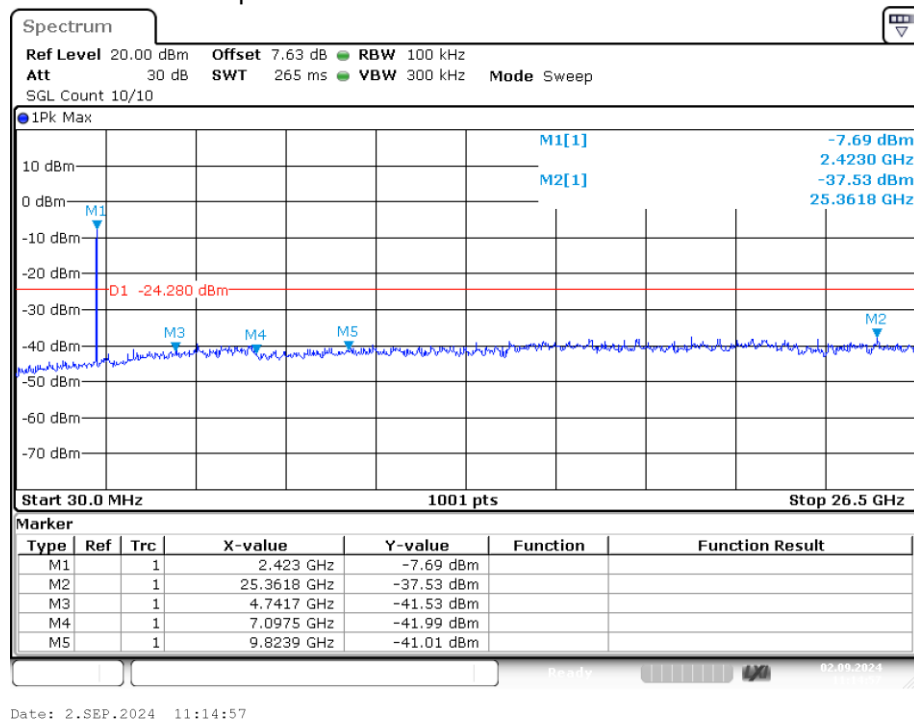


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

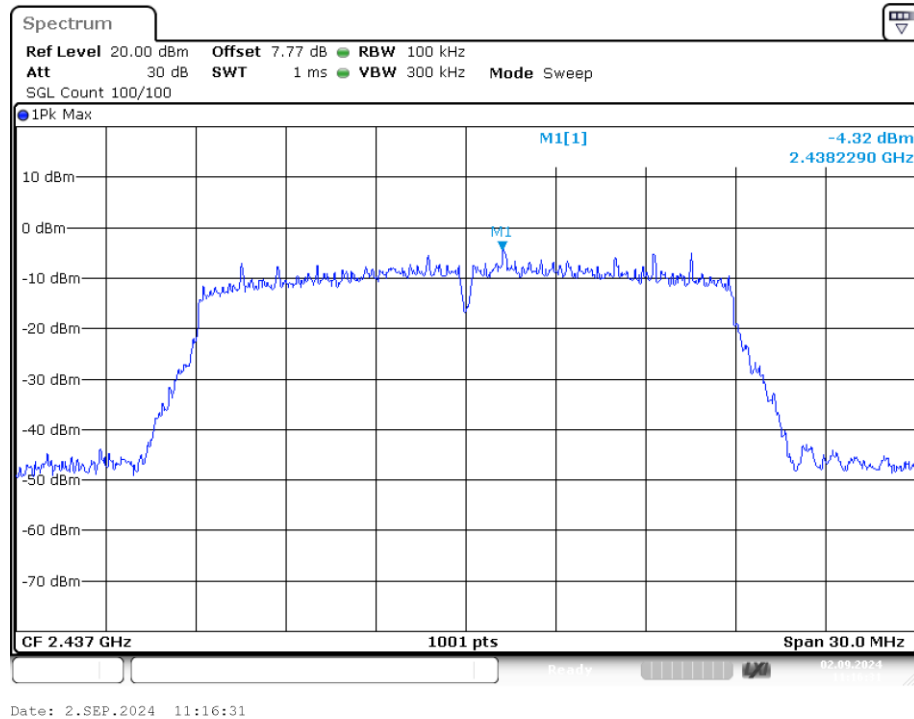


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

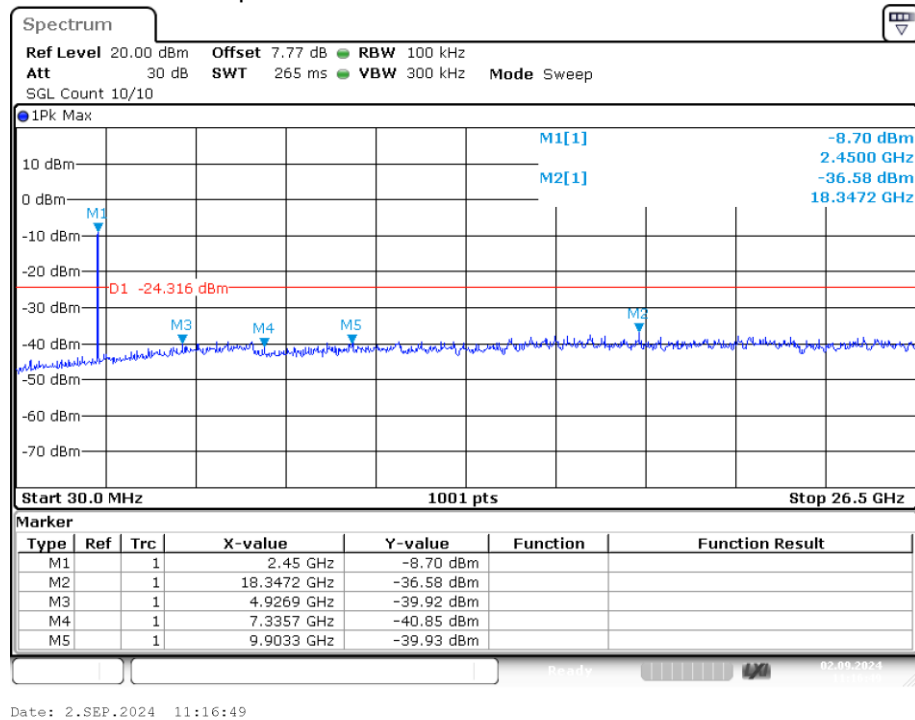


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

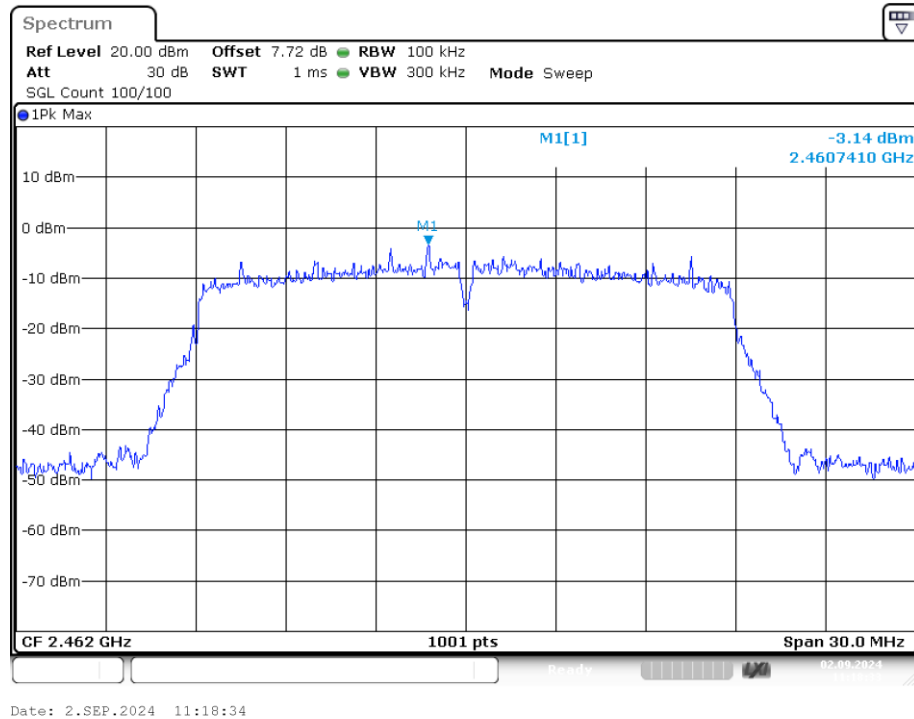


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

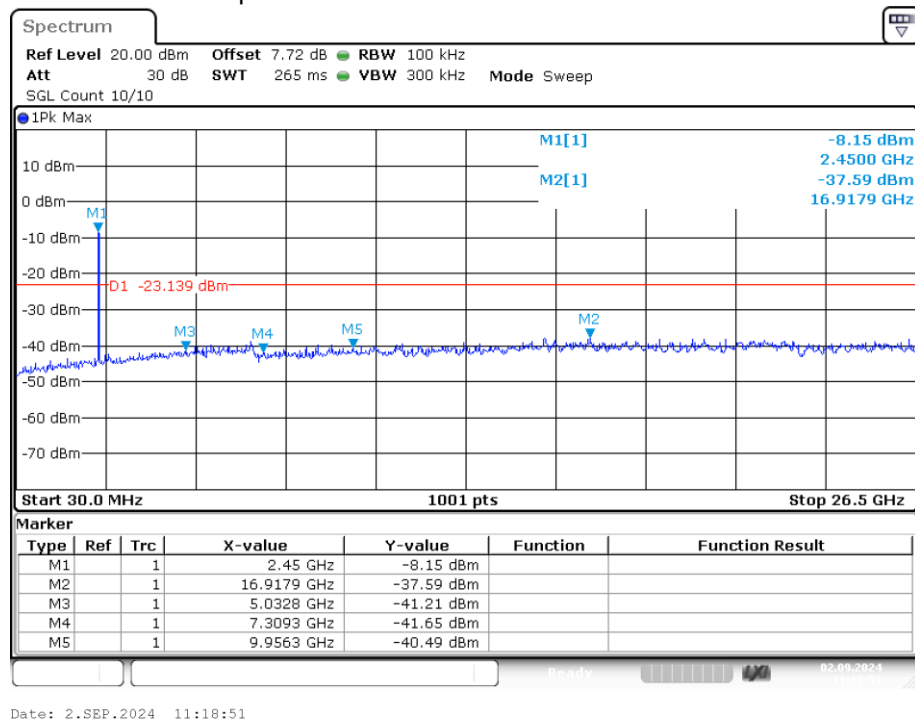


Tx. Spurious NVNT n40 2422MHz Ant1 Ref

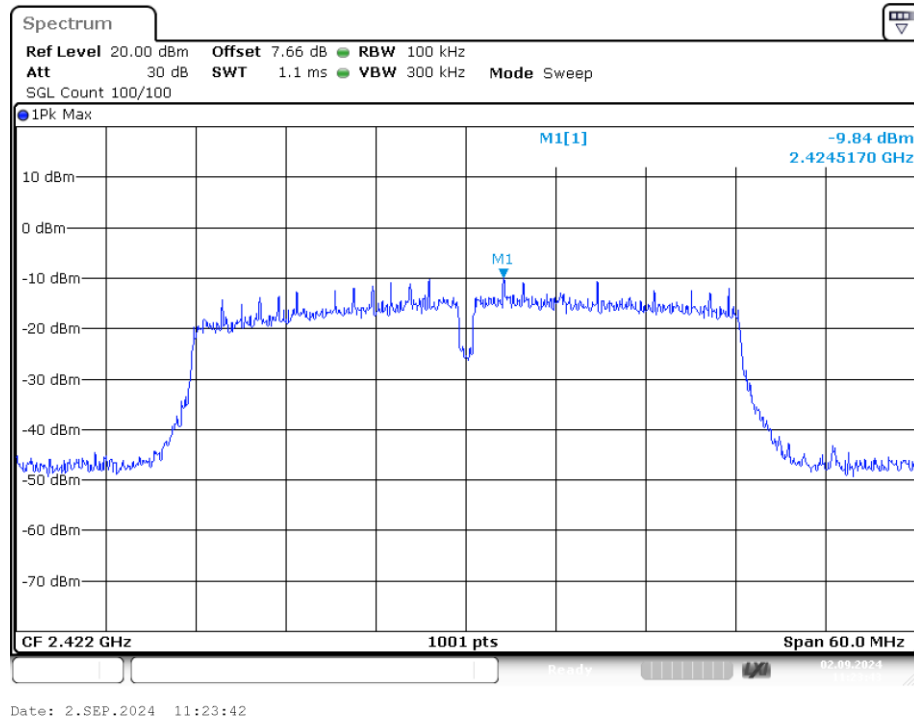


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

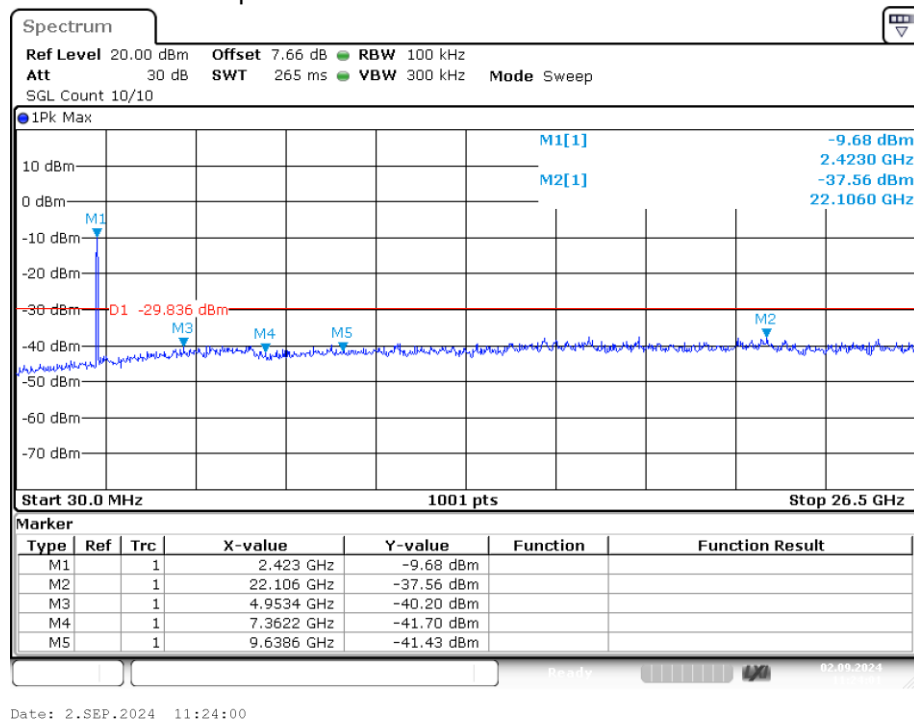


Tx. Spurious NVNT n40 2437MHz Ant1 Ref

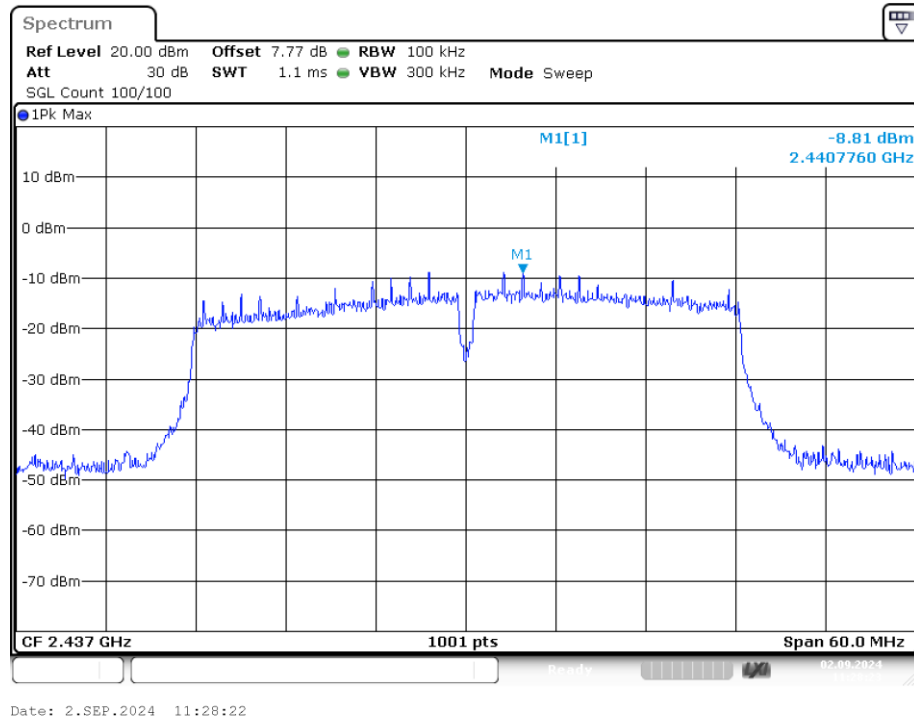


Tx. Spurious NVNT n40 2437MHz Ant1 Emission

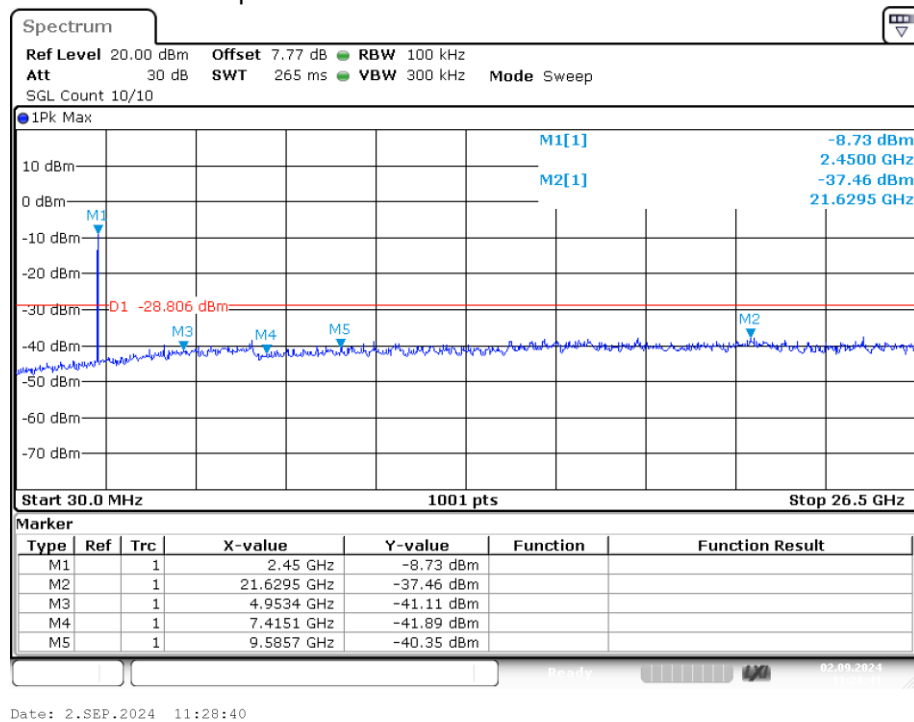

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

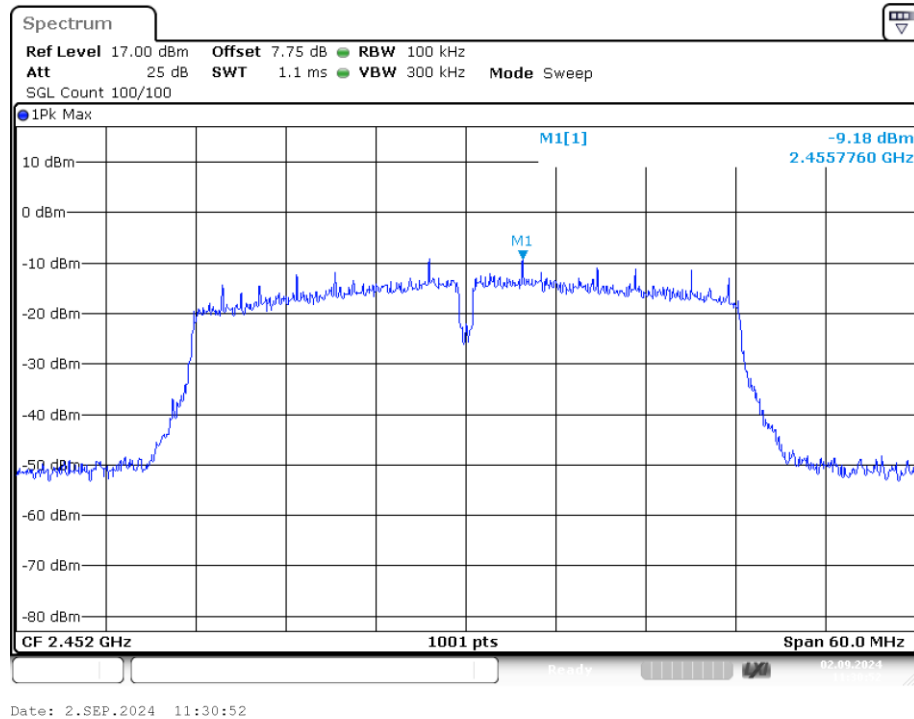

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

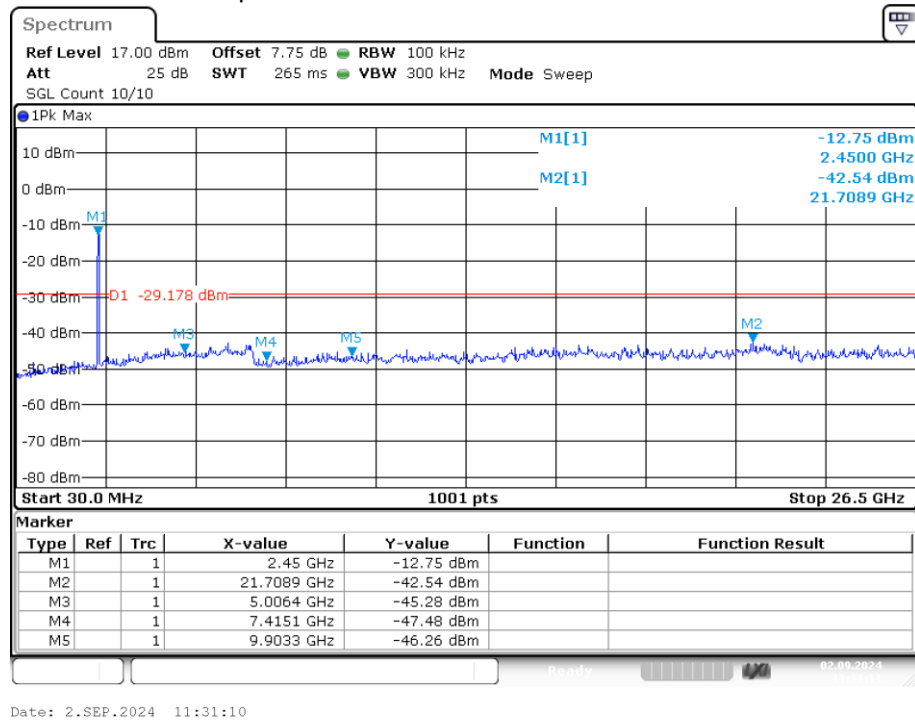

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

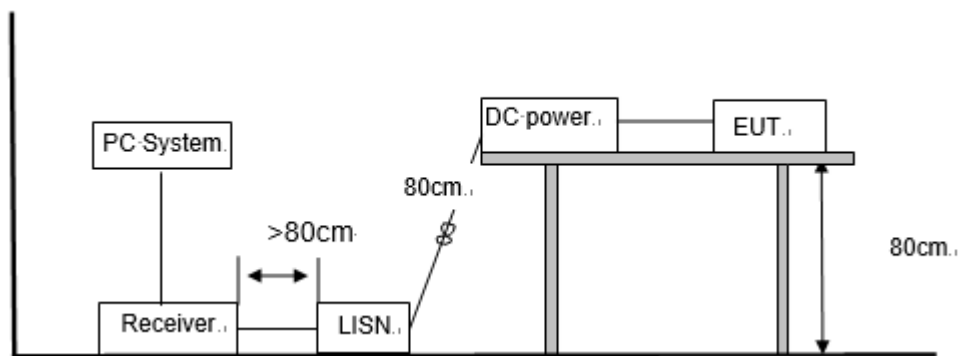


4.4. Test Results

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Model: IP-1024B


Line:

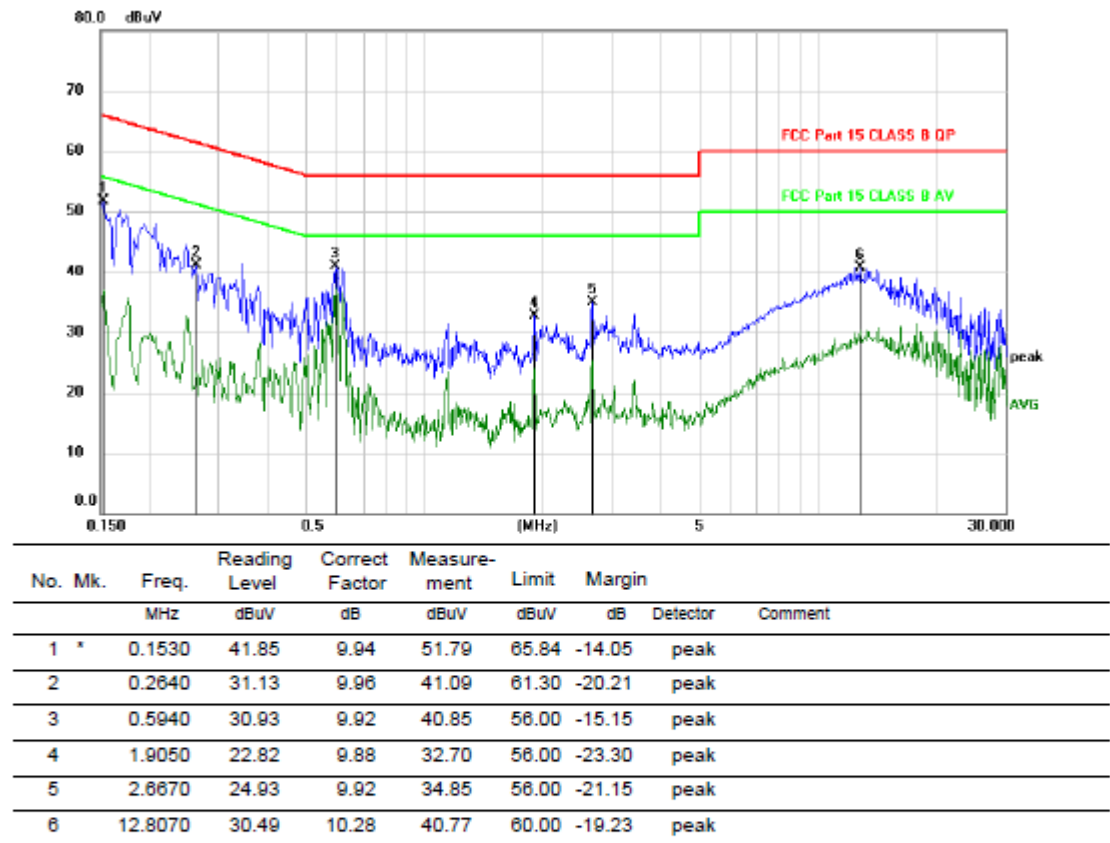

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

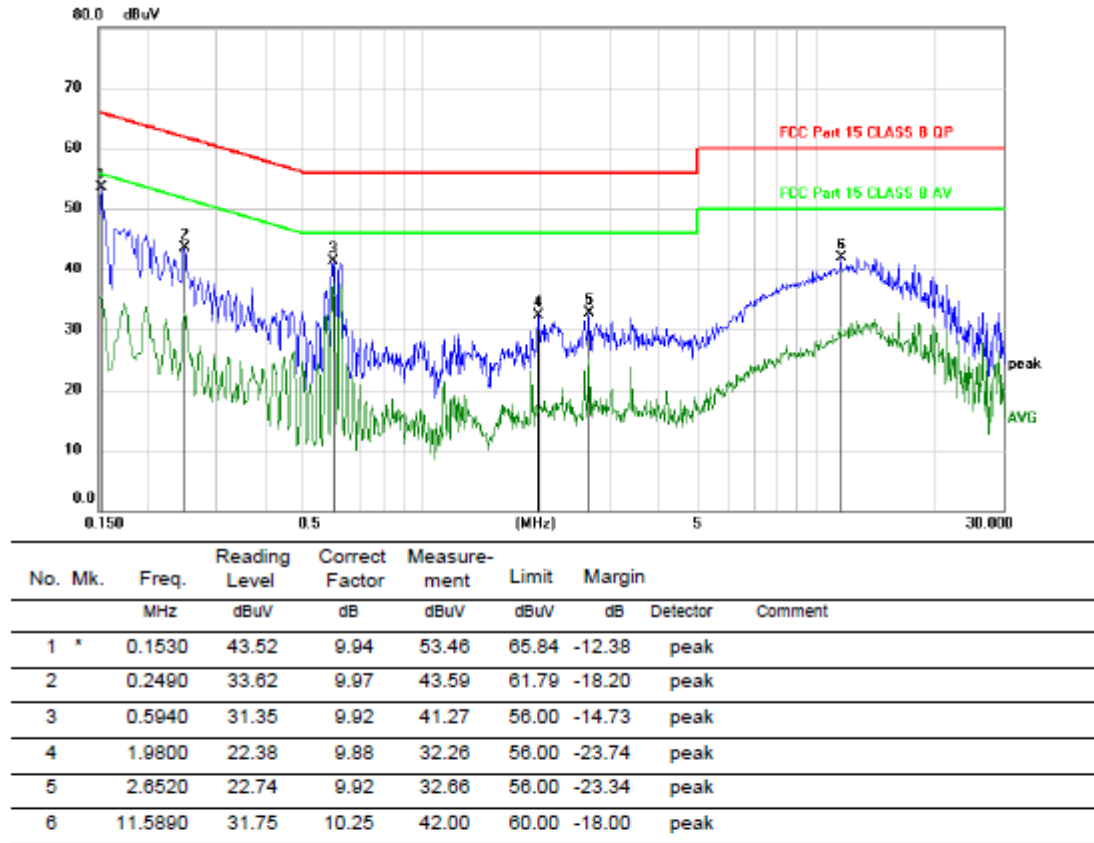Neutral:


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Model: IP-7024B


Line:

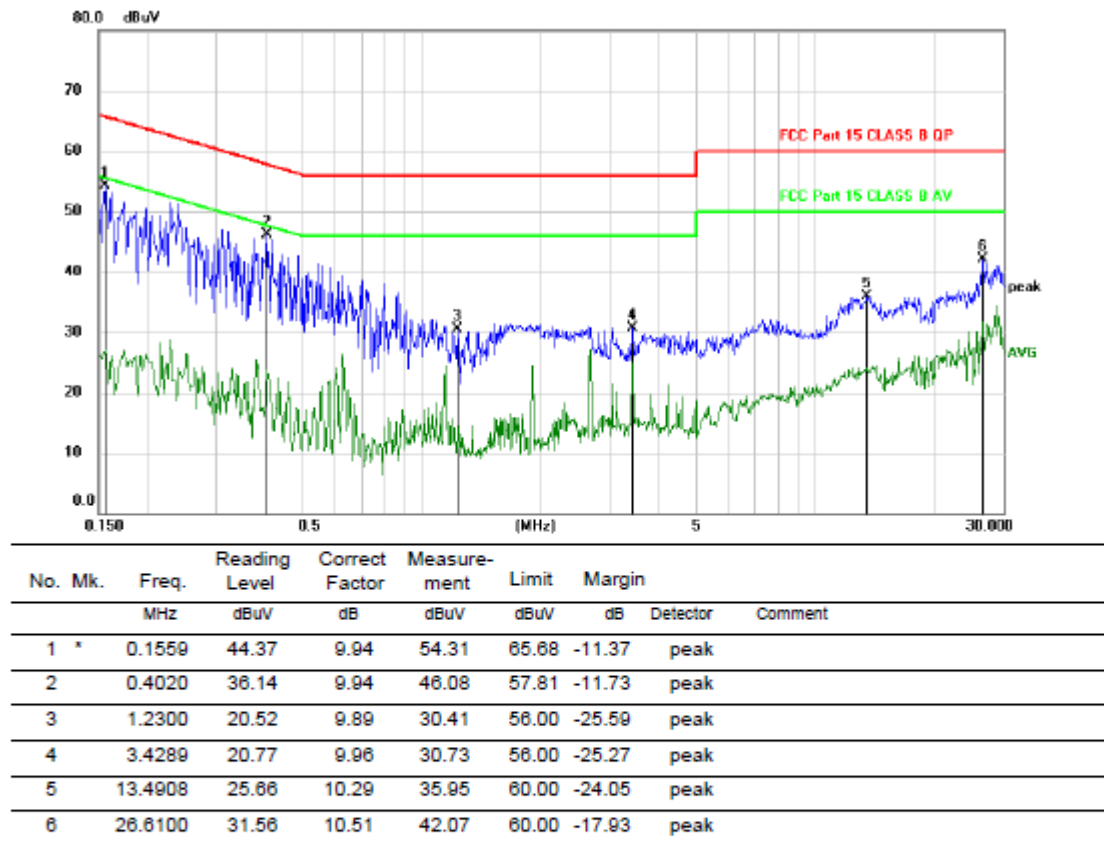

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

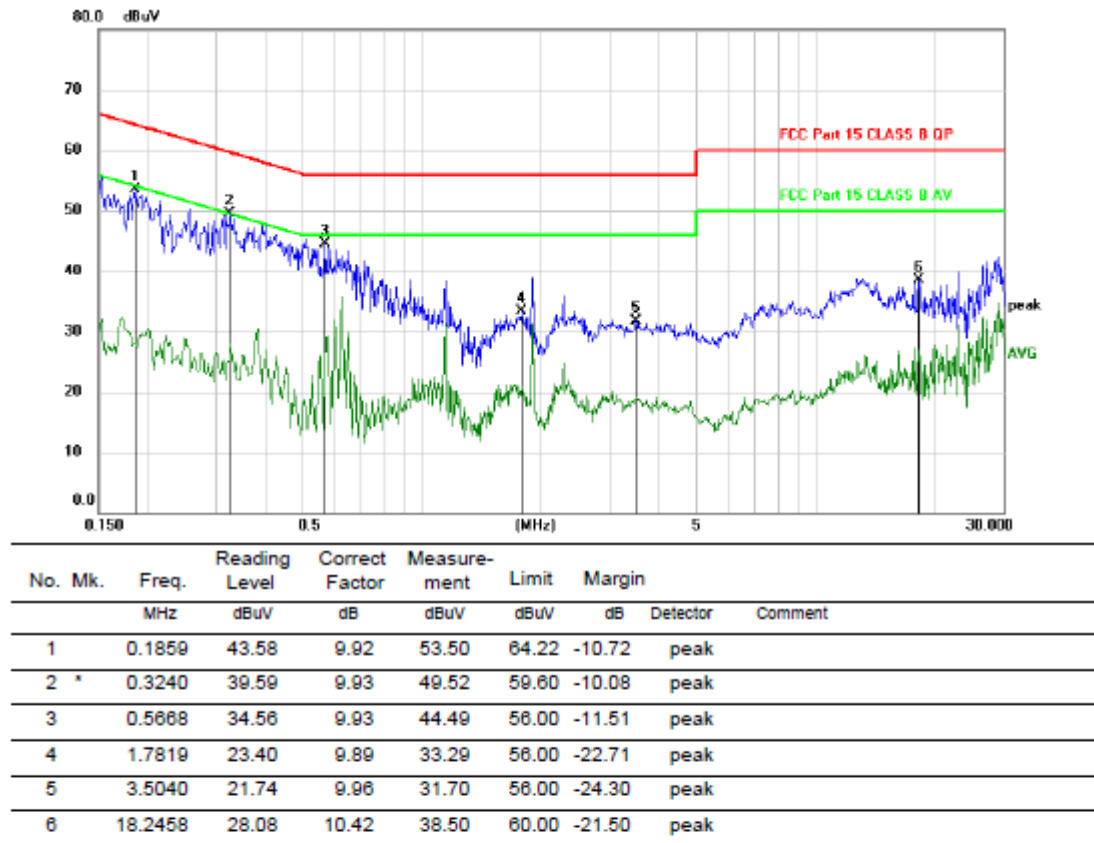Neutral:


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Model: IP-7024K


Line:

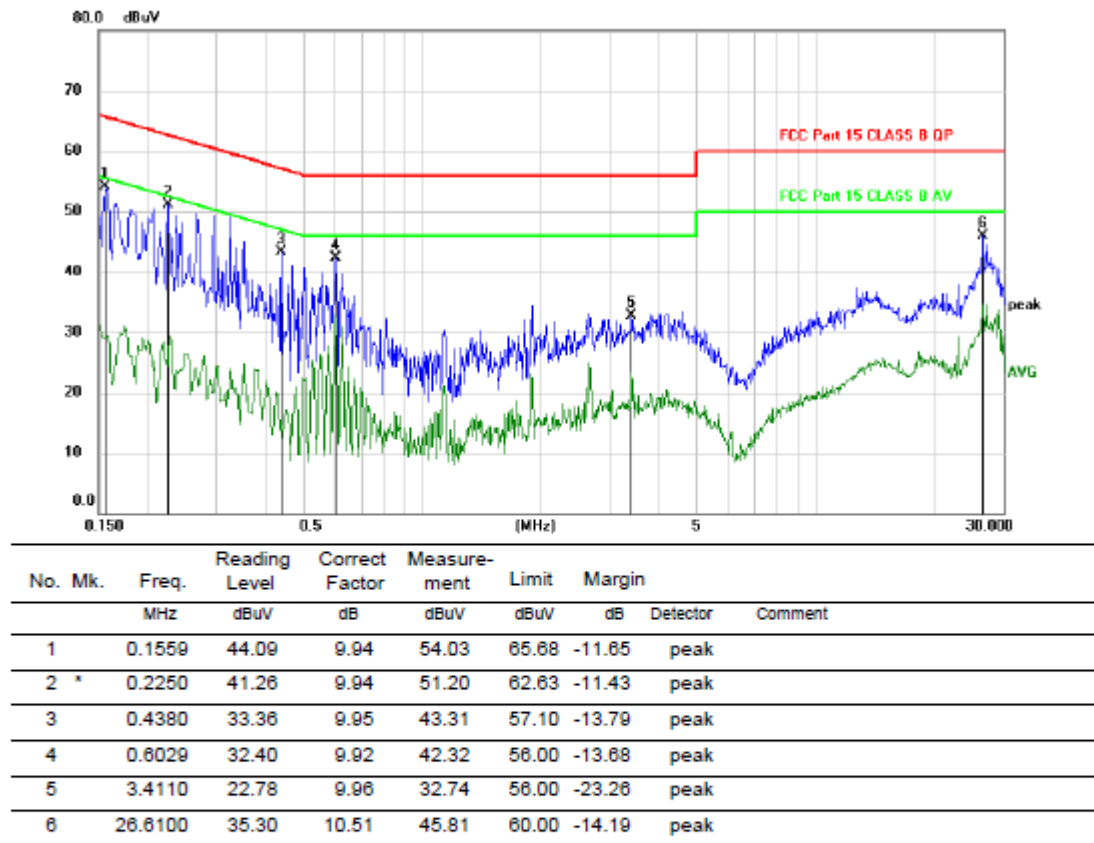

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

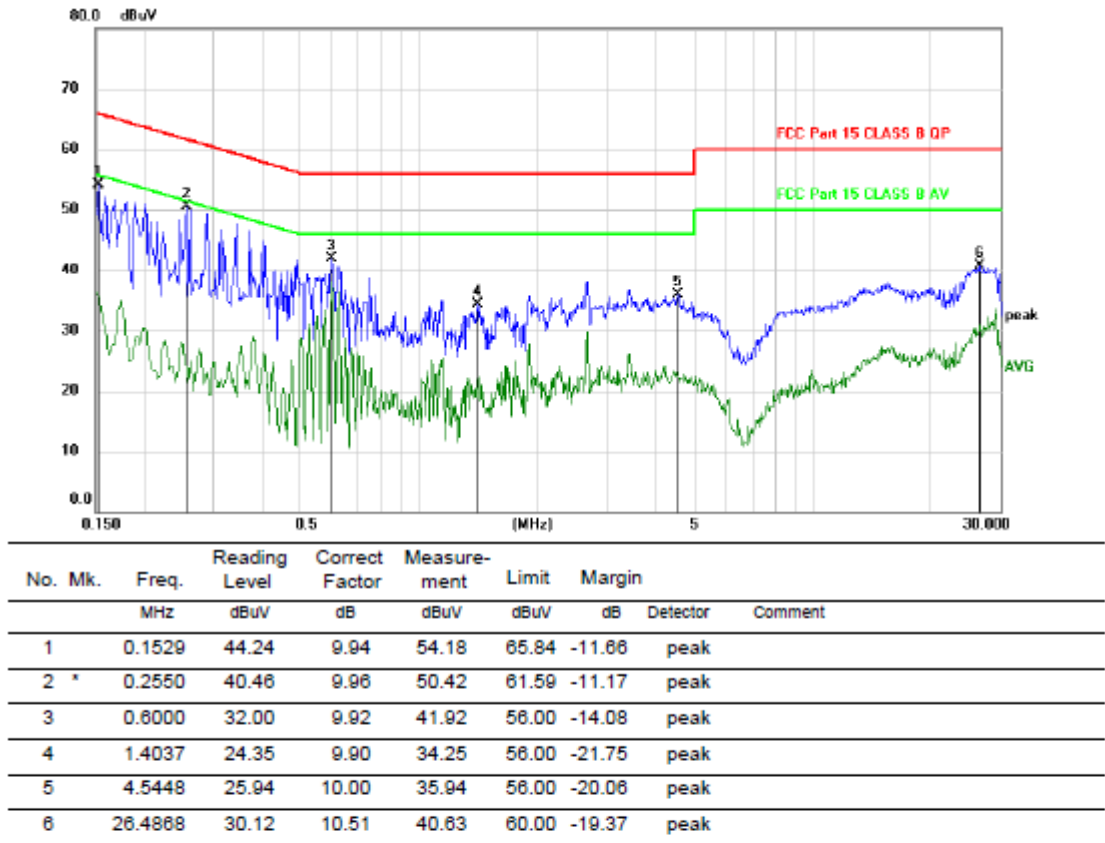Neutral:


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Model: IP-7024T


Line:

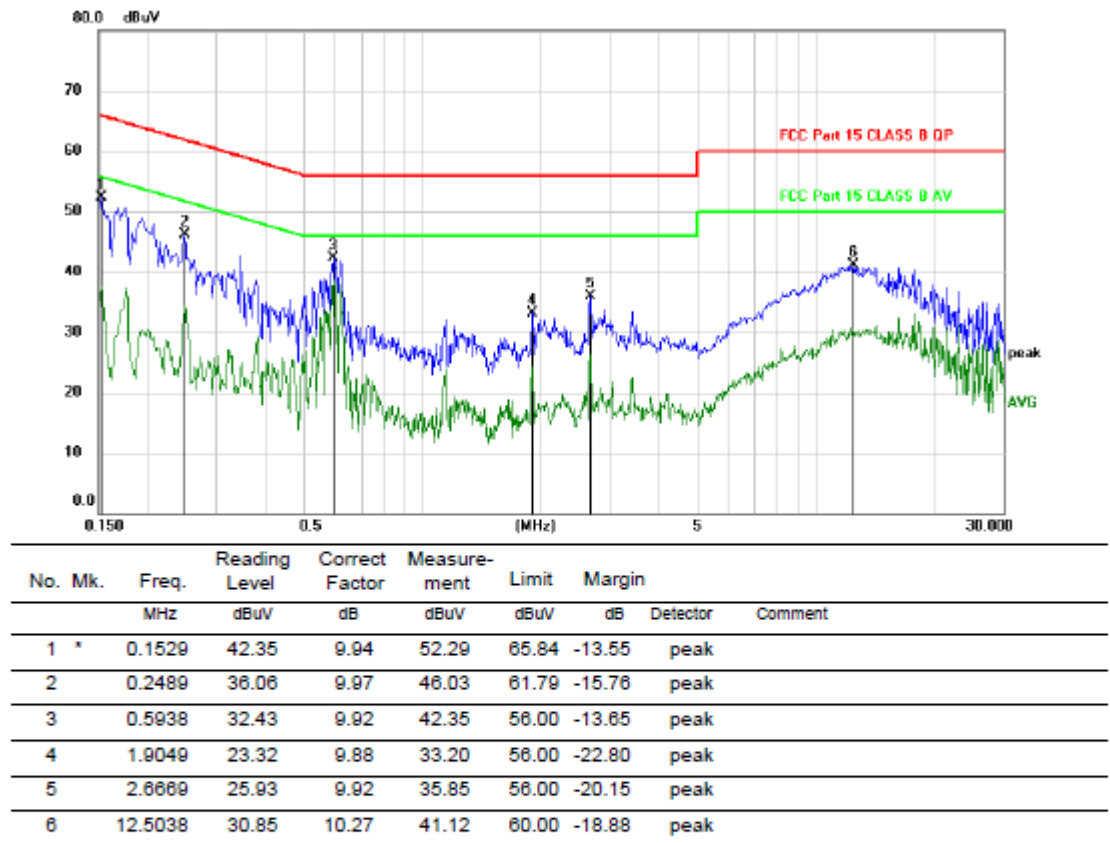

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

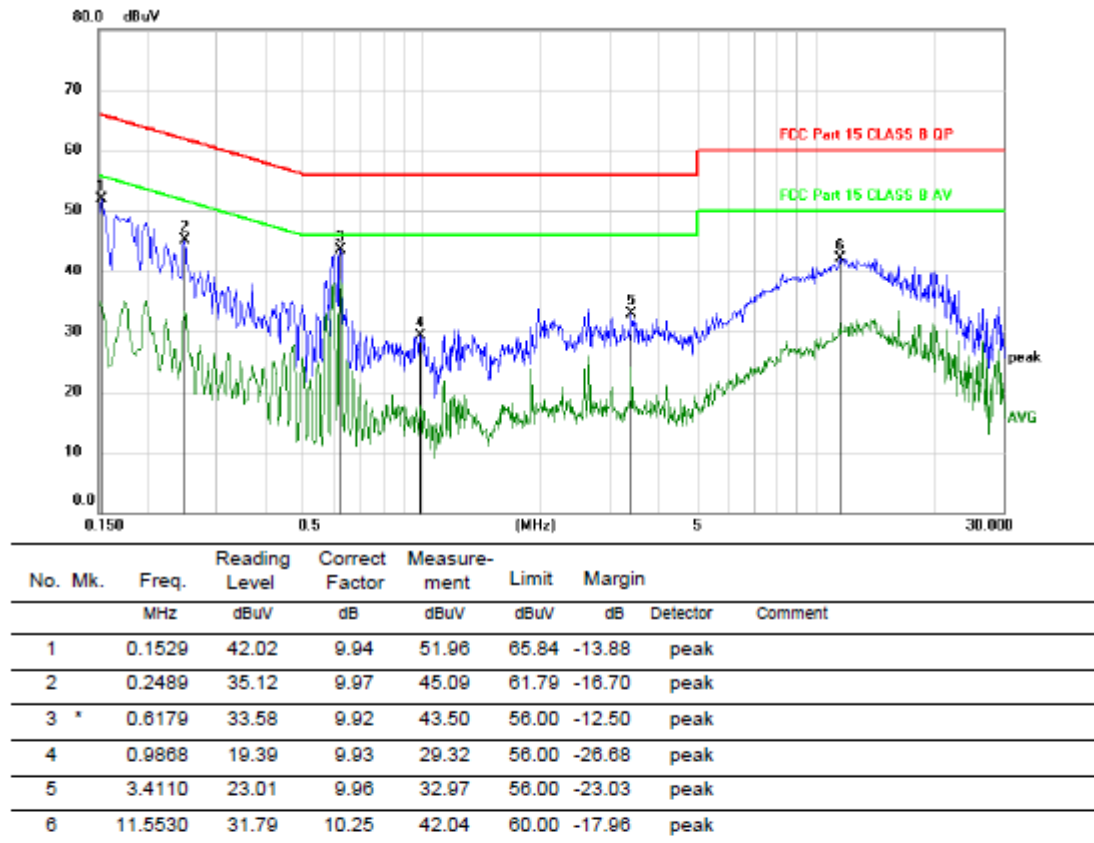Neutral:

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the B mode 2412MHz mode with the worst data is listed.

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

PASS

Detailed information please see the following page.

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	13.43	30	Pass
NVNT	b	2437	Ant1	12.951	30	Pass
NVNT	b	2462	Ant1	12.262	30	Pass
NVNT	g	2412	Ant1	13.666	30	Pass
NVNT	g	2437	Ant1	12.675	30	Pass
NVNT	g	2462	Ant1	12.576	30	Pass
NVNT	n20	2412	Ant1	13.145	30	Pass
NVNT	n20	2437	Ant1	12.544	30	Pass
NVNT	n20	2462	Ant1	12.202	30	Pass
NVNT	n40	2422	Ant1	13.06	30	Pass
NVNT	n40	2437	Ant1	12.447	30	Pass
NVNT	n40	2452	Ant1	12.275	30	Pass

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer FCC PART 15: 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as $RBW = 3\text{kHz}$ (Set the RBW to: $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$.), $VBW = 10\text{kHz}$ (Set the $VBW \geq 3 \times RBW$), $\text{span} \geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


6.3. Test Setup




6.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	1.661	8	Pass
NVNT	b	2437	Ant1	1.153	8	Pass
NVNT	b	2462	Ant1	0.403	8	Pass
NVNT	g	2412	Ant1	-4.765	8	Pass
NVNT	g	2437	Ant1	-4.147	8	Pass
NVNT	g	2462	Ant1	-4.21	8	Pass
NVNT	n20	2412	Ant1	-1.097	8	Pass
NVNT	n20	2437	Ant1	-1.532	8	Pass
NVNT	n20	2462	Ant1	-1.835	8	Pass
NVNT	n40	2422	Ant1	-9.043	8	Pass
NVNT	n40	2437	Ant1	-9.274	8	Pass
NVNT	n40	2452	Ant1	-9.677	8	Pass


PSD NVNT b 2412MHz Ant1

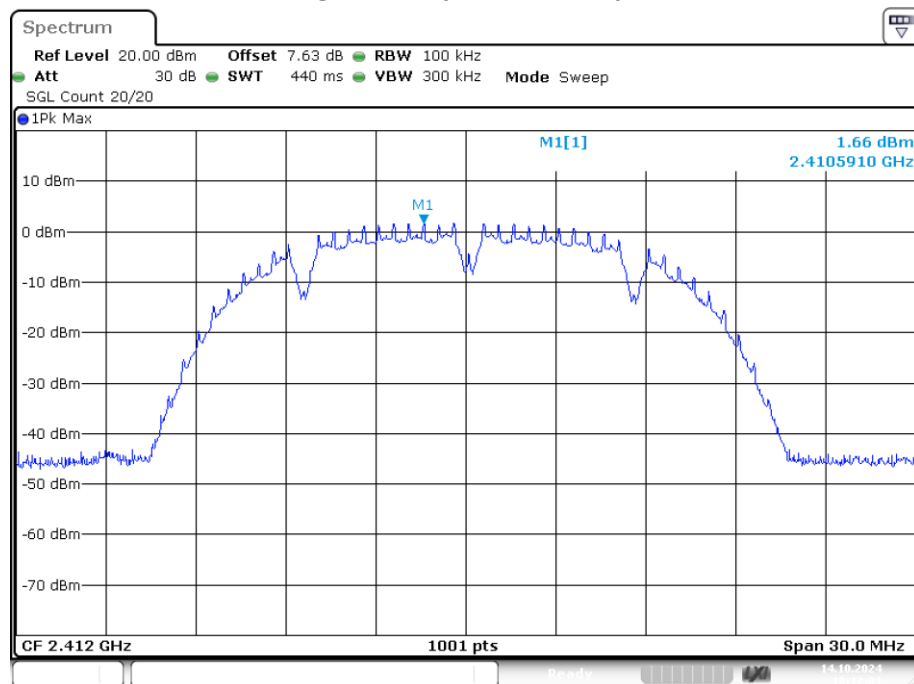


PSD NVNT b 2437MHz Ant1

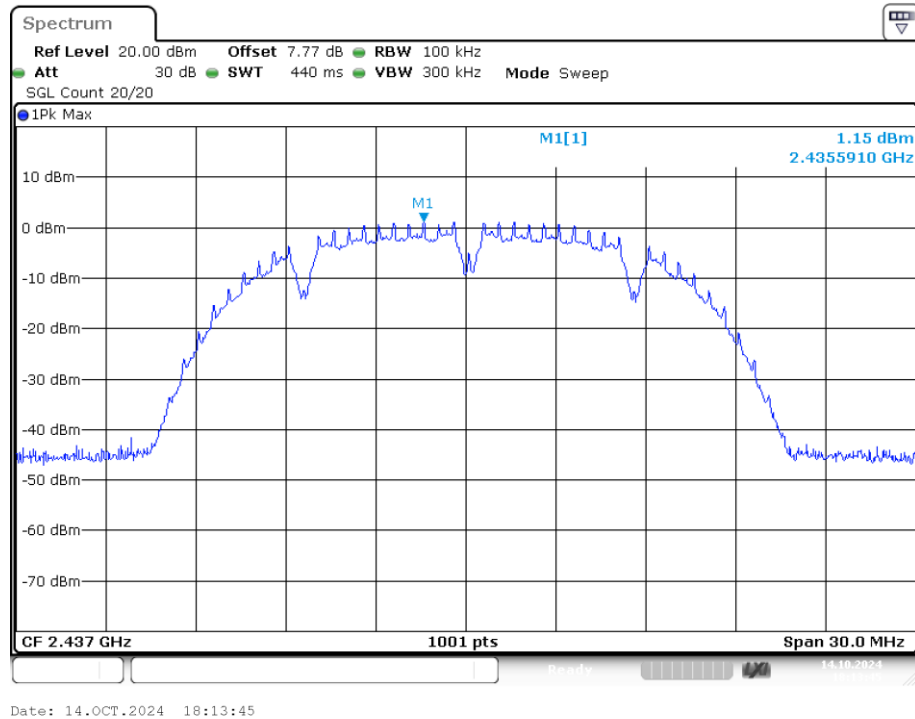


PSD NVNT b 2462MHz Ant1

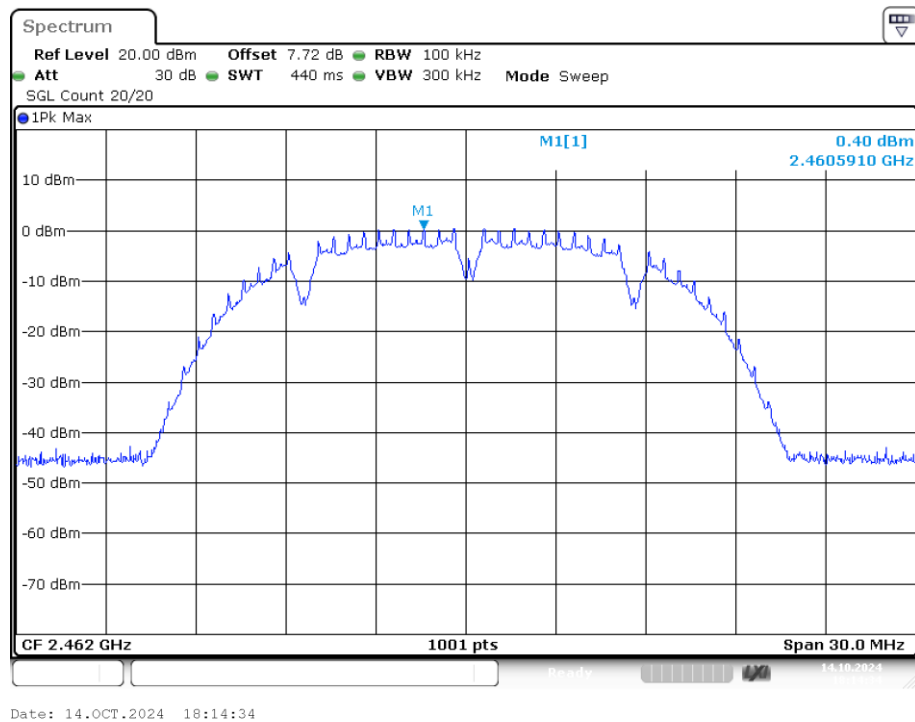


PSD NVNT g 2412MHz Ant1

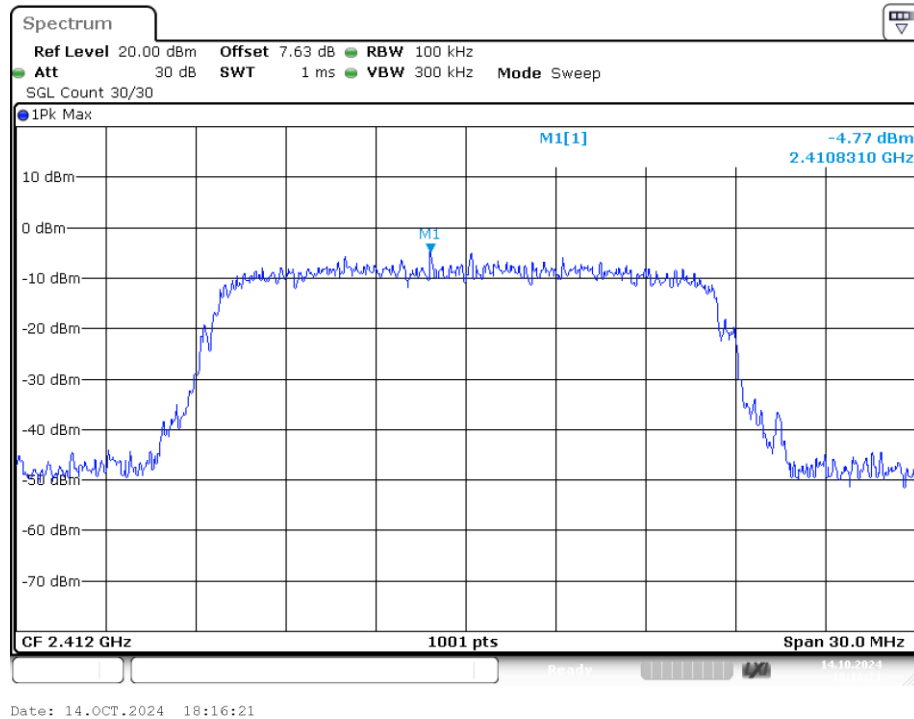


PSD NVNT g 2437MHz Ant1

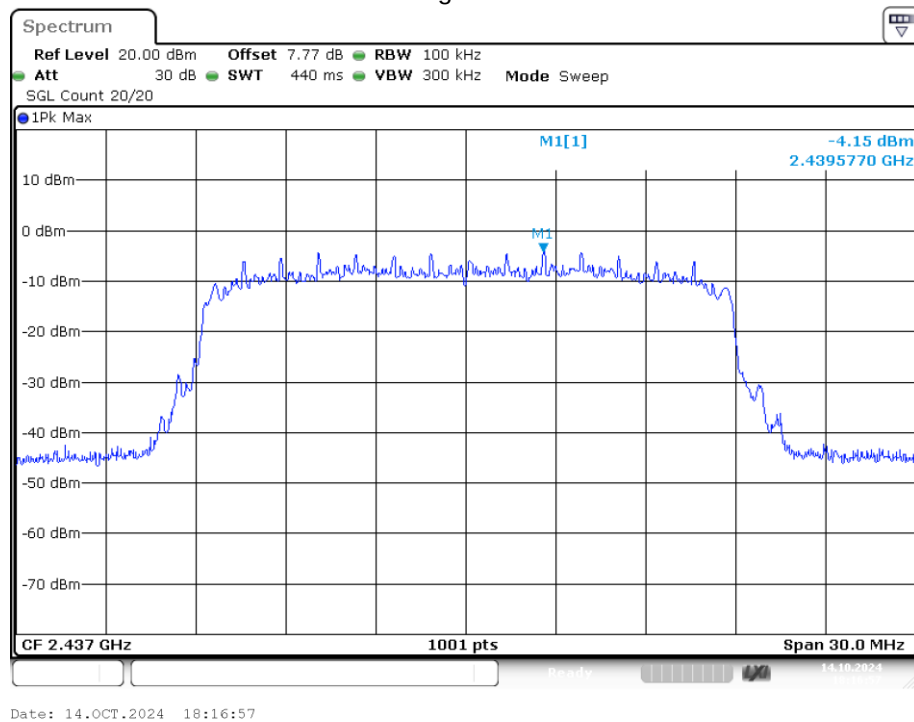


PSD NVNT g 2462MHz Ant1

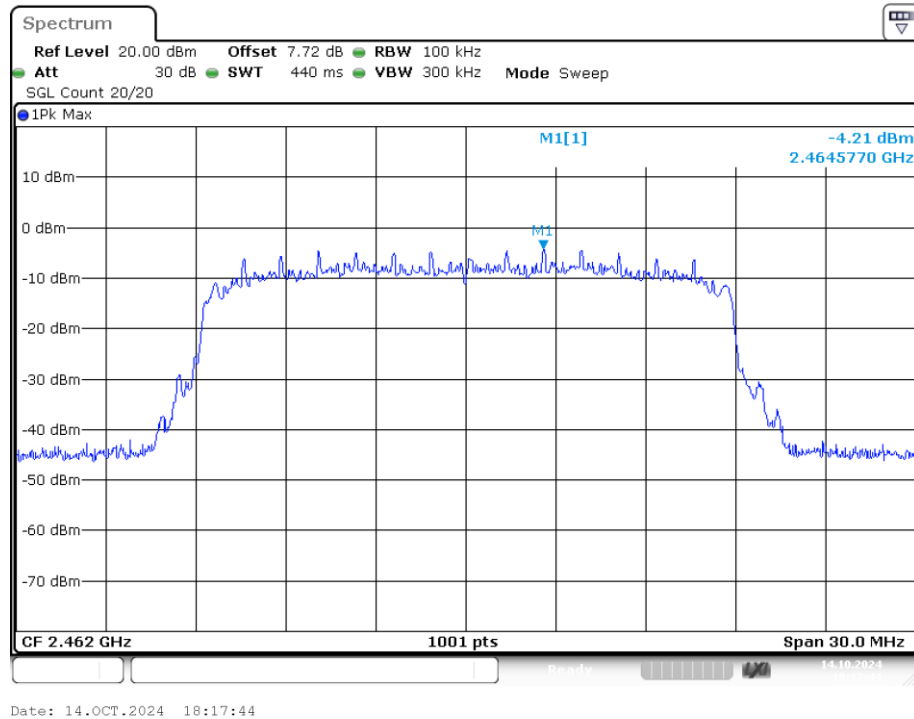


PSD NVNT n20 2412MHz Ant1

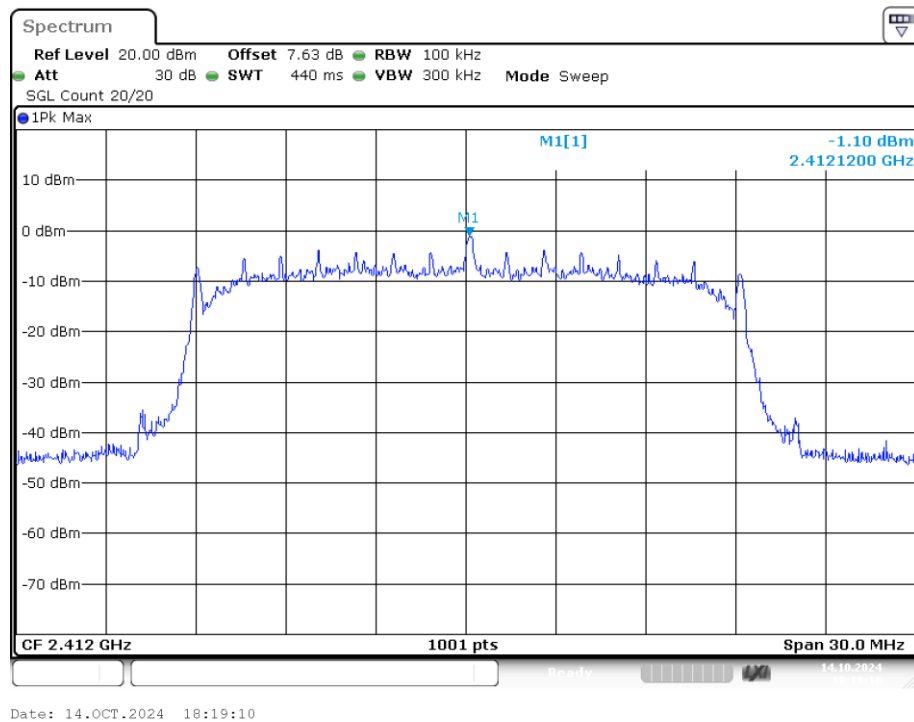


PSD NVNT n20 2437MHz Ant1

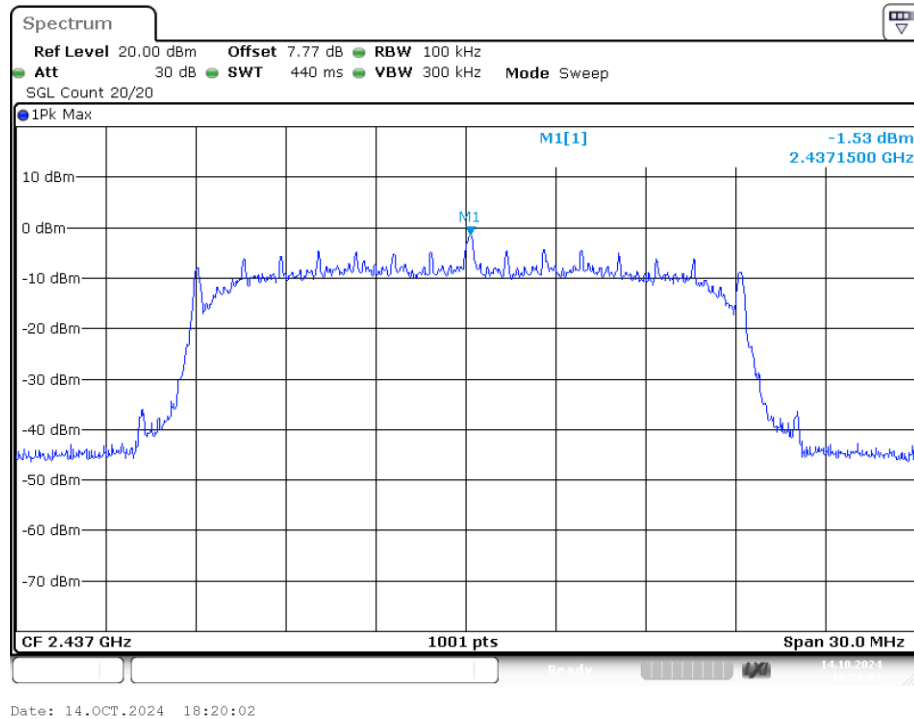


PSD NVNT n20 2462MHz Ant1

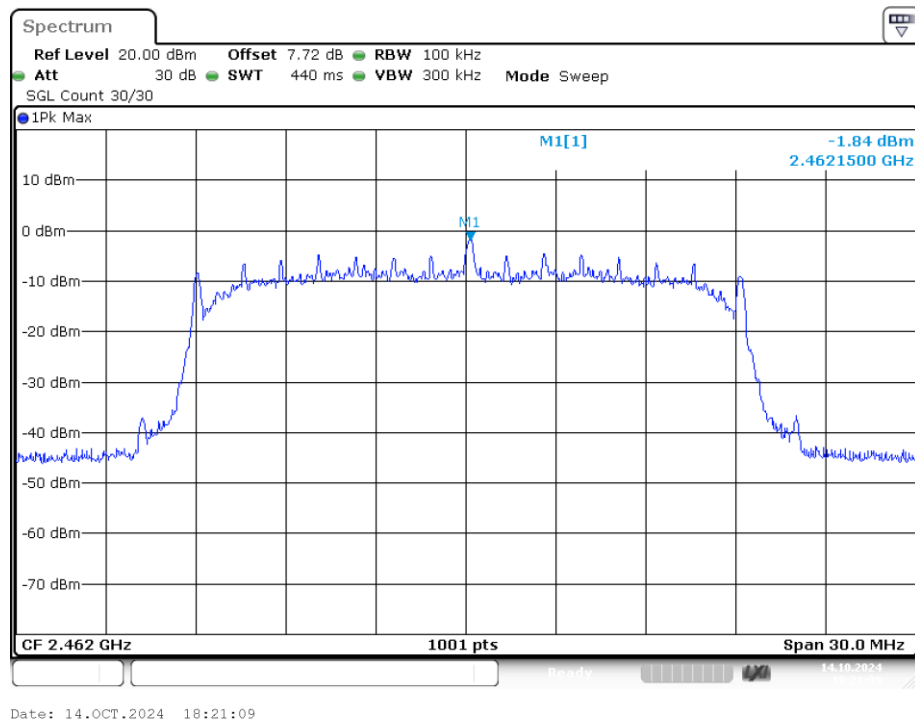


PSD NVNT n40 2422MHz Ant1

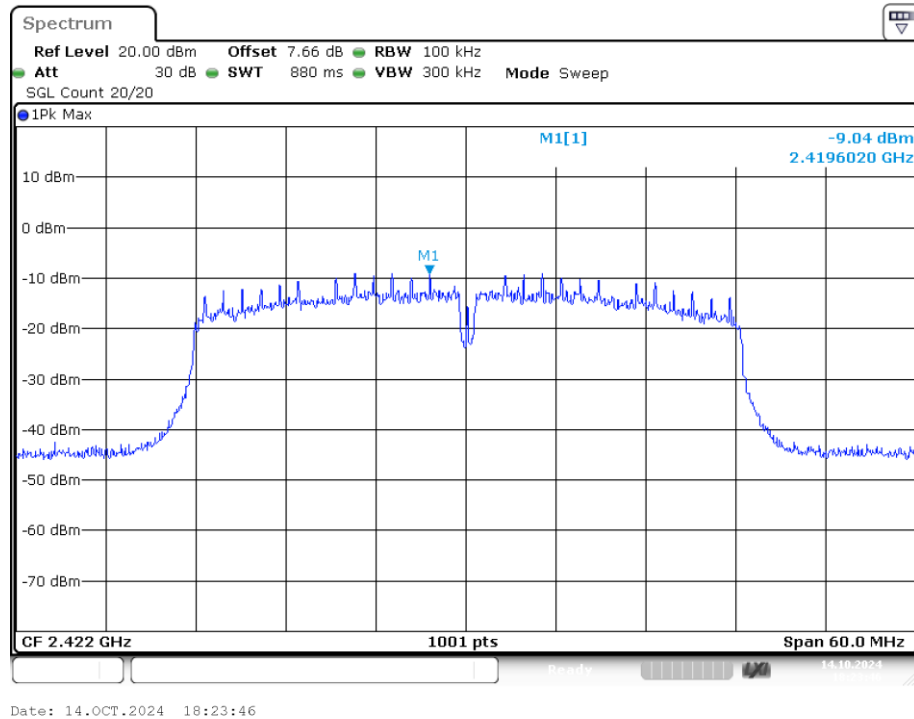

PSD NVNT n40 2437MHz Ant1

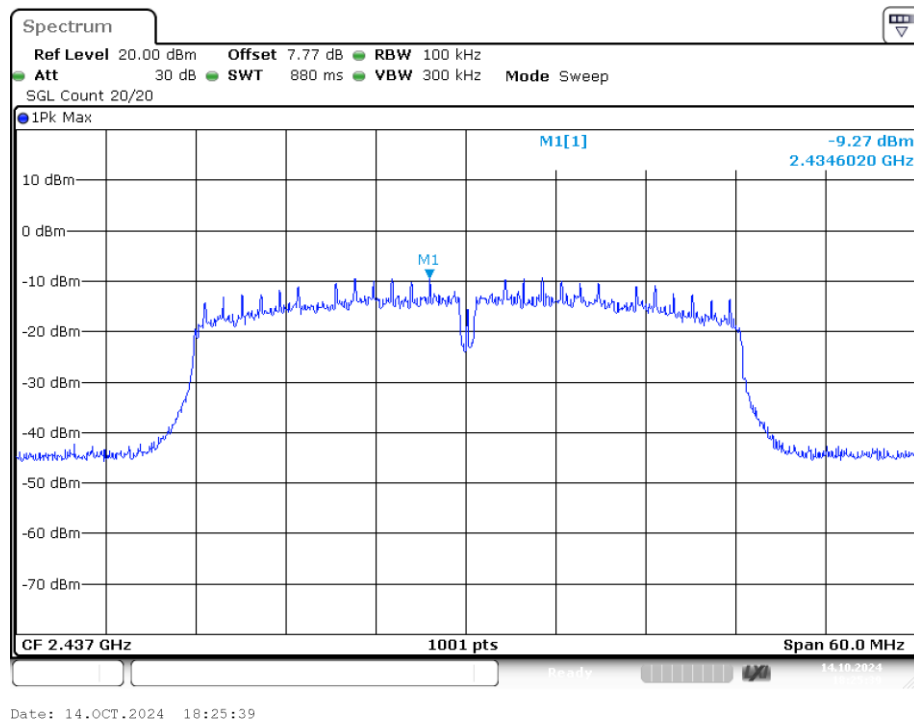

PSD NVNT n40 2452MHz Ant1

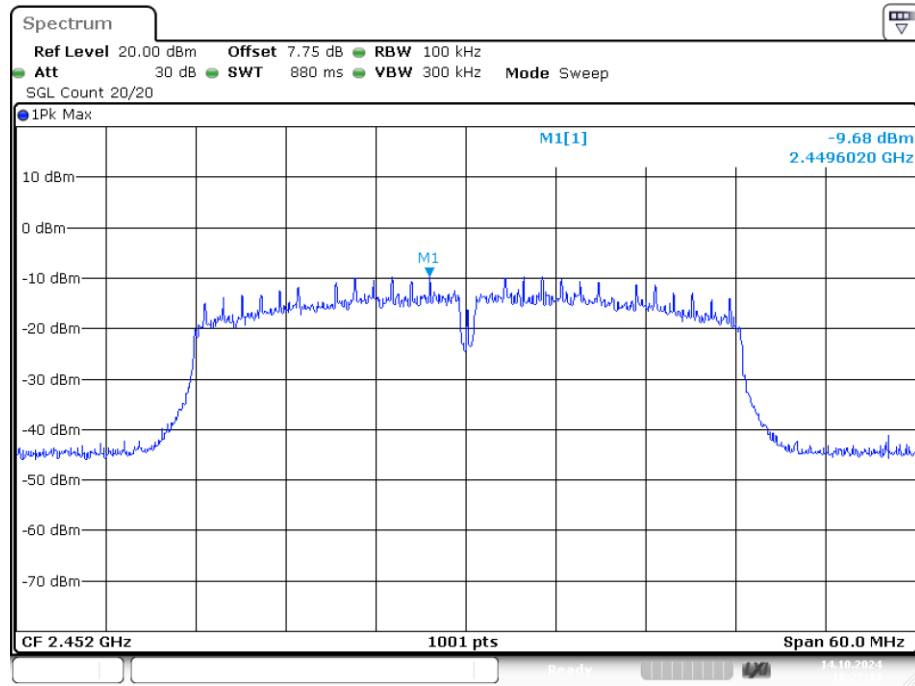

Date: 14.OCT.2024 18:27:13

7. BANDWIDTH

7.1. Test limits

Please refer FCC PART 15: 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, , Peak Detector, Sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.07	0.5	Pass
NVNT	b	2437	Ant1	8.07	0.5	Pass
NVNT	b	2462	Ant1	7.56	0.5	Pass
NVNT	g	2412	Ant1	13.89	0.5	Pass
NVNT	g	2437	Ant1	15.39	0.5	Pass
NVNT	g	2462	Ant1	16.32	0.5	Pass
NVNT	n20	2412	Ant1	16.05	0.5	Pass
NVNT	n20	2437	Ant1	15.66	0.5	Pass
NVNT	n20	2462	Ant1	15.09	0.5	Pass
NVNT	n40	2422	Ant1	35.46	0.5	Pass
NVNT	n40	2437	Ant1	34.5	0.5	Pass
NVNT	n40	2452	Ant1	35.1	0.5	Pass

-6dB Bandwidth NVNT b 2412MHz Ant1

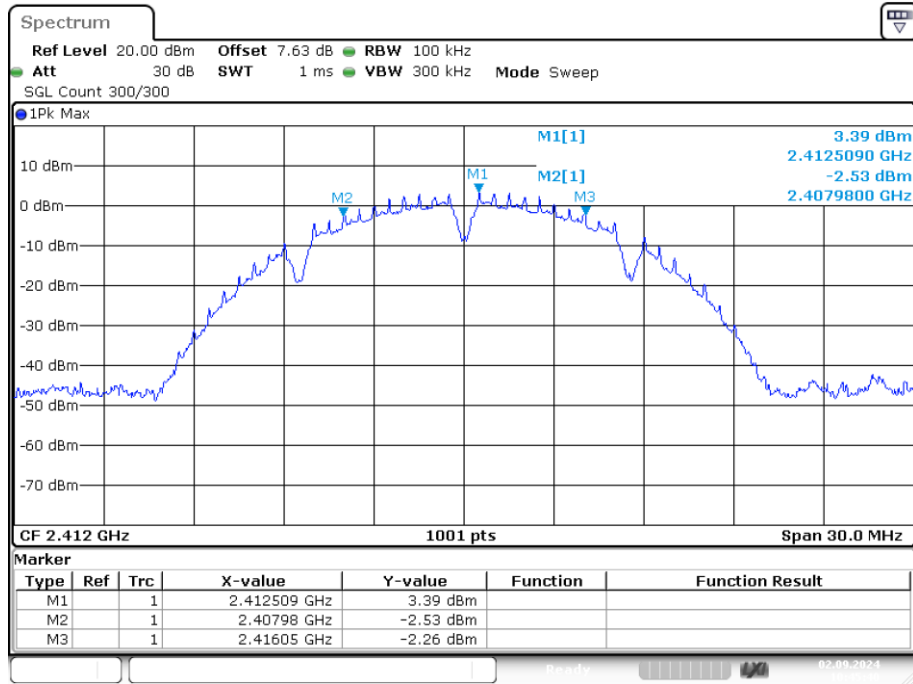


Date: 2.SEP.2024 10:45:39

-6dB Bandwidth NVNT b 2437MHz Ant1

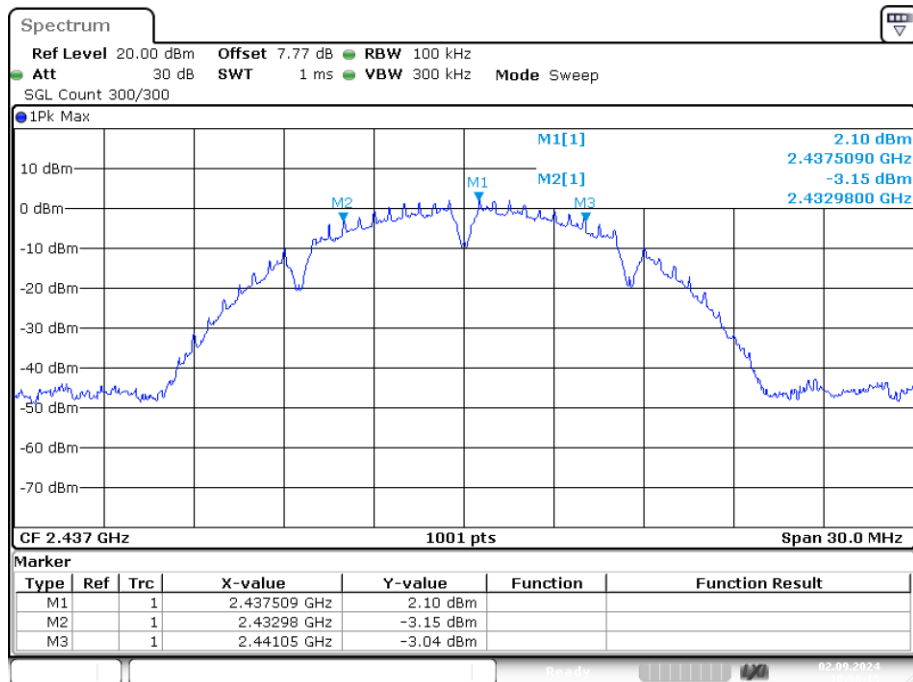


Date: 2.SEP.2024 10:58:15


-6dB Bandwidth NVNT b 2462MHz Ant1

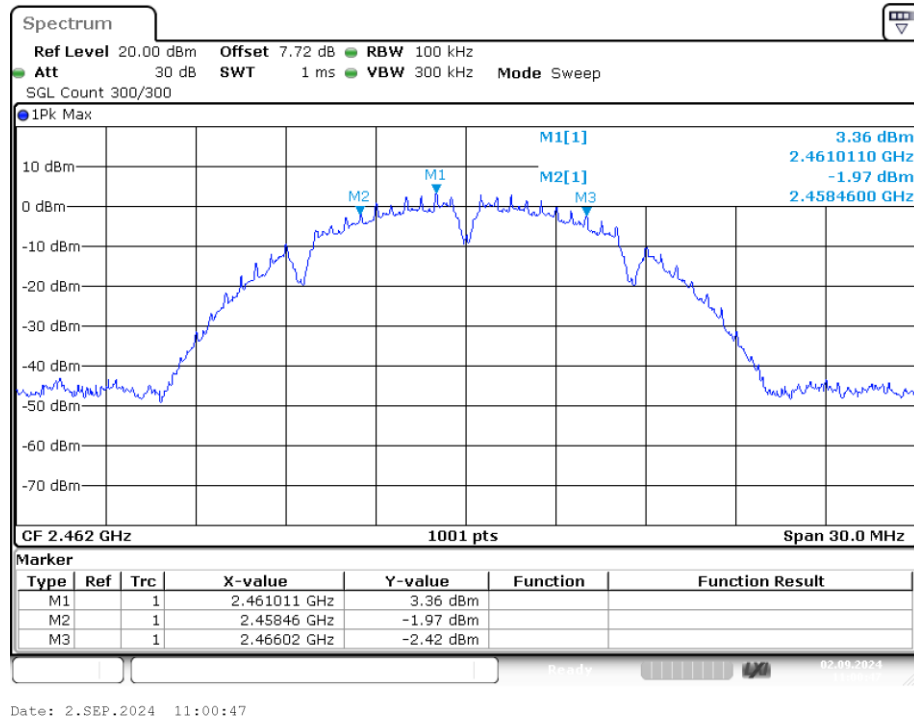


-6dB Bandwidth NVNT g 2412MHz Ant1

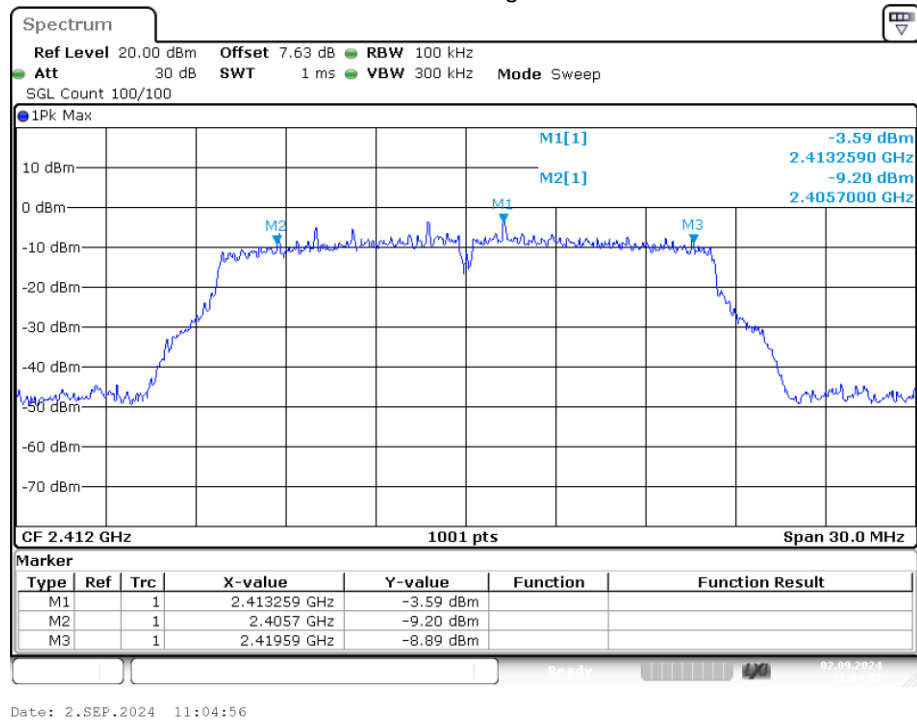


-6dB Bandwidth NVNT g 2437MHz Ant1

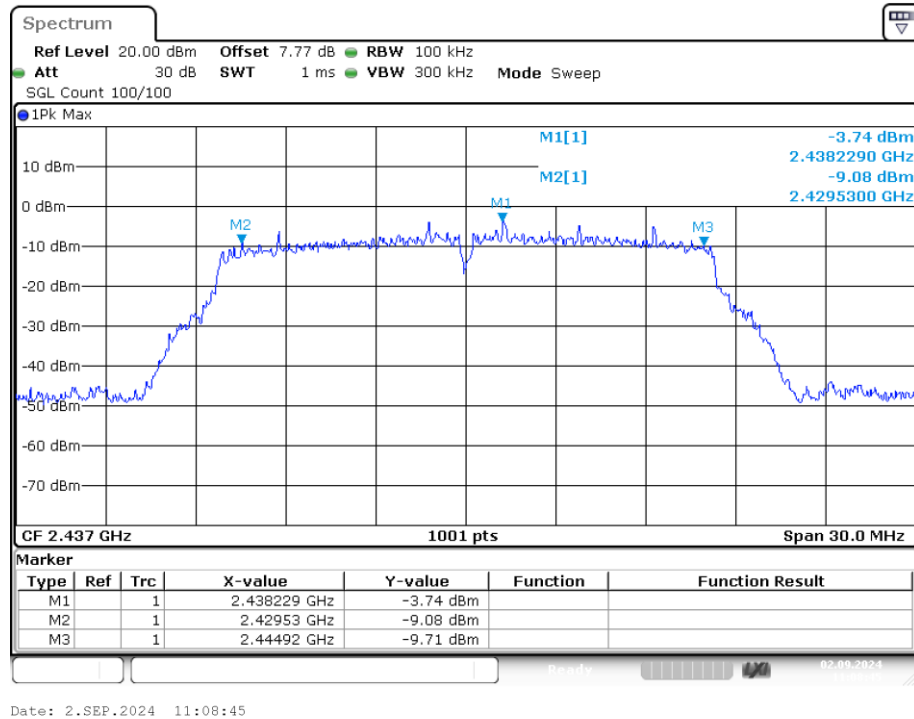


-6dB Bandwidth NVNT g 2462MHz Ant1

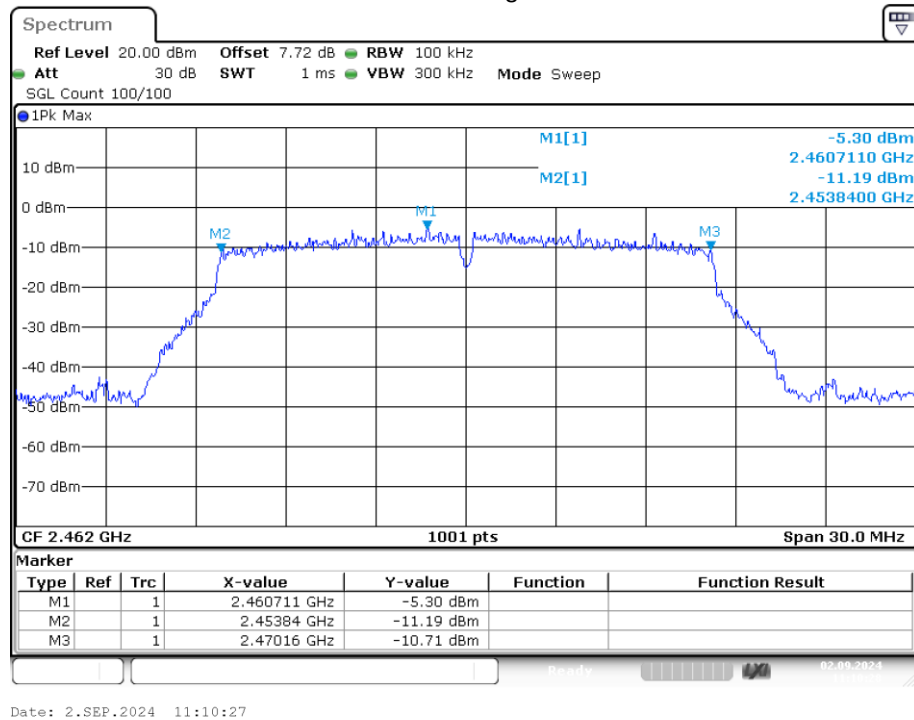


-6dB Bandwidth NVNT n20 2412MHz Ant1

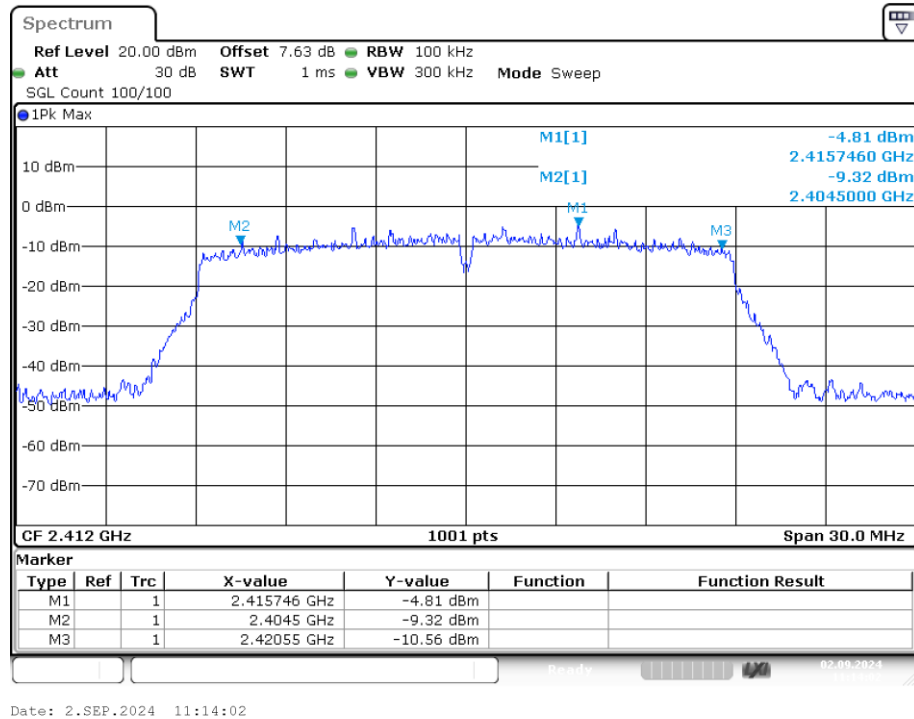


-6dB Bandwidth NVNT n20 2437MHz Ant1

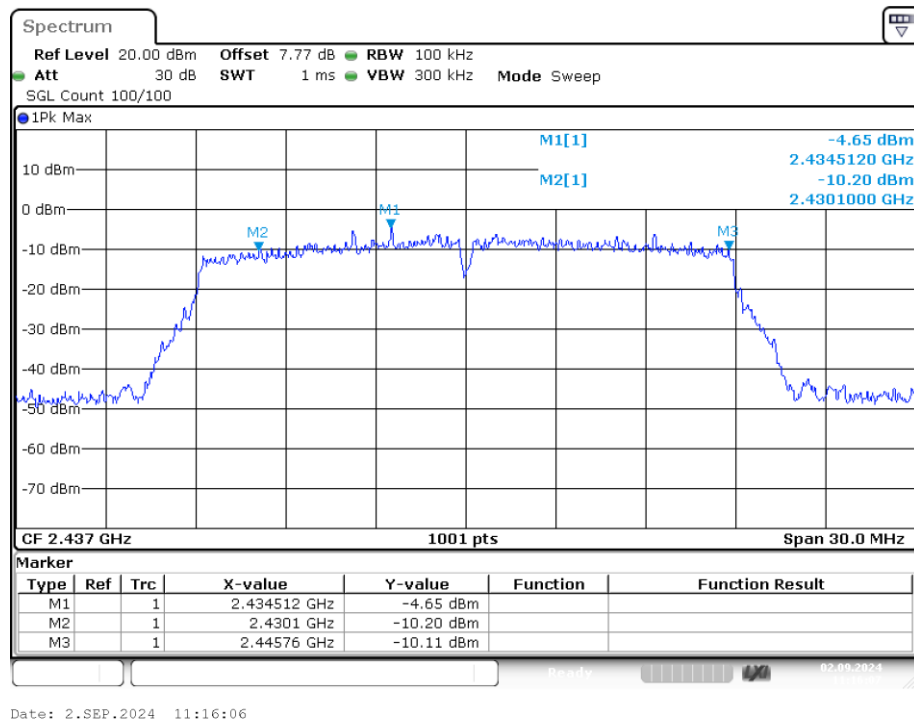



-6dB Bandwidth NVNT n20 2462MHz Ant1

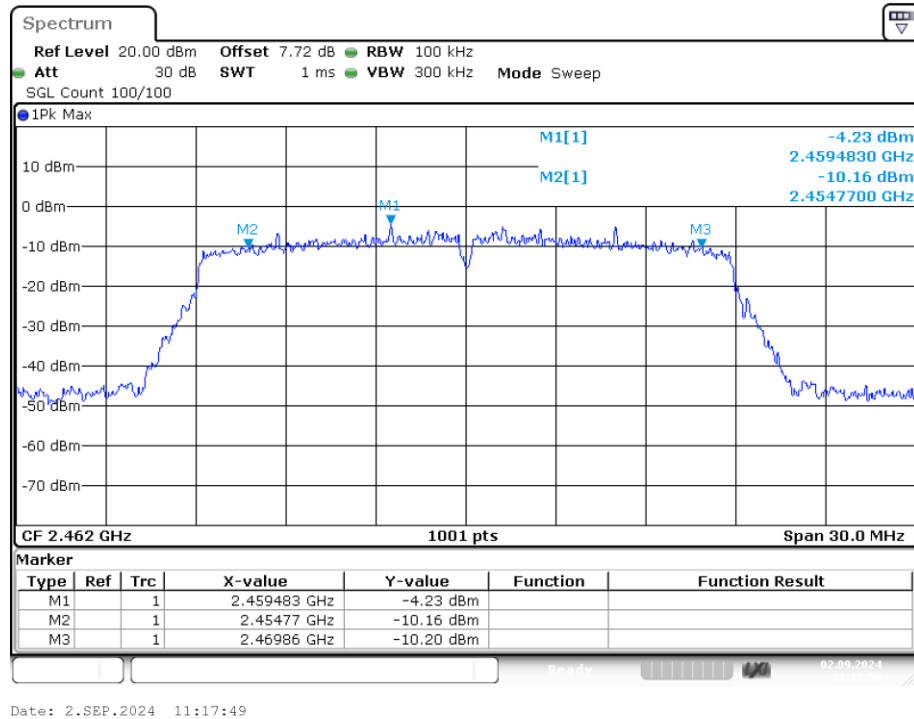

-6dB Bandwidth NVNT n40 2422MHz Ant1

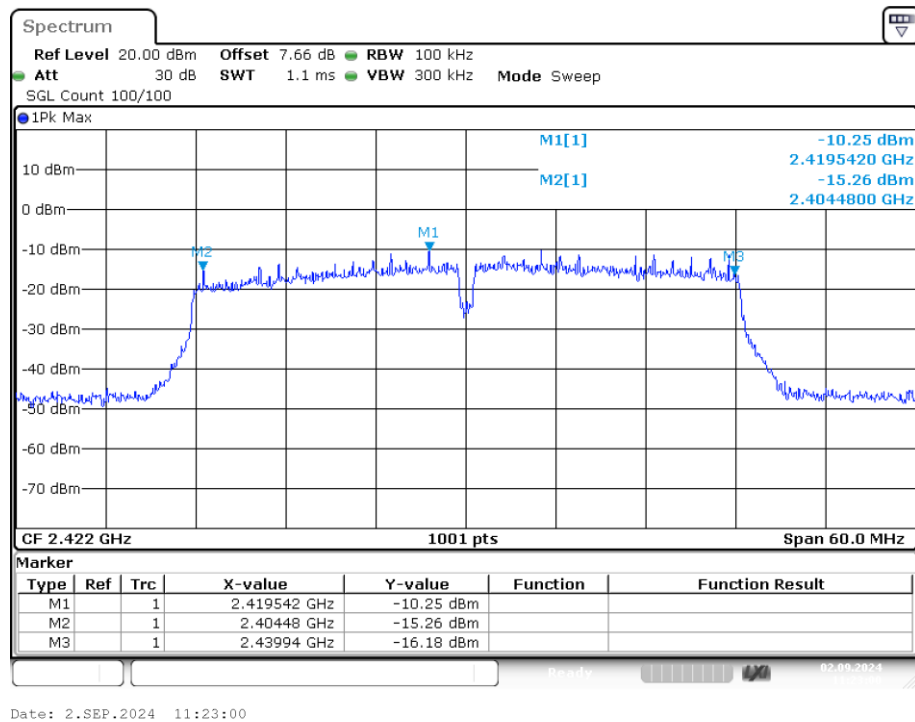


-6dB Bandwidth NVNT n40 2437MHz Ant1

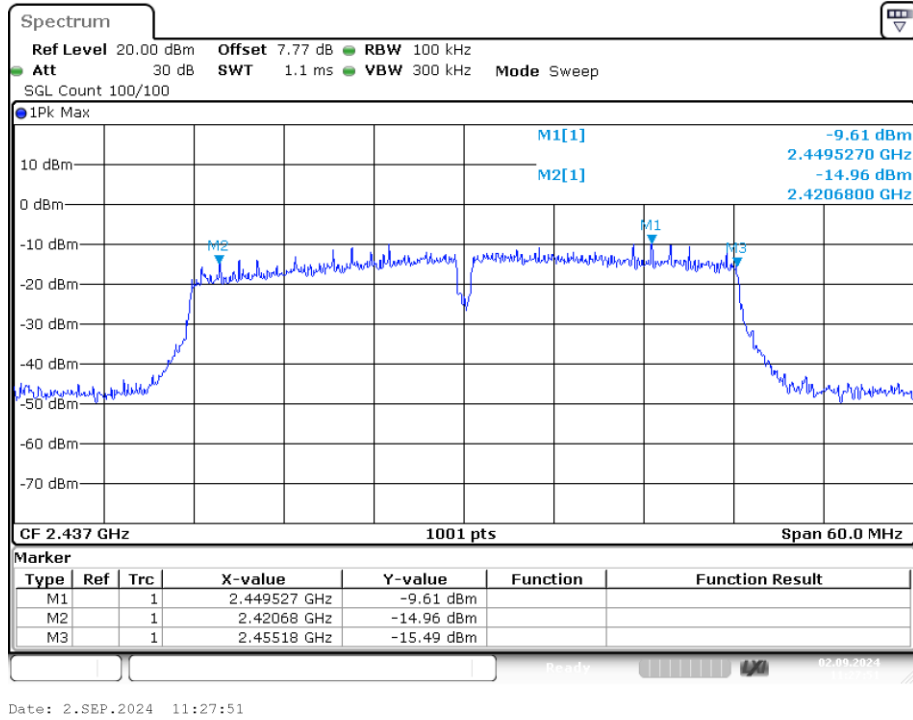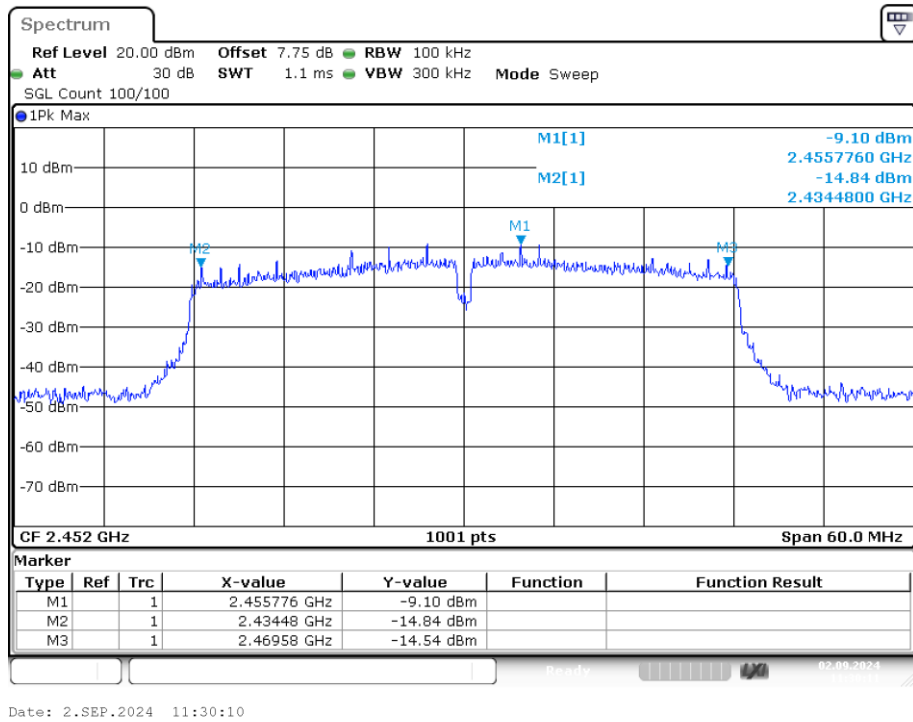**-6dB Bandwidth NVNT n40 2452MHz Ant1**


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.737
NVNT	b	2437	Ant1	12.677
NVNT	b	2462	Ant1	12.647
NVNT	g	2412	Ant1	16.454
NVNT	g	2437	Ant1	16.424
NVNT	g	2462	Ant1	16.424
NVNT	n20	2412	Ant1	17.592
NVNT	n20	2437	Ant1	17.562
NVNT	n20	2462	Ant1	17.532
NVNT	n40	2422	Ant1	36.204
NVNT	n40	2437	Ant1	36.024
NVNT	n40	2452	Ant1	35.904

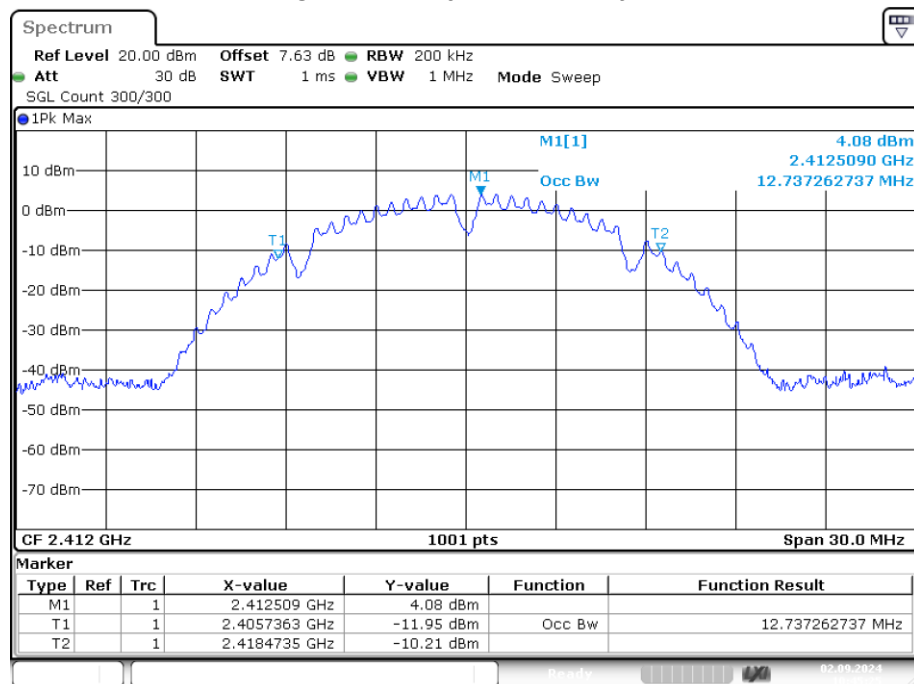
OBW NVNT b 2412MHz Ant1

Date: 2.SEP.2024 10:45:24


OBW NVNT b 2437MHz Ant1

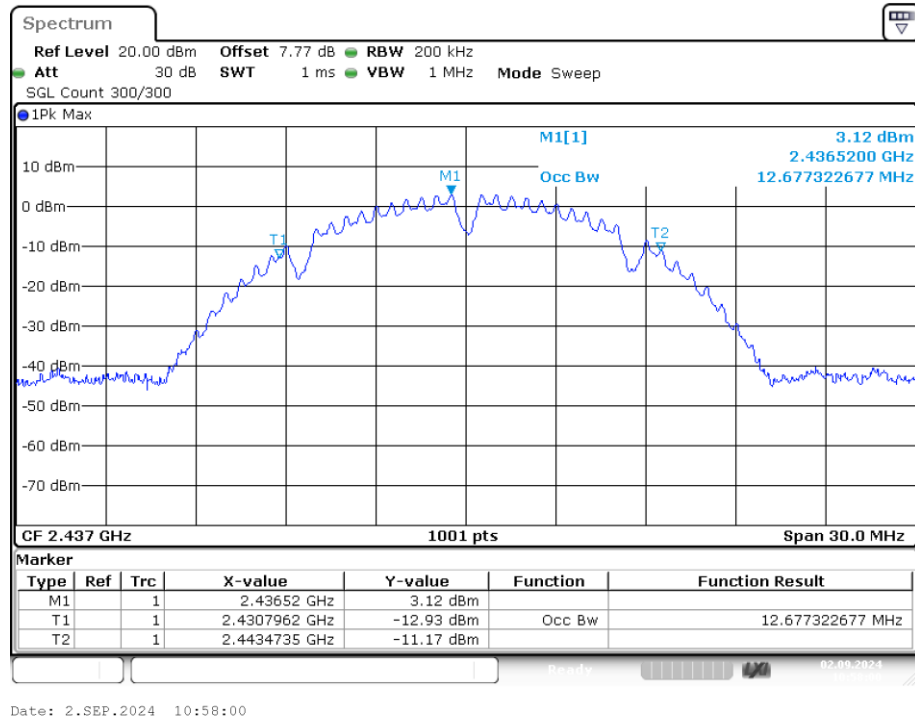


OBW NVNT b 2462MHz Ant1

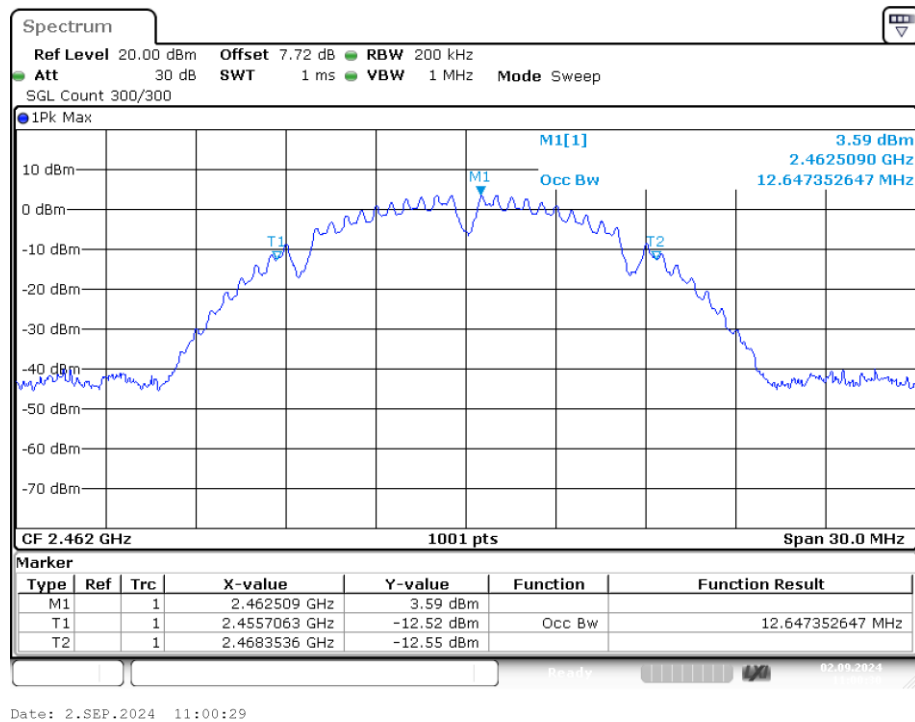


OBW NVNT g 2412MHz Ant1

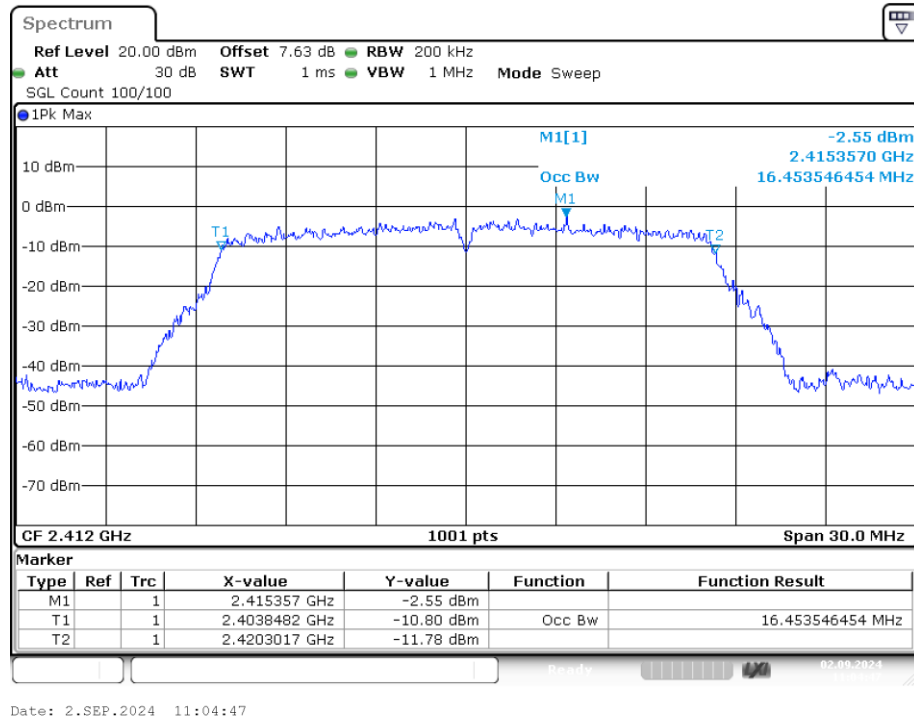


OBW NVNT g 2437MHz Ant1

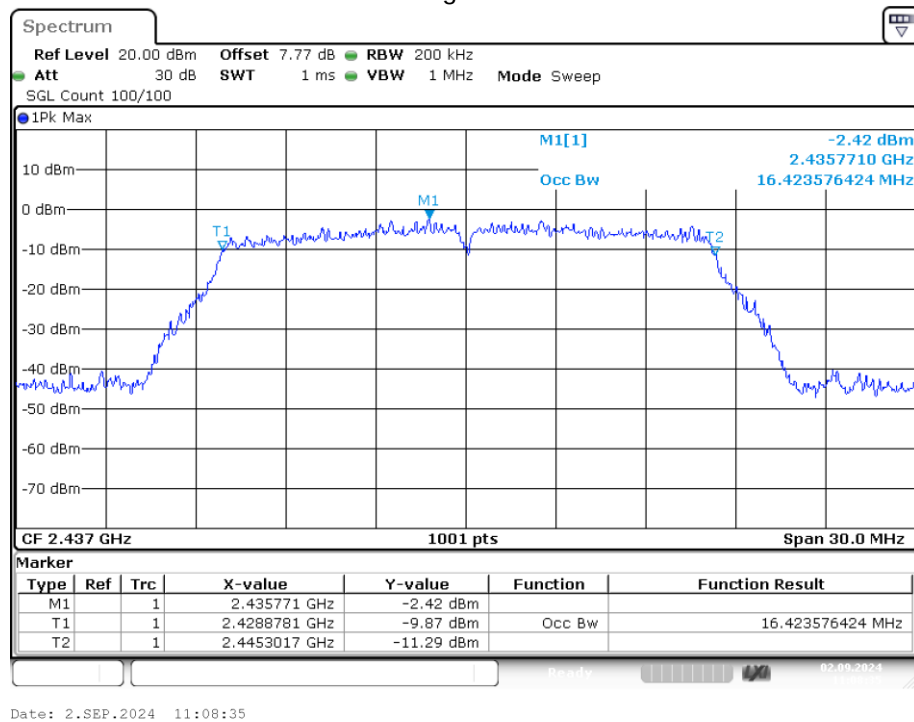


OBW NVNT g 2462MHz Ant1

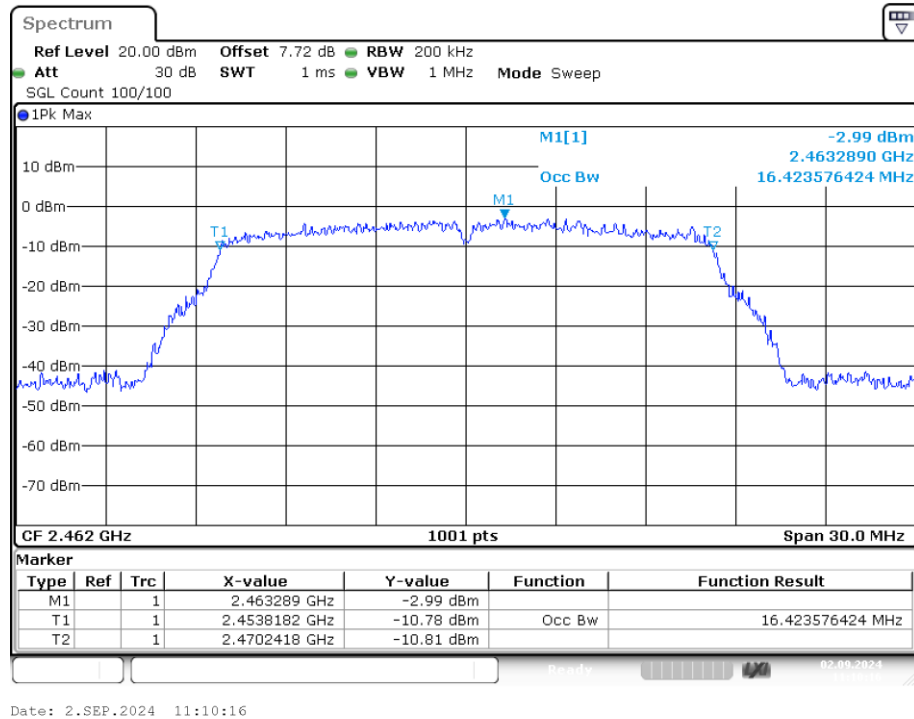


OBW NVNT n20 2412MHz Ant1

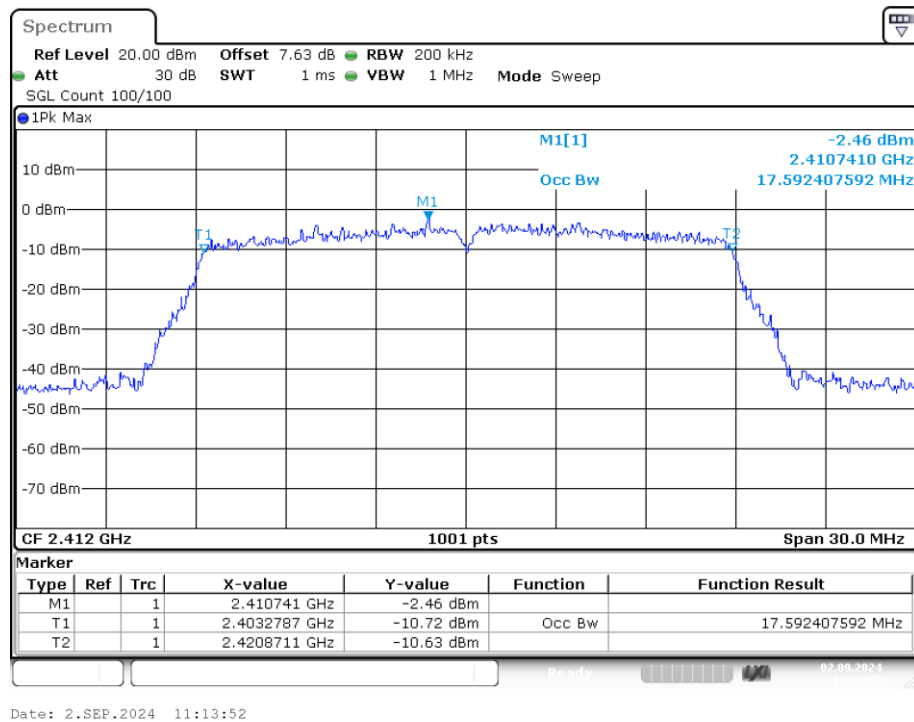


OBW NVNT n20 2437MHz Ant1

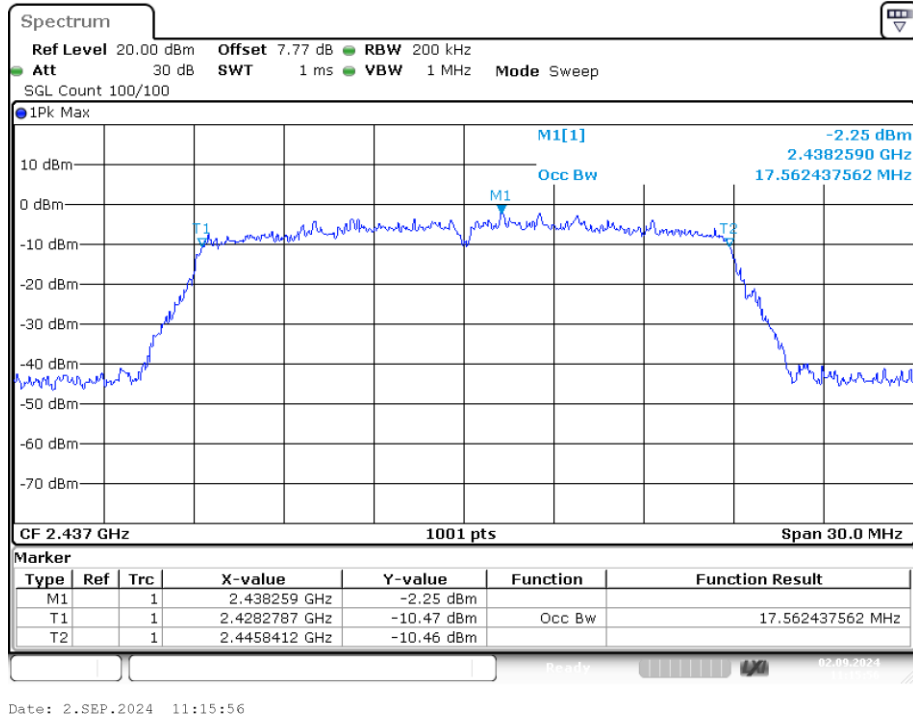


OBW NVNT n20 2462MHz Ant1

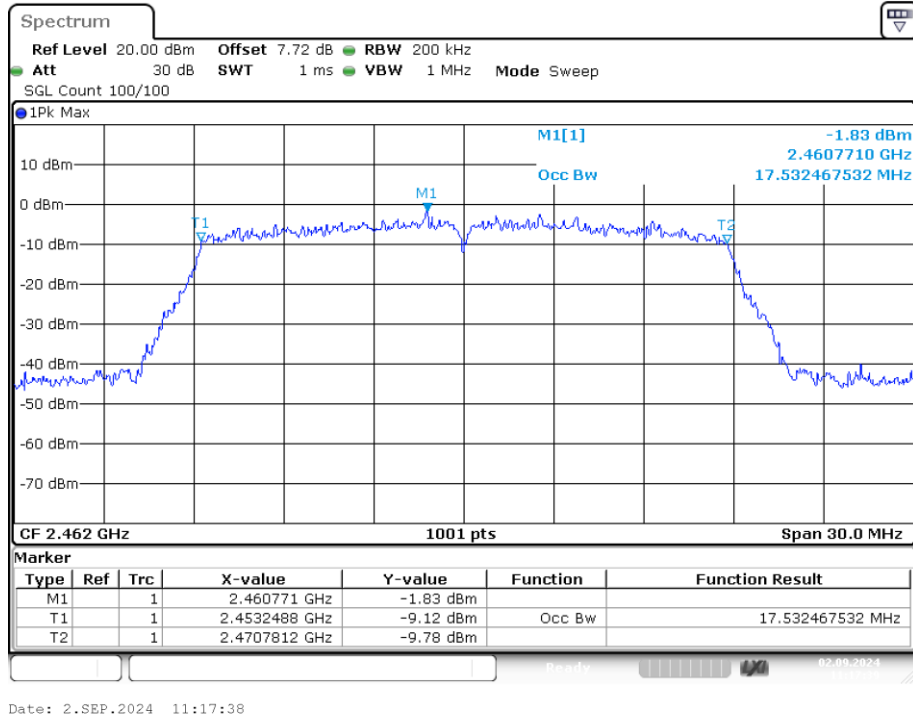


OBW NVNT n40 2422MHz Ant1

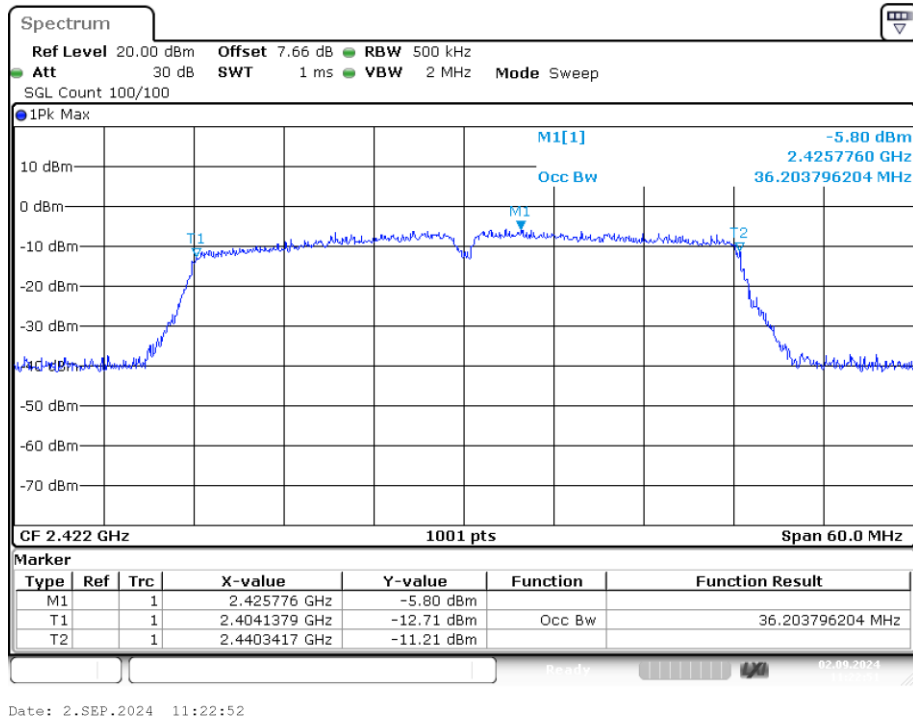

OBW NVNT n40 2437MHz Ant1

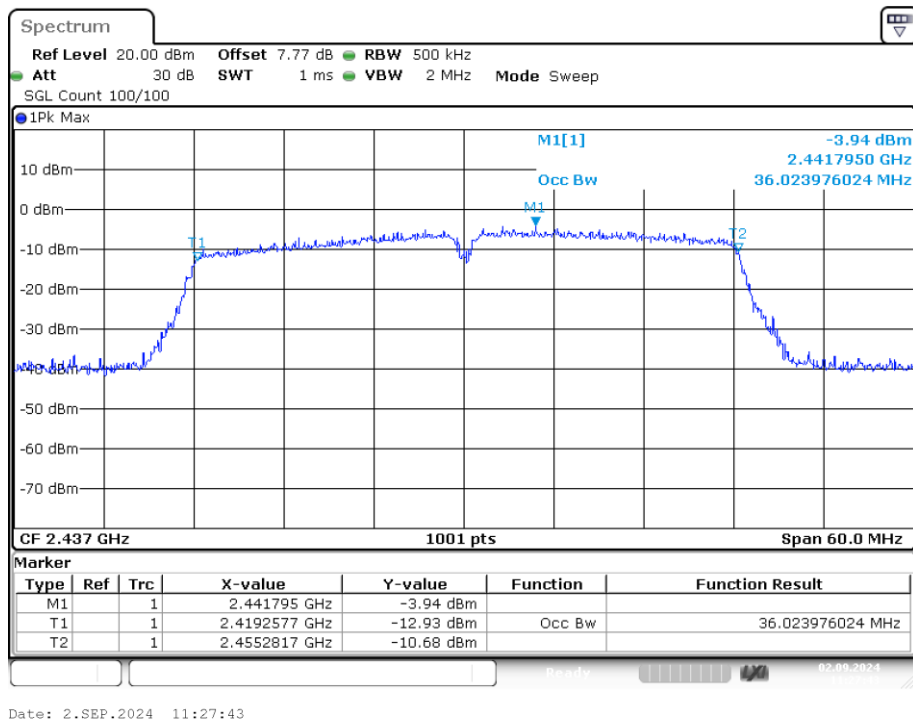

OBW NVNT n40 2452MHz Ant1

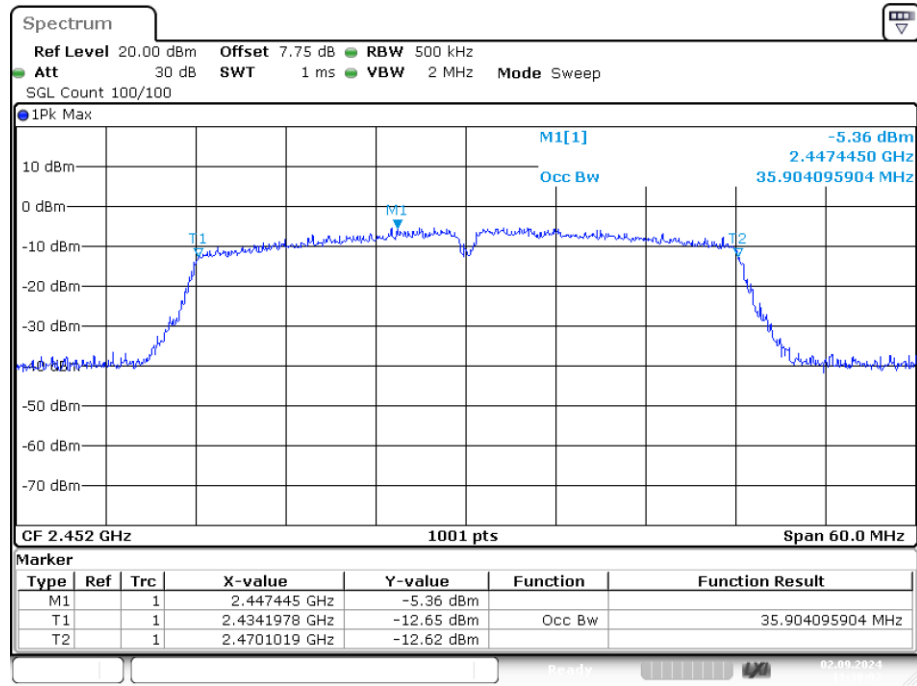

Date: 2.SEP.2024 11:30:02

8. BAND EDGE CHECK

8.1. Test limits

Please refer FCC PART 15: 15.247

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits and RSS-GEN limits.

8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.

8.3. Test Setup

Same as 5.2.2.

8.4. Test Results

PASS.


Detailed information please see the following page.

Note: 1. Both horizontal and vertical polarities were tested, and only worst polarity was listed in this report.


2. All models have been tested, and the report only shows the data of the main test model (IP-1024B)

Horizontal:


Test Mode: IEEE 802.11b-Low

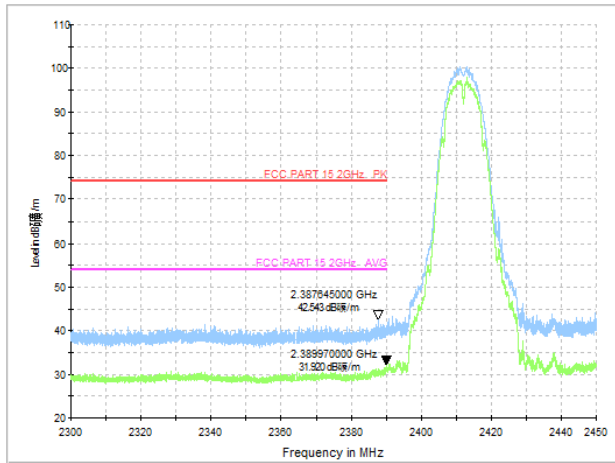


Test Mode: IEEE 802.11b-High

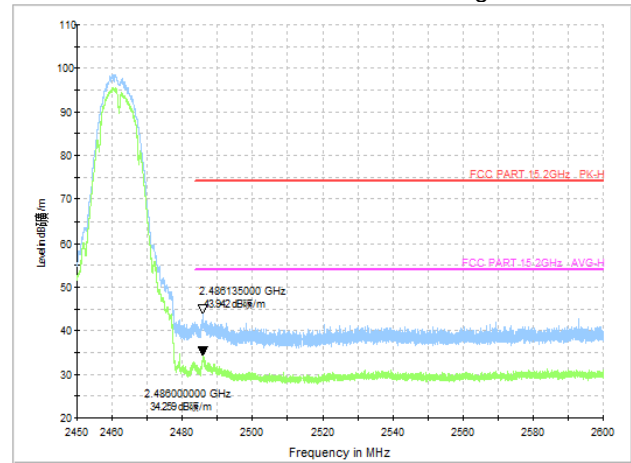

Test Mode: IEEE 802.11g-Low

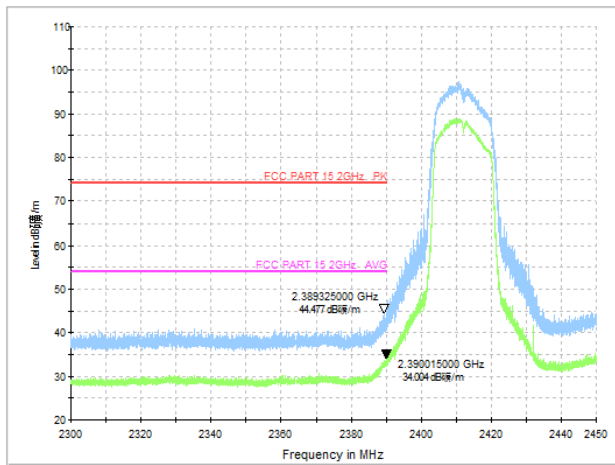


Test Mode: IEEE 802.11g-High

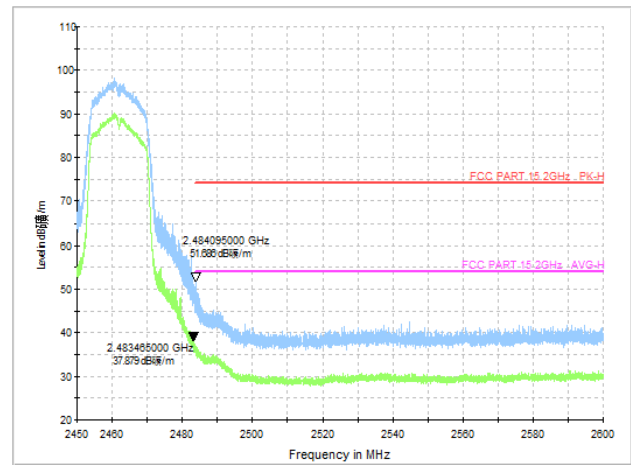


Horizontal:


Test Mode: IEEE 802.11n20-Low

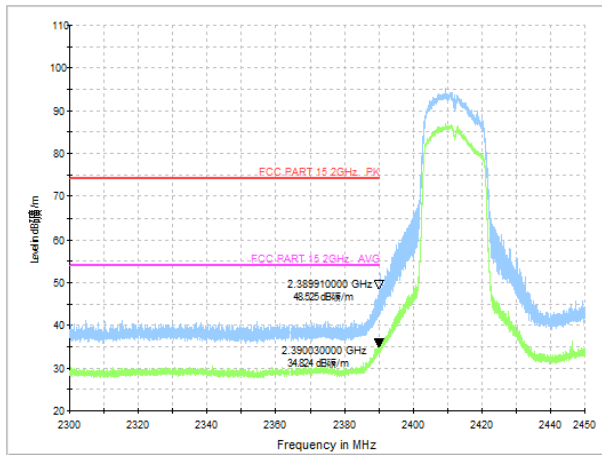


Test Mode: IEEE 802.11n20-High

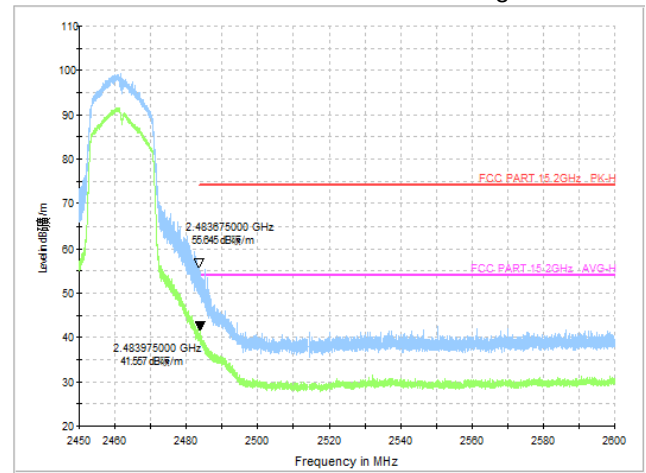


Test Mode: IEEE 802.11n40-Low

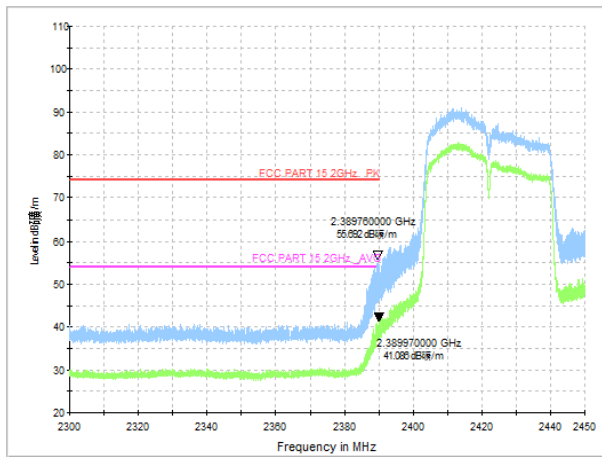

Test Mode: IEEE 802.11n40-High

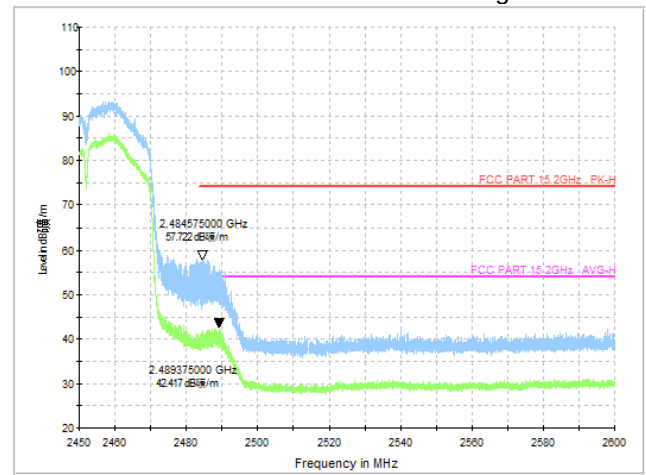


Band Edge NVNT b 2412MHz Ant1 Ref

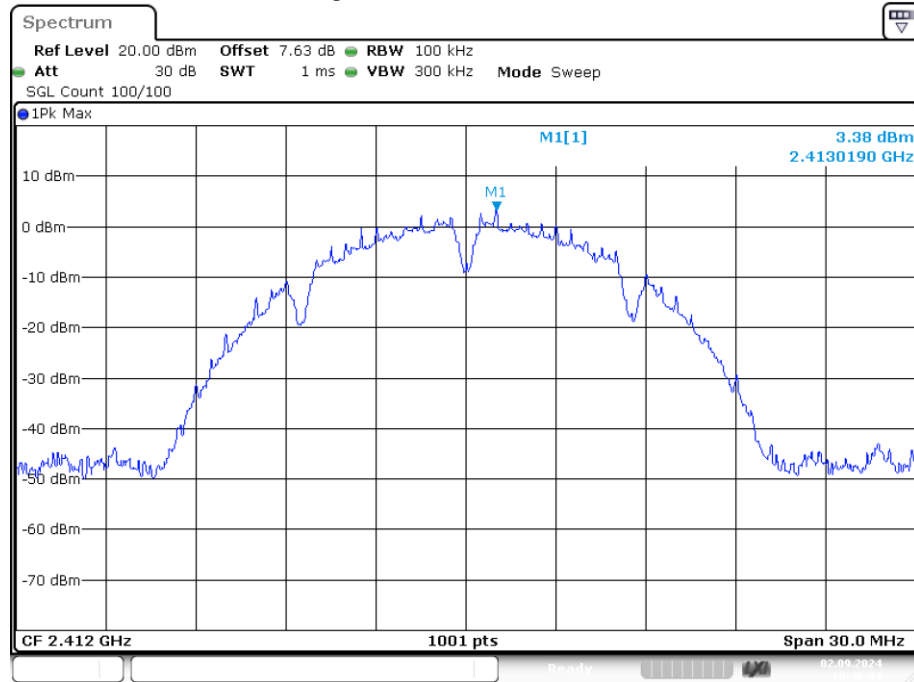

Date: 2.SEP.2024 10:46:04

Band Edge NVNT b 2412MHz Ant1 Emission

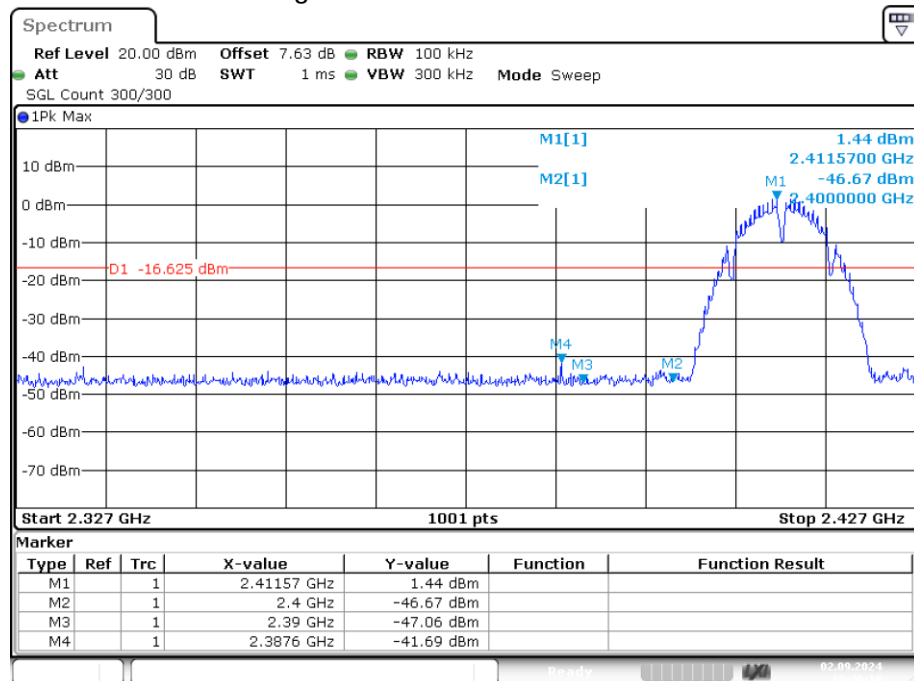

Date: 2.SEP.2024 10:46:10

Band Edge NVNT b 2462MHz Ant1 Ref