

RF TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Purewave Hydro

ISSUED TO
PADO, Inc

28381 Constellation Rd Valencia, CA 91355 USA

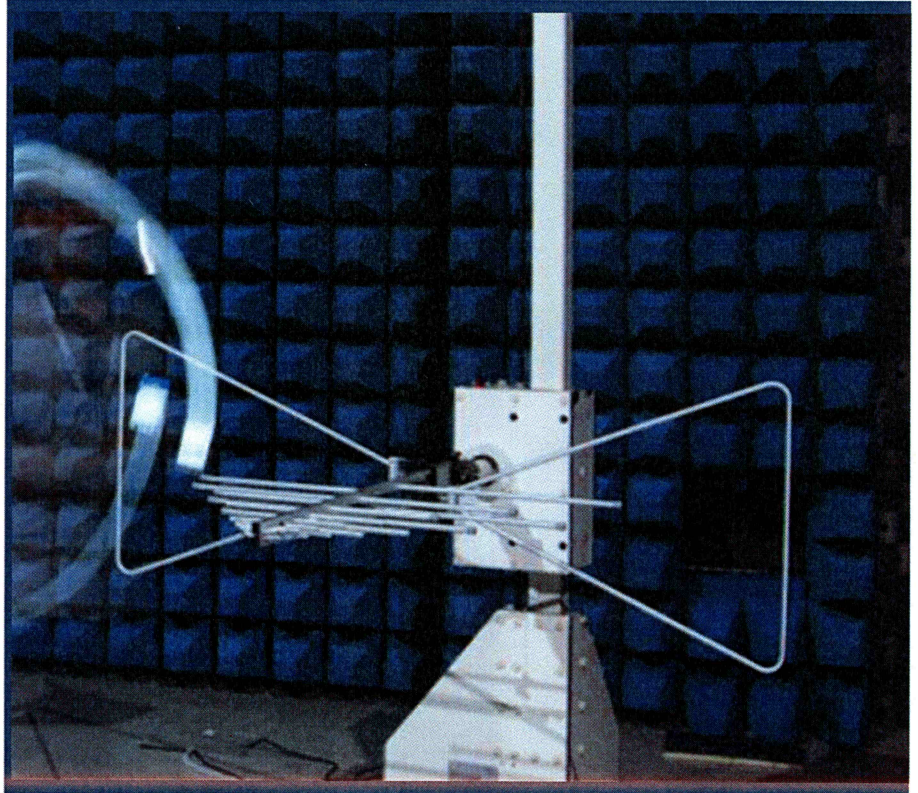

Tested by Xiong Chong
Xiong Chong
Date Nov. 10, 2021

Approved by Telan
Telan
(Testing Director)

Date Nov. 10, 2021

Report No.: BL-SZ2140724-402
EUT Name: Purewave Hydro
Model Name: PW-H20 (refer section 2.4)
Brand Name: PADO, Purewave
Test Standard: 47 CFR Part 15 Subpart C
FCC ID: 2AZMD-PWH20

Test Conclusion: Pass
Test Date: Jun. 08, 2021 ~ Jul. 14, 2021
Date of Issue: Nov. 10, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Oct. 18, 2021</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Nov. 10, 2021</u>	<u>Add designation number of test lab in page 4</u> <u>Add antenna gain and type of modulation in page 6</u> <u>Revise the description massor in page 7</u> <u>Revise the operating frequency in page 6</u> <u>Delete the test of 20dB bandwidth and 99% bandwidth</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION.....	4
1.1 Identification of the Testing Laboratory.....	4
1.2 Identification of the Responsible Testing Location.....	4
1.3 Laboratory Condition.....	4
1.4 Announce.....	4
2 PRODUCT INFORMATION.....	5
2.1 Applicant Information.....	5
2.2 Manufacturer Information.....	5
2.3 Factory Information.....	5
2.4 General Description for Equipment under Test (EUT).....	5
2.5 Ancillary Equipment.....	6
2.6 Technical Information.....	6
3 SUMMARY OF TEST RESULTS.....	7
3.1 Test Standards.....	7
3.2 Verdict.....	7
3.3 Test Uncertainty.....	7
4 GENERAL TEST CONFIGURATIONS.....	8
4.1 Test Environments.....	8
4.2 Test Equipment List.....	8
4.3 Test Setups.....	9
5 TEST ITEMS.....	11
5.1 Emission Tests.....	11

ANNEX A TEST RESULTS 15

 A.1 Radiated Emission 15

 A.2 Conducted Emission 21

 A.3 20 dB Bandwidth..... 25

ANNEX B TEST SETUP PHOTOS 26

ANNEX C EUT EXTERNAL PHOTOS 26

ANNEX D EUT INTERNAL PHOTOS 26

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055
Designation Number of Test Lab	CN1196

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	30% to 60%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	PADO, Inc
Address	28381 Constellation Rd Valencia, CA 91355 USA

2.2 Manufacturer Information

Manufacturer	Ablelink Electronics Limited
Address	Room F1, 11/F., Yeung Yiu Chung Industrial Building, 20 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong

2.3 Factory Information

Factory	Ablelink Electronics Limited
Address	Room 101, No 6 Dongyu 2 nd Street, Qingxi Town, Dongguan, Guangdong, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Purewave Hydro
Model Name Under Test	PW-H20
Series Model Name	PW-H20, PW-WM-H20, PW-WM-H2O, PW-WM-01, PW-WPM, PW-WPM-01, PW-WPM-H20, PW-WPM-H2O, PADO-H20, PADO-H2O, PADO-WM-H20, PADO-WM-H2O, PADO-WM-01, PADO-WPM, PADO-WPM-01, PADO-WPM-H20, PADO-WPM-H2O
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name.
Hardware Version	V1
Software Version	V1
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	Cham
	Model No.	18650-2S
	Serial No.	N/A
	Capacity	3200mAh
	Rated Voltage	7.2 V
	Limit Charge Voltage	N/A
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	XSD-091500USD
	Serial No.	N/A
	Rated Input	100-240 V~, 0.5 A, 50/60 Hz
	Rated Output	9 V= 1.5 A
Ancillary Equipment 3	Charging Base	

2.6 Technical Information

Network and Wireless connectivity	Qi
-----------------------------------	----

The requirement for the following technical information of the EUT was tested in this report:

Operating Frequency	110.5~142 kHz
Product Type	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Antenna Type	Coil Antenna
About Product	The EUT support the Qi technology.
Type of Modulation	FSK
Antenna Gain	0 dBi

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-19 Edition)	Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.209,15.215(b)	Pass	Annex A.1
2	Conducted Emission, AC Ports	15.207	Pass	Annex A.2
3	20 dB Bandwidth	15.215(c)	N.A	Annex A.3
The EUT has two test modes,as follow: Mode1: EUT + Adapter + QI TX Mode2: EUT + Adapter + massager + QI Link Note: The Operating Frequency of EUT is 110.5~142 kHz, so the test item of 20 dB Bandwidth is not applicable.				

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	2.96 dB
Radiated emissions (30 MHz-1 GHz)	3.67 dB
Radiated emissions (1 GHz-18 GHz)	3.57 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments


Relative Humidity	30% to 60%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	AC 120 V/60 Hz

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna- Bi-Log(30 MHz- 3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021 08.21
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7 .35m	N/A	2018.08.08	2021.08.07
EMI Receiver	KEYSIGHT	N9010B	MY5711030 9	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.08	2022.06.07
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.4m*3.1m*2. 8m	N/A	2018.08.16	2021.08.15
Test Software	BALUN	BL410_E	V19.918	--	--


4.3 Test Setups

Test Setup 1

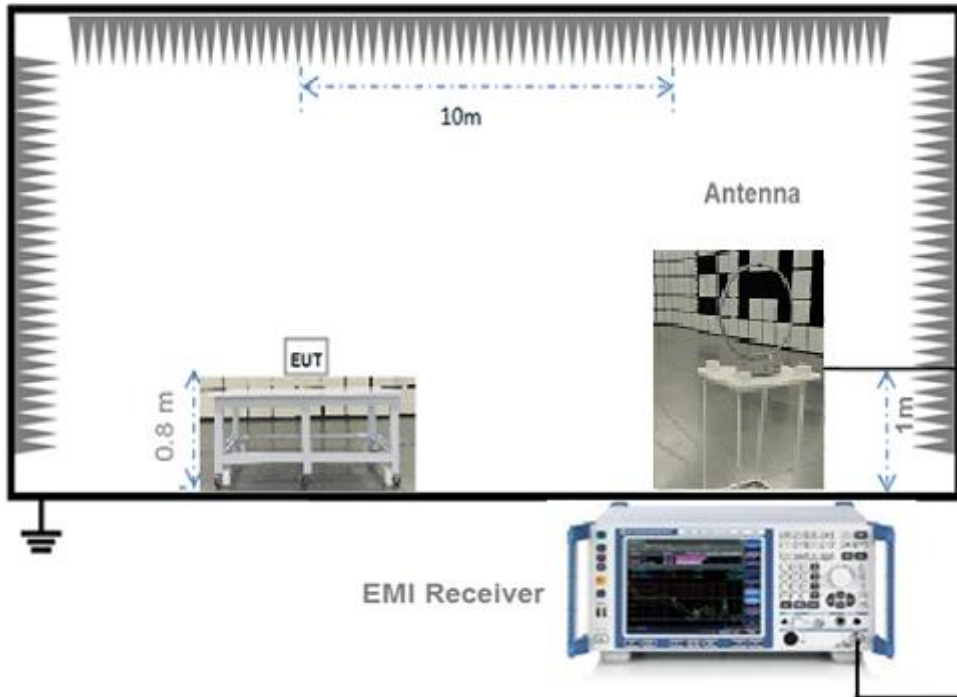


For Radiated Emission Test (Below 30 MHz)

Test Setup 2

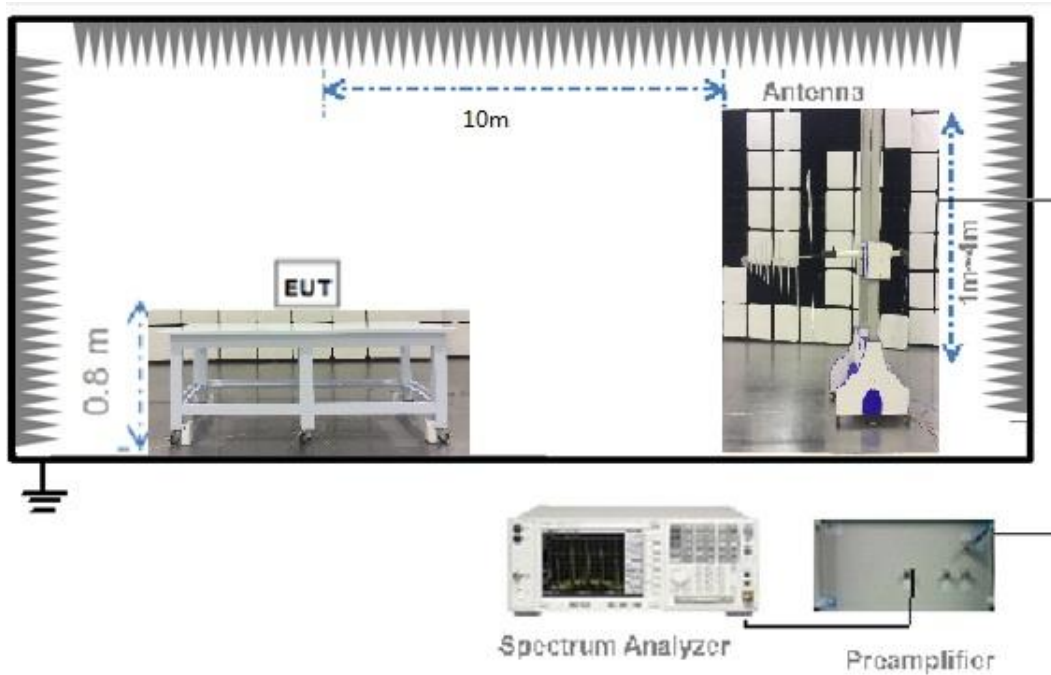

(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 3

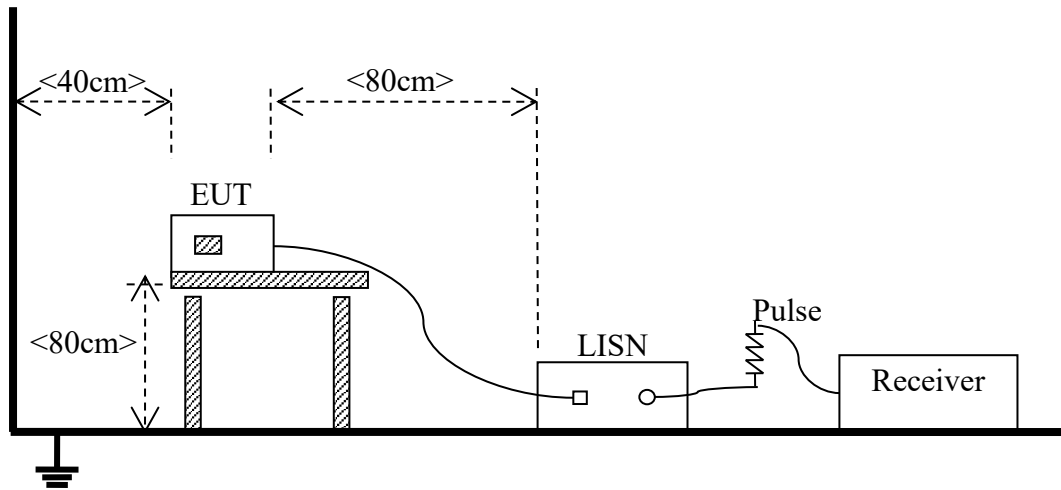

(For Conducted Emission, AC Ports Test)

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength (dB $\mu\text{V}/\text{m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V}/\text{m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000 MHz, limit field strength of harmonics: 54 dB $\mu\text{V}/\text{m}@3$ m (AV) and 74 dB $\mu\text{V}/\text{m}@3$ m (PK)
- 4) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). For example, at the frequency 9 kHz, limit @10m = $20 \cdot \log (2400/f) + 40 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 300m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \cdot \log (2400/9) + 40 \log (300/10) = 107.5$ (dB $\mu\text{V}/\text{m}$).
- 5) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided, When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). For example, at the frequency 30 MHz, limit @10m = $20 \cdot \log (100) + 20 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 3m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \cdot \log (100) + 20 \log (3/10) = 29.5$ (dB $\mu\text{V}/\text{m}$).

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results (dBuV/m) = Reading (dBuV/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.

5.1.3 20 dB Bandwidth

5.1.3.1 Limit

FCC §15.215(c)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

5.1.3.2 Test Setup

Refer to 4.3 section test (test setup 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.1.3.3 Test Procedure

Use the following spectrum analyzer settings:

Span = between 2 and 5 times the OBW

RBW = 1%~5% of the OBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.1.3.4 Test Result

Please refer to ANNEX A.3.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data and Plots

Note: This frequency which near 0.138 MHz with circle should be ignored because they are Fundamental frequency.


Mode 1

A.1.1 Test Antenna Horizontal, 9 kHz –30 MHz

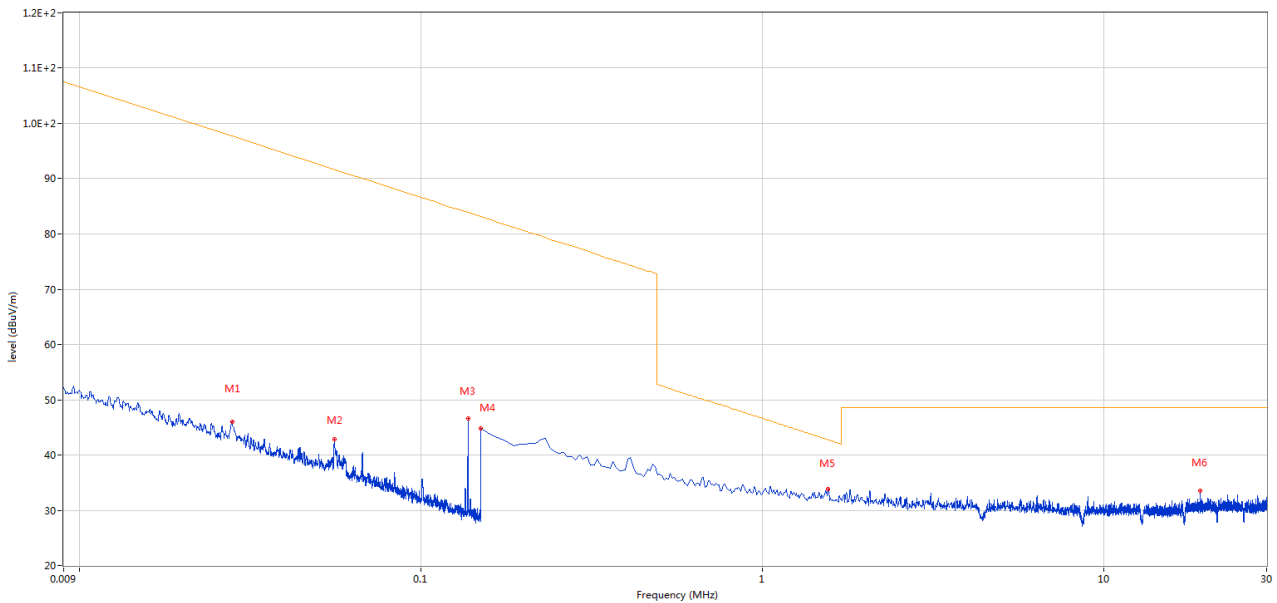


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.028	45.35	20.15	97.7	-52.35	Peak	42.00	100	Horizontal	Pass
2	0.056	42.39	20.21	91.6	-49.21	Peak	148.00	100	Horizontal	Pass
3	0.138	46.32	20.14	83.8	-37.48	Peak	8.00	100	Horizontal	N/A
4	0.150	45.16	20.15	83.1	-37.94	Peak	68.00	100	Horizontal	Pass
5	1.560	33.91	20.50	42.7	-8.79	Peak	204.00	100	Horizontal	Pass
6	19.194	33.59	21.09	48.5	-14.91	Peak	61.00	100	Horizontal	Pass

A.1.2 Test Antenna Vertical, 30 MHz – 1 GHz

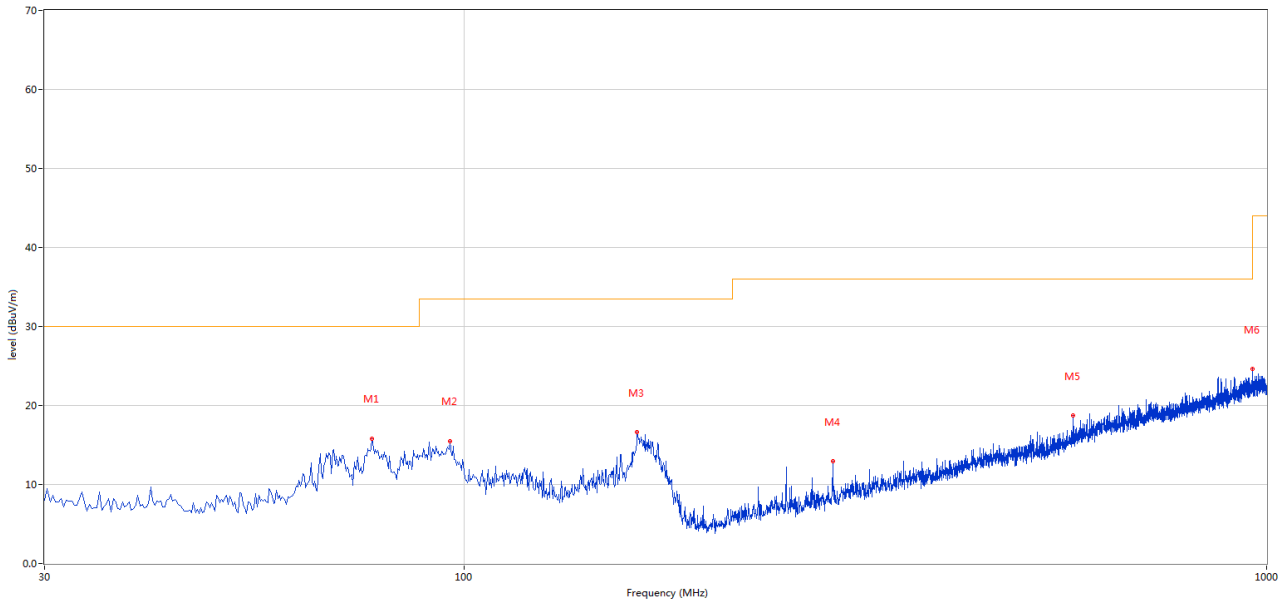

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	76.791	15.83	-30.75	30.0	-14.17	Peak	226.00	200	Vertical	Pass
2	95.944	15.48	-30.41	33.5	-18.02	Peak	317.00	200	Vertical	Pass
3	164.311	16.60	-26.21	33.5	-16.90	Peak	255.00	100	Vertical	Pass
4	287.956	12.91	-26.09	36.0	-23.09	Peak	210.00	100	Vertical	Pass
5	574.276	18.73	-18.86	36.0	-17.27	Peak	310.00	100	Vertical	Pass
6	960.482	24.62	-11.46	44.0	-19.38	Peak	149.00	100	Vertical	Pass

A.1.3 Test Antenna Horizontal, 30 MHz – 1 GHz

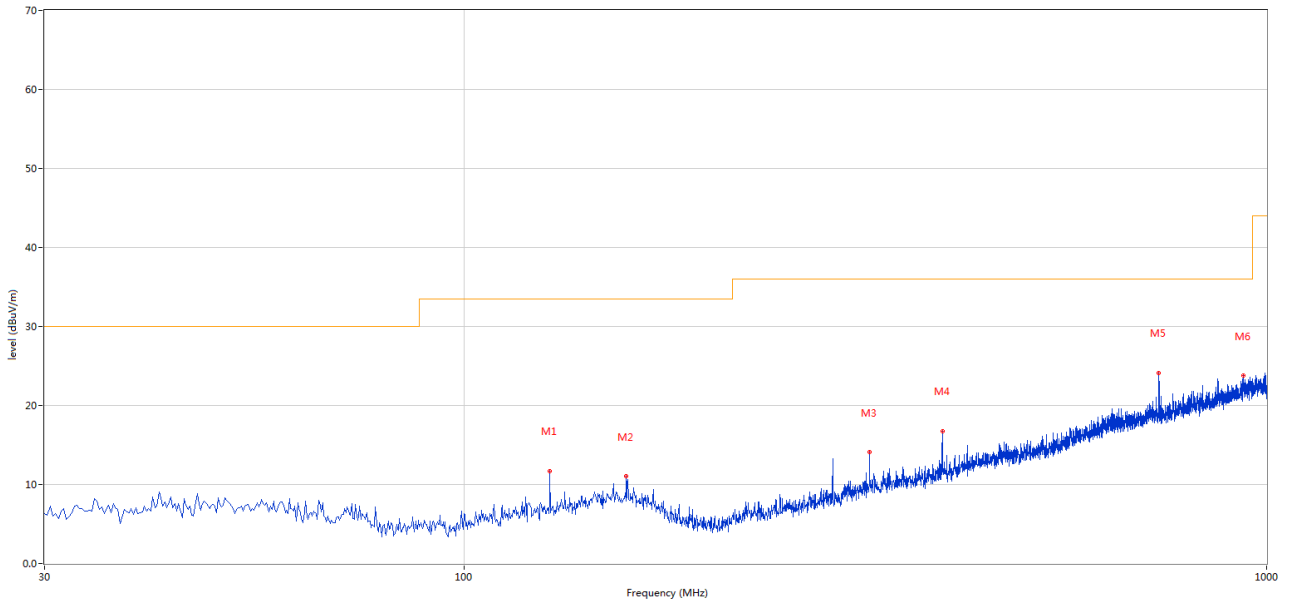


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	127.946	11.71	-27.34	33.5	-21.79	Peak	292.00	200	Horizontal	Pass
2	159.220	11.02	-25.83	33.5	-22.48	Peak	302.00	200	Horizontal	Pass
3	319.958	14.07	-25.31	36.0	-21.93	Peak	174.00	100	Horizontal	Pass
4	394.386	16.79	-23.19	36.0	-19.21	Peak	360.00	100	Horizontal	Pass
5	734.286	24.16	-15.38	36.0	-11.84	Peak	347.00	200	Horizontal	Pass
6	935.996	23.76	-11.71	36.0	-12.24	Peak	89.00	100	Horizontal	Pass

Test Data and Plots

Note: This frequency which near 0.140 MHz with circle should be ignored because they are Fundamental frequency.


Mode 2

A.1.4 Test Antenna Horizontal, 9 kHz –30 MHz

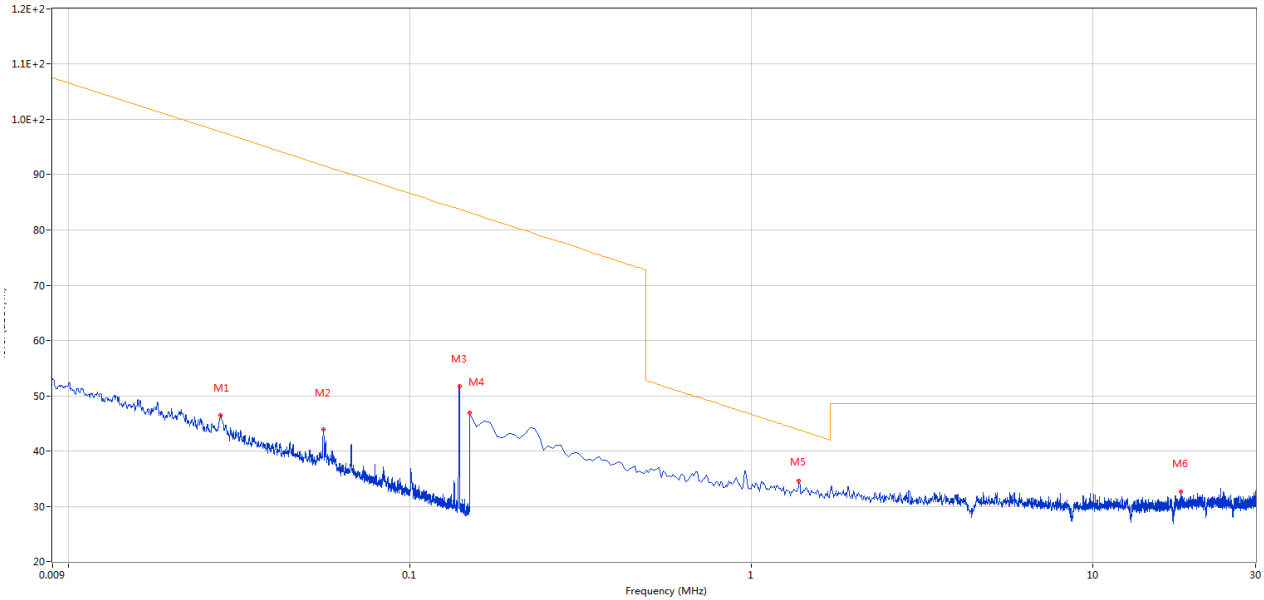


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.028	46.12	20.17	97.7	-51.58	Peak	183.00	100	Horizontal	Pass
2	0.056	43.58	20.20	91.6	-48.02	Peak	360.00	100	Horizontal	Pass
3	0.140	51.47	20.14	83.7	-32.23	Peak	1.00	100	Horizontal	N/A
4	0.150	46.11	20.15	83.1	-36.99	Peak	289.00	100	Horizontal	Pass
5	1.381	34.61	20.52	43.8	-9.19	Peak	35.00	100	Horizontal	Pass
6	18.135	32.70	21.05	48.5	-15.80	Peak	61.00	100	Horizontal	Pass

A.1.5 Test Antenna Vertical, 30 MHz – 1 GHz

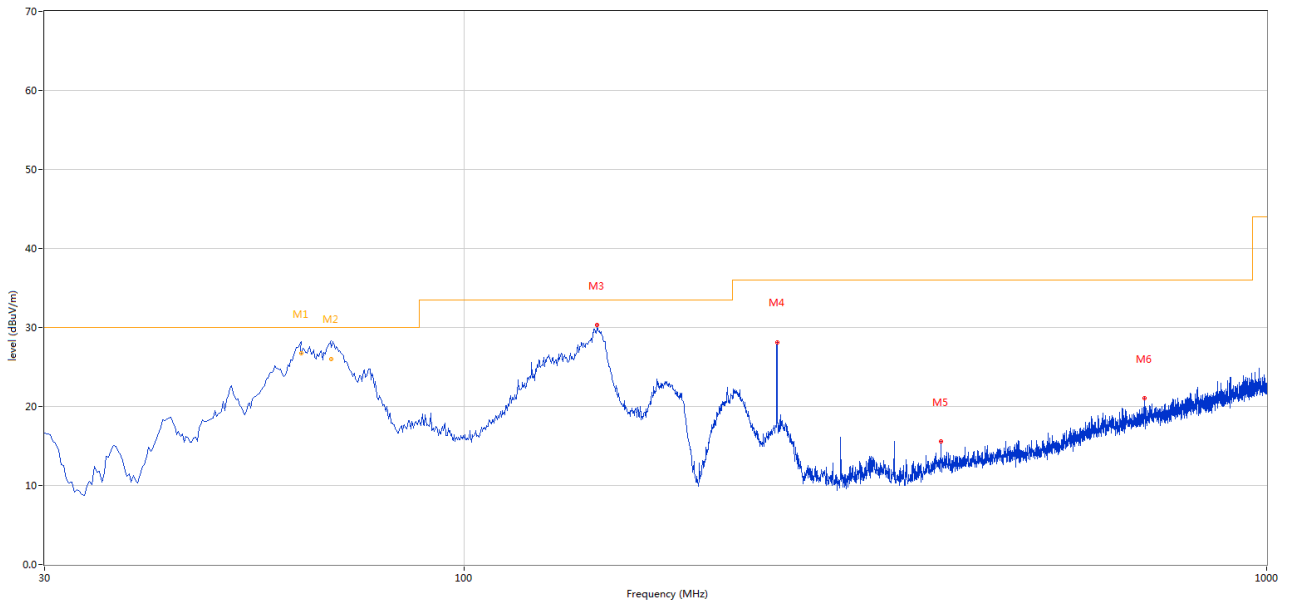

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	62.662	28.20	-28.32	30.0	-1.80	Peak	149.00	100	Vertical	N/A
1*	62.662	26.78	-28.32	30.0	-3.22	QP	149.00	100	Vertical	Pass
2	68.204	28.33	-29.33	30.0	-1.67	Peak	166.00	200	Vertical	N/A
2*	68.204	25.96	-29.33	30.0	-4.04	QP	166.00	200	Vertical	Pass
3	146.532	30.32	-25.95	33.5	-3.18	Peak	300.00	100	Vertical	Pass
4	245.529	28.14	-27.57	36.0	-7.86	Peak	310.00	100	Vertical	Pass
5	392.689	15.54	-23.26	36.0	-20.46	Peak	53.00	100	Vertical	Pass
6	703.739	21.03	-15.91	36.0	-14.97	Peak	129.00	100	Vertical	Pass

A.1.6 Test Antenna Horizontal, 30 MHz – 1 GHz

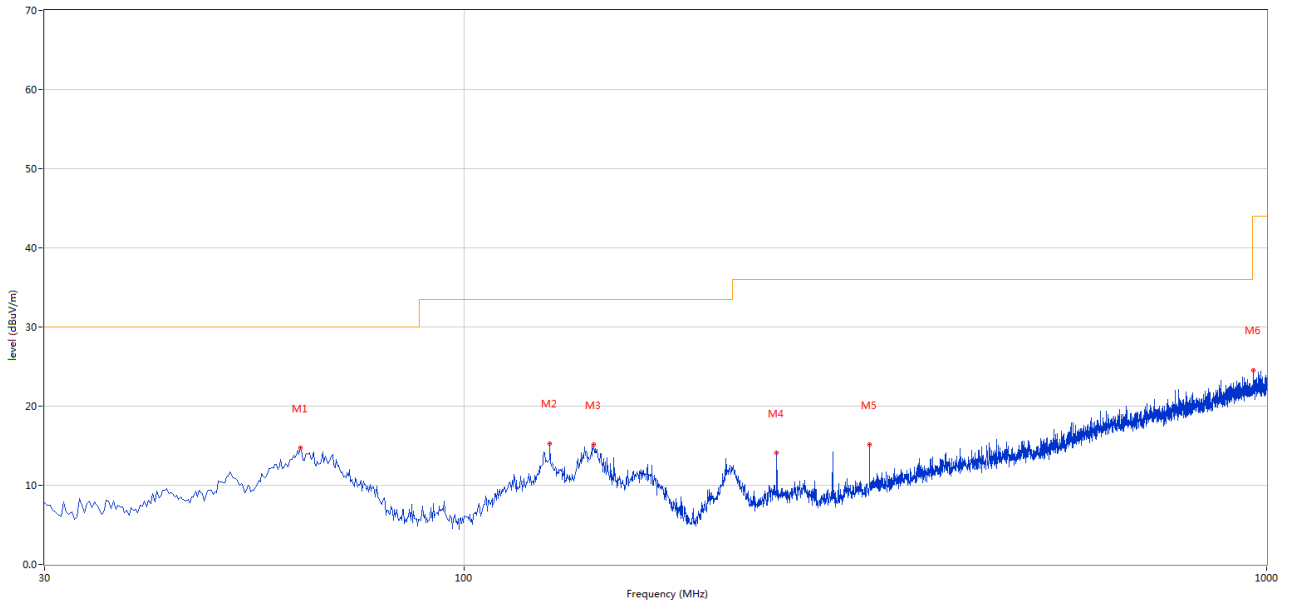

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	62.487	14.71	-28.36	30.0	-15.29	Peak	330.00	100	Horizontal	Pass
2	127.946	15.30	-27.34	33.5	-18.20	Peak	73.00	100	Horizontal	Pass
3	145.159	15.11	-25.98	33.5	-18.39	Peak	313.00	200	Horizontal	Pass
4	245.286	14.09	-27.58	36.0	-21.91	Peak	96.00	200	Horizontal	Pass
5	319.958	15.16	-25.31	36.0	-20.84	Peak	0.00	200	Horizontal	Pass
6	962.664	24.58	-11.40	44.0	-19.42	Peak	265.00	100	Horizontal	Pass


A.2 Conducted Emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots


Mode 1

A.2.1 L Phase

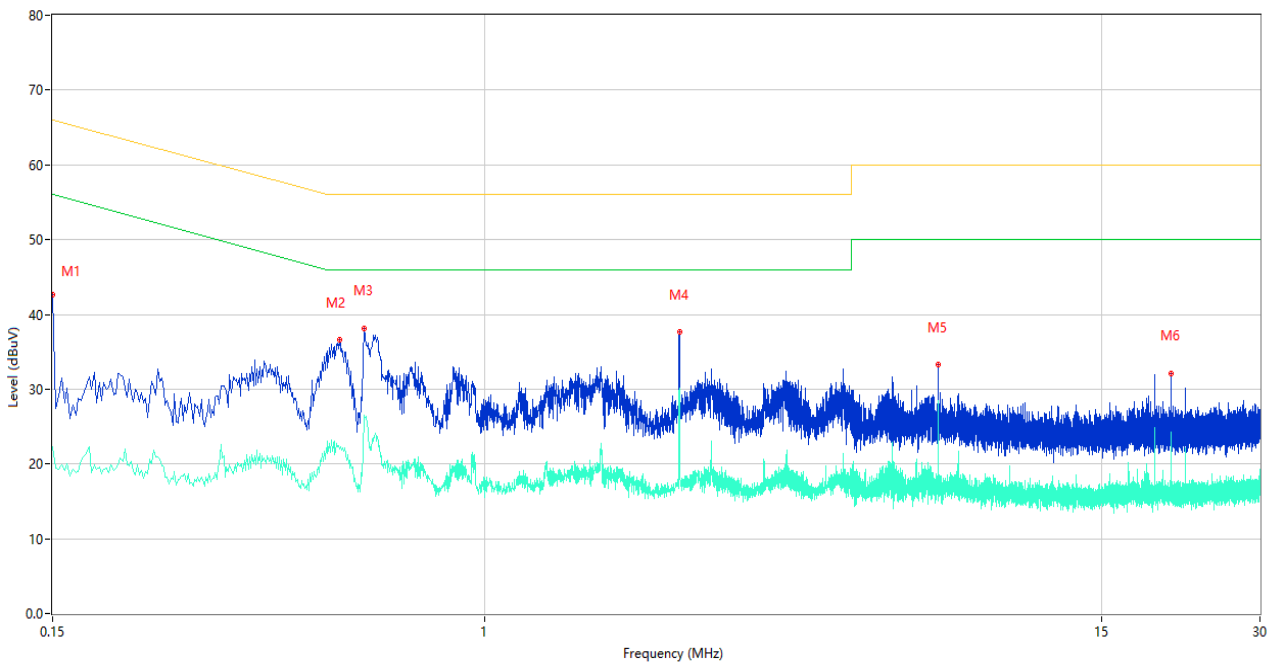

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	42.81	10.41	66.00	-23.19	Peak	L	Pass
1**	0.150	22.41	10.41	56.00	-33.59	AV	L	Pass
2	0.528	36.68	10.29	56.00	-19.32	Peak	L	Pass
2**	0.528	21.92	10.29	46.00	-24.08	AV	L	Pass
3	0.588	38.16	10.27	56.00	-17.84	Peak	L	Pass
3**	0.588	26.53	10.27	46.00	-19.47	AV	L	Pass
4	2.348	37.65	10.26	56.00	-18.35	Peak	L	Pass
4**	2.348	30.10	10.26	46.00	-15.90	AV	L	Pass
5	7.310	33.23	10.34	60.00	-26.77	Peak	L	Pass
5**	7.310	28.51	10.34	50.00	-21.49	AV	L	Pass
6	20.288	32.03	10.56	60.00	-27.97	Peak	L	Pass
6**	20.288	24.18	10.56	50.00	-25.82	AV	L	Pass

A.2.2 N Phase

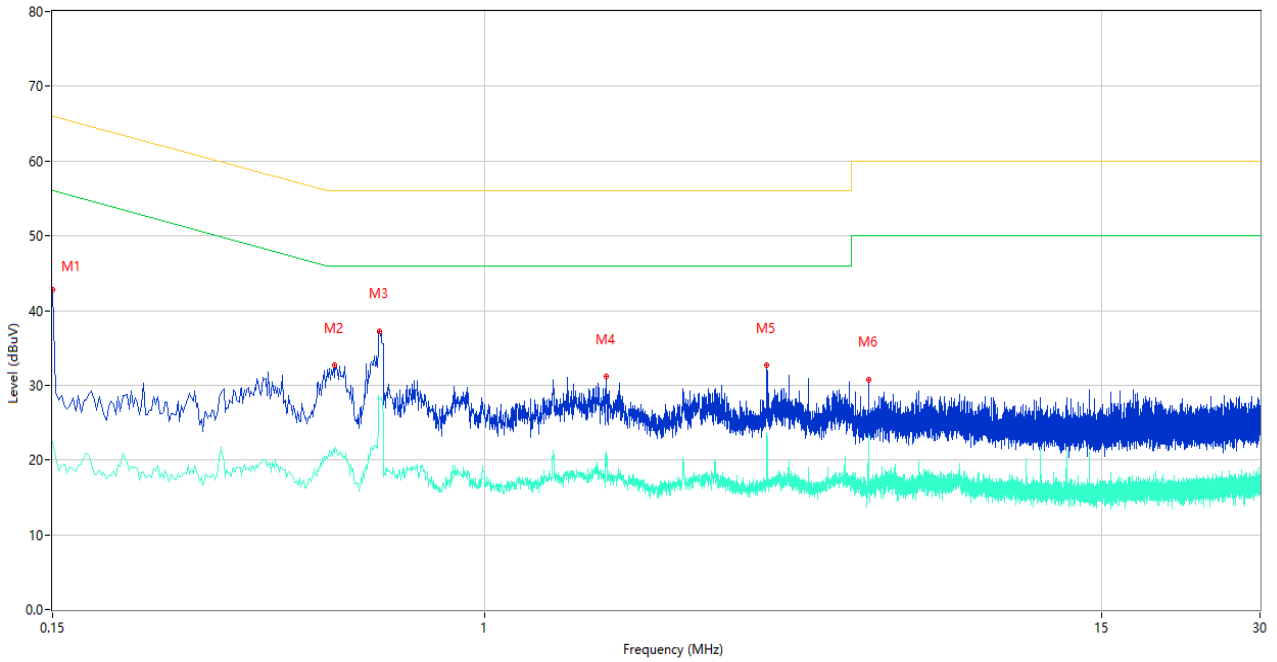


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	42.81	10.41	66.00	-23.19	Peak	N	Pass
1**	0.150	22.41	10.41	56.00	-33.59	AV	N	Pass
2	0.518	32.73	10.30	56.00	-23.27	Peak	N	Pass
2**	0.518	21.42	10.30	46.00	-24.58	AV	N	Pass
3	0.630	37.14	10.28	56.00	-18.86	Peak	N	Pass
3**	0.630	28.34	10.28	46.00	-17.66	AV	N	Pass
4	1.702	31.16	10.26	56.00	-24.84	Peak	N	Pass
4**	1.702	19.53	10.26	46.00	-26.47	AV	N	Pass
5	3.450	32.75	10.29	56.00	-23.25	Peak	N	Pass
5**	3.450	23.68	10.29	46.00	-22.32	AV	N	Pass
6	5.380	30.77	10.31	60.00	-29.23	Peak	N	Pass
6**	5.380	23.50	10.31	50.00	-26.50	AV	N	Pass

Test Data and Plots


Mode 2

A.2.3 L Phase

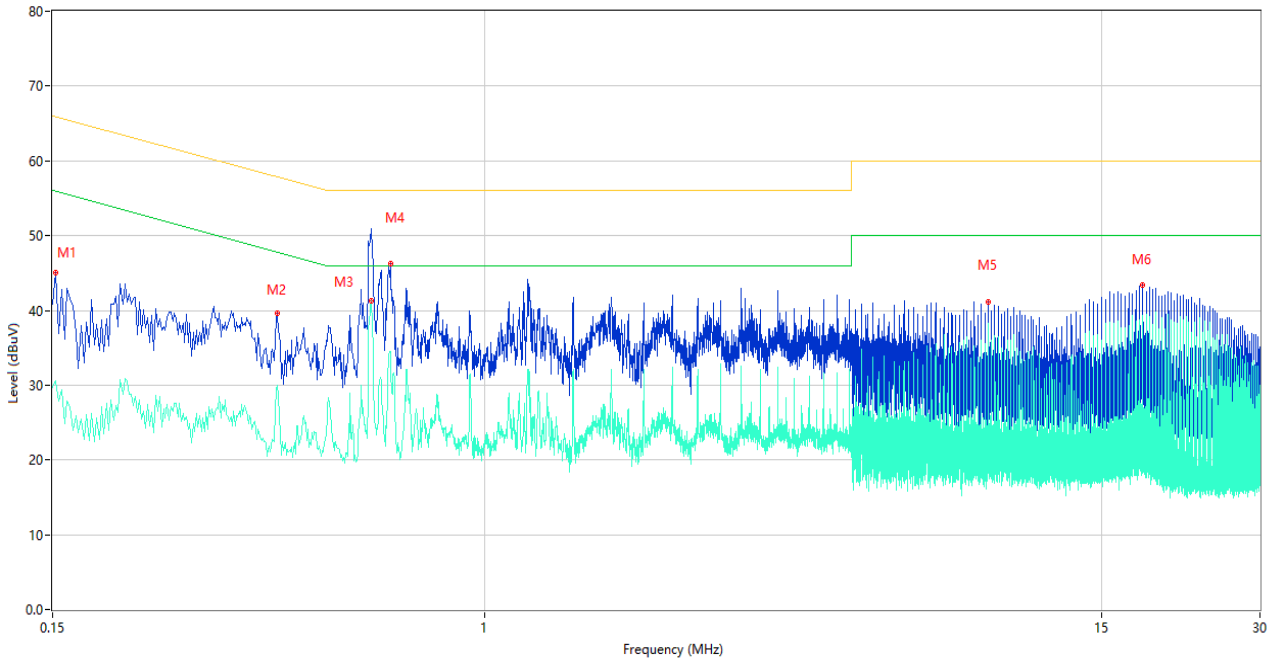

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.152	45.06	10.41	65.89	-20.83	Peak	L	Pass
1**	0.152	30.61	10.41	55.89	-25.28	AV	L	Pass
2	0.402	39.56	10.31	57.81	-18.25	Peak	L	Pass
2**	0.402	29.94	10.31	47.81	-17.87	AV	L	Pass
3	0.608	50.97	10.29	56.00	-5.03	Peak	L	Pass
3**	0.608	41.33	10.29	46.00	-4.67	AV	L	Pass
4	0.660	46.19	10.28	56.00	-9.81	Peak	L	Pass
4**	0.660	34.47	10.28	46.00	-11.53	AV	L	Pass
5	9.102	41.17	10.36	60.00	-18.83	Peak	L	Pass
5**	9.102	38.22	10.36	50.00	-11.78	AV	L	Pass
6	17.938	43.34	10.49	60.00	-16.66	Peak	L	Pass
6**	17.938	37.47	10.49	50.00	-12.53	AV	L	Pass

A.2.4 N Phase

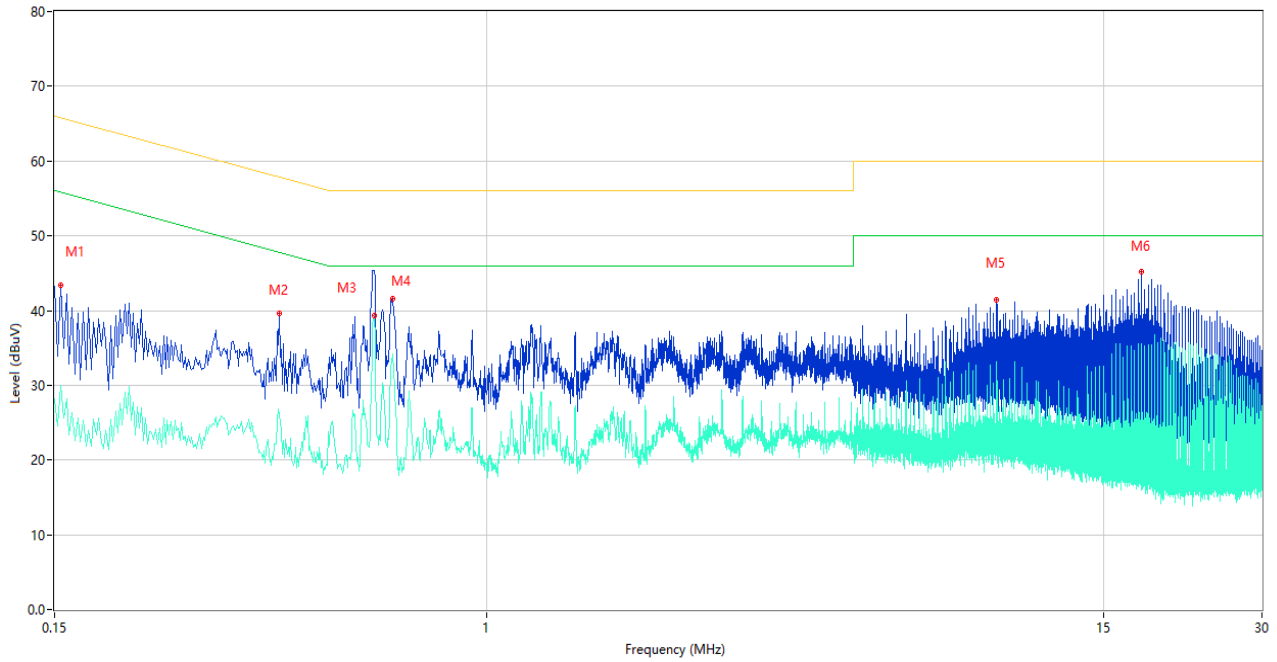

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	43.35	10.41	65.78	-22.43	Peak	N	Pass
1**	0.154	29.91	10.41	55.78	-25.87	AV	N	Pass
2	0.402	39.58	10.31	57.81	-18.23	Peak	N	Pass
2**	0.402	26.14	10.31	47.81	-21.67	AV	N	Pass
3	0.610	45.42	10.29	56.00	-10.58	Peak	N	Pass
3**	0.610	39.37	10.29	46.00	-6.63	AV	N	Pass
4	0.662	41.61	10.28	56.00	-14.39	Peak	N	Pass
4**	0.662	33.99	10.28	46.00	-12.01	AV	N	Pass
5	9.374	41.37	10.36	60.00	-18.63	Peak	N	Pass
5**	9.374	33.15	10.36	50.00	-16.85	AV	N	Pass
6	17.678	45.20	10.48	60.00	-14.80	Peak	N	Pass
6**	17.678	35.60	10.48	50.00	-14.40	AV	N	Pass

A.3 20 dB Bandwidth

Note: Not applicable.

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2140724-AE-2 PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2140724-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2140724-AI.PDF".

--END OF REPORT--