

## 5190

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5190.004	4	Pass
	-10	5189.985	-15	Pass
	0	5189.998	-2	Pass
	10	5190.002	2	Pass
	20	5189.992	-8	Pass
	30	5189.986	-14	Pass
	40	5189.985	-15	Pass
55	5189.999	-1	Pass	
85% Vnom	25	5189.986	-14	Pass
115% Vnom	25	5190.006	6	Pass

## 5230

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5230.005	5	Pass
	-10	5230.02	20	Pass
	0	5230.006	6	Pass
	10	5230.019	19	Pass
	20	5229.991	-9	Pass
	30	5230.012	12	Pass
	40	5230.017	17	Pass
55	5229.996	-4	Pass	
85% Vnom	25	5230.011	11	Pass
115% Vnom	25	5229.98	-20	Pass

## 5210

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5209.983	-17	Pass
	-10	5209.988	-12	Pass
	0	5209.991	-9	Pass
	10	5209.982	-18	Pass
	20	5209.991	-9	Pass
	30	5209.983	-17	Pass
	40	5209.998	-2	Pass
55	5209.996	-4	Pass	
85% Vnom	25	5210.002	2	Pass
115% Vnom	25	5209.991	-9	Pass

802.11a		5260		
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5259.993	-7	Pass
	-10	5259.993	-7	Pass
	0	5260.019	19	Pass
	10	5259.988	-12	Pass
	20	5259.991	-9	Pass
	30	5260.01	10	Pass
	40	5259.996	-4	Pass
55	5259.999	-1	Pass	
85% Vnom	25	5259.993	-7	Pass
115% Vnom	25	5259.985	-15	Pass

		5280		
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5280.006	6	Pass
	-10	5279.986	-14	Pass
	0	5280.014	14	Pass
	10	5279.988	-12	Pass
	20	5279.991	-9	Pass
	30	5280.019	19	Pass
	40	5279.986	-14	Pass
55	5279.99	-10	Pass	
85% Vnom	25	5279.996	-4	Pass
115% Vnom	25	5280.007	7	Pass

		5320		
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5319.997	-3	Pass
	-10	5319.982	-18	Pass
	0	5319.996	-4	Pass
	10	5320.007	7	Pass
	20	5319.991	-9	Pass
	30	5320.014	14	Pass
	40	5319.982	-18	Pass
55	5320.003	3	Pass	
85% Vnom	25	5319.98	-20	Pass
115% Vnom	25	5320.019	19	Pass

## 5270

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5269.994	-6	Pass
	-10	5269.991	-9	Pass
	0	5270.008	8	Pass
	10	5270.011	11	Pass
	20	5269.991	-9	Pass
	30	5269.997	-3	Pass
	40	5269.984	-16	Pass
	55	5270.005	5	Pass
85% Vnom	25	5269.986	-14	Pass
115% Vnom	25	5269.98	-20	Pass

## 5310

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5309.986	-14	Pass
	-10	5309.992	-8	Pass
	0	5309.999	-1	Pass
	10	5310.011	11	Pass
	20	5309.991	-9	Pass
	30	5310.011	11	Pass
	40	5309.99	-10	Pass
	55	5309.995	-5	Pass
85% Vnom	25	5310.01	10	Pass
115% Vnom	25	5310.009	9	Pass

## 5290

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5290.001	1	Pass
	-10	5290.019	19	Pass
	0	5290.019	19	Pass
	10	5289.986	-14	Pass
	20	5289.991	-9	Pass
	30	5289.993	-7	Pass
	40	5290.002	2	Pass
	55	5290.011	11	Pass
85% Vnom	25	5289.995	-5	Pass
115% Vnom	25	5290.018	18	Pass

802.11a		5500		
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5500.007	7	Pass
	-10	5500.004	4	Pass
	0	5499.986	-14	Pass
	10	5499.998	-2	Pass
	20	5499.99	-10	Pass
	30	5499.992	-8	Pass
	40	5499.989	-11	Pass
55	5500.011	11	Pass	
85% Vnom	25	5499.998	-2	Pass
115% Vnom	25	5500.02	20	Pass

		5600		
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5599.991	-9	Pass
	-10	5599.993	-7	Pass
	0	5599.990	-10	Pass
	10	5600.006	6	Pass
	20	5600.012	12	Pass
	30	5599.994	-6	Pass
	40	5599.990	-10	Pass
55	5600.014	14	Pass	
85% Vnom	25	5600.010	10	Pass
115% Vnom	25	5599.994	6	Pass

		5700		
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5699.996	-4	Pass
	-10	5700.019	19	Pass
	0	5699.983	-17	Pass
	10	5700.012	12	Pass
	20	5699.99	-10	Pass
	30	5699.994	-6	Pass
	40	5700.02	20	Pass
55	5700.002	2	Pass	
85% Vnom	25	5700.016	16	Pass
115% Vnom	25	5699.99	-10	Pass

## 5510

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5510.011	11	Pass
	-10	5510.001	1	Pass
	0	5509.992	-8	Pass
	10	5510.008	8	Pass
	20	5509.99	-10	Pass
	30	5509.991	-9	Pass
	40	5510.004	4	Pass
	55	5509.99	-10	Pass
85% Vnom	25	5509.987	-13	Pass
115% Vnom	25	5509.985	-15	Pass

## 5670

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5670.013	13	Pass
	-10	5669.996	-4	Pass
	0	5669.995	-5	Pass
	10	5670.008	8	Pass
	20	5669.99	-10	Pass
	30	5670.008	8	Pass
	40	5669.989	-11	Pass
	55	5669.999	-1	Pass
85% Vnom	25	5670.003	3	Pass
115% Vnom	25	5669.993	-7	Pass

## 5530

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5529.992	-8	Pass
	-10	5530.012	12	Pass
	0	5530.01	10	Pass
	10	5529.994	-6	Pass
	20	5529.99	-10	Pass
	30	5529.989	-11	Pass
	40	5529.999	-1	Pass
	55	5529.998	-2	Pass
85% Vnom	25	5530.006	6	Pass
115% Vnom	25	5530.005	5	Pass

802.11a

5745

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5745.018	18	Pass
	-10	5744.989	-11	Pass
	0	5745.001	1	Pass
	10	5745.003	3	Pass
	20	5744.99	-10	Pass
	30	5744.989	-11	Pass
	40	5744.98	-20	Pass
55	5744.995	-5	Pass	
85% Vnom	25	5744.997	-3	Pass
115% Vnom	25	5744.991	-9	Pass

5785

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5785.013	13	Pass
	-10	5784.995	-5	Pass
	0	5784.994	-6	Pass
	10	5784.99	-10	Pass
	20	5784.99	-10	Pass
	30	5785.008	8	Pass
	40	5785.002	2	Pass
55	5785.014	14	Pass	
85% Vnom	25	5784.983	-17	Pass
115% Vnom	25	5785.004	4	Pass

5825

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.997	-3	Pass
	-10	5824.985	-15	Pass
	0	5825.003	3	Pass
	10	5825.005	5	Pass
	20	5824.99	-10	Pass
	30	5825.009	9	Pass
	40	5825.02	20	Pass
55	5824.999	-1	Pass	
85% Vnom	25	5825.01	10	Pass
115% Vnom	25	5825.005	5	Pass

## 5755

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.98	-20	Pass
	-10	5755.015	15	Pass
	0	5755.008	8	Pass
	10	5755.012	12	Pass
	20	5754.99	-10	Pass
	30	5754.997	-3	Pass
	40	5754.999	-1	Pass
	55	5755.014	14	Pass
85% Vnom	25	5754.984	-16	Pass
115% Vnom	25	5755.013	13	Pass

## 5795

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.995	-5	Pass
	-10	5795.004	4	Pass
	0	5795.014	14	Pass
	10	5794.992	-8	Pass
	20	5794.99	-10	Pass
	30	5795.016	16	Pass
	40	5794.995	-5	Pass
	55	5795.014	14	Pass
85% Vnom	25	5794.984	-16	Pass
115% Vnom	25	5794.991	-9	Pass

## 5775

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5775.009	9	Pass
	-10	5774.988	-12	Pass
	0	5775.007	7	Pass
	10	5774.997	-3	Pass
	20	5774.989	-11	Pass
	30	5775.003	3	Pass
	40	5774.986	-14	Pass
	55	5774.986	-14	Pass
85% Vnom	25	5774.998	-2	Pass
115% Vnom	25	5775.006	6	Pass

## 8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

### 8.5.1 Applicable Standard

According to FCC Part 15.407 (b)  
According to 789033 D02 Section II(G)

### 8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209 The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Remark: 1. Emission level in dBuV/m=20 log (uV/m)



2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

### 8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

### 8.5.4 Test Procedure

#### ■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for  $f < 1$  GHz(30MHz to 1GHz), 200Hz for  $f < 150$ KHz(9KHz to 150KHz), 9KHz for  $< 30$ MHz

(150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

#### ■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW  $\geq$  3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

#### ■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle  $\geq$  98 percent, set  $VBW \leq RBW/100$  (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is  $<$  98 percent, set  $VBW \geq 1/T$ , where  $T$  is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of 1/x, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

- For Undesirable radiated Spurious Emission in U-NII – 1  
All the modes 802.11a/n/ac has been tested and the worst result antenna 1 802.11ac recorded as below:

:  Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11ac Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5447.752	V	48.53	-46.7	-27	-19.7
10964.61	V	54.15	-41.08	-27	-14.08
17919.53	V	64.26	-30.97	-27	-3.97
5483.296	H	46.89	-48.34	-27	-21.34
10893.53	H	54.05	-41.18	-27	-14.18
17989.59	H	63.89	-31.34	-27	-4.34

Test mode: 802.11ac Frequency(MHz): 5200

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5414.003	V	46.83	-48.4	-27	-21.4
11169.32	V	54.87	-40.36	-27	-13.36
17981.8	V	64.39	-30.84	-27	-3.84
5544.654	H	46.95	-48.28	-27	-21.28
11803.28	H	54.74	-40.49	-27	-13.49
17984.39	H	64.23	-31	-27	-4

Test mode: 802.11ac Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5527.054	V	47.1	-48.13	-27	-21.13
10959.85	V	55.05	-40.18	-27	-13.18
17963.61	V	64.28	-30.95	-27	-3.95
5630.247	H	47.05	-48.18	-27	-21.18
11111.36	H	54.8	-40.43	-27	-13.43
17997.39	H	63.99	-31.24	-27	-4.24

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ac

Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5447.752	V	48.53	30.57	74	54	-25.47	-23.43
10964.61	V	54.15	37.93	74	54	-19.85	-16.07
17919.53	V	64.26	46.83	74	54	-9.74	-7.17
5483.296	H	46.89	30.54	74	54	-27.11	-23.46
10893.53	H	54.05	38.41	74	54	-19.95	-15.59
17989.59	H	63.89	45.38	74	54	-10.11	-8.62

Test mode: 802.11ac

Frequency(MHz): 5200

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5414.003	V	46.83	29.75	74	54	-27.17	-24.25
11169.32	V	54.87	38.59	74	54	-19.13	-15.41
17981.8	V	64.39	46.34	74	54	-9.61	-7.66
5544.654	H	46.95	30.69	74	54	-27.05	-23.31
11803.28	H	54.74	38.93	74	54	-19.26	-15.07
17984.39	H	64.23	48.24	74	54	-9.77	-5.76

Test mode: 802.11ac

Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5527.054	V	47.1	30.19	74	54	-26.9	-23.81
10959.85	V	55.05	37.53	74	54	-18.95	-16.47
17963.61	V	64.28	46.82	74	54	-9.72	-7.18
5630.247	H	47.05	31.28	74	54	-26.95	-22.72
11111.36	H	54.8	37.53	74	54	-19.2	-16.47
17997.39	H	63.99	45.39	74	54	-10.01	-8.61

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

●  Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ac Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5145.092	H	59.25	-35.98	-27	Pass
5087.568	V	58.86	-36.37	-27	Pass

Test mode: 802.11ac Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5355.373	H	59.62	-35.61	-27	Pass
5355.285	V	59.70	-35.53	-27	Pass

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ac Frequency(MHz): 5180

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5145.092	H	59.25	74	42.36	54
5087.568	V	58.86	74	41.36	54


Test mode: 802.11ac Frequency(MHz): 5240

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5355.373	H	59.62	74	42.67	54
5355.285	V	59.70	74	42.33	54

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


U-NII - 1

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5180	<input type="checkbox"/> 5200	<input type="checkbox"/> 5240
			Ant.Pol H

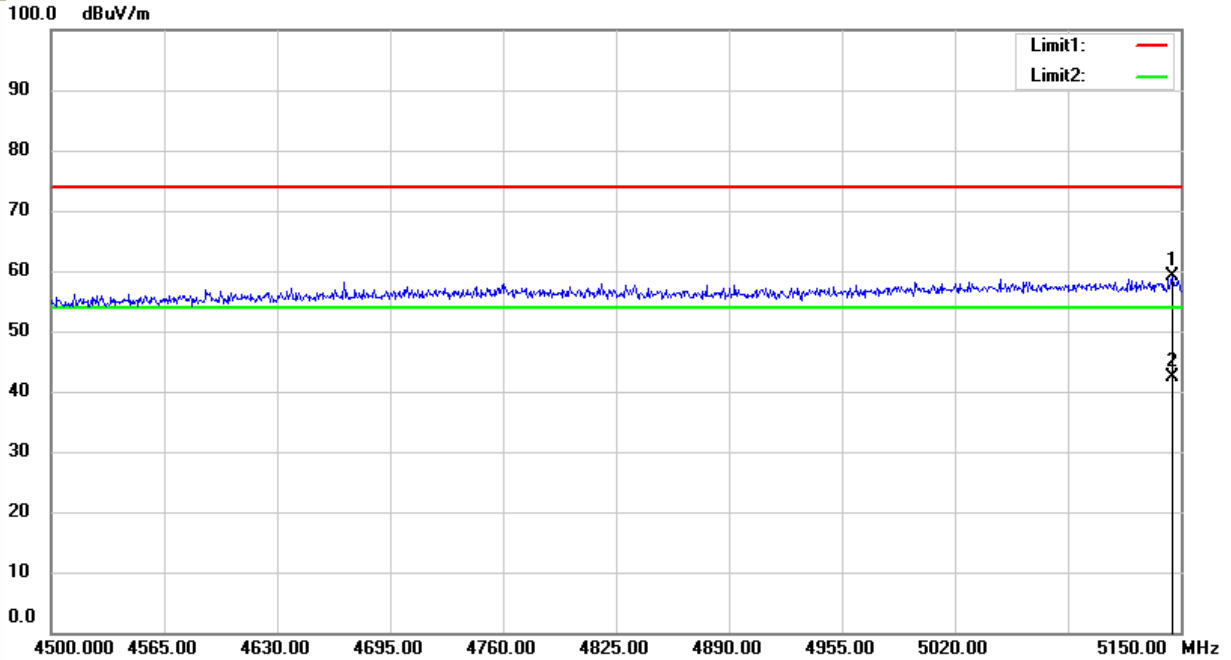


U-NII - 1

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5180	<input type="checkbox"/> 5200	<input type="checkbox"/> 5240
			Ant.Pol V

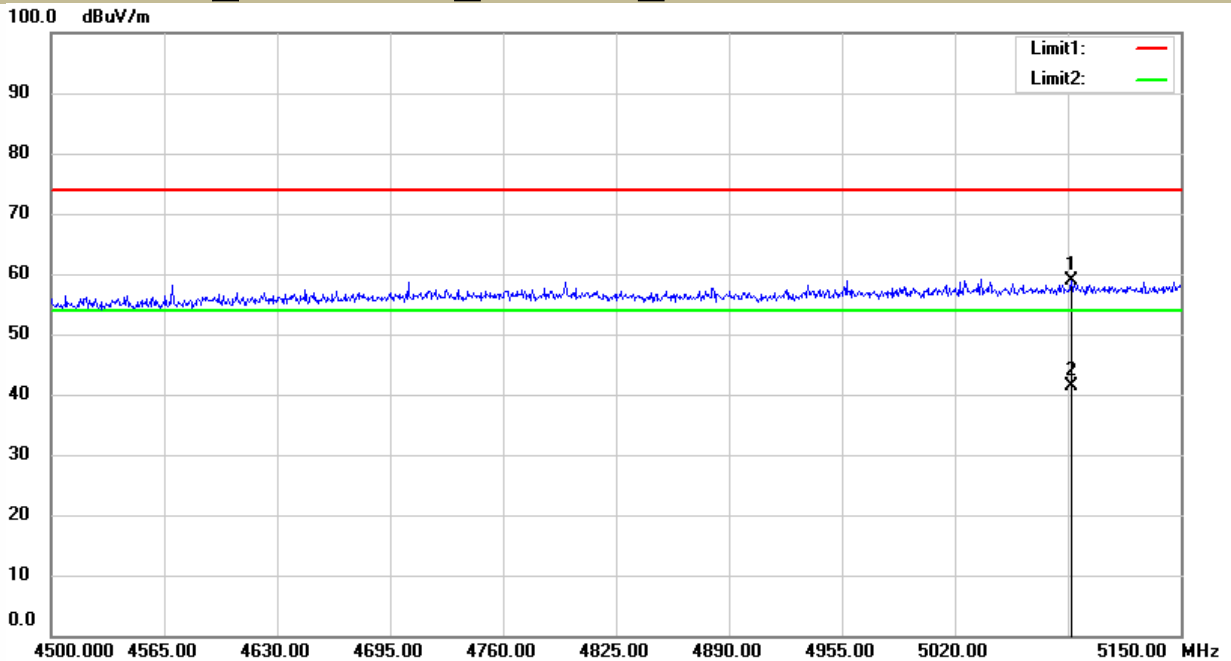


U-NII - 1

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11n(HT40)
	<input type="checkbox"/> 5180	<input type="checkbox"/> 5200	Ant.Pol H

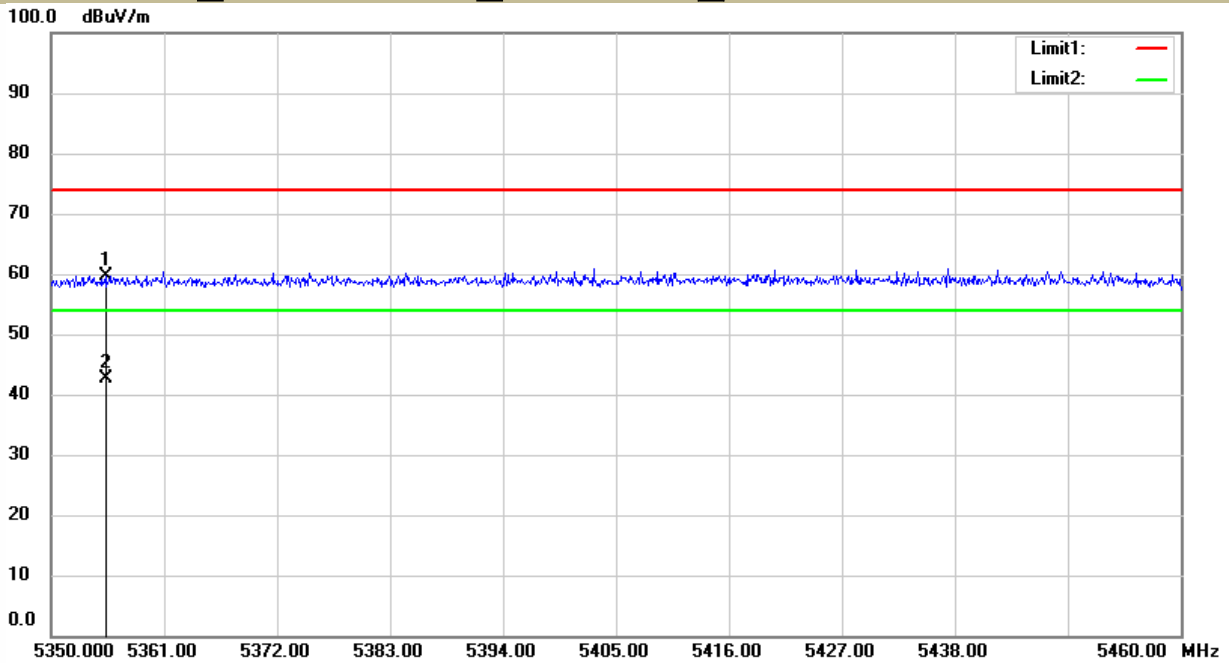

U-NII - 1

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11n(HT40)
	<input type="checkbox"/> 5180	<input type="checkbox"/> 5200	Ant.Pol V

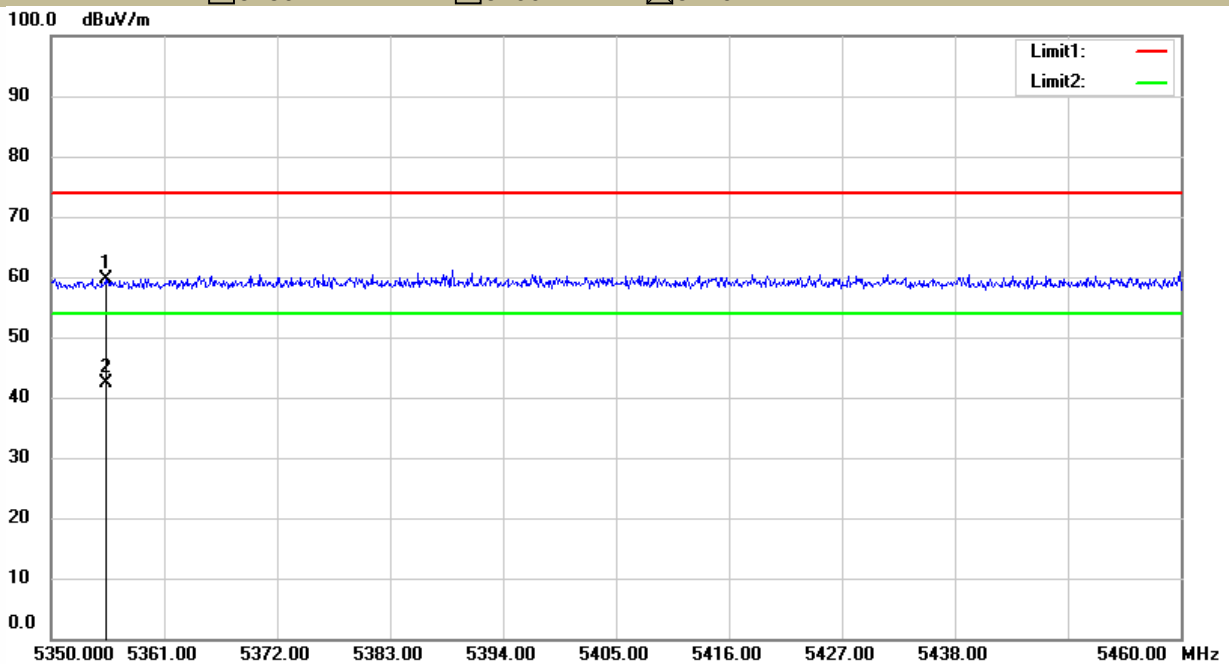

- For Undesirable radiated Spurious Emission in U-NII -2A
- All the modes 802.11a/n/ac has been tested and the worst result antenna 1 802.11ac recorded as below:
- :  Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11ac Frequency(MHz): 5260

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5740.342	V	50.02	-45.21	-27	-18.21
11364.71	V	54.33	-40.9	-27	-13.9
17994.79	V	64.05	-31.18	-27	-4.18
5673.537	H	47.59	-47.64	-27	-20.64
11366.36	H	53.93	-41.3	-27	-14.3
17989.59	H	64.11	-31.12	-27	-4.12

Test mode: 802.11ac Frequency(MHz): 5280

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5403.06	V	47.03	-48.2	-27	-21.2
11179.01	V	54.63	-40.6	-27	-13.6
17984.39	V	64.16	-31.07	-27	-4.07
5461.942	H	47.47	-47.76	-27	-20.76
11145.14	H	55.18	-40.05	-27	-13.05
17981.8	H	64.12	-31.11	-27	-4.11

Test mode: 802.11ac Frequency(MHz): 5320

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5439.885	V	46.91	-48.32	-27	-21.32
11822.05	V	54.33	-40.9	-27	-13.9
17862.65	V	64.05	-31.18	-27	-4.18
5397.597	H	47	-48.23	-27	-21.23
11738.63	H	54.48	-40.75	-27	-13.75
17994.79	H	63.82	-31.41	-27	-4.41

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters



Frequency: 802.11ac

Frequency(MHz): 5260

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5740.342	V	50.02	33.79	74	54	-23.98	-20.21
11364.71	V	54.33	37.66	74	54	-19.67	-16.34
17994.79	V	64.05	47.14	74	54	-9.95	-6.86
5673.537	H	47.59	47.59	74	54	-26.41	-6.41
11366.36	H	53.93	53.93	74	54	-20.07	-0.07
17989.59	H	64.11	64.11	74	54	-9.89	10.11

Frequency: 802.11ac

Frequency(MHz): 5280

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5403.06	V	47.03	30.25	74	54	-26.97	-23.75
11179.01	V	54.63	36.88	74	54	-19.37	-17.12
17984.39	V	64.16	46.24	74	54	-9.84	-7.76
5461.942	H	47.47	30.12	74	54	-26.53	-23.88
11145.14	H	55.18	38.92	74	54	-18.82	-15.08
17981.8	H	64.12	46.23	74	54	-9.88	-7.77

Frequency: 802.11ac

Frequency(MHz): 5320

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5439.885	V	46.91	29.72	74	54	-27.09	-24.28
11822.05	V	54.33	36.95	74	54	-19.67	-17.05
17862.65	V	64.05	46.83	74	54	-9.95	-7.17
5397.597	H	47	30.03	74	54	-27	-23.97
11738.63	H	54.48	36.88	74	54	-19.52	-17.12
17994.79	H	63.82	45.65	74	54	-10.18	-8.35

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

●  Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ac Frequency(MHz): 5260

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5140.055	H	58.77	-36.46	-27	Pass
5121.140	V	58.47	-36.76	-27	Pass

Test mode: 802.11ac Frequency(MHz): 5320

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5354.582	H	59.79	-35.44	-27	Pass
5354.191	V	59.47	-35.76	-27	Pass

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ac Frequency(MHz): 5260


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5140.055	H	58.77	74	42.87	54
5121.140	V	58.47	74	41.93	54

Test mode: 802.11ac Frequency(MHz): 5320


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5354.582	H	59.79	74	41.98	54
5354.191	V	59.47	74	42.14	54

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

U-NII -2A					
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in	Band Edge	
	<input checked="" type="checkbox"/> 802.11ac	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11 ac (VHT20)		
	<input checked="" type="checkbox"/> 5260	<input type="checkbox"/> 5300	<input type="checkbox"/> 5320	Ant.Pol	H

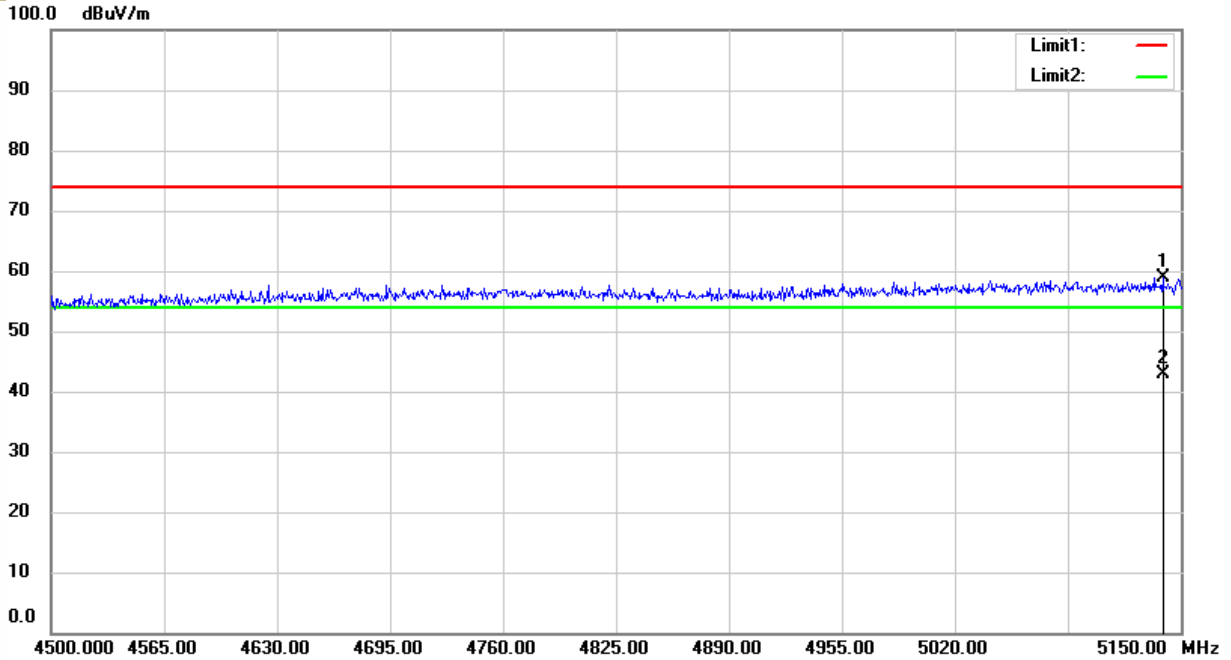


U-NII -2A					
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in	Band Edge	
	<input checked="" type="checkbox"/> 802.11ac	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11 ac (VHT20)		
	<input checked="" type="checkbox"/> 5260	<input type="checkbox"/> 5300	<input type="checkbox"/> 5320	Ant.Pol	V

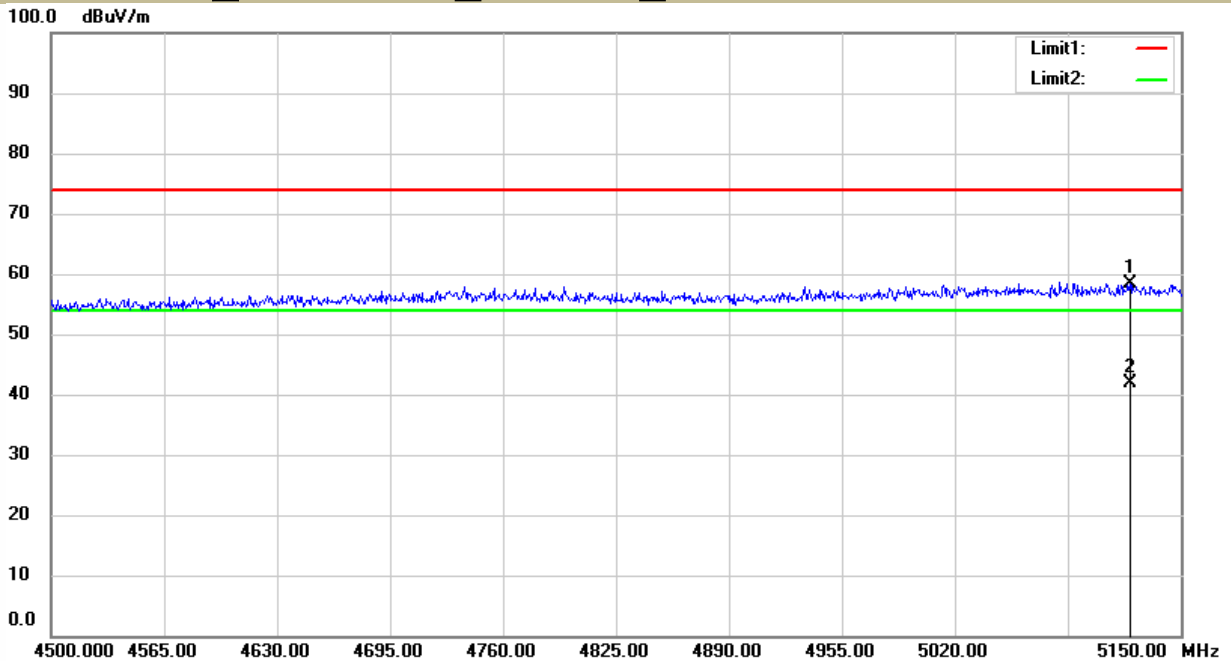


**U-NII -2A**

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11 ac (VHT20)
	<input type="checkbox"/> 5260	<input type="checkbox"/> 5300	Ant.Pol <input type="checkbox"/> H

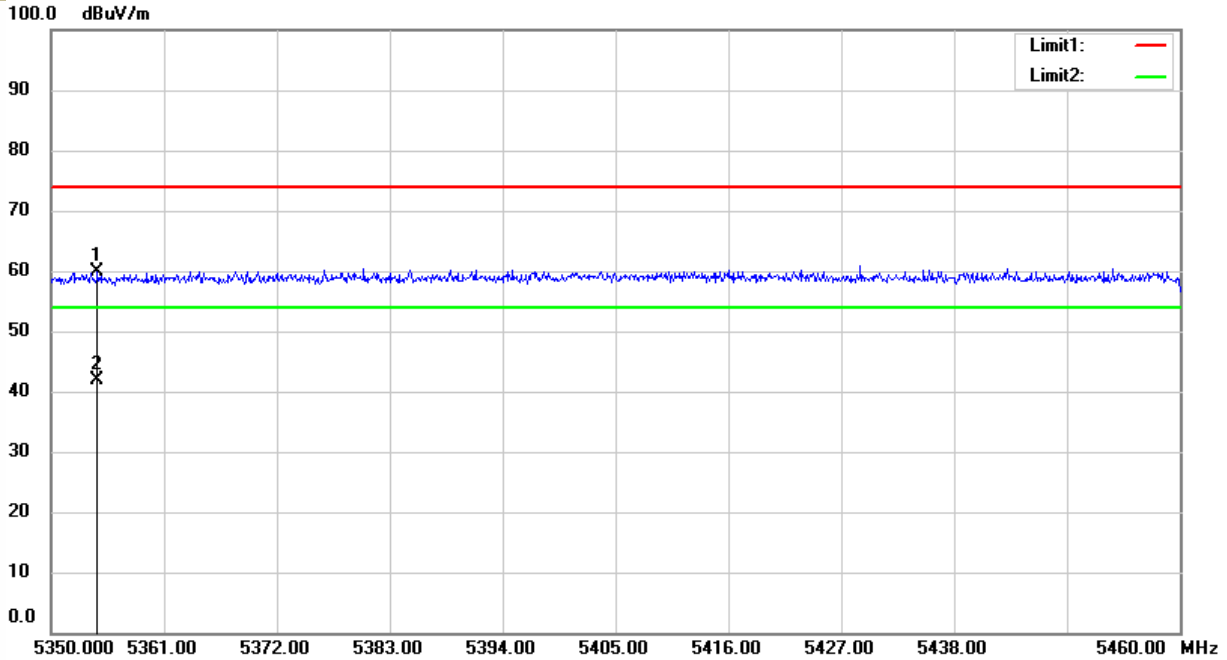

**U-NII -2A**

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11 ac (VHT20)
	<input type="checkbox"/> 5260	<input type="checkbox"/> 5300	Ant.Pol <input type="checkbox"/> V

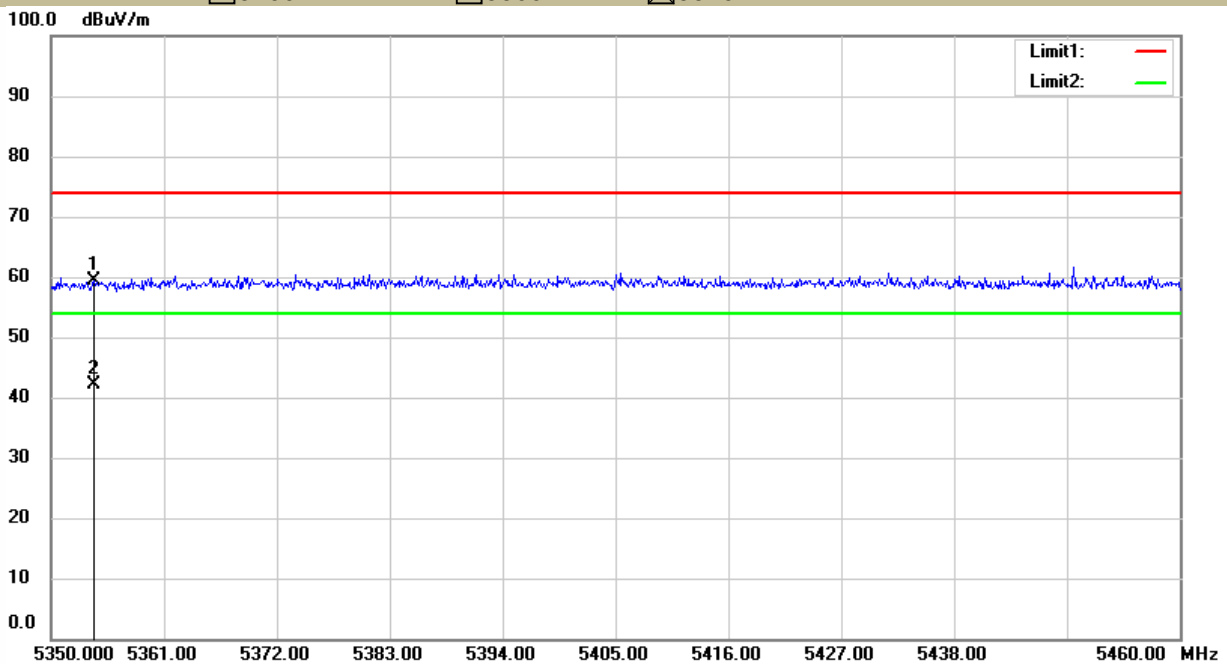

- For Undesirable radiated Spurious Emission in U-NII -2C
- All the modes 802.11a/n/ac has been tested and the worst result antenna 1 802.11ac recorded as below:
- :  Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11ac Frequency(MHz): 5500

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5396.04	V	46.58	-48.65	-27	-21.65
11135.48	V	54.61	-40.62	-27	-13.62
17994.79	V	63.99	-31.24	-27	-4.24
5460.36	H	46.99	-48.24	-27	-21.24
11090.51	H	54.91	-40.32	-27	-13.32
17986.99	H	64.65	-30.58	-27	-3.58

Test mode: 802.11ac Frequency(MHz): 5600

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5595.37	V	46.73	-48.5	-27	-21.5
11374.57	V	53.89	-41.34	-27	-14.34
17981.8	V	64	-31.23	-27	-4.23
5586.48	H	47.21	-48.02	-27	-21.02
10945.61	H	54.31	-40.92	-27	-13.92
17994.79	H	64.86	-30.37	-27	-3.37

Test mode: 802.11ac Frequency(MHz): 5700

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5596.18	V	46.91	-48.32	-27	-21.32
10715.53	V	54.69	-40.54	-27	-13.54
17919.53	V	64.74	-30.49	-27	-3.49
5531.05	H	47.15	-48.08	-27	-21.08
11117.79	H	54.2	-41.03	-27	-14.03
17883.32	H	63.79	-31.44	-27	-4.44

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Frequency: 802.11ac

Frequency(MHz): 5500

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5396.04	V	46.58	29.43	74.00	54.00	-27.42	-24.57
11135.48	V	54.61	38.05	74.00	54.00	-19.39	-15.95
17994.79	V	63.99	45.28	74.00	54.00	-10.01	-8.72
5460.36	H	46.99	29.45	74.00	54.00	-27.01	-24.55
11090.51	H	54.91	37.84	74.00	54.00	-19.09	-16.16
17986.99	H	64.65	46.93	74.00	54.00	-9.35	-7.07

Frequency: 802.11ac

Frequency(MHz): 5600

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5595.37	V	46.73	29.58	74.00	54.00	-27.27	-24.42
11374.57	V	53.89	36.37	74.00	54.00	-20.11	-17.63
17981.80	V	64.00	46.14	74.00	54.00	-10.00	-7.86
5586.48	H	47.21	30.29	74.00	54.00	-26.79	-23.71
10945.61	H	54.31	37.72	74.00	54.00	-19.69	-16.28
17994.79	H	64.86	46.96	74.00	54.00	-9.14	-7.04

Frequency: 802.11ac

Frequency(MHz): 5700

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5596.18	V	46.91	28.64	74.00	54.00	-27.09	-25.36
10715.53	V	54.69	38.95	74.00	54.00	-19.31	-15.05
17919.53	V	64.74	47.52	74.00	54.00	-9.26	-6.48
5531.05	H	47.15	31.03	74.00	54.00	-26.85	-22.97
11117.79	H	54.20	36.96	74.00	54.00	-19.80	-17.04
17883.32	H	63.79	45.24	74.00	54.00	-10.21	-8.76

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

●  Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ac Frequency(MHz): 5500

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5466.92	H	60.17	-35.06	-27	Pass
5467.70	V	59.81	-35.42	-27	Pass

Test mode: 802.11ac Frequency(MHz): 5700

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5726.20	H	59.89	-35.34	-27	Pass
5726.56	V	59.37	-35.86	-27	Pass

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ac Frequency(MHz): 5500

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5466.92	H	60.17	74	43.15	54
5467.70	V	59.81	74	42.34	54


Test mode: 802.11ac Frequency(MHz): 5700

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5726.20	H	59.89	74	42.19	54
5726.56	V	59.37	74	42.58	54

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


**U-NII -2C**

Test Model	<input checked="" type="checkbox"/> 802.11ac	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11 ac (VHT20)	
	<input checked="" type="checkbox"/> 5500	<input type="checkbox"/> 5580	<input type="checkbox"/> 5700	Ant.Pol: H

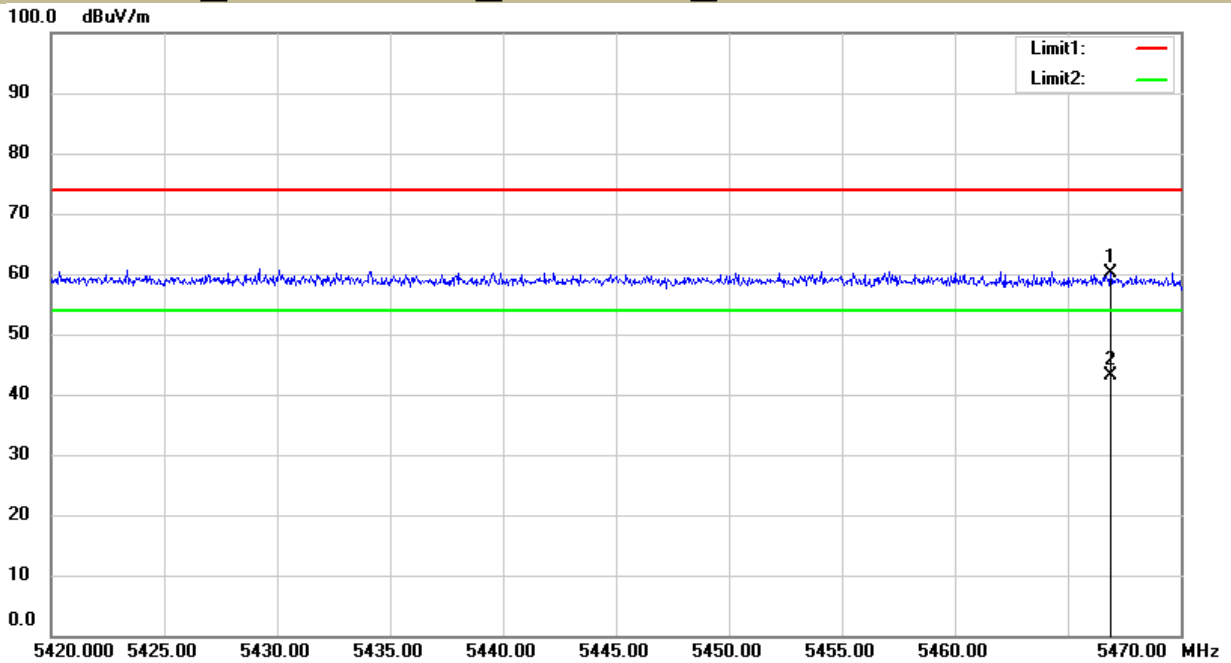

**U-NII -2C**


Test Model	<input checked="" type="checkbox"/> 802.11ac	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11 ac (VHT20)	
	<input checked="" type="checkbox"/> 5500	<input type="checkbox"/> 5580	<input type="checkbox"/> 5700	Ant.Pol: V

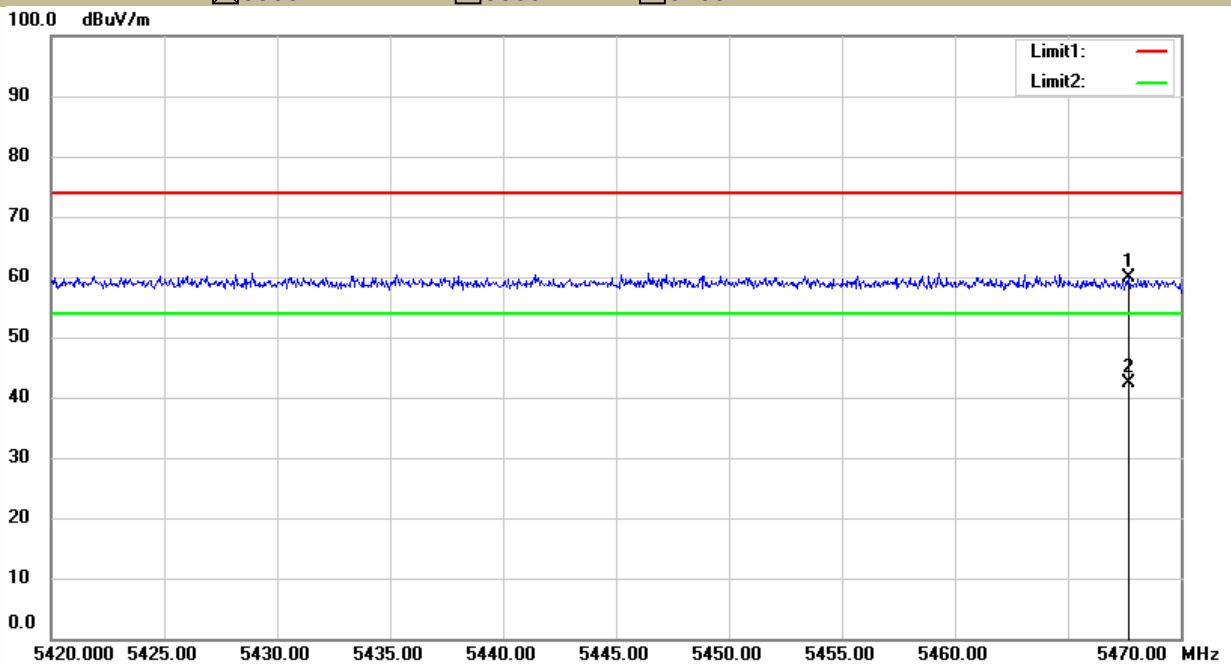




**U-NII -2C**

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11 ac (VHT20)
	<input type="checkbox"/> 5500	<input type="checkbox"/> 5580	Ant.Pol <input type="checkbox"/> H

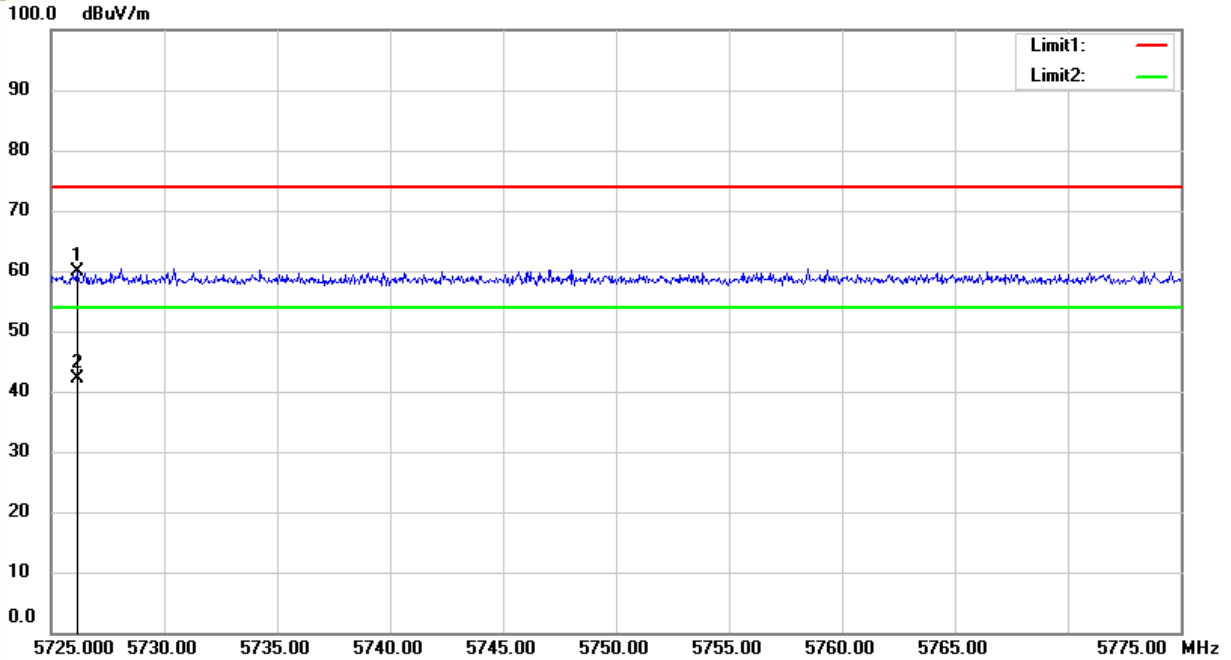

**U-NII -2C**

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11ac	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11 ac (VHT20)
	<input type="checkbox"/> 5500	<input type="checkbox"/> 5580	Ant.Pol <input type="checkbox"/> V

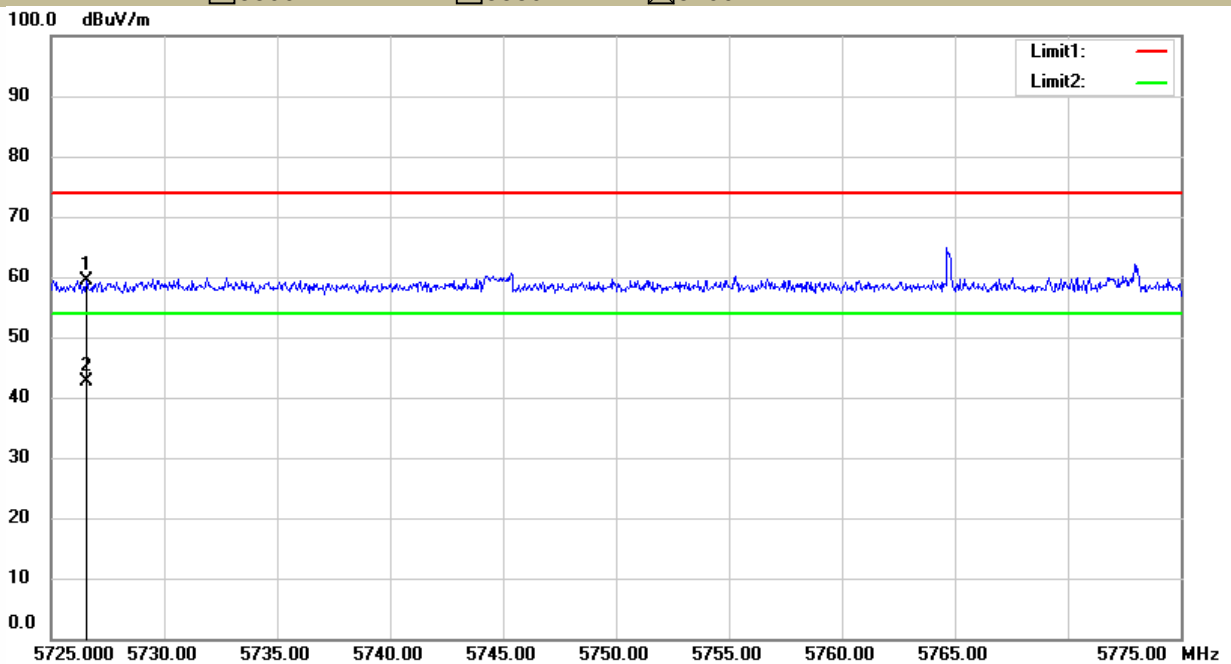

- For Undesirable radiated Spurious Emission in U-NII -3
- All the modes 802.11a/n/ac has been tested and the worst result antenna 1 802.11ac recorded as below:
- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11ac Frequency(MHz): 5745

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5448.54	V	47	-48.23	-27	-21.23
10967.78	V	54.41	-40.82	-27	-13.82
18000	V	64.85	-30.38	-27	-3.38
5508.71	H	46.85	-48.38	-27	-21.38
11004.29	H	54.52	-40.71	-27	-13.71
17880.73	H	64.48	-30.75	-27	-3.75

Test mode: 802.11ac Frequency(MHz): 5785

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5500.76	V	46.69	-48.54	-27	-21.54
11154.8	V	54.8	-40.43	-27	-13.43
18000	V	64.22	-31.01	-27	-4.01
5587.29	H	47.47	-47.76	-27	-20.76
11143.53	H	54.47	-40.76	-27	-13.76
17997.39	H	64.3	-30.93	-27	-3.93

Test mode: 802.11ac Frequency(MHz): 5825

Freq. (MHz)	Ant.Pol.	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5551.87	V	46.74	-48.49	-27	-21.49
11377.86	V	55.02	-40.21	-27	-13.21
17997.39	V	64.75	-30.48	-27	-3.48
5435.96	H	46.89	-48.34	-27	-21.34
11077.69	H	54.35	-40.88	-27	-13.88
17994.79	H	64	-31.23	-27	-4.23

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Frequency: 802.11ac

Frequency(MHz): 5745

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5448.54	V	47.00	29.99	74.00	54.00	-27.00	-24.01
10967.78	V	54.41	36.74	74.00	54.00	-19.59	-17.26
18000.00	V	64.85	46.24	74.00	54.00	-9.15	-7.76
5508.71	H	46.85	29.53	74.00	54.00	-27.15	-24.47
11004.29	H	54.52	37.25	74.00	54.00	-19.48	-16.75
17880.73	H	64.48	46.88	74.00	54.00	-9.52	-7.12

Frequency: 802.11ac

Frequency(MHz): 5785

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5500.76	V	46.69	29.33	74.00	54.00	-27.31	-24.67
11154.80	V	54.80	37.79	74.00	54.00	-19.20	-16.21
18000.00	V	64.22	46.52	74.00	54.00	-9.78	-7.48
5587.29	H	47.47	30.19	74.00	54.00	-26.53	-23.81
11143.53	H	54.47	37.83	74.00	54.00	-19.53	-16.17
17997.39	H	64.30	46.21	74.00	54.00	-9.70	-7.79

Frequency: 802.11ac

Frequency(MHz): 5825

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
5551.87	V	46.74	28.77	74.00	54.00	-27.26	-25.23
11377.86	V	55.02	38.86	74.00	54.00	-18.98	-15.14
17997.39	V	64.75	46.10	74.00	54.00	-9.25	-7.90
5435.96	H	46.89	29.34	74.00	54.00	-27.11	-24.66
11077.69	H	54.35	37.15	74.00	54.00	-19.65	-16.85
17994.79	H	64.00	46.96	74.00	54.00	-10.00	-7.04

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- Undesirable radiated Spurious Emission in band edge

Test mode: 802.11ac Frequency: 5745

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5722.72	H	60.39	-34.84	23.43	Pass
5720.59	V	60.04	-35.19	17.29	Pass

Test mode: 802.11ac Frequency: 5825

Freq. (MHz)	Ant.Pol.	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5856.34	H	59.89	-35.34	15.23	Pass
5860.17	V	59.21	-36.02	14.15	Pass


- Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) EIRP [dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

U-NII -3

Test Model    Undesirable radiated Spurious Emission in Band Edge

802.11ac     802.11n(HT20)     802.11n(HT40)

5745    Ant. Pol    H

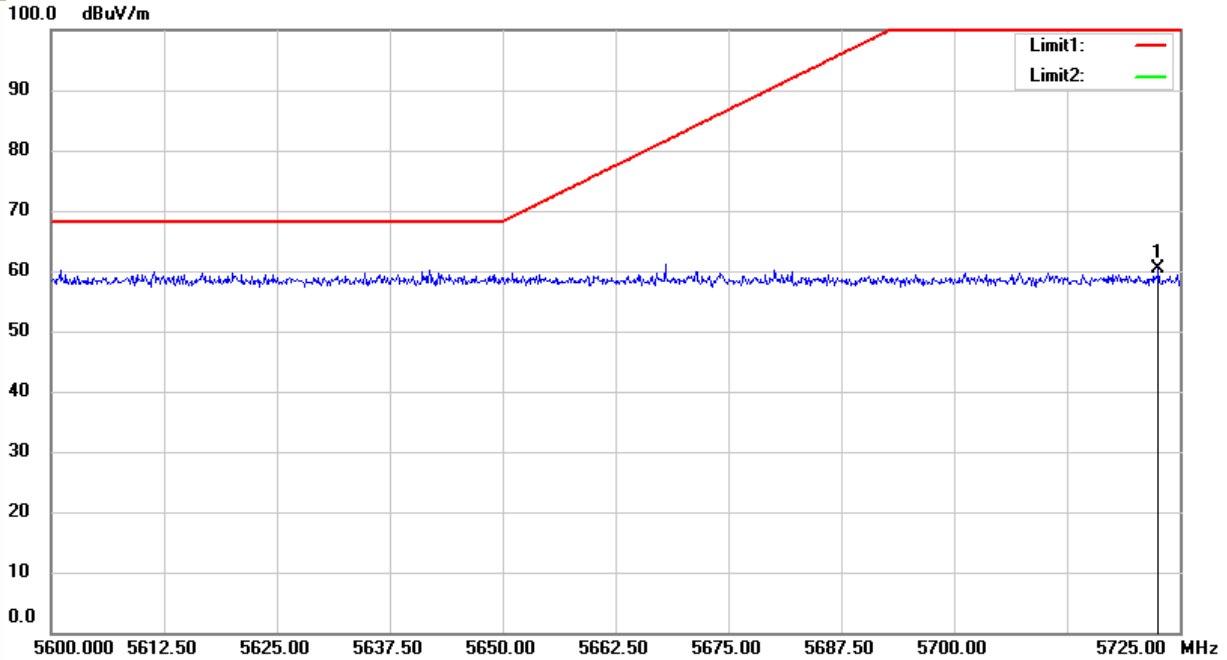


U-NII -3

Test Model    Undesirable radiated Spurious Emission in Band Edge


802.11ac     802.11n(HT20)     802.11n(HT40)

5745    Ant. Pol    V

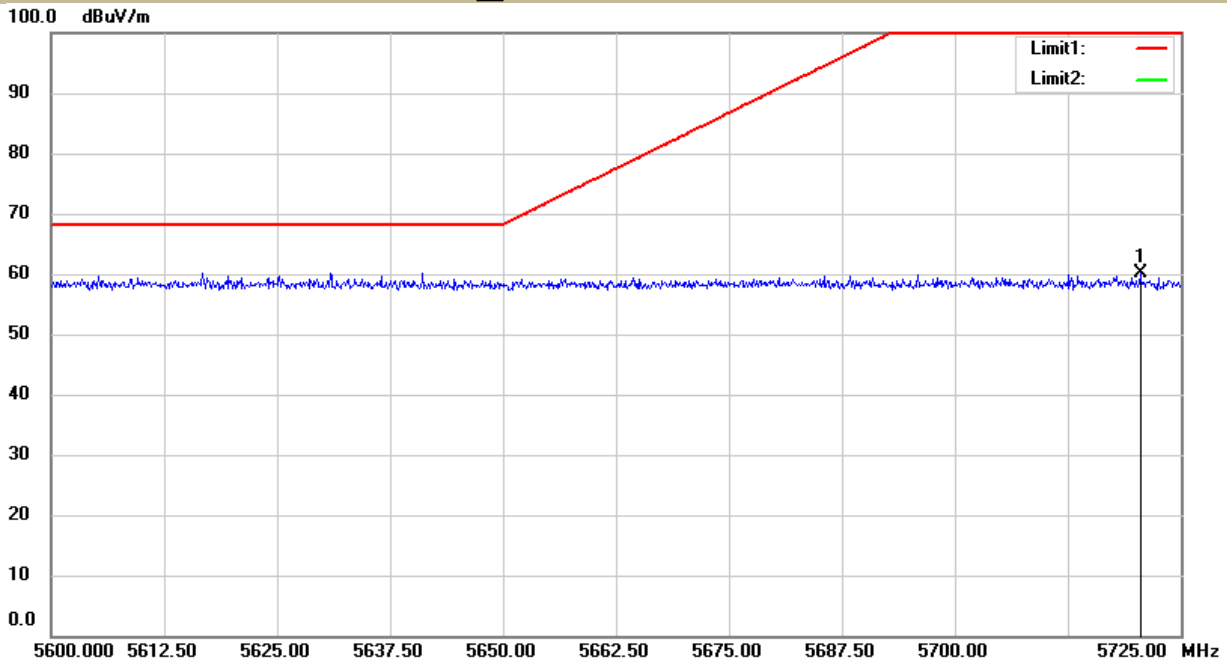

**U-NII -3**


Test Model Undesirable radiated Spurious Emission in Band Edge  
802.11ac 802.11n(HT20) 802.11n(HT40)  
5825 Ant.Pol H

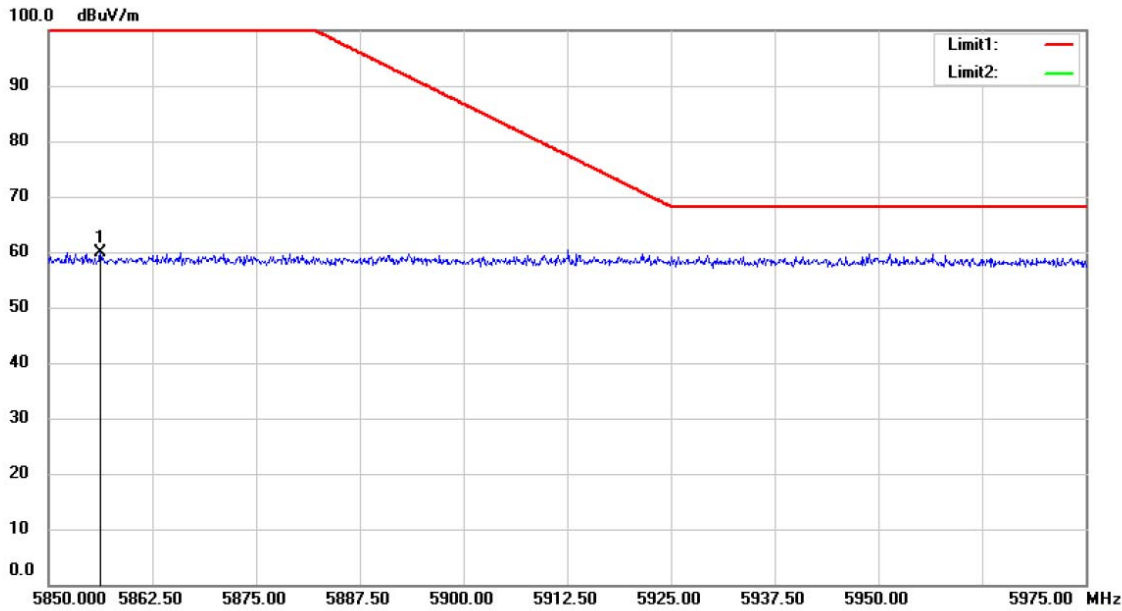

Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 26.2 C  
 Limit: (RE)FCC PART 15C B4 ( 5G Bandedge) Peak Power: AC 230V/50Hz Humidity: 40 %


**U-NII -3**

Test Model Undesirable radiated Spurious Emission in Band Edge  
802.11ac 802.11n(HT20) 802.11n(HT40)  
5825 Ant.Pol V

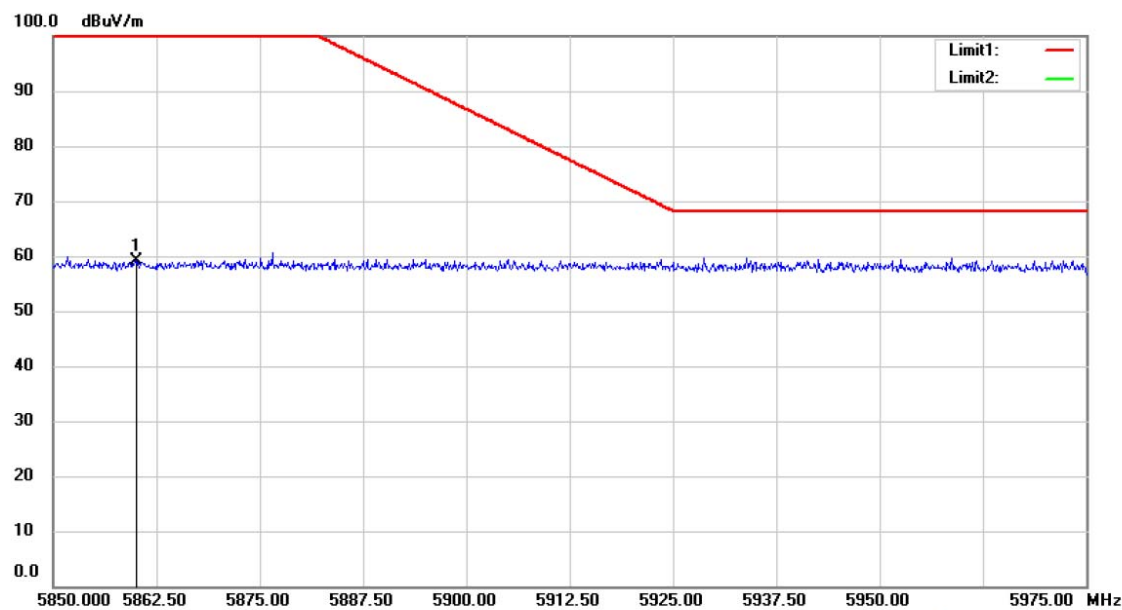


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 26.2 C  
 Limit: (RE)FCC PART 15C B4 ( 5G Bandedge) Peak Power: AC 230V/50Hz Humidity: 40 %

- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)  
All the modes 802.11a/n/ac/ax has been tested and the worst result 802.11a recorded as below:

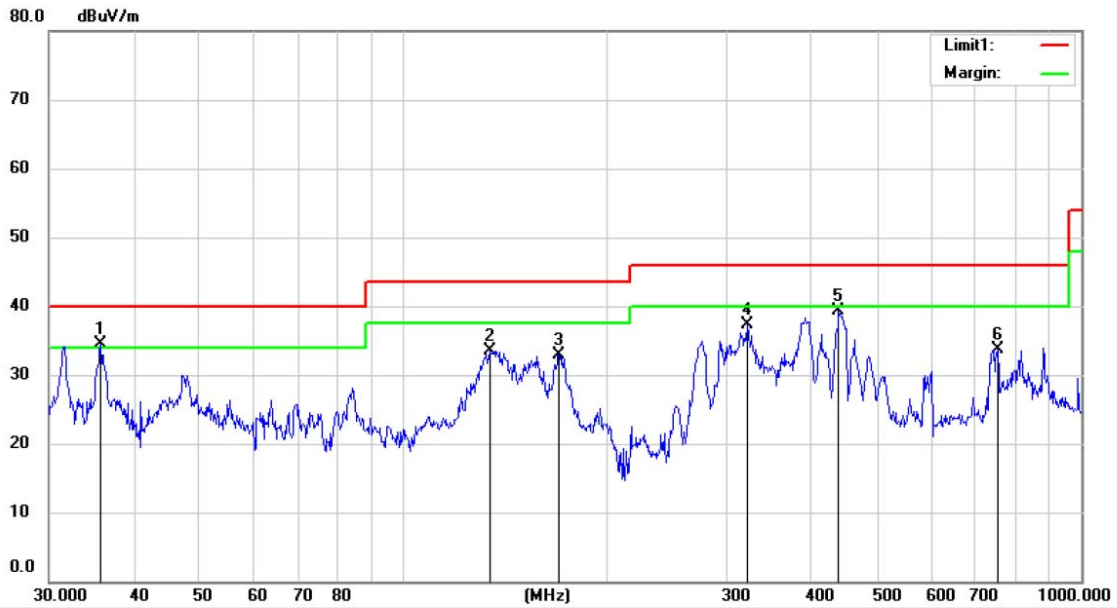

Site 3m Chamber #1      Polarization: **Vertical**      Temperature: 26.2 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 230V/50Hz      Humidity: 40 %  
 Mode:WIFI 5180  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	35.8432	48.08	-13.58	34.50	40.00	-5.50	QP			
2		134.2056	47.62	-14.20	33.42	43.50	-10.08	QP			
3		170.0456	47.01	-14.02	32.99	43.50	-10.51	QP			
4		321.6240	45.87	-8.66	37.21	46.00	-8.79	QP			
5		439.6177	45.23	-5.88	39.35	46.00	-6.65	QP			
6		752.7431	33.46	0.20	33.66	46.00	-12.34	QP			

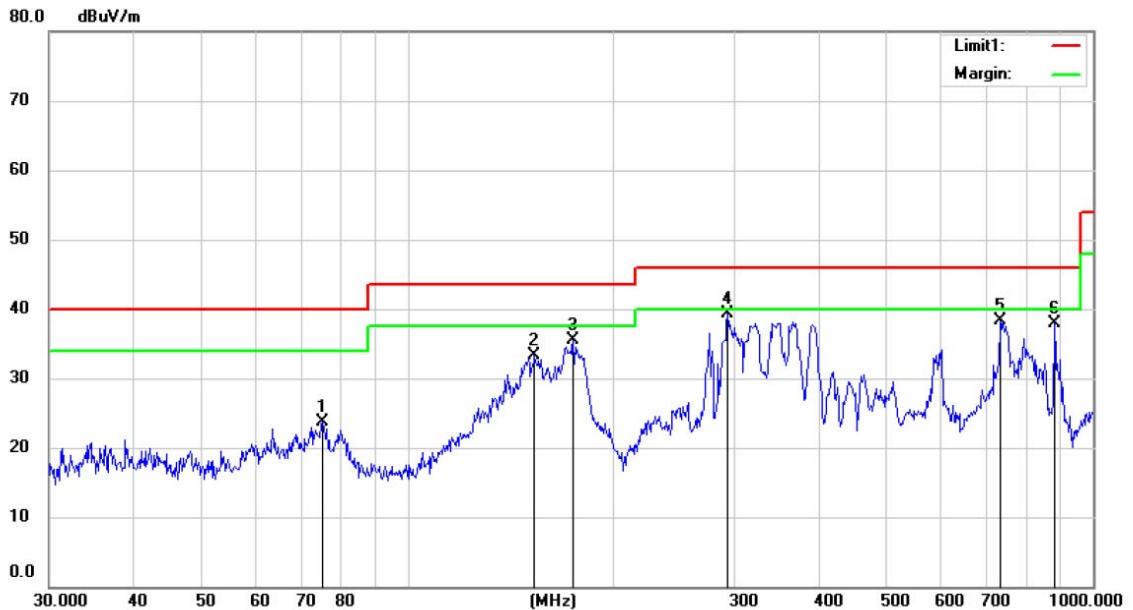

Site: 3m Chamber #1      Polarization: **Horizontal**      Temperature: 26.2 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 230V/50Hz      Humidity: 40 %  
 Mode: WIFI 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		75.2810	38.02	-14.23	23.79	40.00	-16.21	QP			
2		153.6710	47.22	-13.88	33.34	43.50	-10.16	QP			
3		174.6535	49.33	-13.81	35.52	43.50	-7.98	QP			
4	*	293.5985	48.63	-9.38	39.25	46.00	-6.75	QP			
5		732.5620	38.43	-0.09	38.34	46.00	-7.66	QP			
6		879.0914	36.21	1.63	37.84	46.00	-8.16	QP			



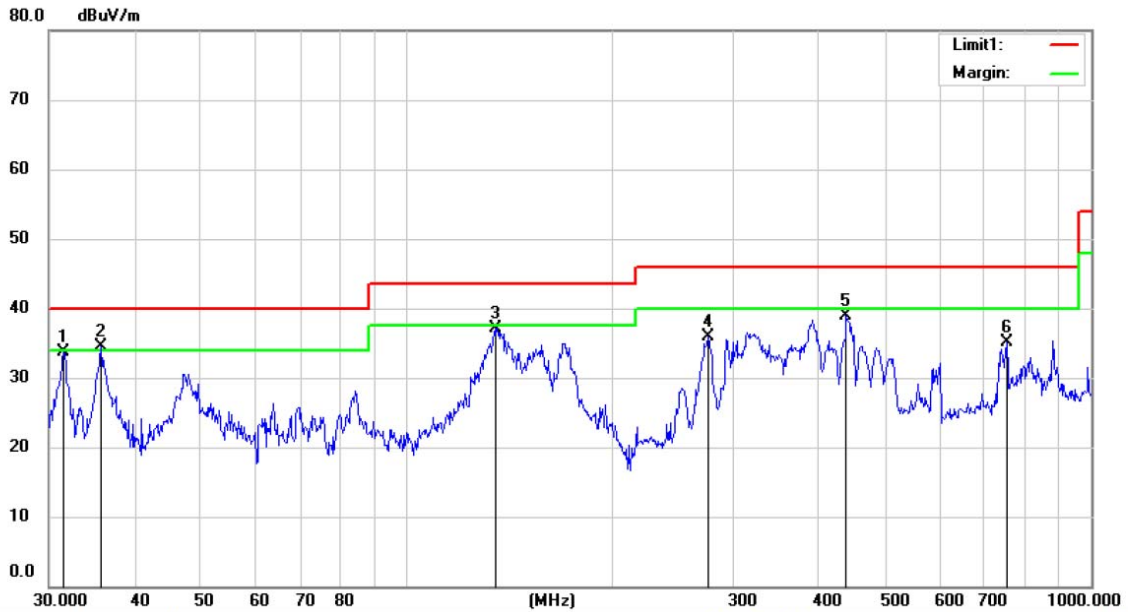

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 26.2 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 230V/50Hz

Humidity: 40 %

Mode: WIFI 5200


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.6063	48.18	-14.49	33.69	40.00	-6.31			
2	*	35.8432	48.08	-13.58	34.50	40.00	-5.50			
3		134.9130	51.38	-14.20	37.18	43.50	-6.32			
4		275.5190	46.08	-10.09	35.99	46.00	-10.01			
5		439.6177	44.73	-5.88	38.85	46.00	-7.15			
6		752.7431	34.96	0.20	35.16	46.00	-10.84			

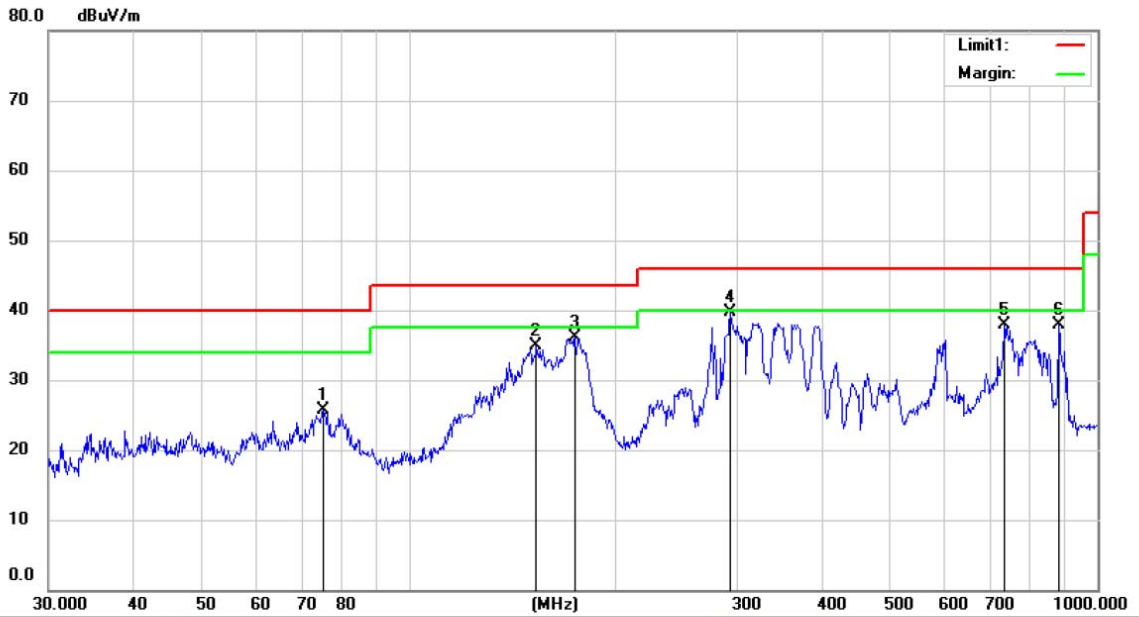


Site: 3m Chamber #1      Polarization: **Horizontal**      Temperature: 26.2 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 230V/50Hz      Humidity: 40 %  
 Mode: WIFI 5200  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		75.2810	40.02	-14.23	25.79	40.00	-14.21	QP		
2		153.6710	48.72	-13.88	34.84	43.50	-8.66	QP		
3		174.6535	49.83	-13.81	36.02	43.50	-7.48	QP		
4	*	293.5985	49.13	-9.38	39.75	46.00	-6.25	QP		
5		732.5620	37.93	-0.09	37.84	46.00	-8.16	QP		
6		879.0914	36.21	1.63	37.84	46.00	-8.16	QP		

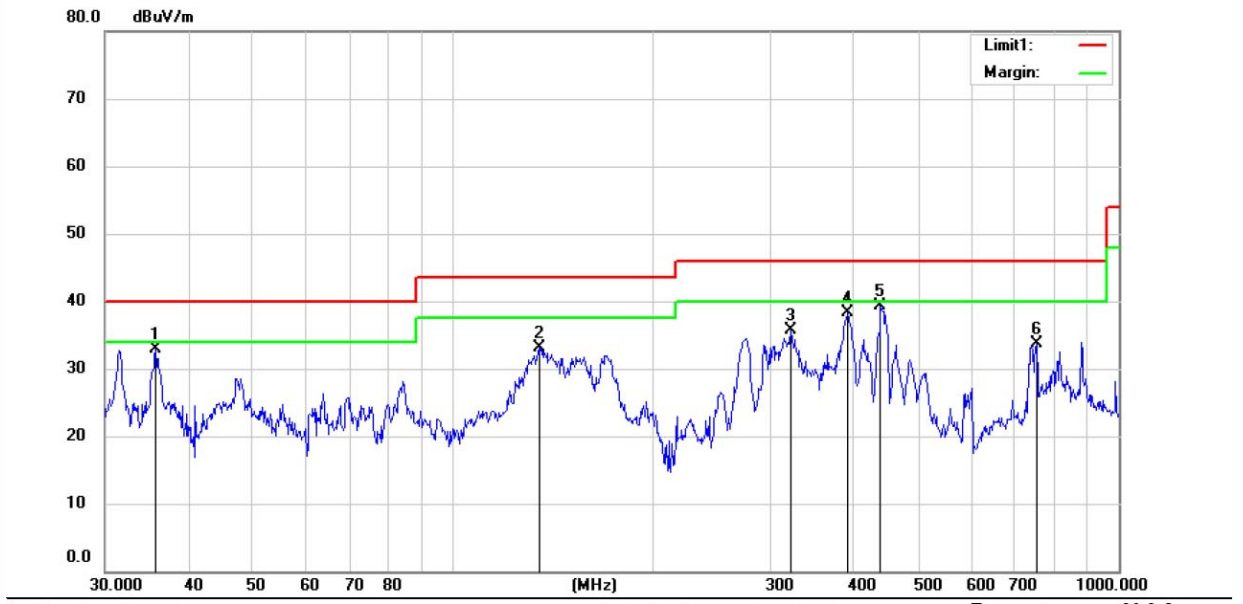

Site 3m Chamber #1      Polarization: **Vertical**      Temperature: 26.2 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 230V/50Hz      Humidity: 40 %  
 Mode:WIFI 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		35.8432	46.58	-13.58	33.00	40.00	-7.00	QP		
2		134.9130	47.38	-14.20	33.18	43.50	-10.32	QP		
3		321.6240	44.37	-8.66	35.71	46.00	-10.29	QP		
4		392.0950	45.00	-6.66	38.34	46.00	-7.66	QP		
5	*	439.6177	45.23	-5.88	39.35	46.00	-6.65	QP		
6		752.7431	33.46	0.20	33.66	46.00	-12.34	QP		

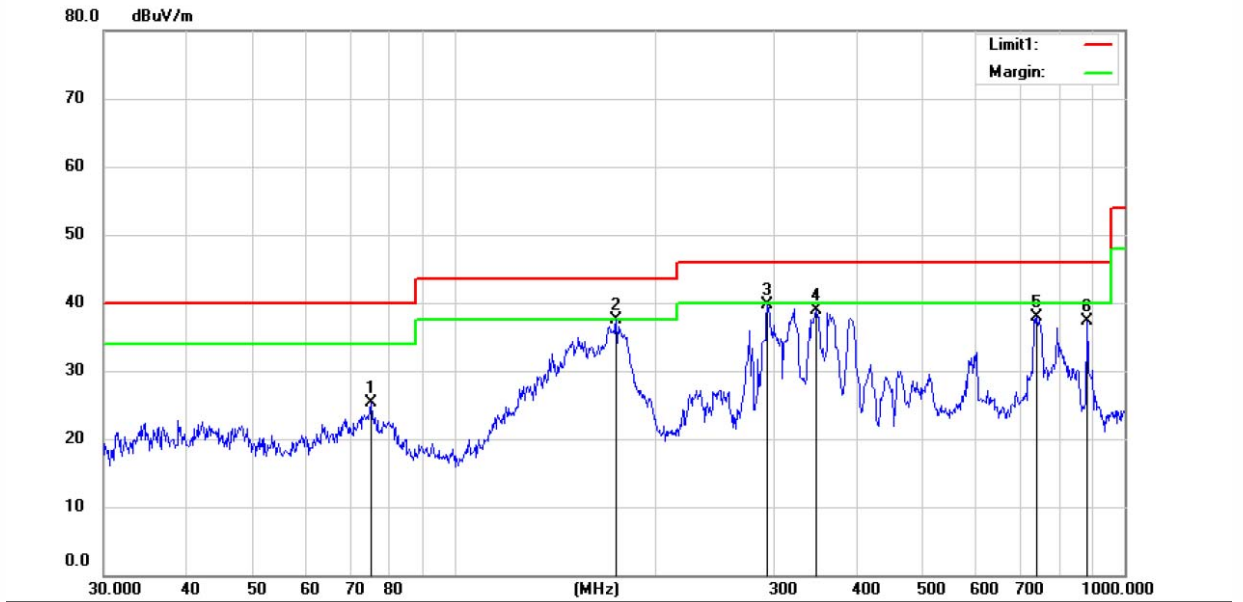

Site 3m Chamber #1      Polarization: **Horizontal**      Temperature: 26.2 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 230V/50Hz      Humidity: 40 %  
 M/N: M135FGN-PRO  
 Mode:WIFI 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		75.2810	39.52	-14.23	25.29	40.00	-14.71	QP		
2	*	174.6535	51.33	-13.81	37.52	43.50	-5.98	QP		
3		293.5985	49.13	-9.38	39.75	46.00	-6.25	QP		
4		346.9612	46.67	-7.70	38.97	46.00	-7.03	QP		
5		739.9845	37.91	-0.01	37.90	46.00	-8.10	QP		
6		879.0914	35.71	1.63	37.34	46.00	-8.66	QP		

## 8.6 POWER LINE CONDUCTED EMISSIONS

### 8.6.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


### 8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
 Repeat above procedures until all frequency measured were complete.

### 8.6.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

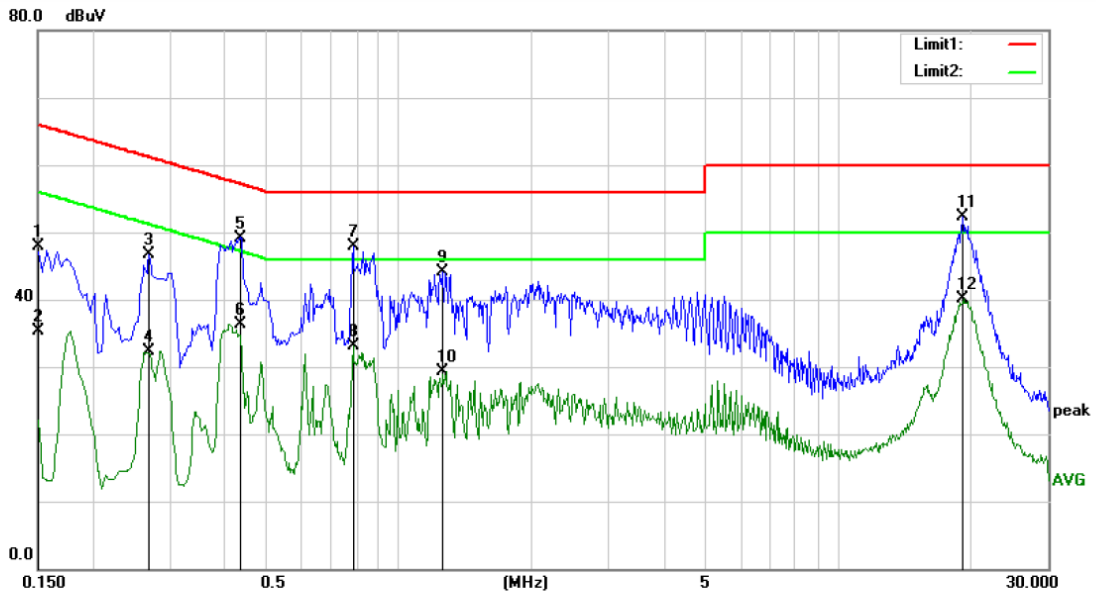

Site Conduction #2

Phase: **L1**

Temperature: 29.4

Limit: (CE)FCC PART 15 class B\_QP


Power: AC 120V/60Hz

Humidity: 34 %

Mode: Wifi Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	37.50	10.48	47.98	66.00	-18.02	QP	
2		0.1500	24.90	10.48	35.38	56.00	-20.62	AVG	
3		0.2700	36.26	10.41	46.67	61.12	-14.45	QP	
4		0.2700	21.94	10.41	32.35	51.12	-18.77	AVG	
5		0.4340	38.83	10.37	49.20	57.18	-7.98	QP	
6		0.4340	25.88	10.37	36.25	47.18	-10.93	AVG	
7		0.7860	37.59	10.37	47.96	56.00	-8.04	QP	
8		0.7860	22.67	10.37	33.04	46.00	-12.96	AVG	
9		1.2580	33.67	10.39	44.06	56.00	-11.94	QP	
10		1.2580	18.96	10.39	29.35	46.00	-16.65	AVG	
11	*	19.1980	41.53	10.75	52.28	60.00	-7.72	QP	
12		19.1980	29.35	10.75	40.10	50.00	-9.90	AVG	

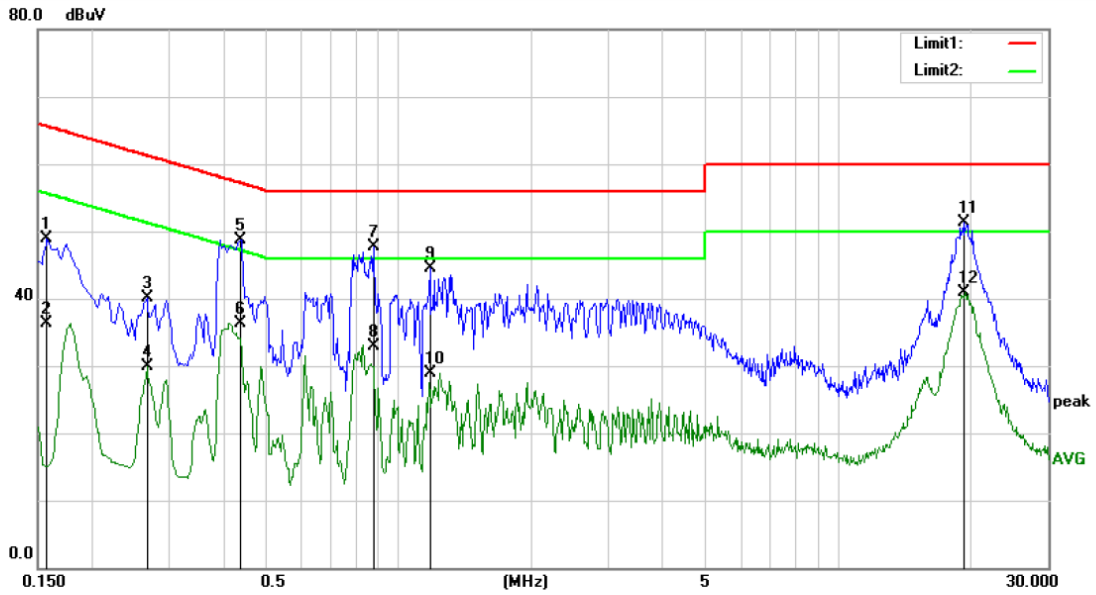

Site Conduction #2

Phase: **N**

Temperature: 29.4

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz

Humidity: 34 %

Mode: Wifi Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	38.48	10.48	48.96	65.57	-16.61	QP	
2		0.1580	25.75	10.48	36.23	55.57	-19.34	AVG	
3		0.2660	29.69	10.41	40.10	61.24	-21.14	QP	
4		0.2660	19.49	10.41	29.90	51.24	-21.34	AVG	
5		0.4340	38.33	10.37	48.70	57.18	-8.48	QP	
6		0.4340	25.89	10.37	36.26	47.18	-10.92	AVG	
7	*	0.8740	37.29	10.38	47.67	56.00	-8.33	QP	
8		0.8740	22.62	10.38	33.00	46.00	-13.00	AVG	
9		1.1740	34.14	10.40	44.54	56.00	-11.46	QP	
10		1.1740	18.43	10.40	28.83	46.00	-17.17	AVG	
11		19.2780	40.47	10.75	51.22	60.00	-8.78	QP	
12		19.2780	30.06	10.75	40.81	50.00	-9.19	AVG	

## 8.7 ANTENNA APPLICATION

### 8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.7.2 Result

PASS.

- The EUT has two FPC antennas: antenna 1 gains are 5.34 dBi; antenna 2 gains are 5.57dBi

- Note:
- Antennas use a permanently attached antenna which is not replaceable.
  - Not using a standard antenna jack or electrical connector for antenna replacement
  - The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.



Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

----- END OF REPORT -----