



Report No.: AAEMT/RF/230322-05-01

FCC RADIO TEST REPORT

Part 15 subpart E

FCC ID: 2AZOI4XL1BTSDE

Report Reference No. : AAEMT/RF/230322-05-01

Date of issue : 2023-07-10

Testing Laboratory..... : AA Electro Magnetic Test Laboratory Private Limited

Address : Plot No 174, Udyog Vihar - Phase 4, Sector 18,
Gurgaon, Haryana, India


Applicant's name..... : HFCL Limited

Address : Plot no. 38, Institutional Area, Sector 32,Gurgaon -122001

Manufacturer : HFCL Limited
Plot no. 38, Institutional Area, Sector 32,Gurgaon -122001

Test specification:

Test item description..... : IO 5 GHz 1000 Mbps UBR with Integrated Antenna (17 dBi) with
dying gas [extended temperature]

Trade Mark..... : 

Model/Type reference : ion4xl1_BTS_d_ext

Ratings : **Input of PoE: 100-240VAC, 50/60Hz,**
Output of PoE/input of EUT: +48V(PoE),0.315A

Prepared By: (+ signature) Ankur Kumar 

Reviewed & Approved by: (+ signature)


Dr. Lenin Raja (Authorized Representative) (/ lenin83/) 

TABLE OF CONTENTS

1.	Summary of test results	5
2.	General test information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test	7
3.	Equipment's List for All Test Items	8
3.1.	Block diagram of EUT configuration for test	10
3.2.	Test environment conditions	10
3.3.	Measurement uncertainty	10
4.	POWER SPECTRAL DENSITY TEST	11
4.1.	Block diagram of test setup	11
4.2.	Applied procedures / limit	11
4.3.	Test Procedure.....	12
4.4.	Test Result:	13
5.	26 dB & 99% Emission Bandwidth.....	38
5.1.	Block diagram of test setup	38
5.2.	Applied procedures / limit	38
5.3.	Test Procedure.....	38
5.4.	Test Result	39
6.	MAXIMUM CONDUCTED OUTPUT POWER.....	88
6.1.	Test Result	89
7.	Band Edges Measurement	90
7.1.	Test Result	91
8.	RADIATED EMISSION MEASUREMENT	109
8.1.	Block diagram of test setup	109
8.2.	Limit.....	111
8.3.	Test Procedure.....	112
8.4.	Test result(Below 30MHz).....	114
9.	Power Line Conducted Emission.....	120
9.1.	Block diagram of test setup	120



Report No.: AAEMT/RF/230322-05-01

9.2. Power Line Conducted Emission Limits.....120

9.3. Test Procedure.....121

9.4. Test Result121

10. Conducted Spurious Emissions.....124

11. Antenna Requirements157


11.1. Limit.....157

11.2. EUT ANTENNA157



Report No.: AAEMT/RF/230322-05-01

TEST REPORT DECLARE

Applicant	:	HFCL Limited
Address	:	Plot no. 38, Institutional Area, Sector 32,Gurgaon -122001
Equipment under Test	:	IO 5 GHz 1000 Mbps UBR with Integrated Antenna (17 dBi) with dying gasp [extended temperature]
Model No	:	ion4x11_BTS_d_ext
Trade Mark	:	
Manufacturer	:	HFCL Limited
Address	:	Plot no. 38, Institutional Area, Sector 32,Gurgaon -122001

Test Standard Used: FCC Part 15E 15.407

Test procedure used: ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01 .

We Declare:

The equipment described above is tested by AA Electro Magnetic Test Laboratory Private Limited and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and AA Electro Magnetic Test Laboratory Private Limited is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	AAEMT/RF/230322-05-01		
Date of Test:	Mar. 22 ~ Apr. 25, 2023	Date of Report:	July. 10, 2023

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of AA Electro Magnetic Test Laboratory Private Limited

1. SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below.		
FCC Part15 (15.407) , Subpart E		
Description of Test Item	Standard	Results
AC Power Line Conducted Emissions	FCC §15.207/ RSS-Gen	PASS
Spurious Radiated Emissions	FCC §15.209(a), 15.407(b)	PASS
26 dB and 99% Emission Bandwidth	FCC §15.407(a)	PASS
Maximum Conducted Output Power	FCC §407(a) (1)	PASS
Band Edges	FCC §2.1051, §15.407(b)	PASS
Power Spectral Density	FCC §15.407(a)(1)	PASS
Spurious Emissions at Antenna Terminals	FCC §2.1051, §15.407(b)	PASS
Antenna Requirement	FCC §15.203	PASS

2. GENERAL TEST INFORMATION

2.1. DESCRIPTION OF EUT

EUT Name	: IO 5 GHz 1000 Mbps UBR with Integrated Antenna (17 dBi) with dying gasp [extended temperature]
Model Number	: ion4x11_BTS_d_ext
Power supply	: Input of PoE: 100-240VAC, 50Hz, : Output of PoE/input of EUT: +48V (PoE),0.315A
Operation frequency	: WiFi: 802.11a/n(HT20)/ac(VHT20)/ax(HE20): 5180MHz~5240MHz; 5745MHz~5825MHz 802.11n(HT40)/ac(VHT40)/ax(HE40): 5190MHz~5230MHz; 5755MHz~5795MHz 802.11ac(VHT80)/ax(HE80):5210MHz; 5775MHz
Modulation	: 802.11a/n: BPSK/QPSK/16QAM/64QAM : 802.11ac/ax: BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM
Data Rate	: 802.11a:6,9,12,18,24,36,48,54Mbps; 802.11ac(VHT20):MCS0-MCS8 802.11ac(VHT40/80):MCS0-MCS9 802.11n(HT20):MCS0-MCS7; 802.11n(HT40):MCS0-MCS7; 802.11ax(HE20/40/80):MCS0-MCS11
Antenna Type	: 17dBi Sector Antenna
Antenna gain	: 17dBi
H/W No.	: B1
S/W No.	: 1.7.0.0
Battery	: N/A
Date of Receipt	: Mar. 22, 2023
Condition of Sample on receipt	: Good / Satisfactory / Fit for Testing
Opinions and Interpretations:	: See the specific Note / Annexure if any in the whole /full report.
Note:	: 1 .For a more detailed features description, please refer to the manufacturer’s specifications or the User's Manual. 2. Antenna gain and antenna type provided by manufacturer.
Note:	: For 5GHz (Port J1 – Chain 1) is the worst case.

Channel List							
802.11a/n/ac/ax (20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
149	5745	153	5765	157	5785	161	5805
165	5825	--	--	--	--	--	--
802.11n/ac/ax (40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	151	5755	159	5795
802.11ac/ax (80MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	155	5775

2.2. ACCESSORIES OF EUT

Description of Accessories	Shielded Type	Ferrite Core	Length
PoE Injector	-	-	-

2.3. ASSISTANT EQUIPMENT USED FOR TEST

Description of Assistant equipment	Manufacturer	Model number or Type	EMC Compliance	SN
Laptop	DELL	Latitude 3490	-	5M2Z1W2
DC Power Supply	JUNKE	JK1504K	-	20181126-43

3. EQUIPMENT'S LIST FOR ALL TEST ITEMS


No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal.Due Date
1	Spectrum Analyzer	Rohde and Schwarz	FSP	101163	2022/02/08	2024/02/07
2	Loop antenna	DAZE Beijing	ZN30900C	18052	2021/09/15	2023/09/14
3	Hi power horn antenna	DAZE Beijing	ZN30700	18012	2021/09/15	2023/09/14
4	Horn antenna	DAZE Beijing	ZN30702	18006	2021/09/15	2023/09/14
5	Horn antenna	DAZE Beijing	ZN30703	18005	2021/09/15	2023/09/14
6	Pre amplifier	KELIANDA	LNA-0009295	-	2023/01/13	2024/01/13
7	Pre amplifier	KELIANDA	CF-00218	-	2023/01/13	2024/01/13
8	Biconical Antenna	DAZE Beijing	ZN30505C	17038	2021/09/15	2023/09/14
9	EMI-RECEIVER	Schwarzbeck	FCKL	1528194	2023/01/13	2024/01/13
10	LISN	Kyoritsu	KNW-407	8-1789-5	2023/01/13	2024/01/13
11	Network-LISN	SCHWAR ZBECK	NNBM8125	81251314	2023/01/13	2024/01/13

12	Network-LISN	SCHWAR ZBECK	NNBM8125	81251315	2023/01/13	2024/01/13
13	PULSELIMITER	Rohde and Schwarz	ESH-Z3	100681	2023/01/13	2024/01/13
14	50Ω Coaxial Switch	DAIWA	1565157	-	2023/01/13	2024/01/13
15	50Ω Coaxial Switch	-	-	-	2023/01/13	2024/01/13
16	Wireless signal power meter	DARE!!	RPR3006W	RFSW19022	2023/01/13	2024/01/13
17	Signal Generator	KEYSIGHT	N5181A	512071	2023/01/13	2024/01/13

Report No.: AAEMT/RF/230322-05-01

18	RF Vector Signal Generator	Keysight	N5182B	512094	2023/01/13	2024/01/13
19	Spectrum Analyzer	R&S	FSV-40N	101385	2023/01/13	2024/01/13
20	Radio Communication Tester	R&S	CMW 500	124589	2021/09/15	2023/09/14
21	Signal Generator	R&S	SMP02	837017/004 836593/005	2021/09/15	2023/09/14 2023/01/13
22	DC Power Supply	Guanker	JK15040K	TNC/ET/C/ 0	2023/01/13	2024/01/13
23	Pro. Temp & Humi. Chamber	MENTEK	MHP-150-1C	MAA08112 5	2023/01/13	2024/01/13
24	Attenuators	AGILENT	8494B	-	-	-
25	Attenuators	AGILENT	8495B	-	-	-

3.1. BLOCK DIAGRAM OF EUT CONFIGURATION FOR TEST

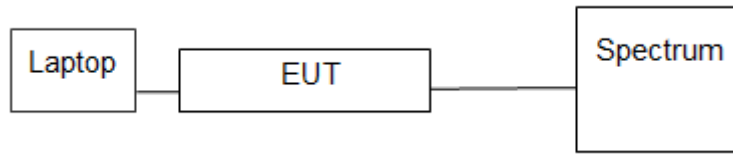

3.2. TEST ENVIRONMENT CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa


3.3. MEASUREMENT UNCERTAINTY

No.	Item	Uncertainty
1	Conducted Emission Test	2.70dB
2	Radiated Emission Test	3.09dB
3	RF power, conducted	2.46dB
4	RF power density, conducted	2.24dB
5	Spurious emissions, conducted	2.71dB
6	All emissions, radiated(<1G)	3.08dB
7	All emissions, radiated(>1G)	3.09dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4. POWER SPECTRAL DENSITY TEST

4.1. BLOCK DIAGRAM OF TEST SETUP

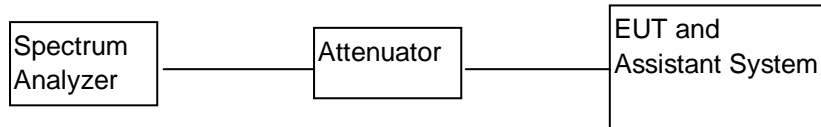

4.2. APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omni directional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi..

4.3. TEST PROCEDURE

(For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500$ KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1$ MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100$ KHZ is available on nearly all spectrum analyzers.

4.4. TEST RESULT:


CH. No.	Frequency	power density (dBm/MHz)	Limit (dBm/MHz)	Result
TX 802.11a Mode				
CH36	5180	5.39	6	Pass
CH44	5220	3.25	6	Pass
CH48	5240	5.14	6	Pass
TX 802.11n20 Mode				
CH36	5180	4.48	6	Pass
CH44	5220	4.84	6	Pass
CH48	5240	5.65	6	Pass
TX 802.11n40 Mode				
CH38	5190	1.08	6	Pass
CH46	5230	2.00	6	Pass
TX 802.11ac20 Mode				
CH36	5180	4.91	6	Pass
CH44	5220	3.99	6	Pass
CH48	5240	5.71	6	Pass
TX 802.11ac40 Mode				
CH38	5190	1.07	6	Pass
CH46	5230	1.88	6	Pass
TX 802.11ac80 Mode				
CH42	5210	0.84	6	Pass
TX 802.11ax20 Mode				
CH36	5180	5.24	6	Pass
CH44	5220	4.59	6	Pass
CH48	5240	4.04	6	Pass
TX 802.11ax40 Mode				
CH38	5190	1.00	6	Pass
CH46	5230	0.97	6	Pass
TX 802.11ax80 Mode				
CH42	5210	0.39	6	Pass

TEST RESULT


CH. No.	Frequency	Limit (dBm/500KHz)	Limit (dBm/500KHz)	Result
TX 802.11a Mode				
CH 149	5745	6.56	19	Pass
CH 157	5785	7.08	19	Pass
CH 165	5825	6.78	19	Pass
TX 802.11n20 Mode				
CH 149	5745	8.33	19	Pass
CH 157	5785	8.16	19	Pass
CH 165	5825	7.52	19	Pass
TX 802.11n40 Mode				
CH151	5755	5.54	19	Pass
CH159	5795	5.13	19	Pass
TX 802.11ac20 Mode				
CH 149	5745	8.07	19	Pass
CH 157	5785	9.34	19	Pass
CH 165	5825	8.34	19	Pass
TX 802.11ac40 Mode				
CH151	5755	5.72	19	Pass
CH159	5795	4.81	19	Pass
TX 802.11ac80 Mode				
CH155	5775	2.81	19	Pass
TX 802.11ax20 Mode				
CH 149	5745	8.66	19	Pass
CH 157	5785	9.62	19	Pass
CH 165	5825	10.01	19	Pass
TX 802.11ax40 Mode				
CH151	5755	6.68	19	Pass
CH159	5795	6.27	19	Pass
TX 802.11ax80 Mode				
CH155	5775	2.76	19	Pass

Test plots as followed

802.11a
Channel: 36

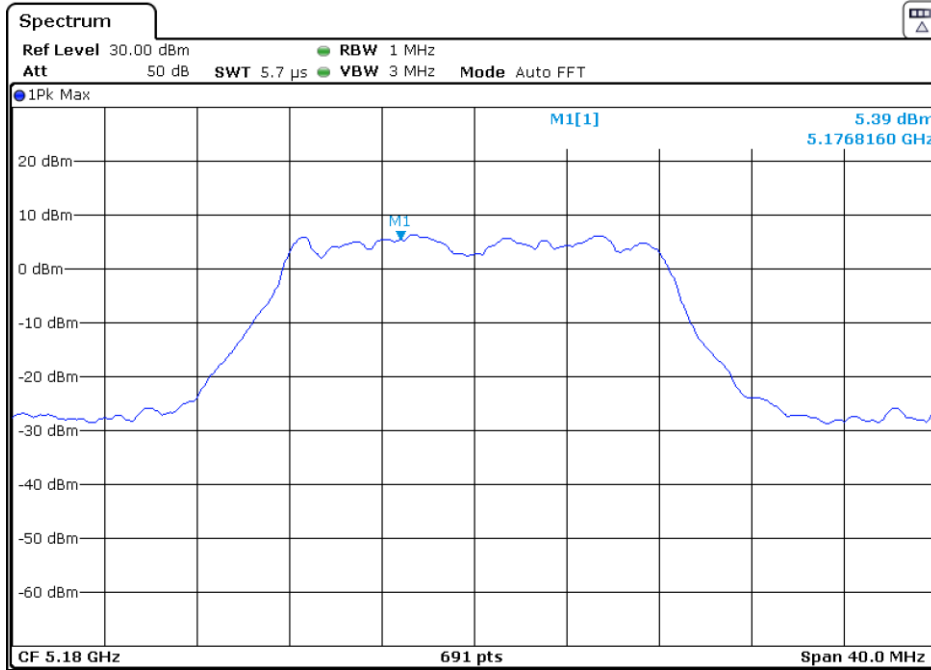


Channel: 44

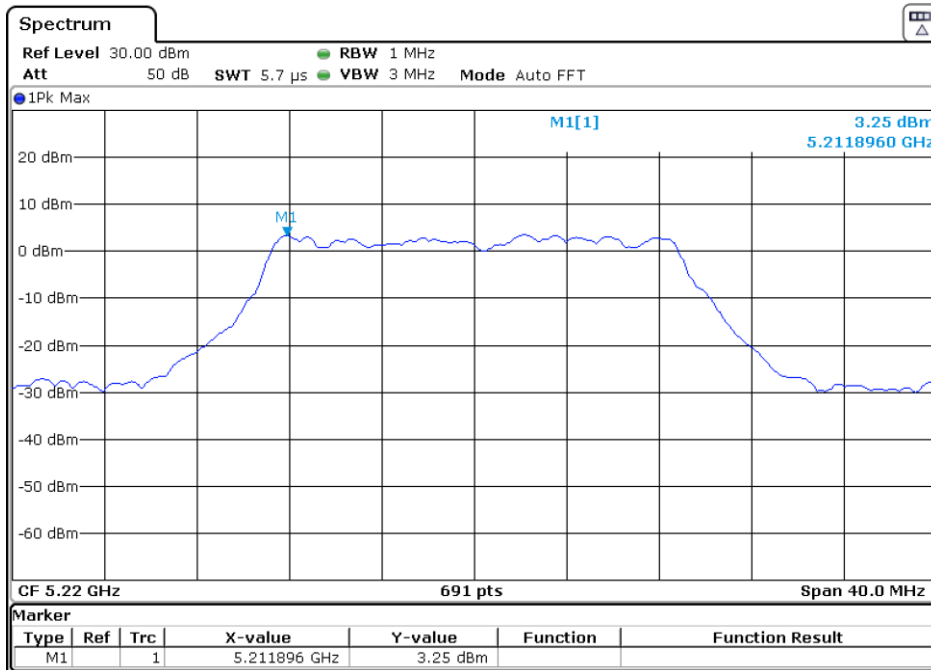


Report No.: AAEMT/RF/230322-05-01

Channel: 48

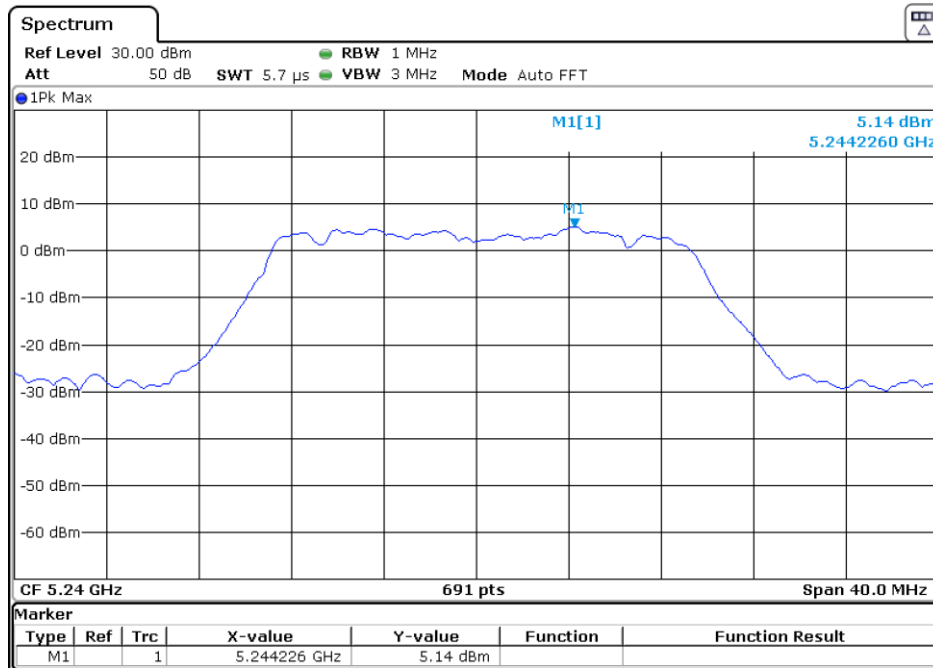


Report No.: AAEMT/RF/230322-05-01

802.11n20
Channel: 36

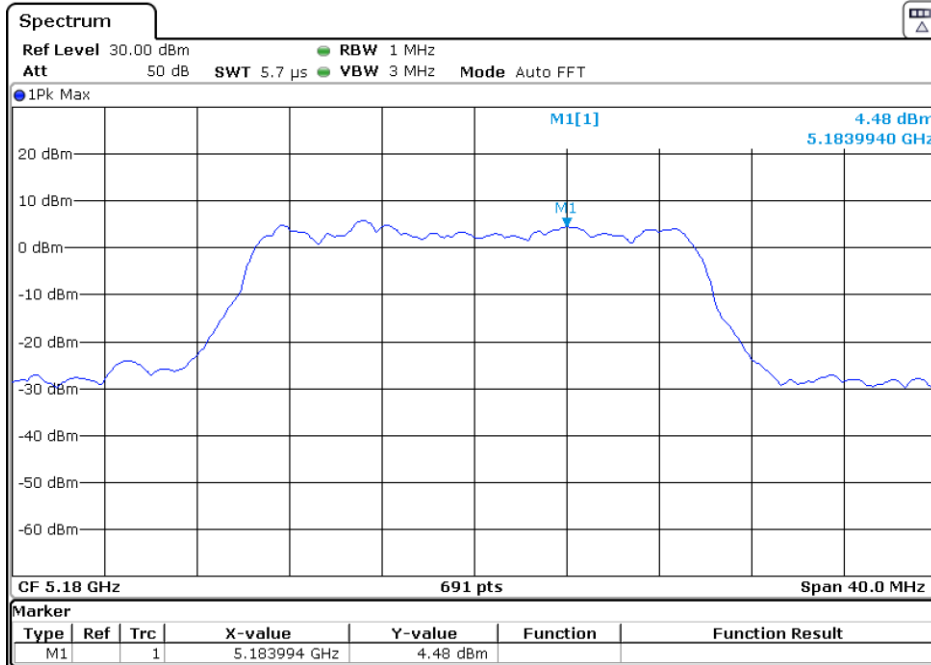


Channel: 44

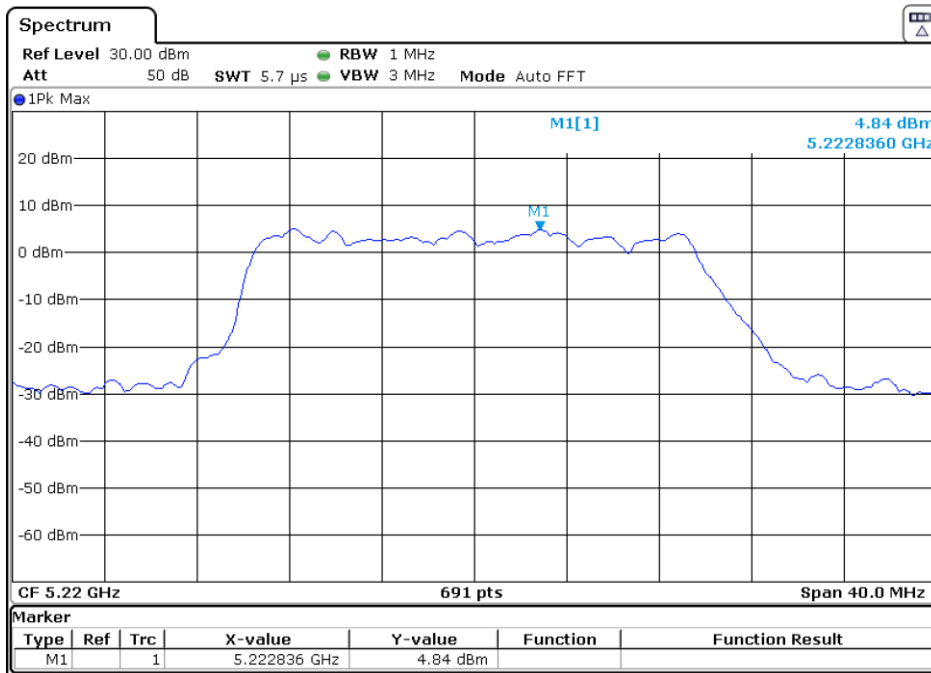


Report No.: AAEMT/RF/230322-05-01

Channel: 48

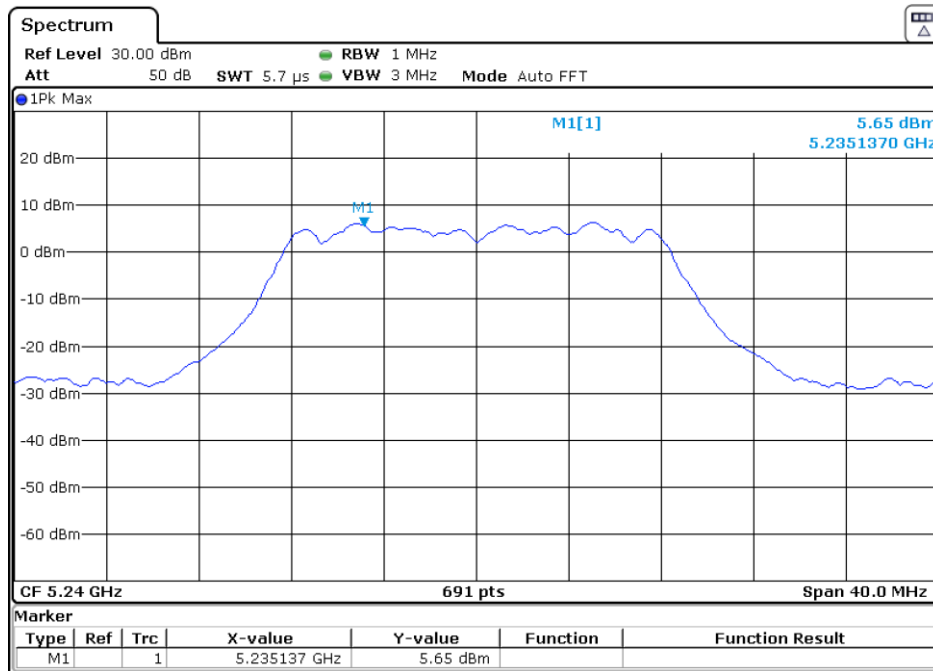


Report No.: AAEMT/RF/230322-05-01

802.11n40
Channel: 38

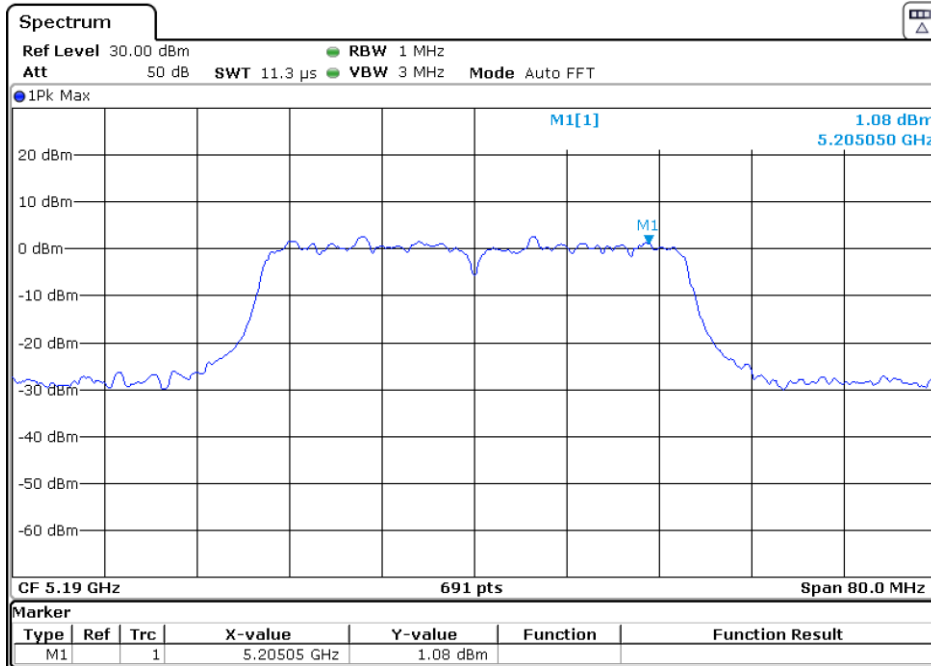


Channel: 46

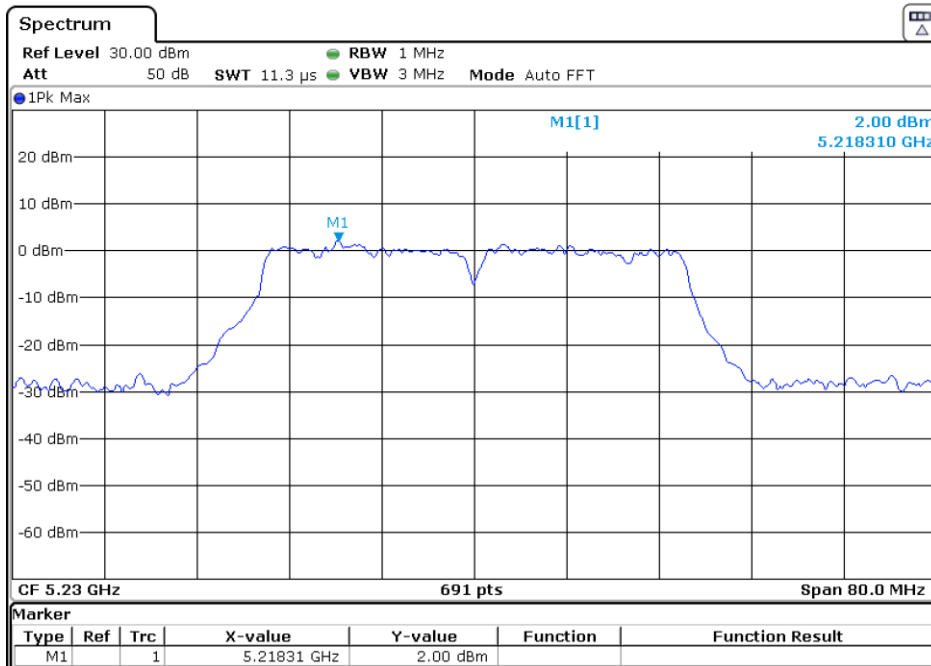


Report No.: AAEMT/RF/230322-05-01

802.11ac20
Channel: 36

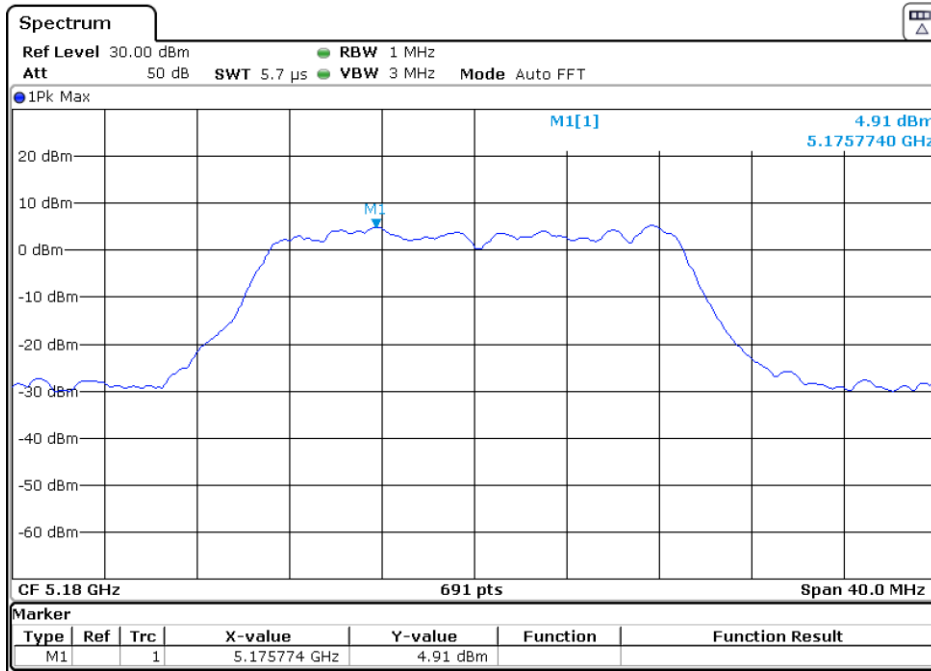


Channel: 44

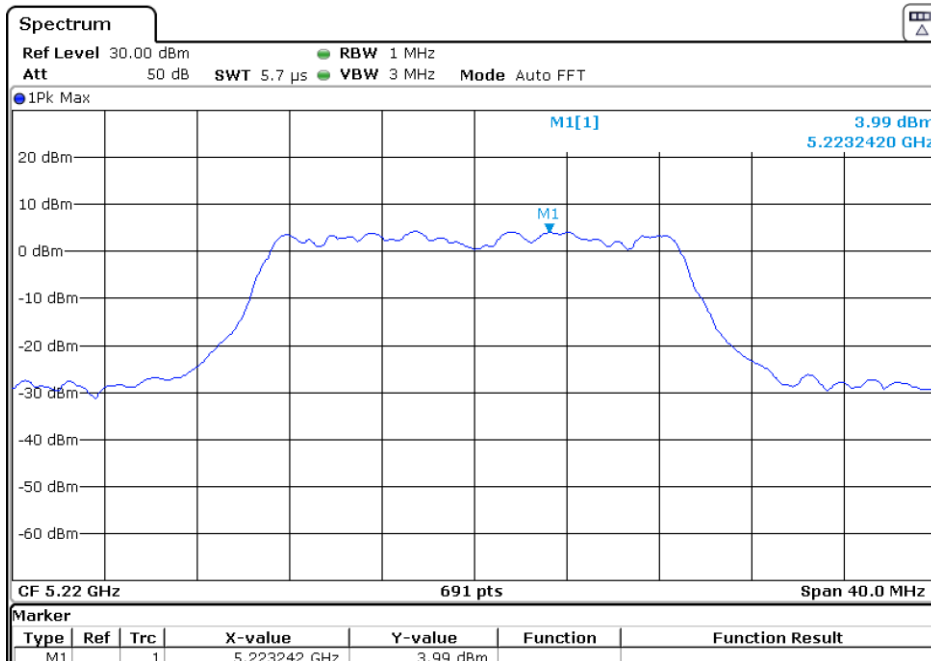


Report No.: AAEMT/RF/230322-05-01

Channel: 48

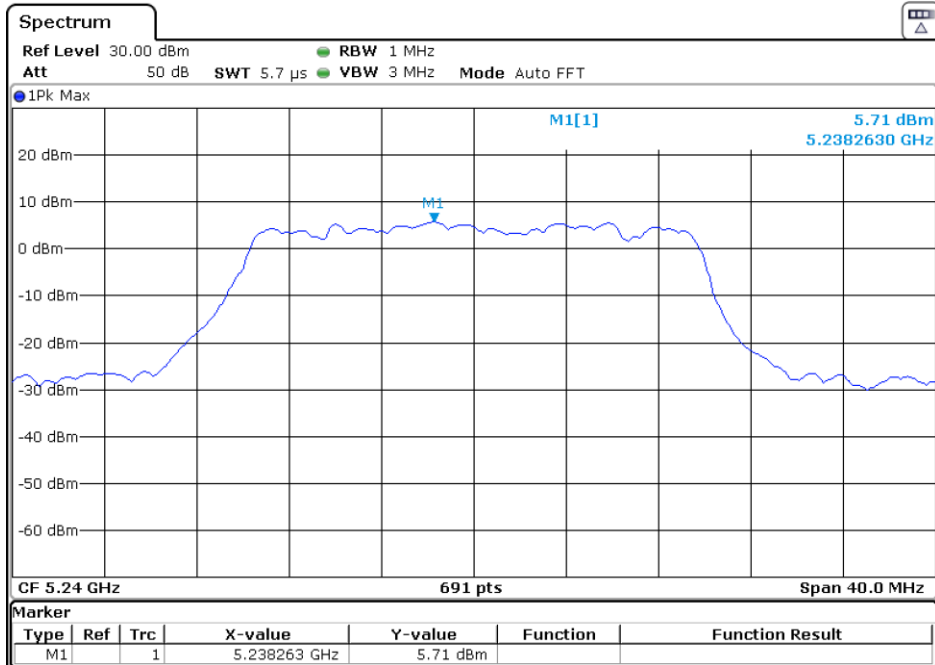


802.11ac40
Channel: 38

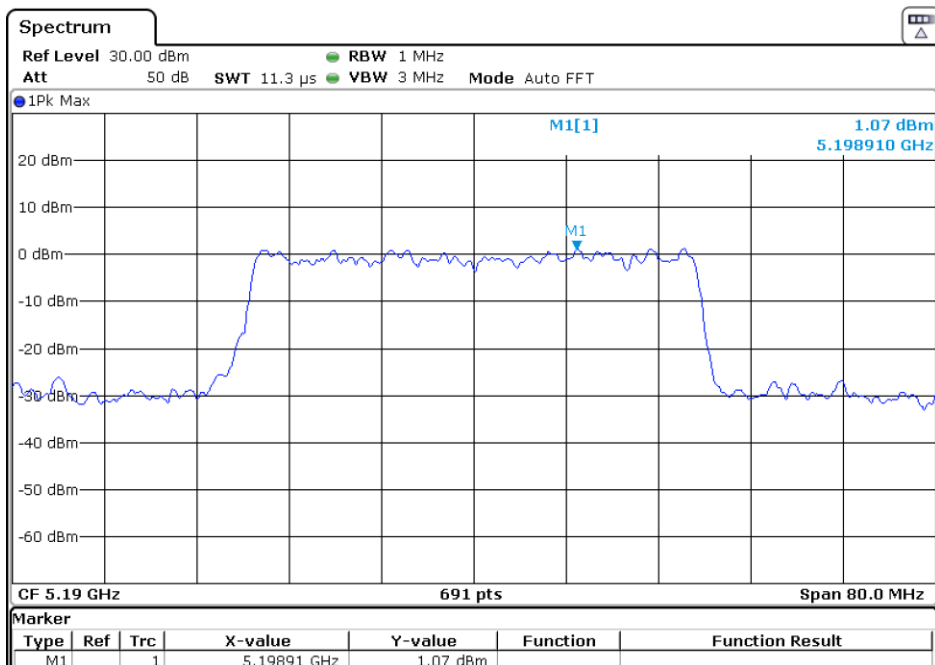


Report No.: AAEMT/RF/230322-05-01


Channel: 46

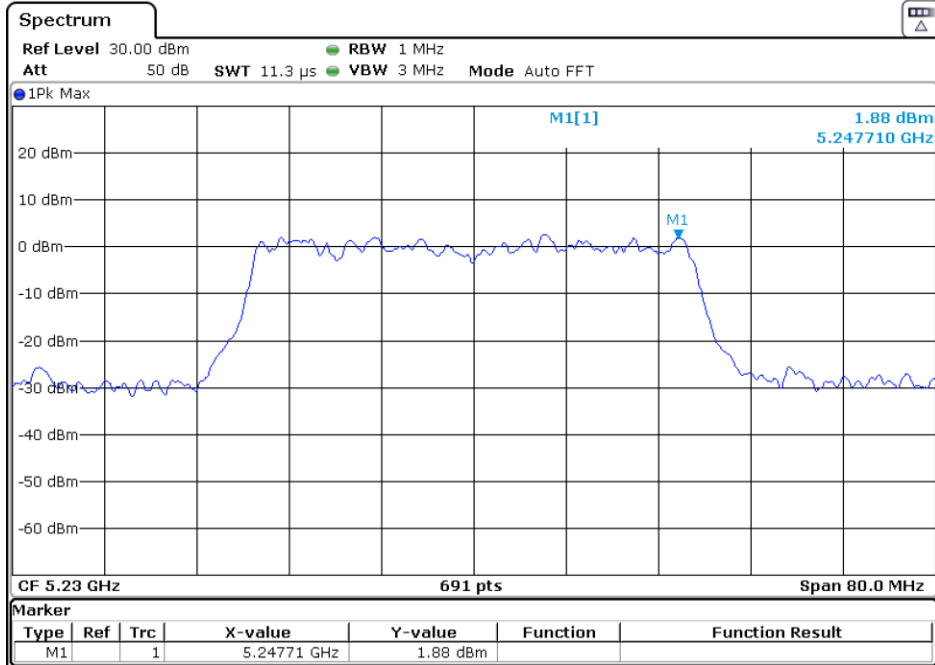


802.11ac80
 Channel: 42

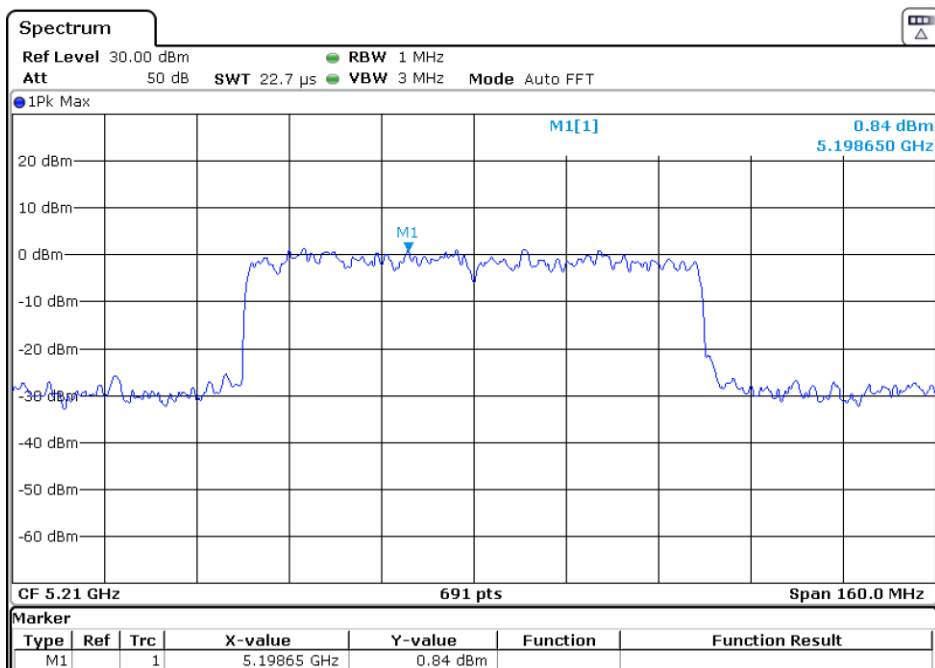

802.11ax20
Channel: 36

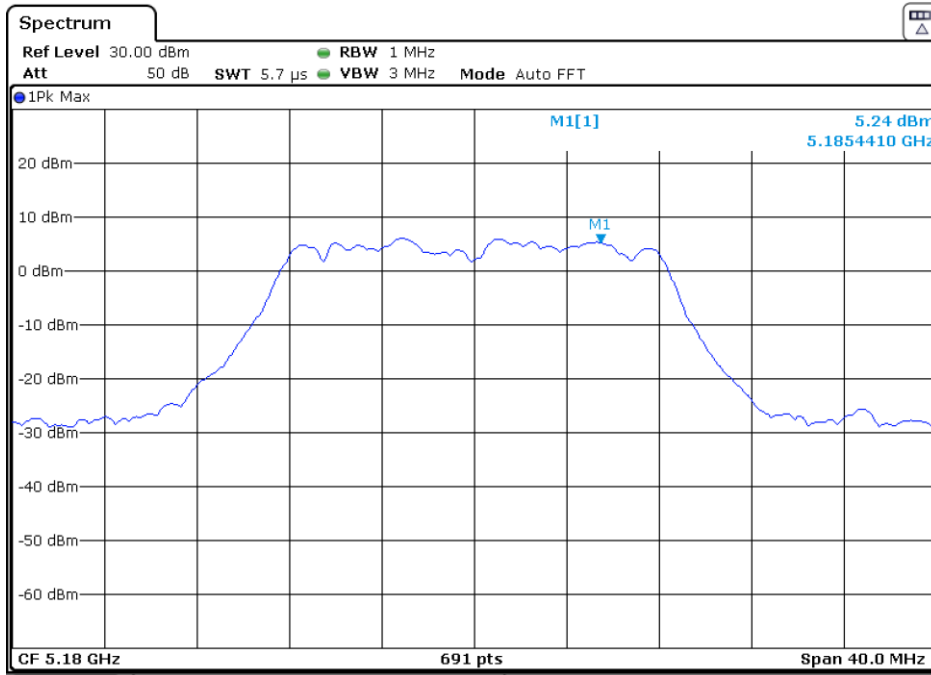


Channel: 44

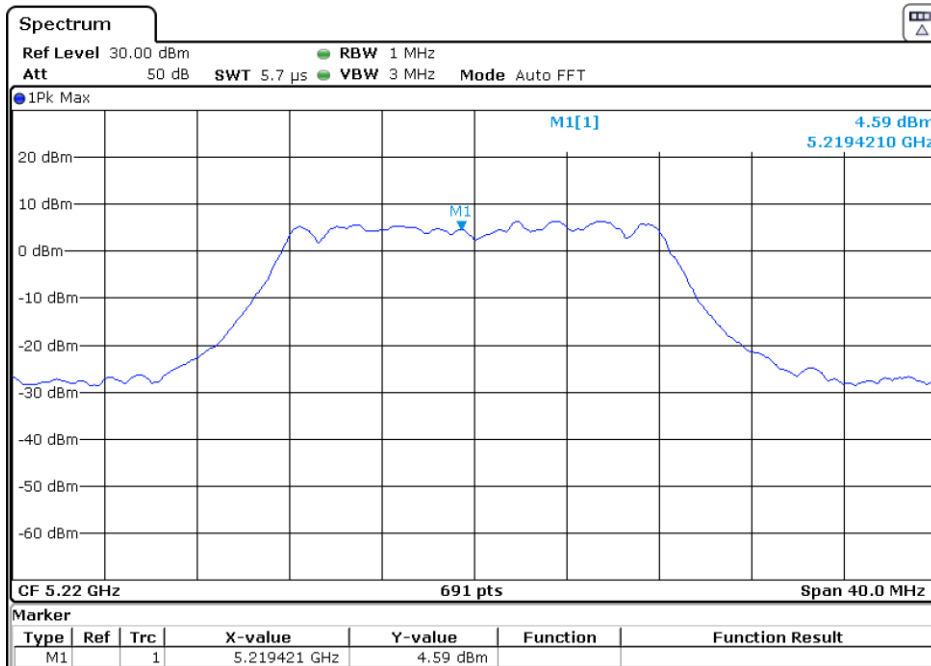

Report No.: AAEMT/RF/230322-05-01


Channel: 48

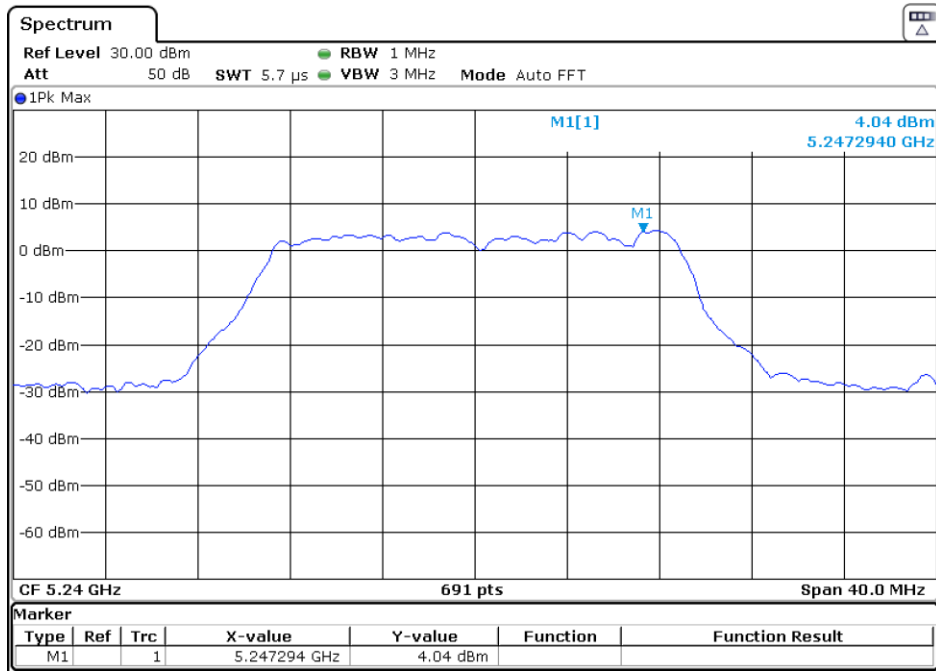


Report No.: AAEMT/RF/230322-05-01

802.11ax40

Channel: 38

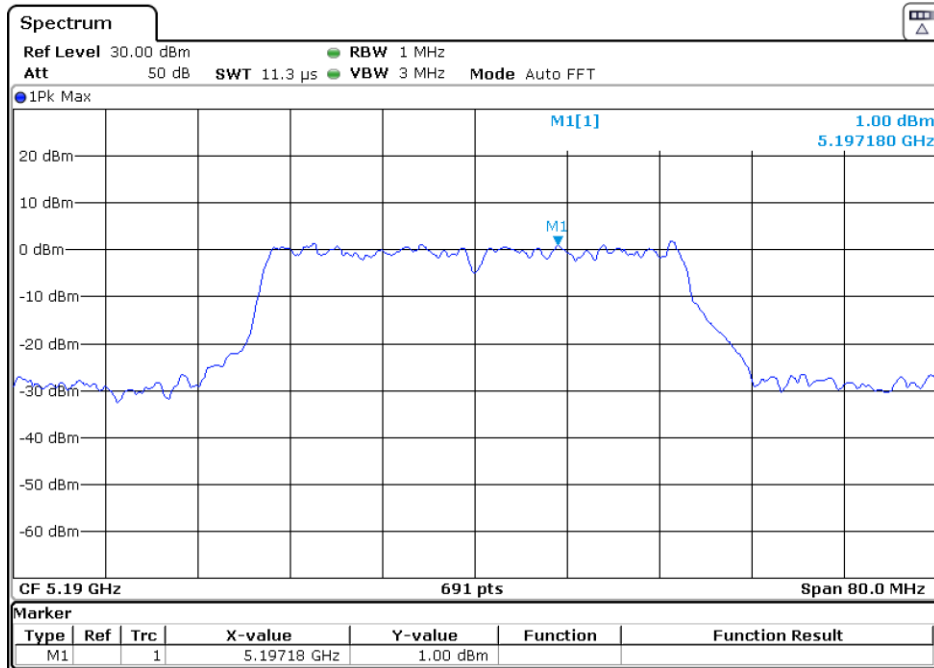


Channel: 46

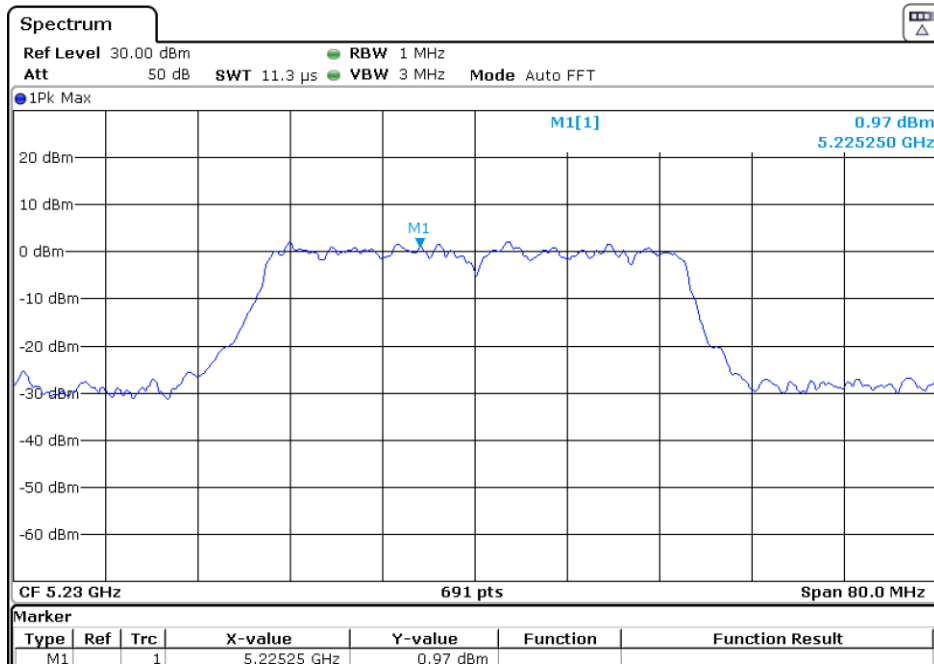


Report No.: AAEMT/RF/230322-05-01

802.11ax80
Channel: 42

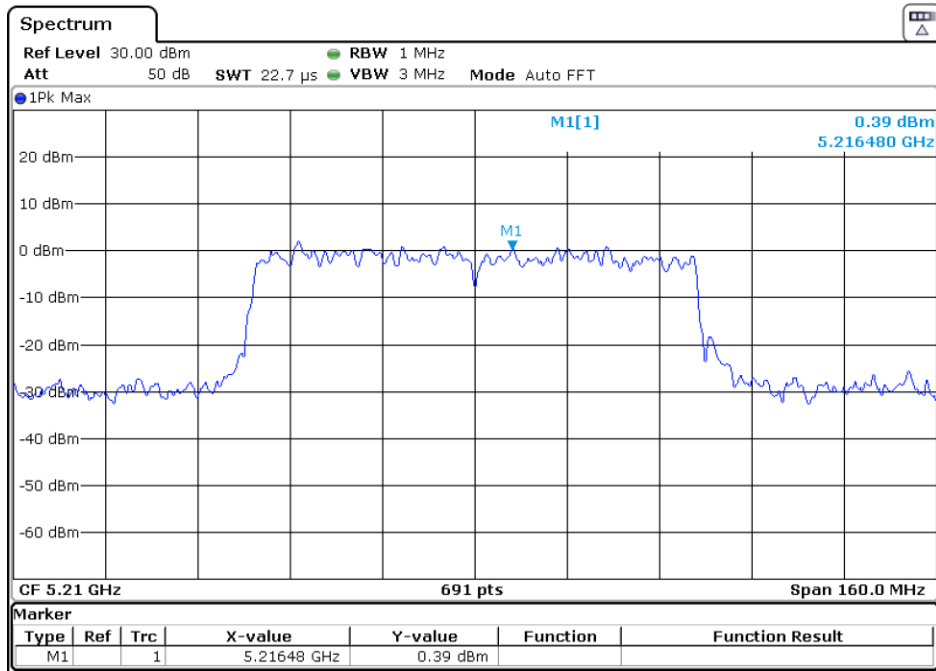


Test plots as followed:

802.11a
Channel: 149

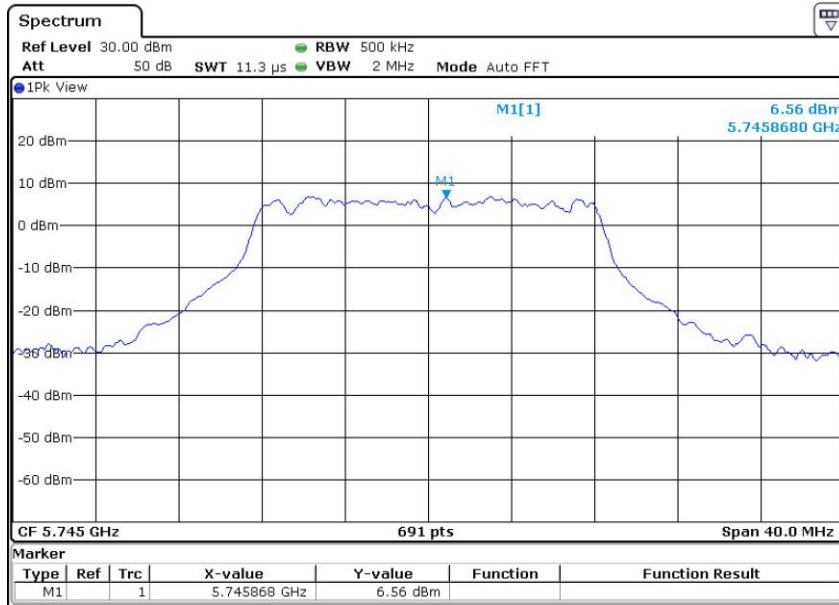


Channel: 157

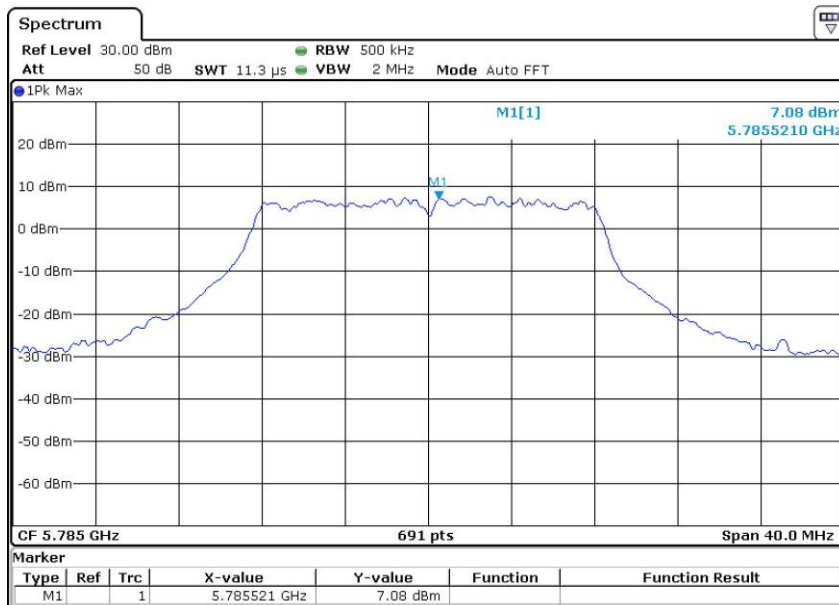


Report No.: AAEMT/RF/230322-05-01

Channel: 165

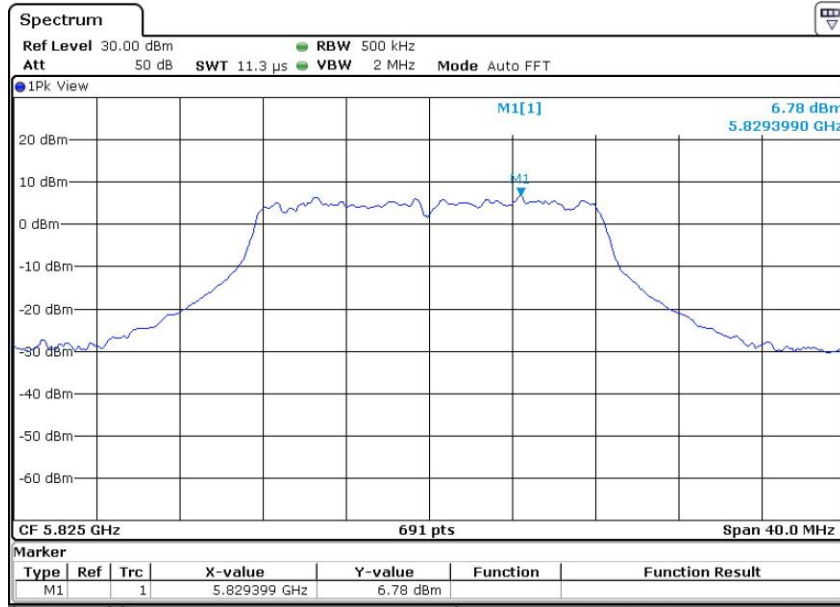


Report No.: AAEMT/RF/230322-05-01

802.11n20
Channel: 149

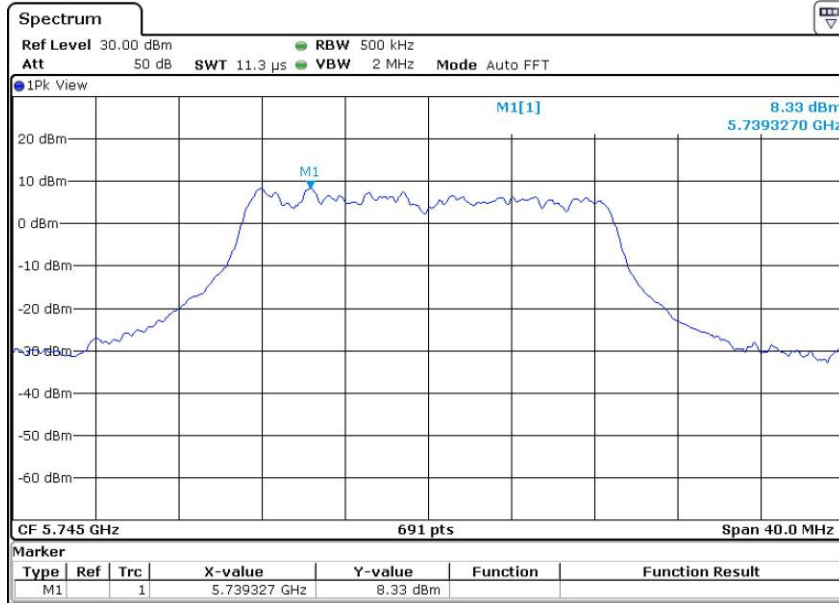


Channel: 157

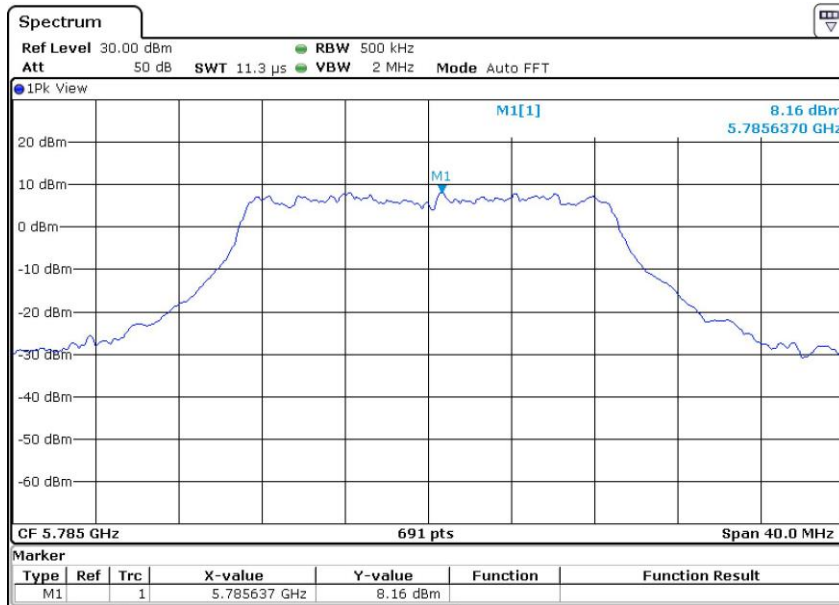


Report No.: AAEMT/RF/230322-05-01

Channel: 165

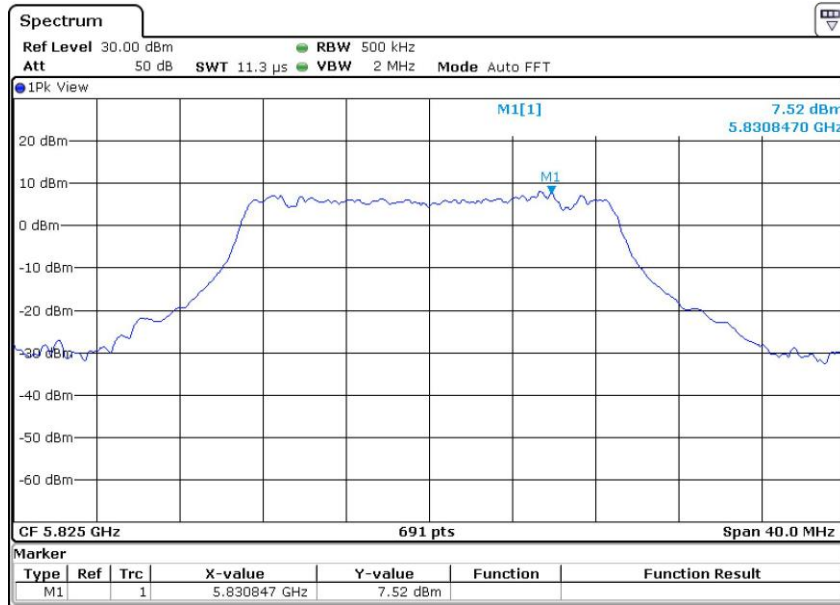


Report No.: AAEMT/RF/230322-05-01

802.11n40
Channel: 151

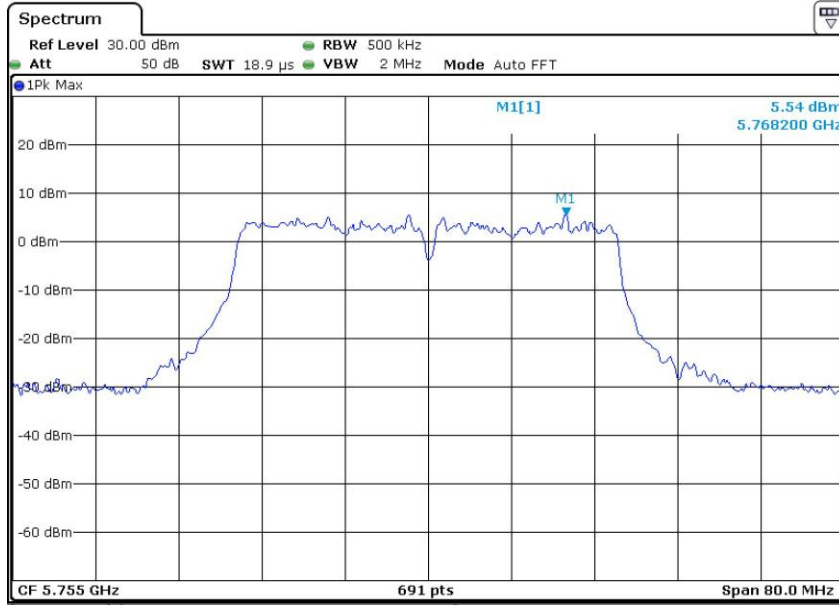


Channel: 159

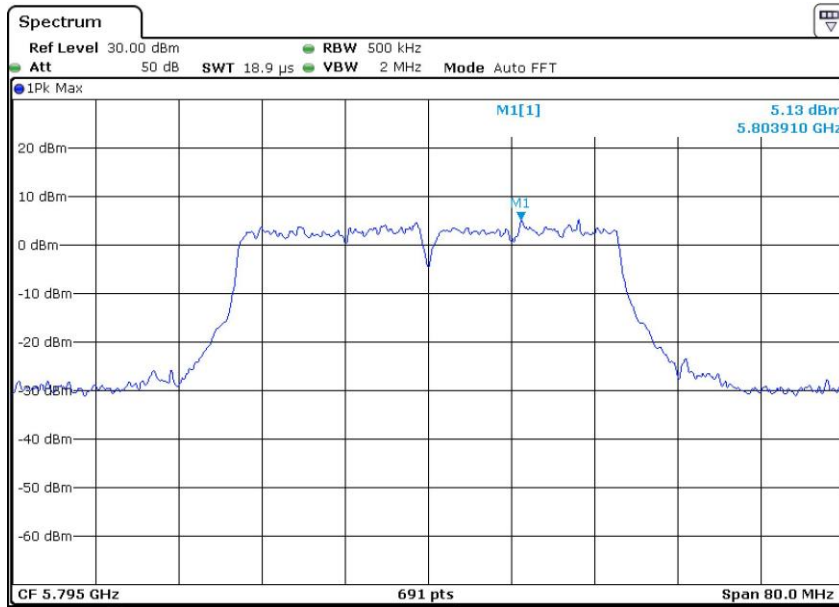


Report No.: AAEMT/RF/230322-05-01

802.11ac20
Channel: 149

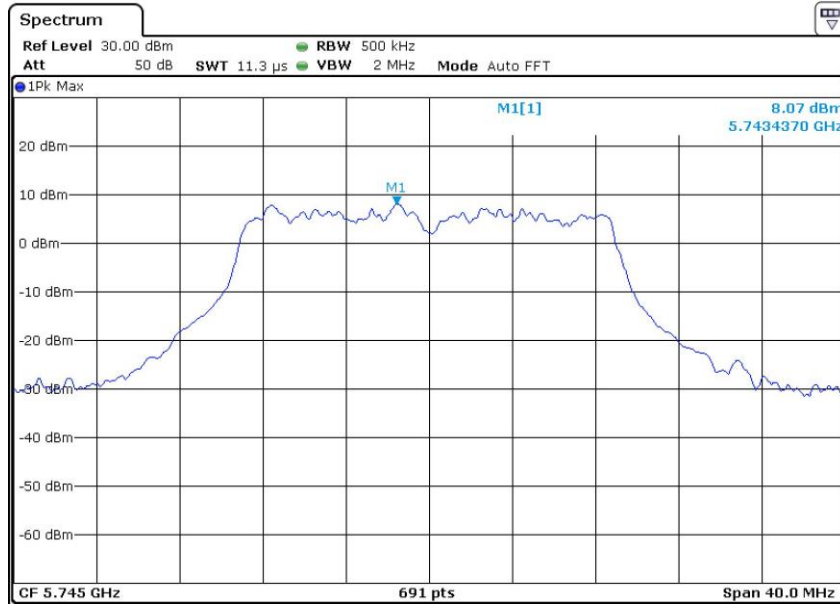


Channel: 157

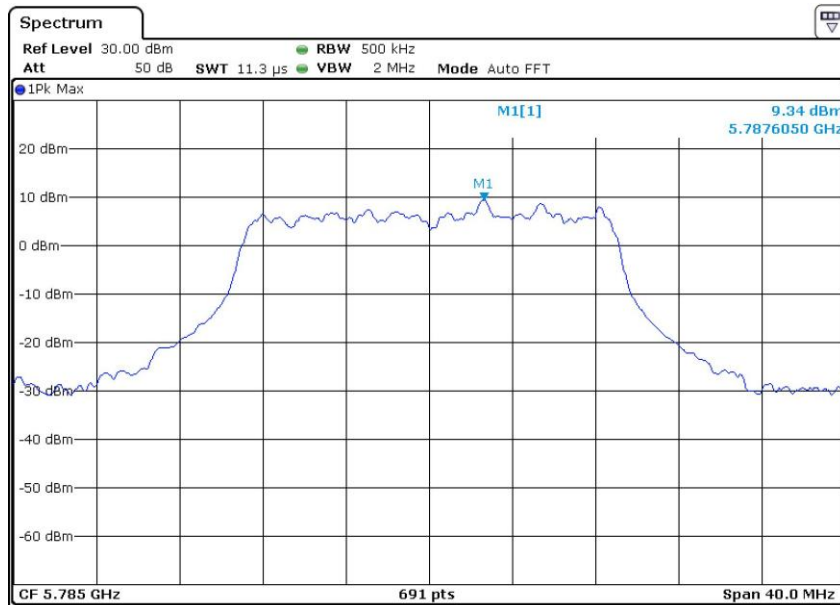


Report No.: AAEMT/RF/230322-05-01

Channel: 165

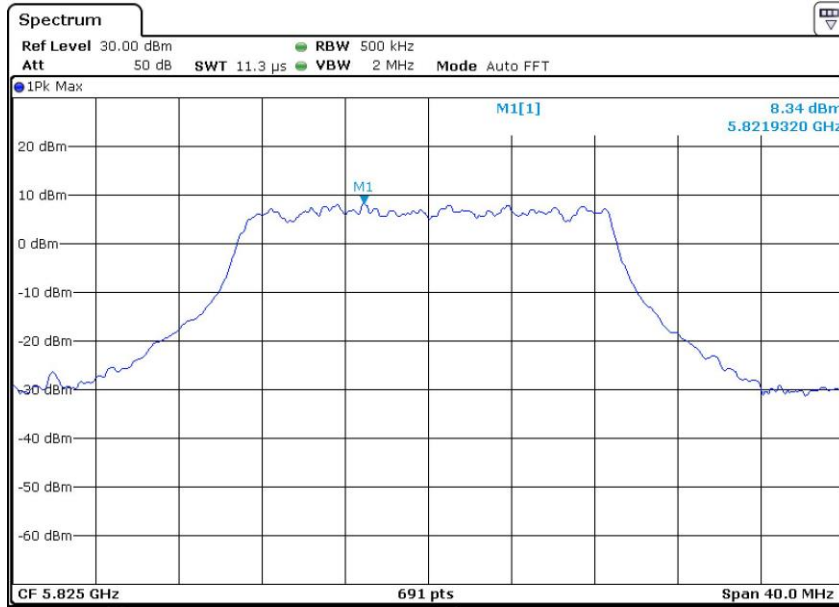


802.11ac40

Channel: 151

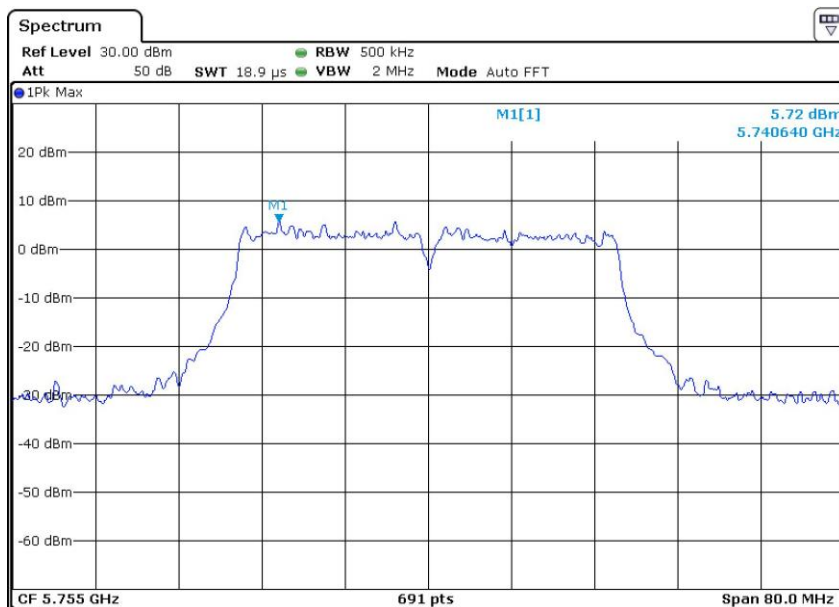


Report No.: AAEMT/RF/230322-05-01

Channel: 159

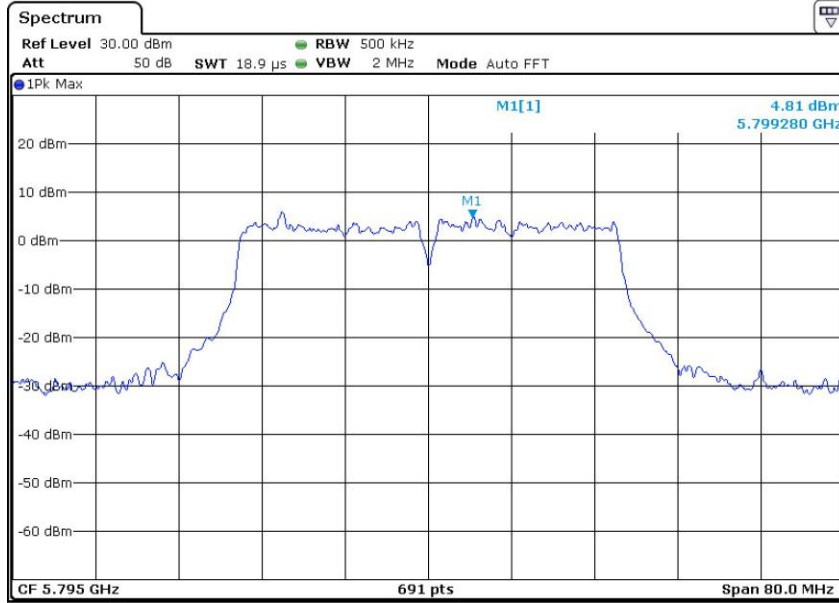


802.11ac80

Channel: 155

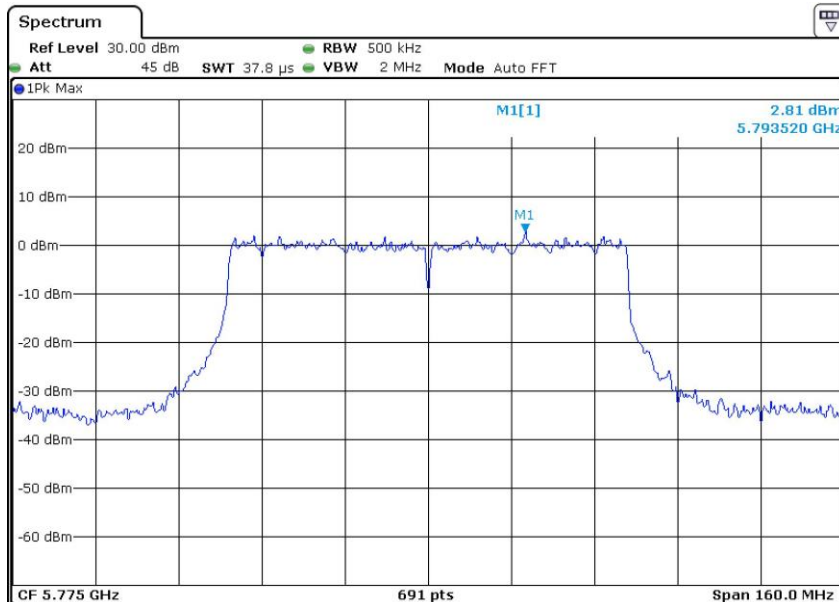


Report No.: AAEMT/RF/230322-05-01

802.11ax20
Channel: 149

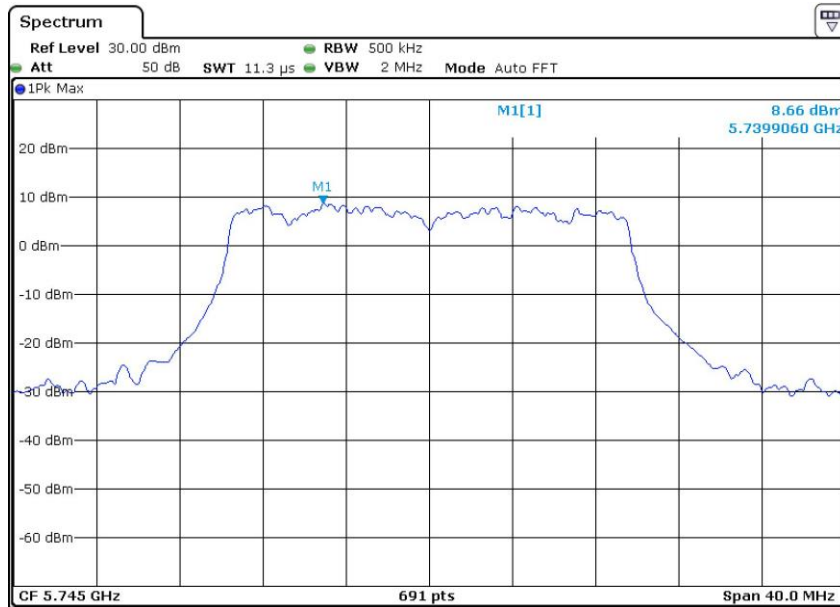


Channel: 157

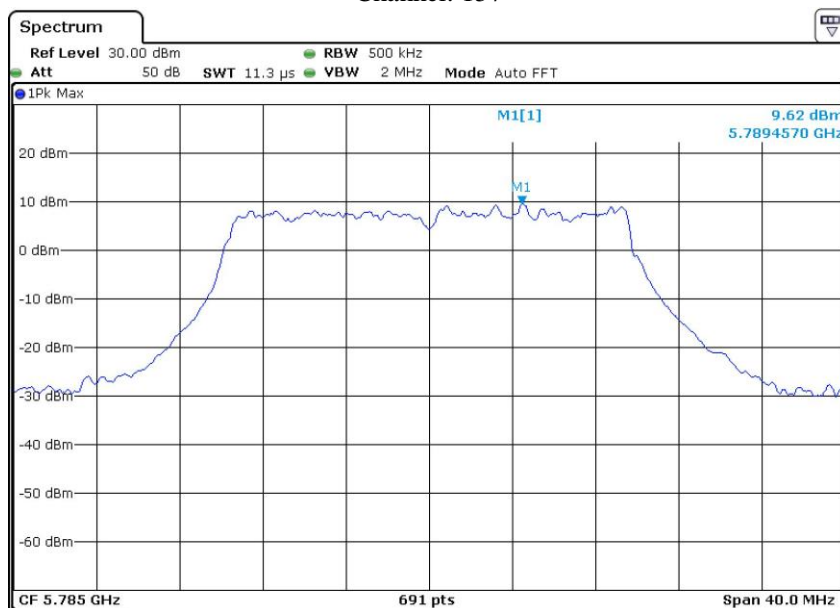


Report No.: AAEMT/RF/230322-05-01

Channel: 165

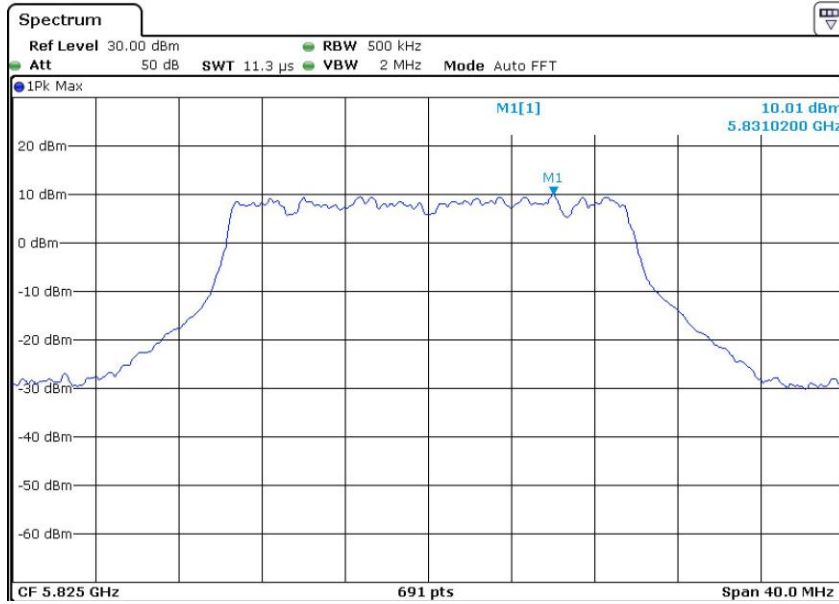


802.11ax40
 Channel: 151

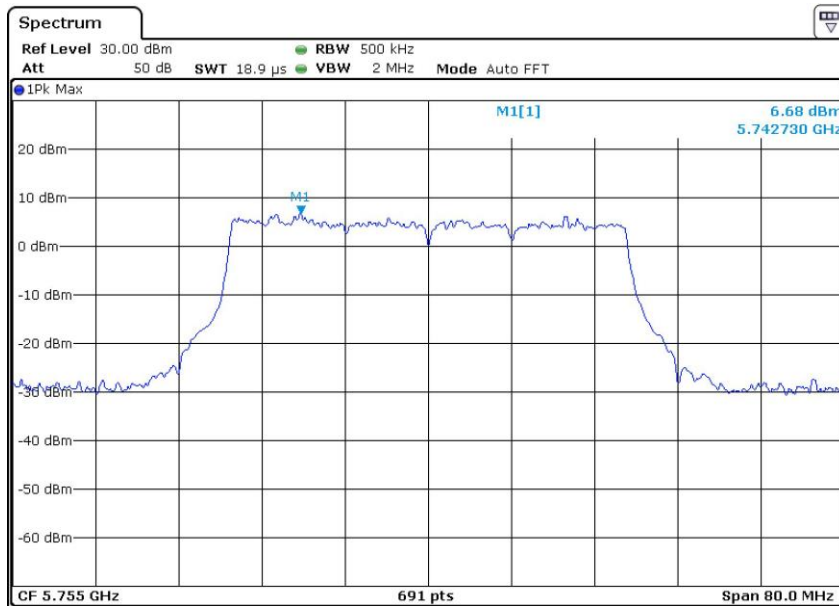


Report No.: AAEMT/RF/230322-05-01

Channel: 159

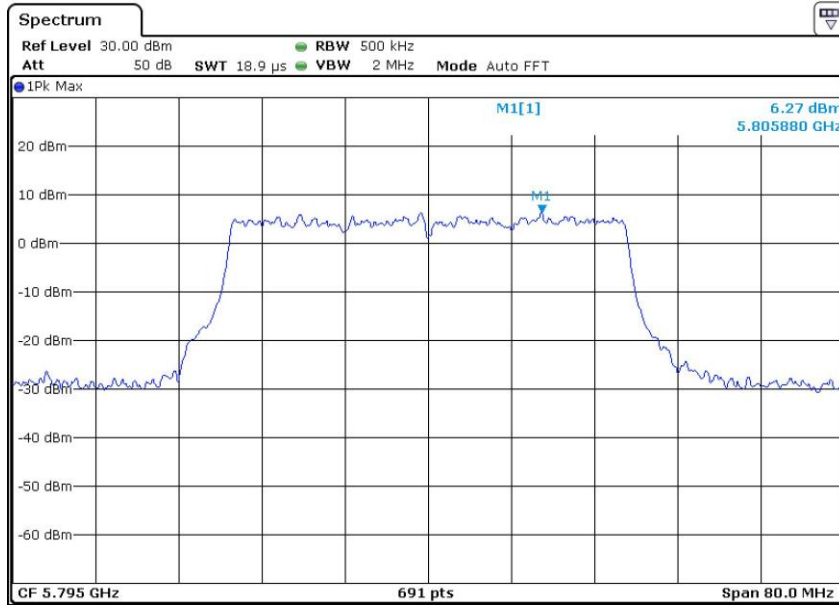


802.11ax80

Channel: 155

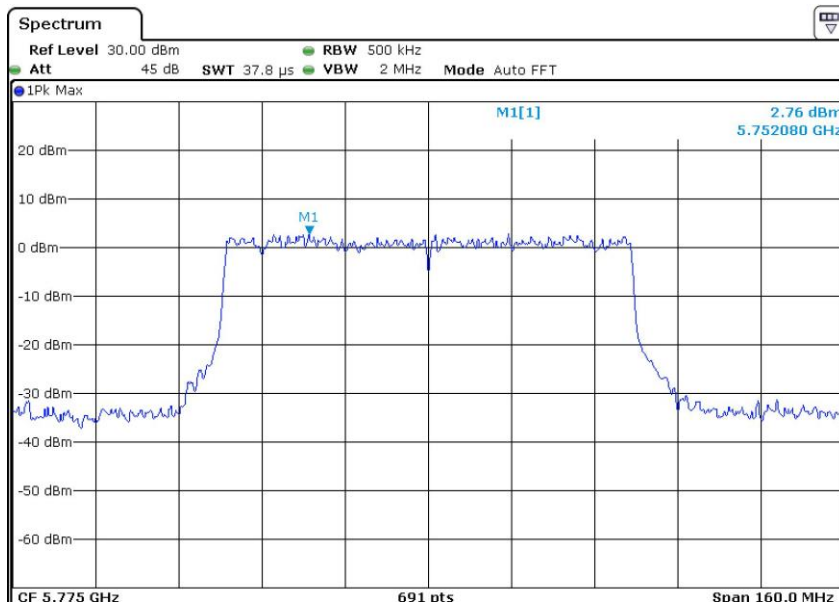

5. 26 dB & 99% Emission Bandwidth

5.1. BLOCK DIAGRAM OF TEST SETUP

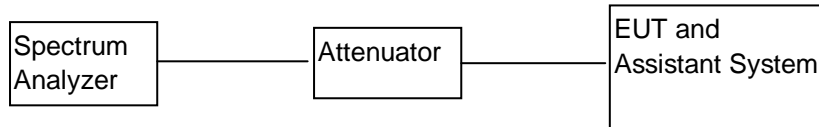

5.2. APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.3. TEST PROCEDURE

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW $\geq 3 \cdot$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.4. TEST RESULT


CH. No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)				99% Occupied Bandwidth (MHz)			
		802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11ax (HE20)	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11ax (HE20)
36	5180.00	21.302	20.376	20.434	25.181	16.584	17.539	17.583	17.626
44	5220.00	21.418	20.203	20.434	21.939	16.541	17.539	17.583	17.626
48	5240.00	20.724	20.087	20.029	21.708	16.497	17.539	17.626	17.626
CH. No.	Frequency (MHz)	6dB Occupied Bandwidth (MHz)				99% Occupied Bandwidth (MHz)			
		802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11ax (HE20)	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11ax (HE20)
149	5745.00	15.166	15.166	13.951	17.192	16.975	17.670	17.713	17.626
157	5785.00	15.166	15.166	15.109	16.324	19.710	18.147	18.191	17.670
165	5825.00	15.166	15.166	15.166	16.324	19.146	18.147	18.234	17.756

CH. No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)			99% Occupied Bandwidth (MHz)		
		802.11n (HT40)	802.11ac (VHT40)	802.11ax (HE40)	802.11n (HT40)	802.11ac (VHT40)	802.11ax (HE40)
38	5190.00	40.060	39.830	47.240	36.034	35.947	36.208
46	5230.00	39.360	39.480	44.340	35.947	35.861	36.121
CH. No.	Frequency (MHz)	6dB Occupied Bandwidth (MHz)			99% Occupied Bandwidth (MHz)		
		802.11n (HT40)	802.11ac (VHT40)	802.11ax (HE40)	802.11n (HT40)	802.11ac (VHT40)	802.11ax (HE40)
151	5755.00	35.08	35.02	31.310	36.382	36.382	36.208
159	5795.00	34.99	32.56	31.310	39.334	38.900	36.382


CH. No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)		99% Occupied Bandwidth (MHz)	
		802.11ac (VHT80)	802.11ax (HE80)	802.11ac (VHT80)	802.11ax (HE80)
42	5210.00	83.590	92.620	75.716	76.584
CH. No.	Frequency (MHz)	6dB Occupied Bandwidth (MHz)		99% Occupied Bandwidth (MHz)	
		802.11ac (VHT80)	802.11ax (HE80)	802.11ac (VHT80)	802.11ax (HE80)
155	5775.00	75.31	74.150	76.410	77.105

Test plots as followed:

26dB BW 802.11a
Channel: 36

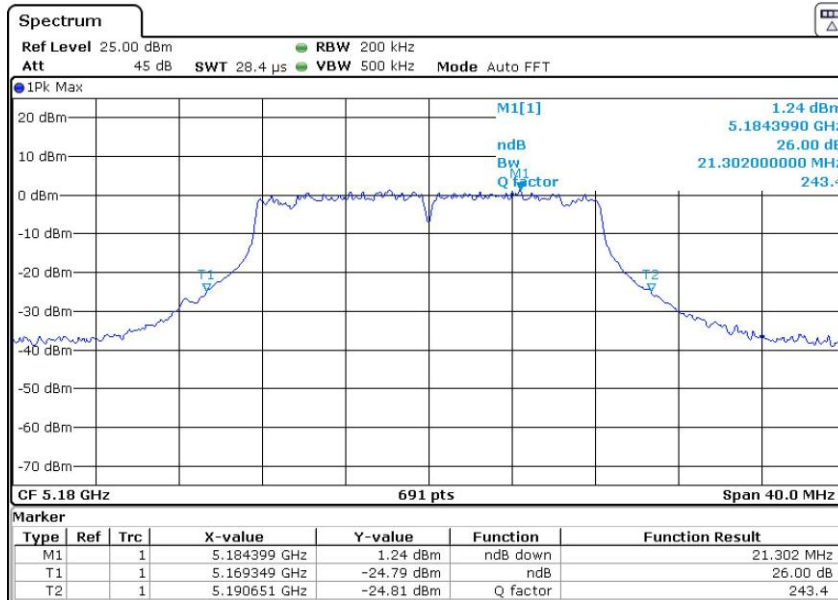


Channel: 44

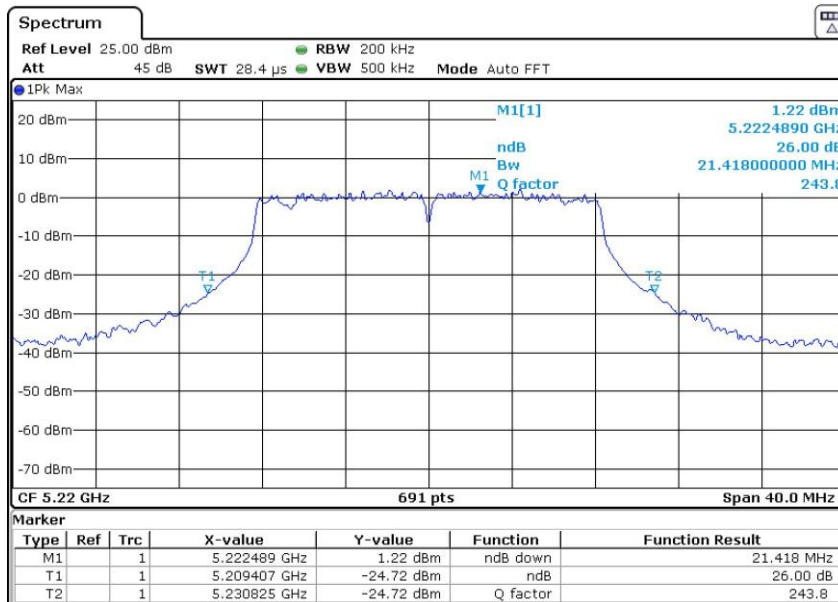


Report No.: AAEMT/RF/230322-05-01

Channel: 48

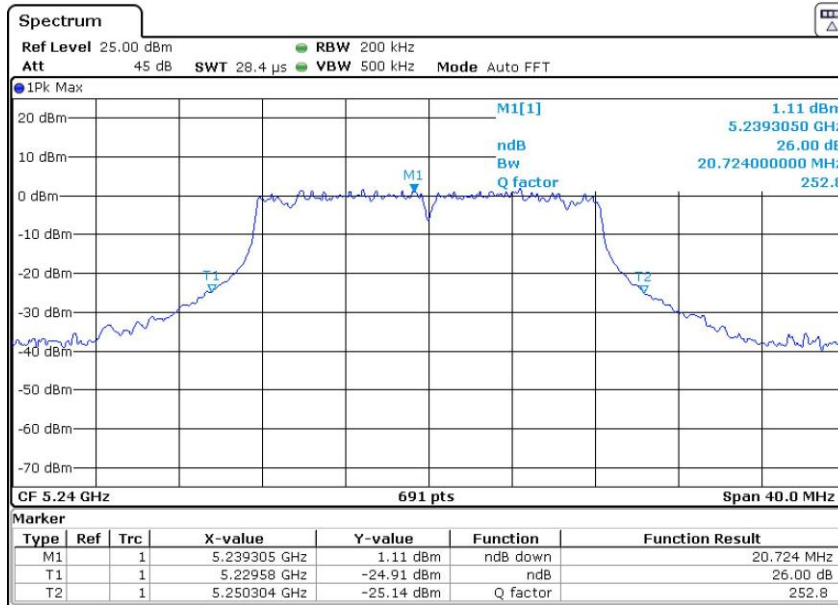


Report No.: AAEMT/RF/230322-05-01

26dB BW 802.11n20
Channel: 36

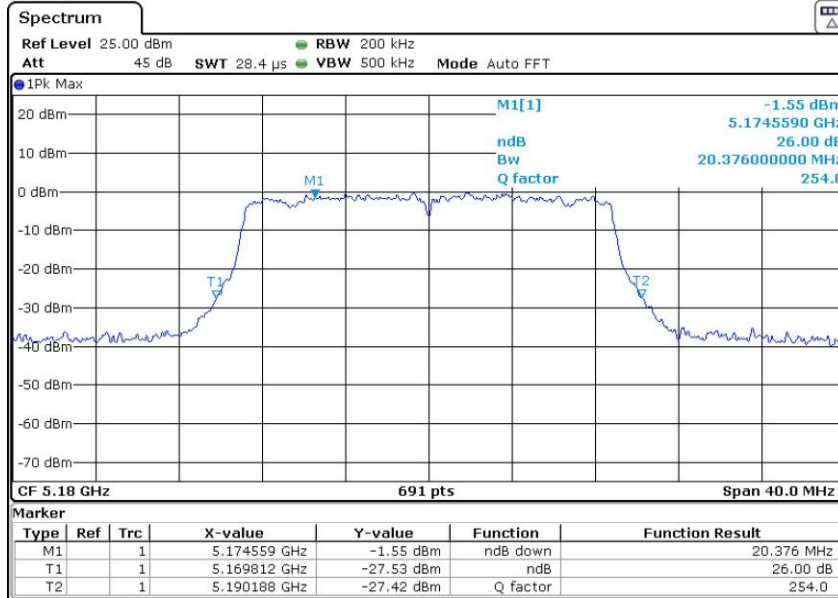


Channel: 44

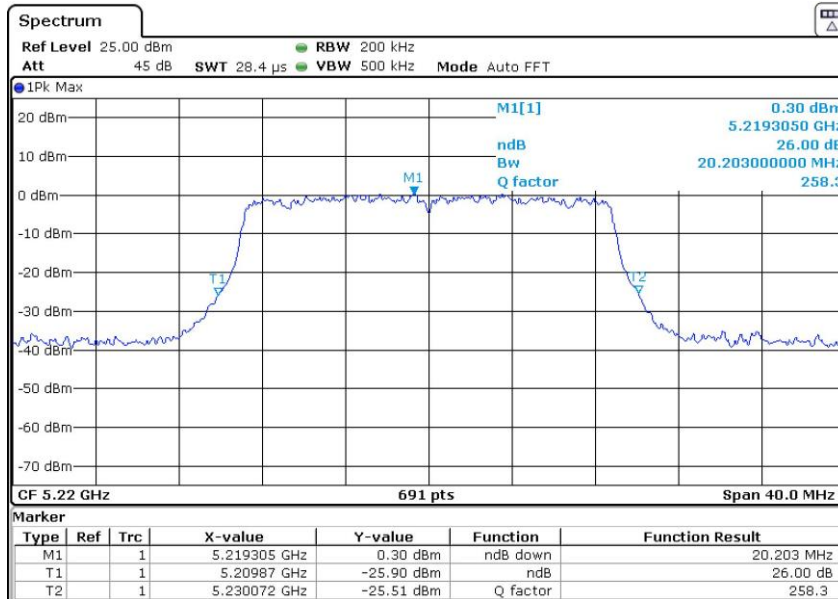


Report No.: AAEMT/RF/230322-05-01

Channel: 48

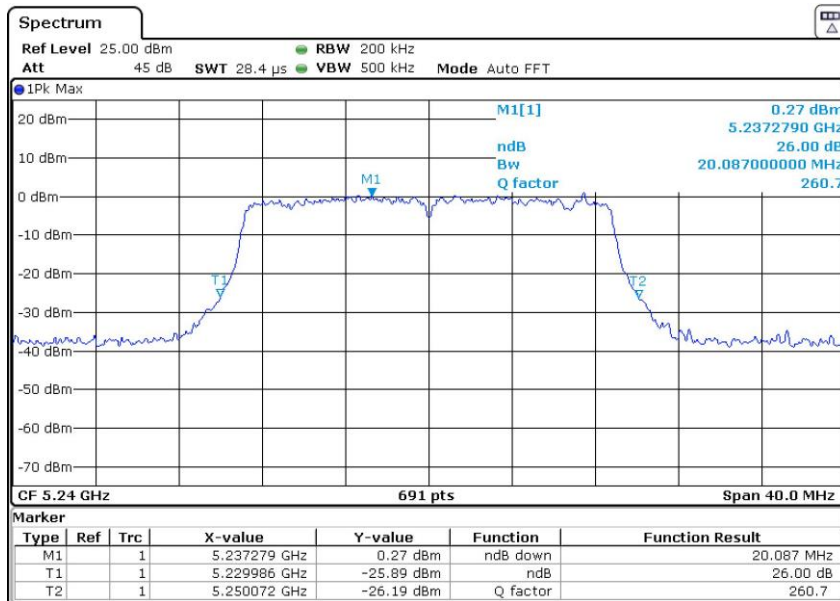


Report No.: AAEMT/RF/230322-05-01

26dB BW 802.11ac20
Channel: 36

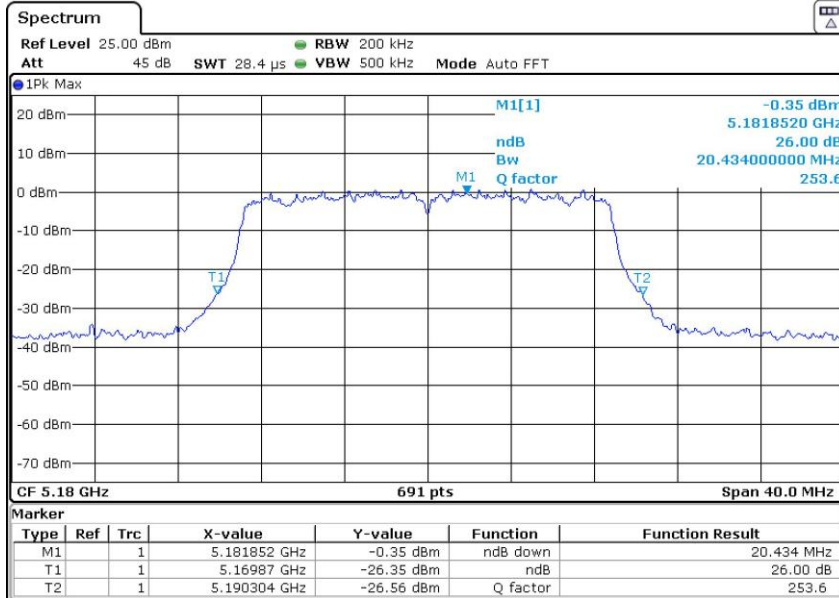


Channel: 44

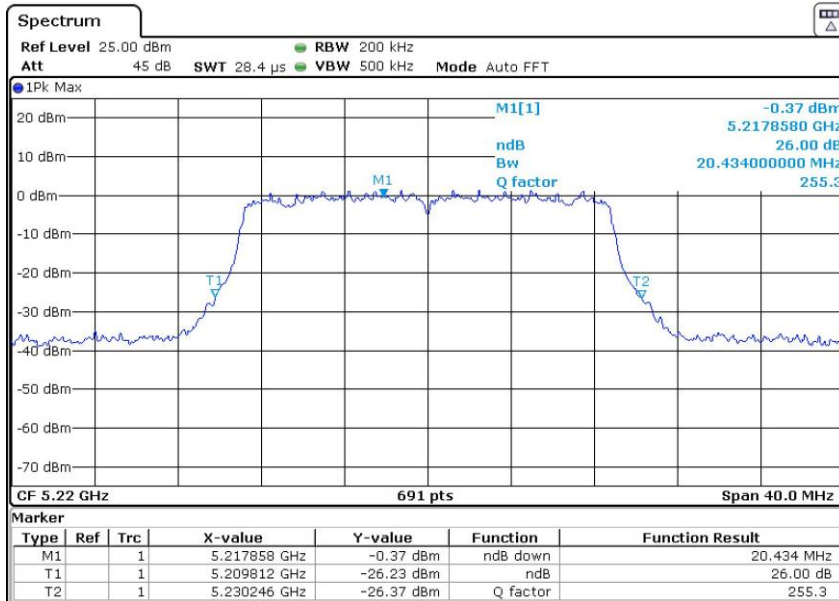

Report No.: AAEMT/RF/230322-05-01


Channel: 48

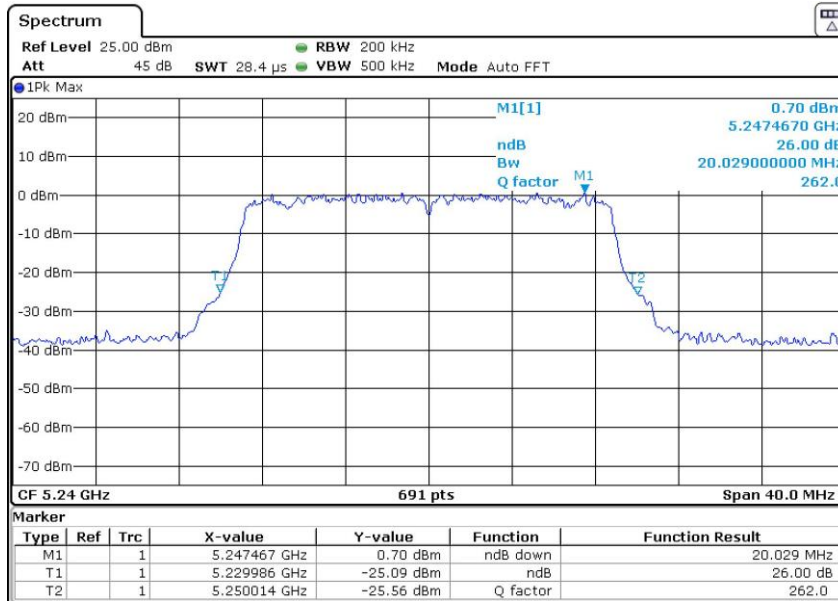


Report No.: AAEMT/RF/230322-05-01

26dB BW 802.11ax20

Channel: 36

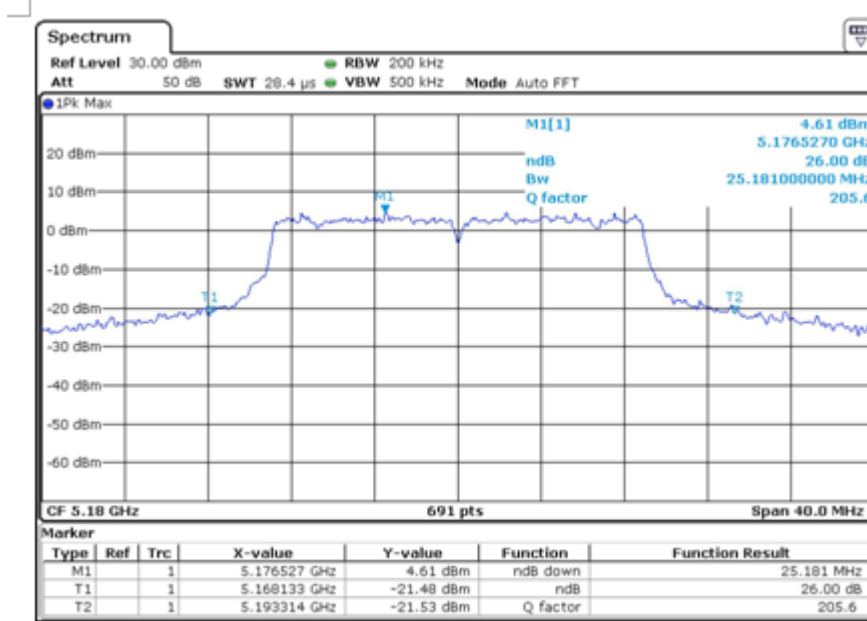


Channel: 44

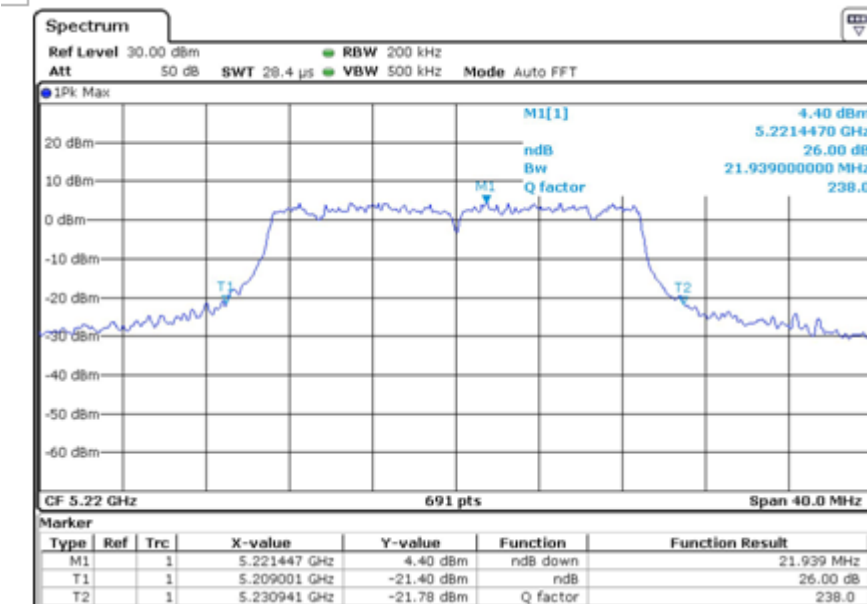


Report No.: AAEMT/RF/230322-05-01

Channel: 48

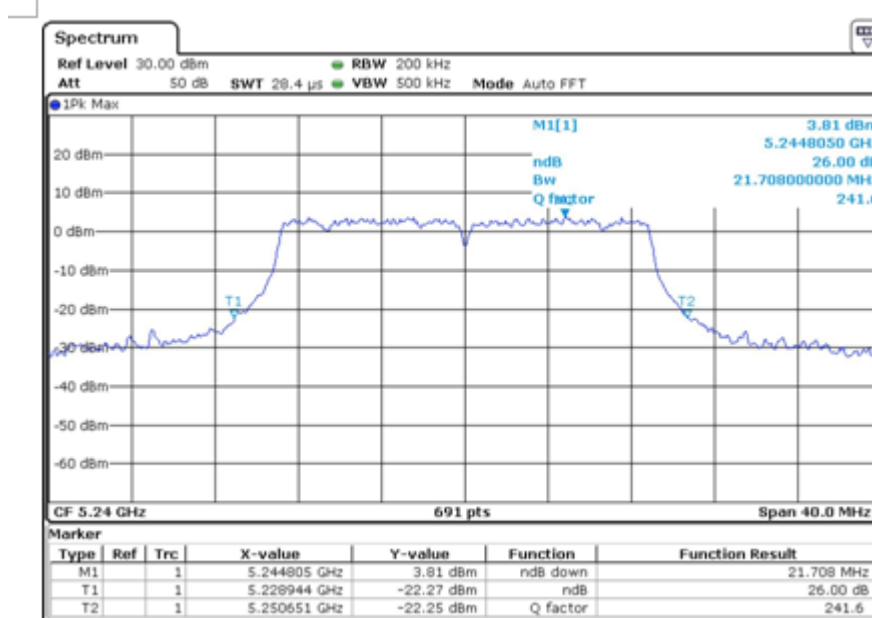


Report No.: AAEMT/RF/230322-05-01

6dB BW 802.11a
Channel: 149

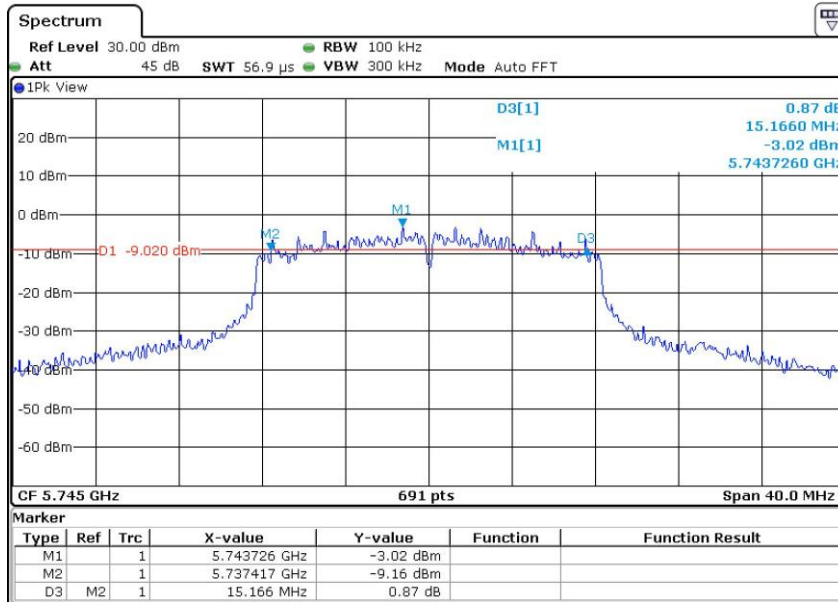


Channel: 157

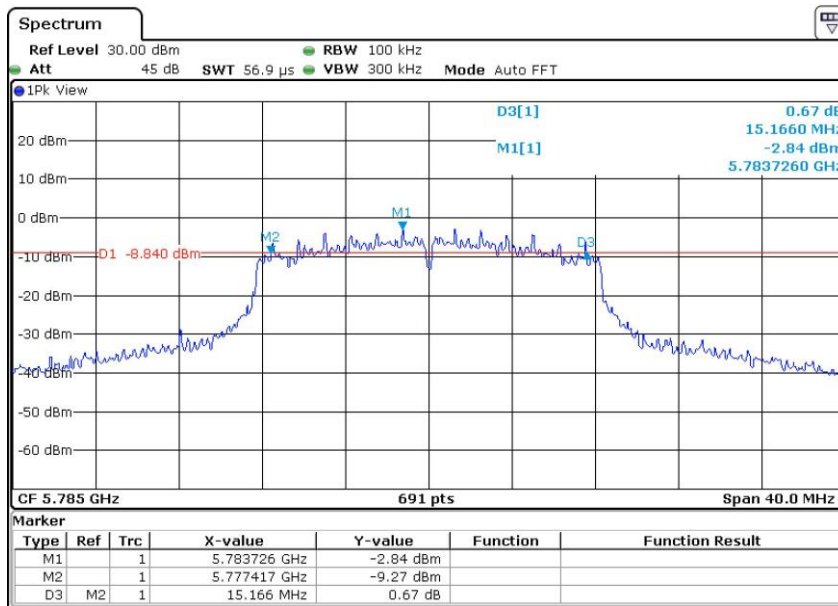

Report No.: AAEMT/RF/230322-05-01


Channel: 165

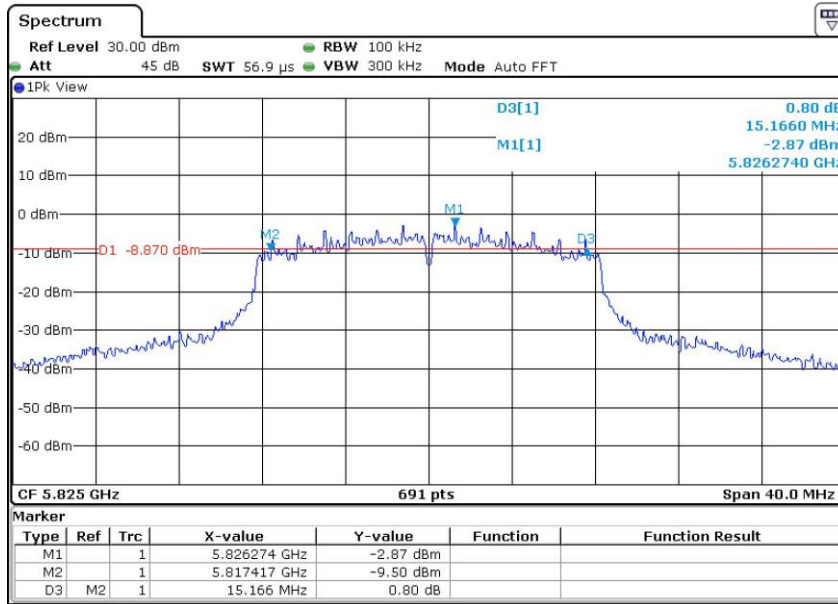

Report No.: AAEMT/RF/230322-05-01

6dB BW 802.11n20

Channel: 149

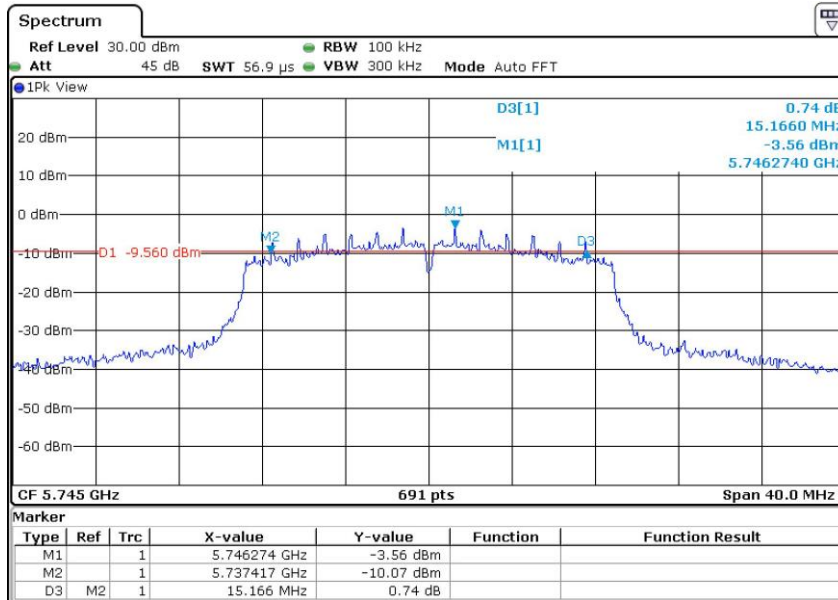

Channel: 157

