



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: 深圳市维度创新实业有限公司

Product Name: 2.4GHz Antenna

Product Model: POD7

Part Number: LJF02-22112908A-R0A

Write By : Huxuwen

Issued Date: 2022-11-29

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2022/11/29	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	7

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Polarization	Linear
Gain(2.4GHz)	≤2.1dB
B. Material & Mechanical Characteristics	
Material of Radiator	FPC(Black),LJWF27A
Cable Type	Φ1.13mm,L135mm,Black
Connector Type	IPX1
Dimension	26.0*18.8mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- 1.Network Analyzers Agilent 8753D/5071C
- 2.HSPA and LTE protocol test set R&S CMW500 -PT
- 3.Communications Test Set Agilent 8960
- 4.3D Chamber Test System

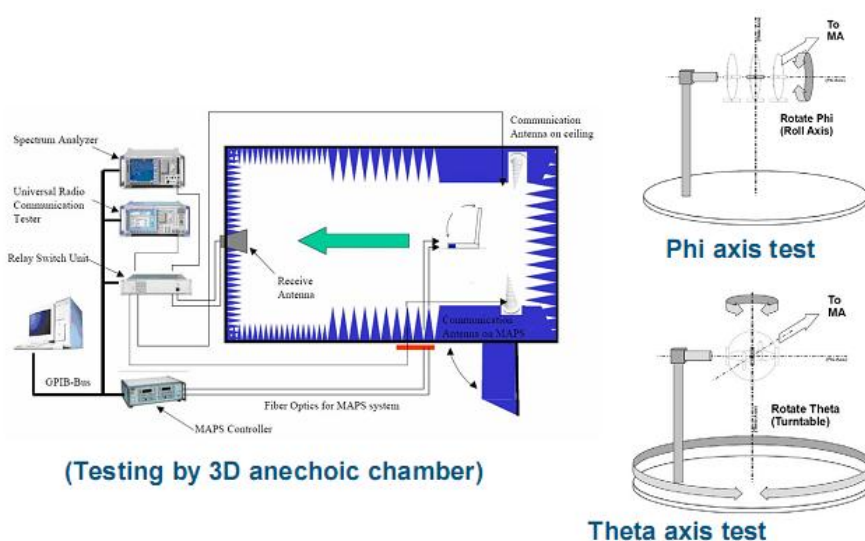


Chart 1 Test topology

5. Test Report

5.1 Voltage Standing Wave Ratio(VSWR).


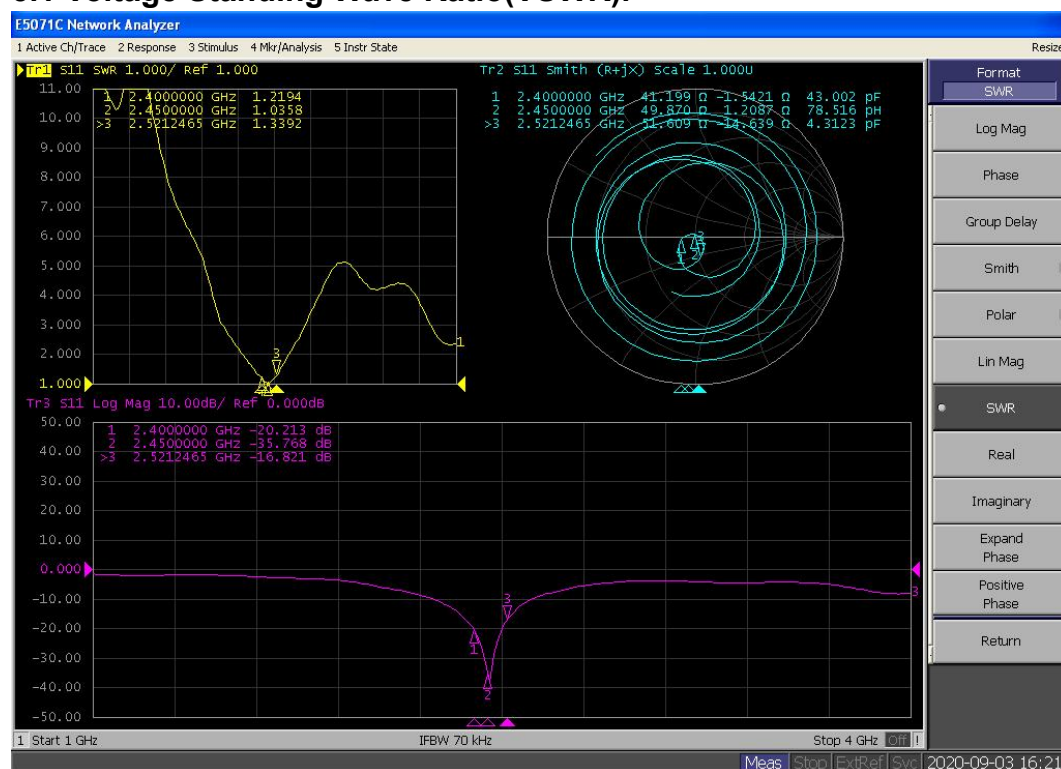



Chart 2 VSWR

5.2 Efficient and gain.

Passive	Freq (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test For	Effi (%)	51.79	57.56	56.67	53.23	61.78	50.16	56.42	59.78	58.55	43.93	40.30
WIFI BT	Gain (dBi)	1.89	1.93	1.90	1.95	1.95	1.92	1.92	1.63	2.07	1.73	1.46

5.3 Radiation pattern.

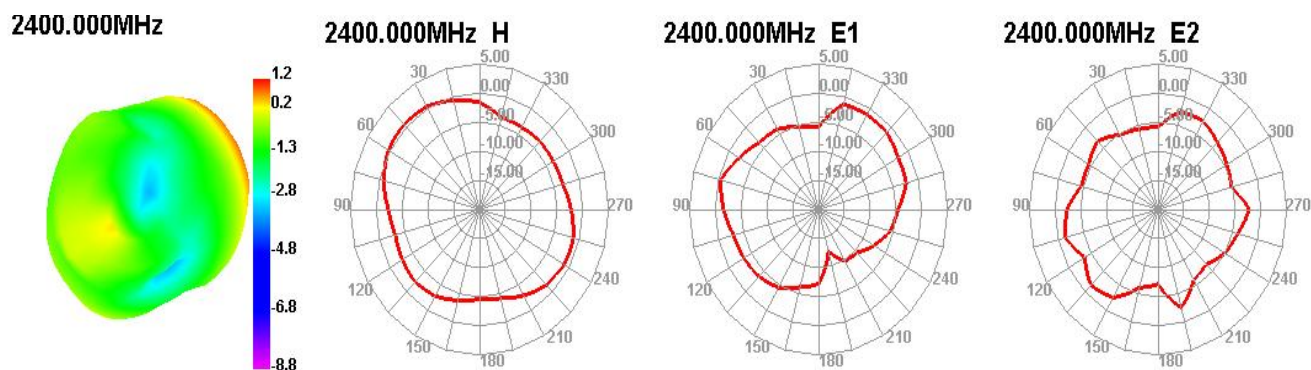

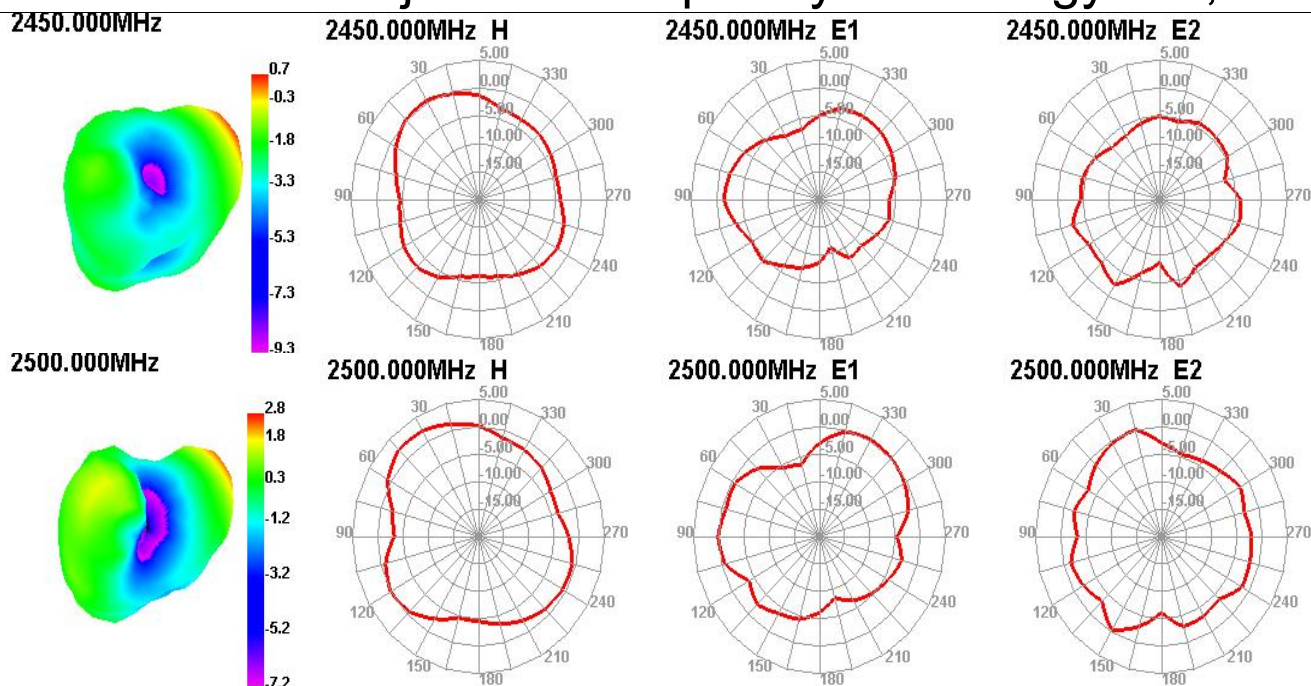

6. Reliability Test

Test Item	Test condition	Equipment	Specification	Result
1 Low Temp. Storage Test	Temperature: -30℃, Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp. & Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2 High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp. & Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3 Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: 35±2℃ Humidity: 85% NaCl salt spray: 5±1%. PH value: 6.5~7.2 Test time: 24 hours	Salt-Spray Tester	No color change No appear rusting	PASS

7. Assemble type.

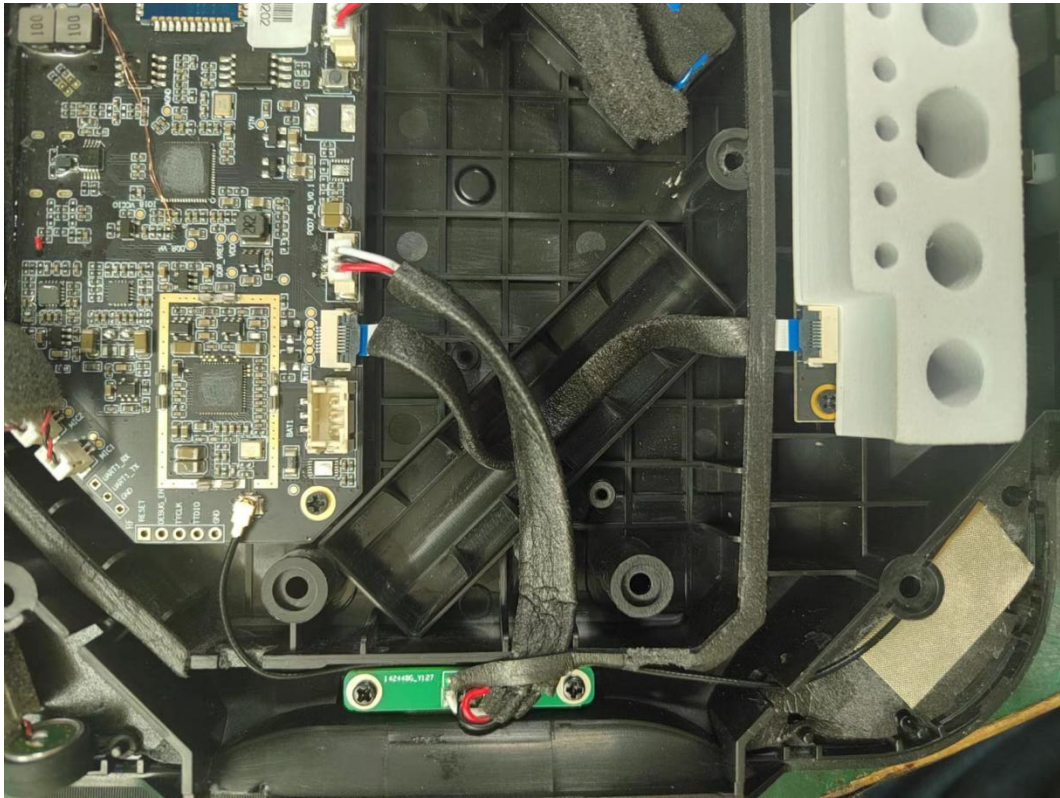


Chart 3 POD3 assemble type


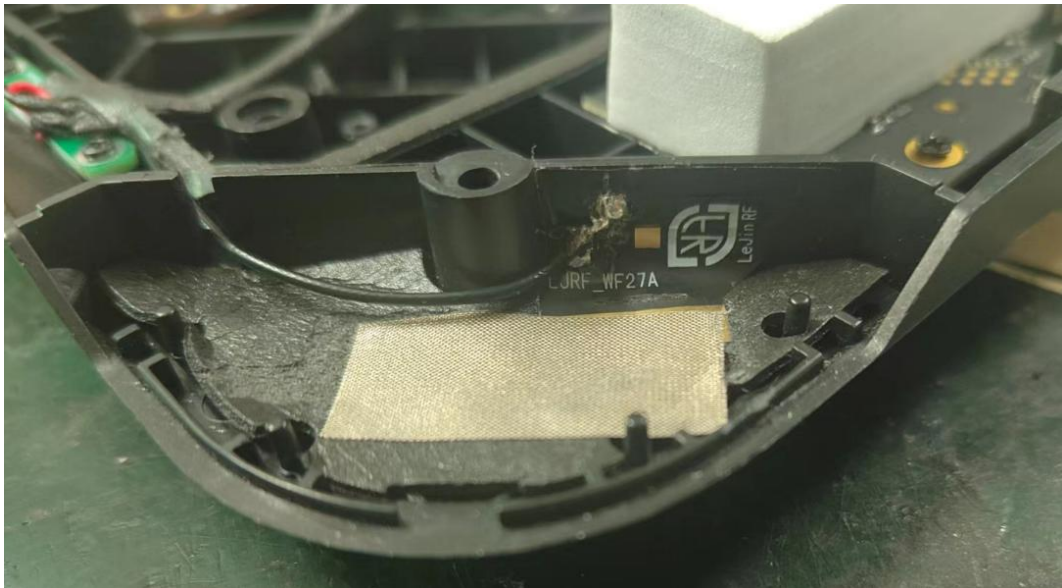


Chart 4 POD3 assemble type(feature)

8.Product Drawing

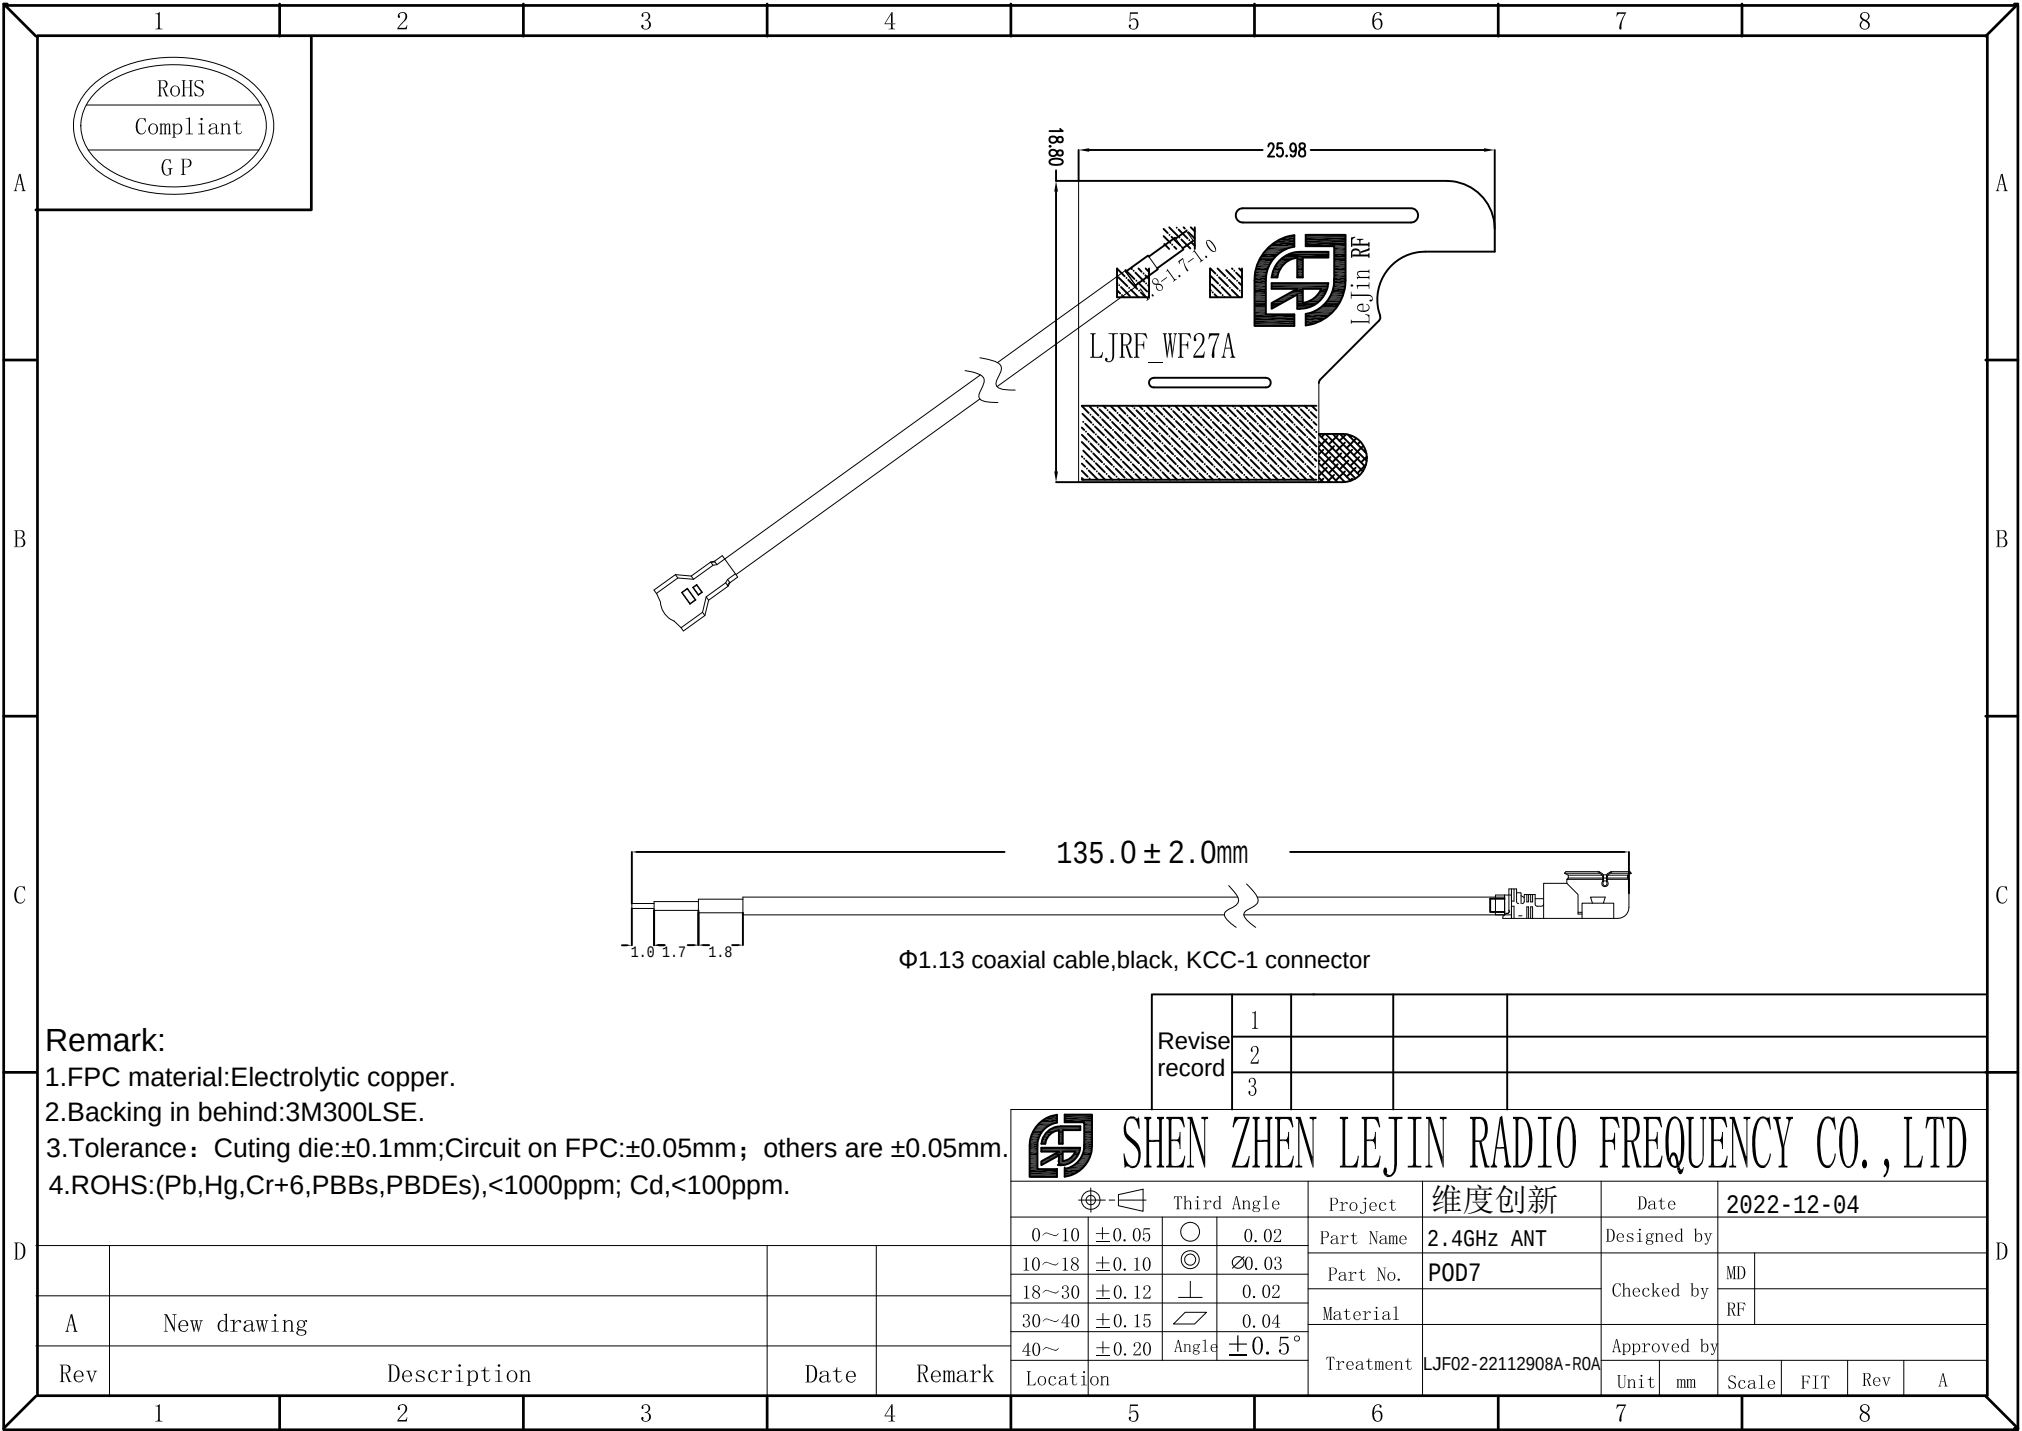

Remark:

- 1.FPC material:Electrolytic copper.
- 2.Backing in behind:3M300LSE.
- 3.Tolerance: Cutting die:±0.1mm;Circuit on FPC:±0.05mm; others are ±0.05mm.
- 4.ROHS:(Pb,Hg,Cr+6,PBBs,PBDEs),<1000ppm; Cd,<100ppm.

Revise record	1			
	2			
	3			

SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD										
 Third Angle		Project	维度创新		Date		2022-12-04			
0~10	±0.05		0.02	Part Name	2.4GHz ANT		Designed by			
10~18	±0.10		∅0.03	Part No.	POD7		Checked by	MD		
18~30	±0.12		0.02	Material				RF		
30~40	±0.15		0.04							
40~	±0.20	Angle	±0.5°	Treatment	LJF02-22112908A-R0A		Approved by			
Location										
		Unit	mm	Scale	FIT	Rev	A			

A	New drawing		
Rev	Description	Date	Remark