

# RF Test Data for Bluetooth LE (Conducted Measurements)



General Description of EUT	
Product Name:	Wireless Lavalier Microphone
Test Model:	Wave W2-C
Sample ID:	202204-0351_01-02
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	DC 3.7V
Test Engineer:	Huangjianping
Note: For a more detailed features description, please refer to the report TBR-C-202204-0351-6	



## Contents

1.Duty Cycle.....	3
2.Maximum Conducted Output Power .....	7
3.-6dB Bandwidth .....	11
4.Occupied Channel Bandwidth .....	15
5.Maximum Power Spectral Density Level.....	19
6.Band Edge .....	23
7.Conducted RF Spurious Emission .....	28
8.Restrict Band.....	35


## 1.Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	100	0	0
NVNT	BLE 1Mbps	2440	Ant1	100	0	0
NVNT	BLE 1Mbps	2480	Ant1	100	0	0
NVNT	BLE 2Mbps	2402	Ant1	100	0	0
NVNT	BLE 2Mbps	2440	Ant1	100	0	0
NVNT	BLE 2Mbps	2480	Ant1	100	0	0

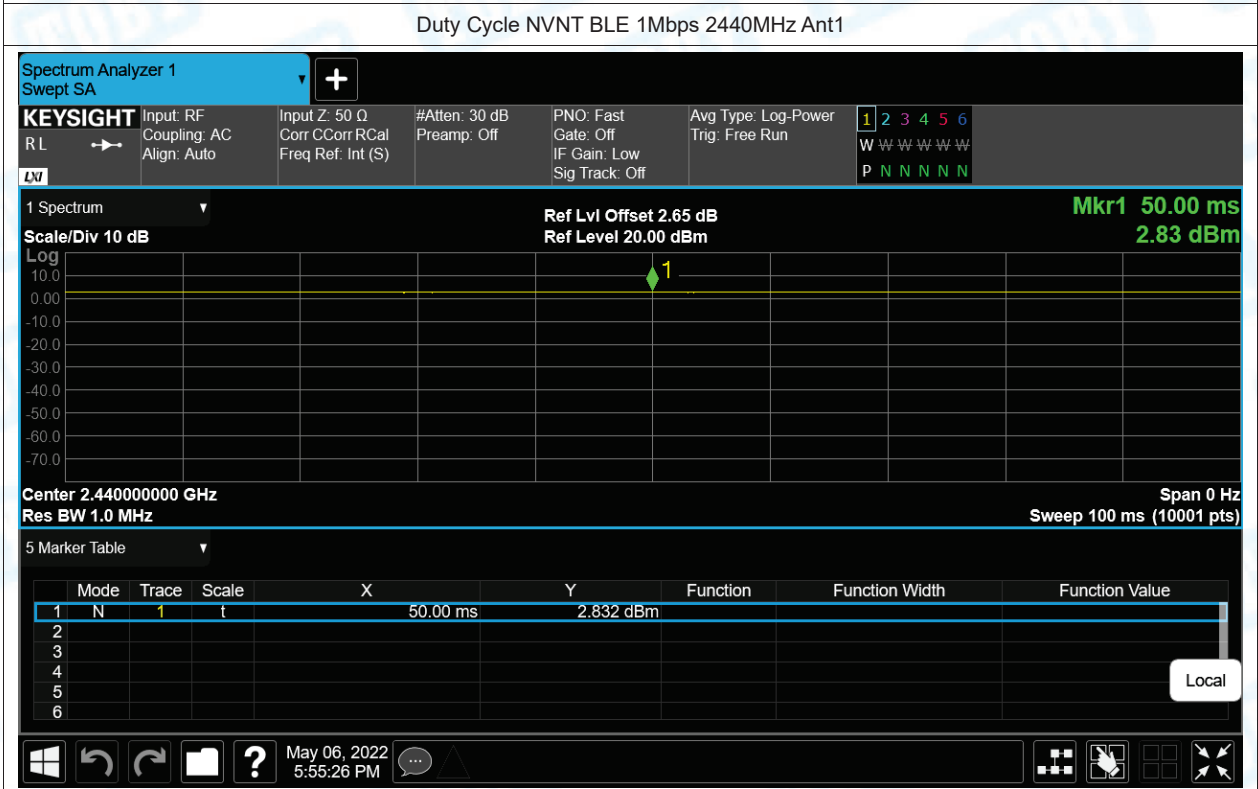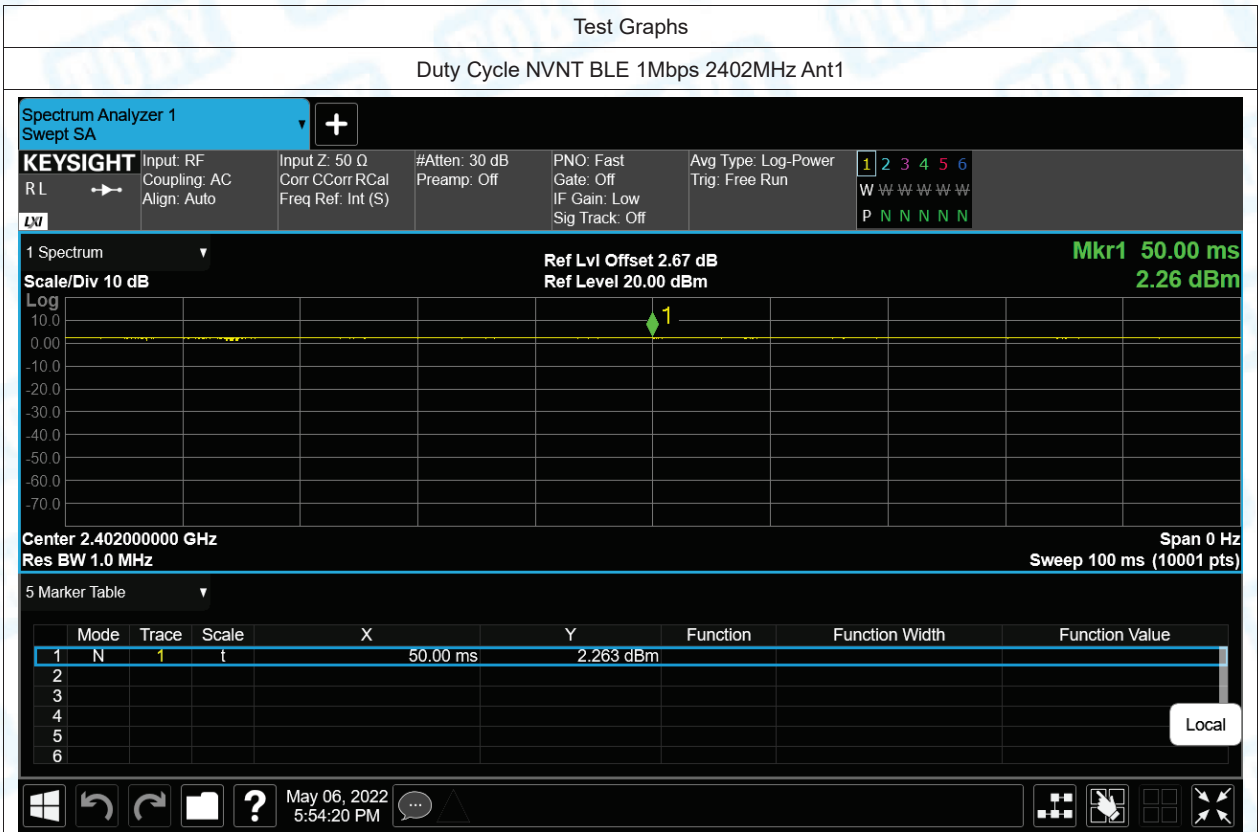


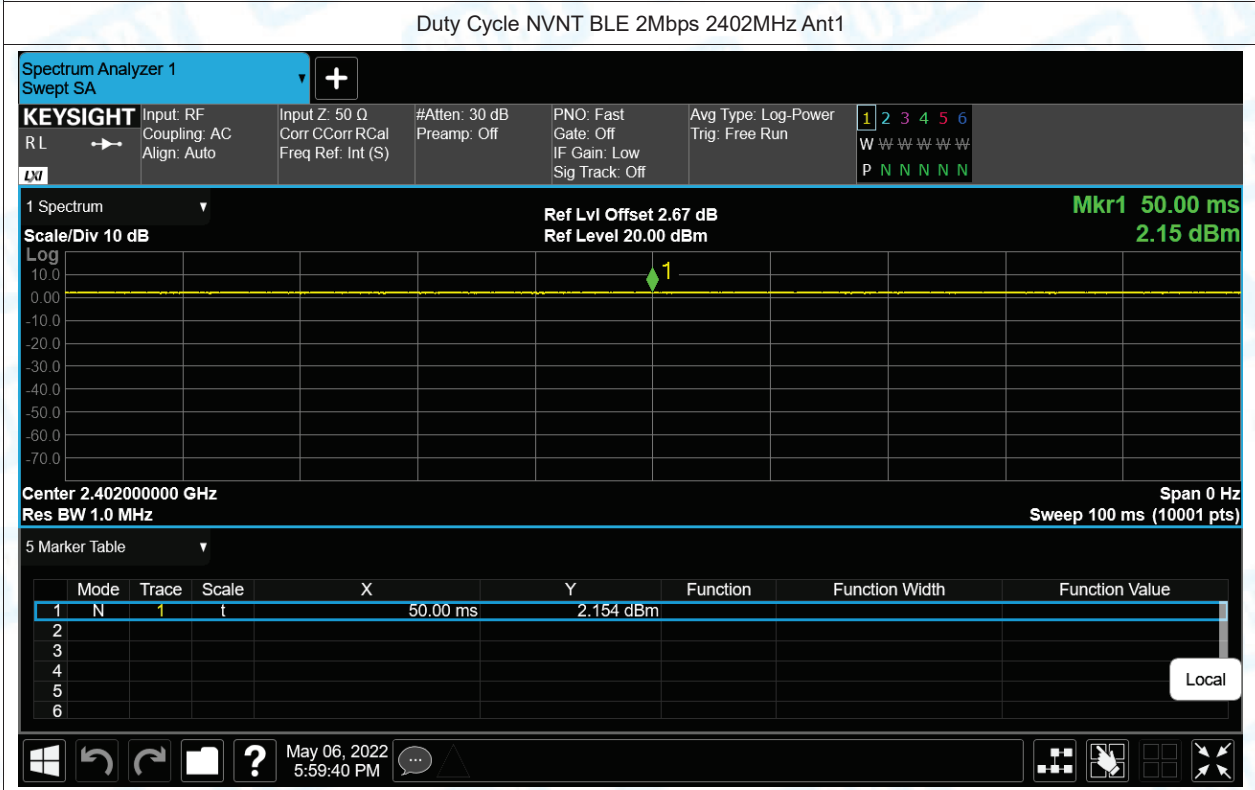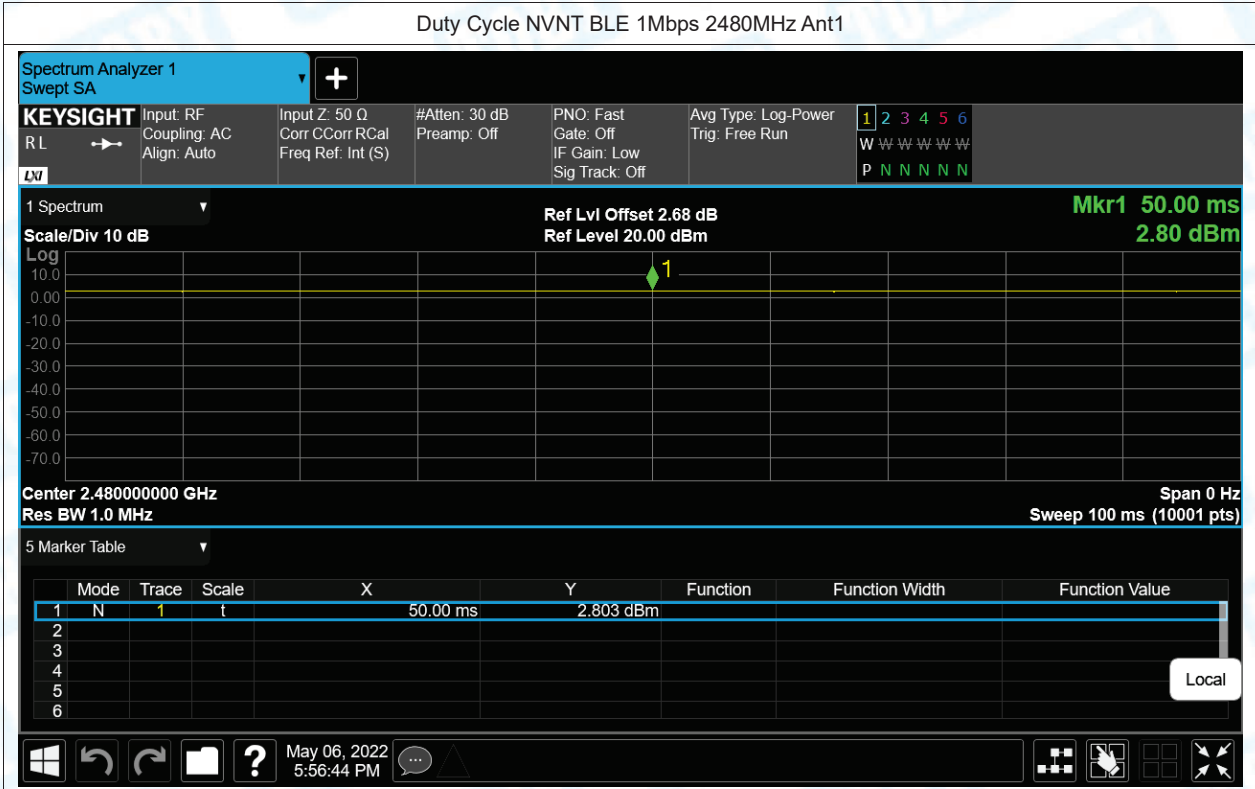

### Duty Cycle NVNT BLE 2Mbps 2440MHz Ant1


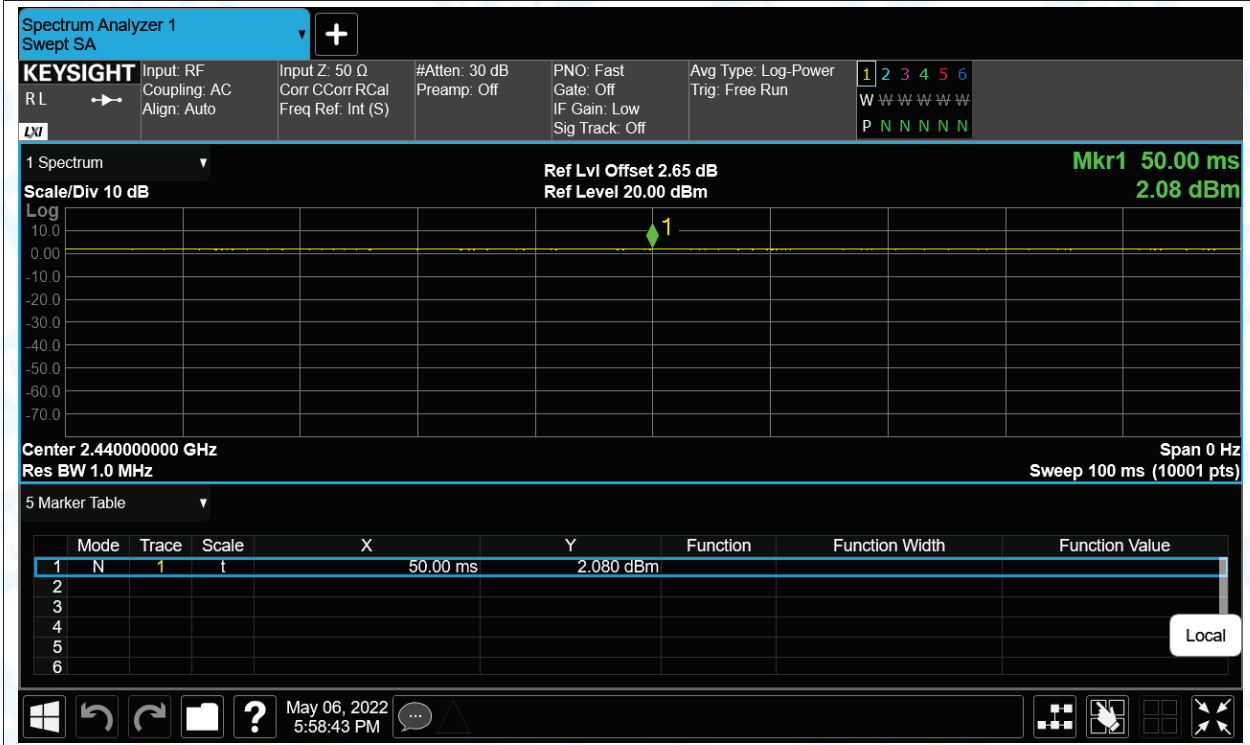


### Duty Cycle NVNT BLE 2Mbps 2480MHz Ant1


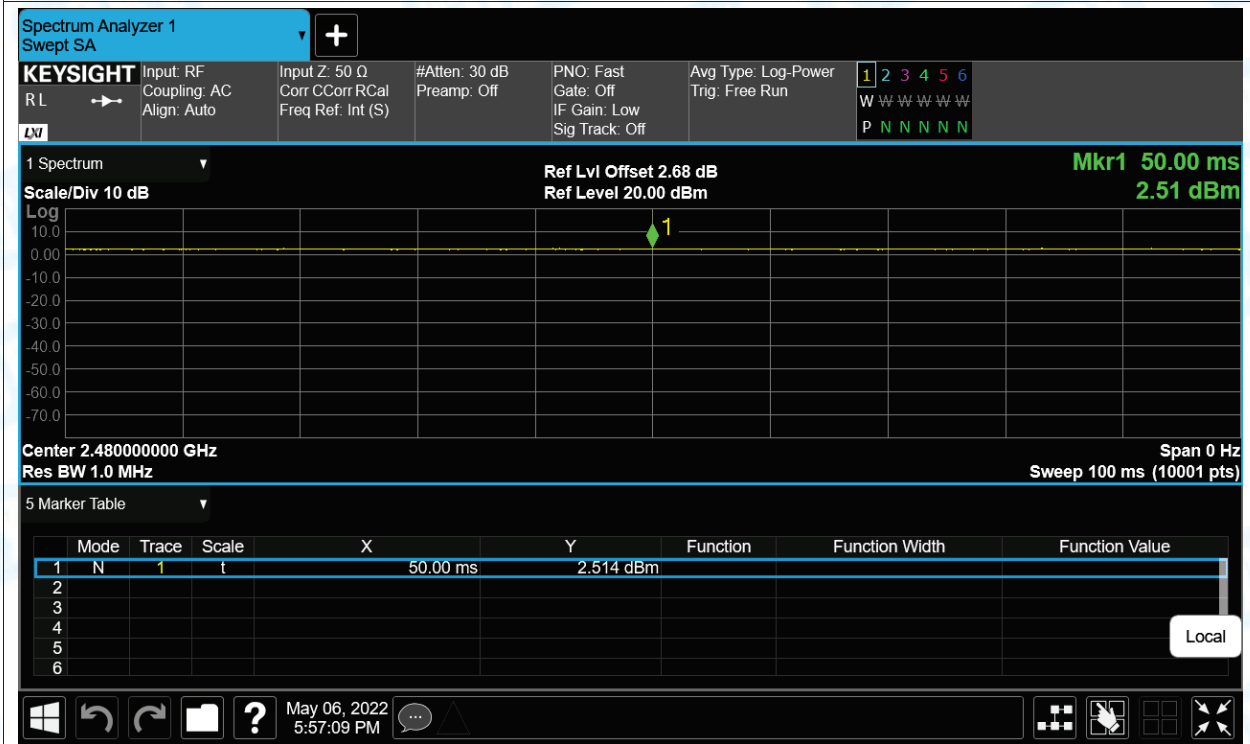




## 2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2.506	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	2.456	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	2.95	30	Pass
NVNT	BLE 2Mbps	2402	Ant1	2.645	30	Pass
NVNT	BLE 2Mbps	2440	Ant1	2.539	30	Pass
NVNT	BLE 2Mbps	2480	Ant1	2.971	30	Pass

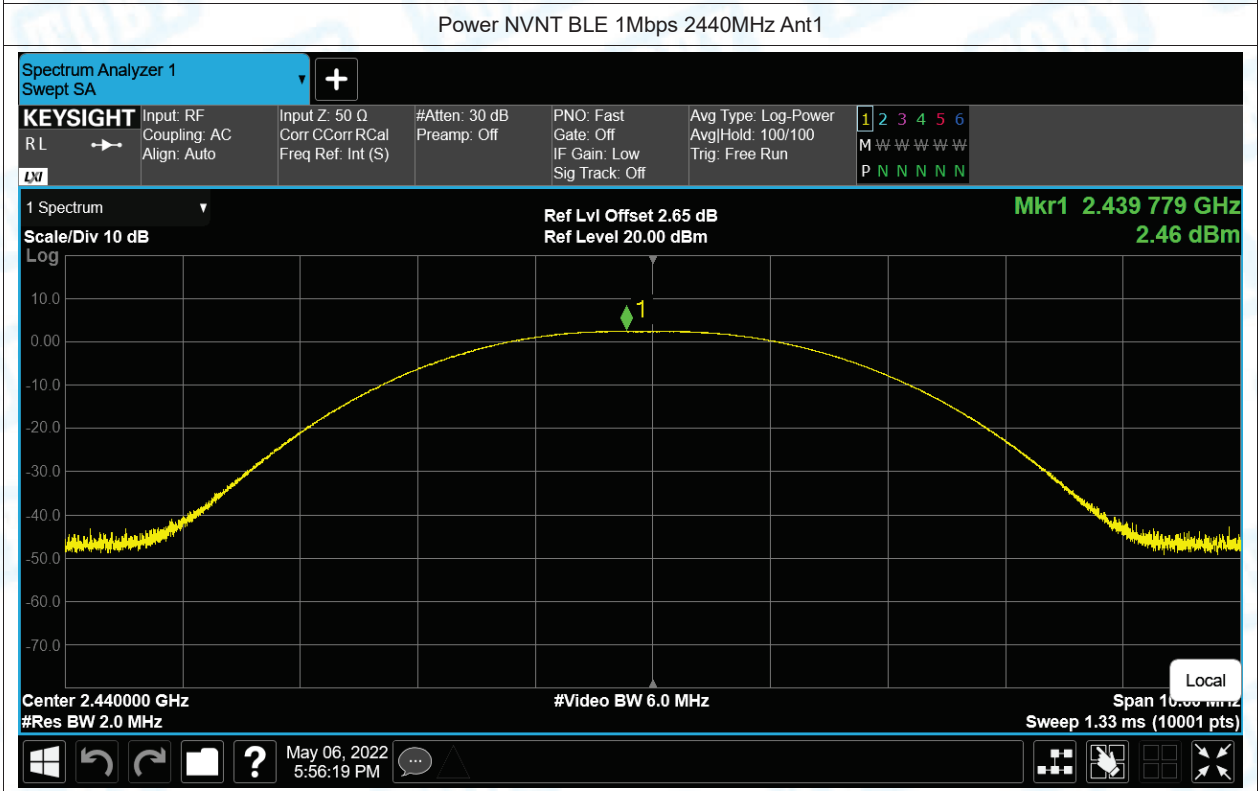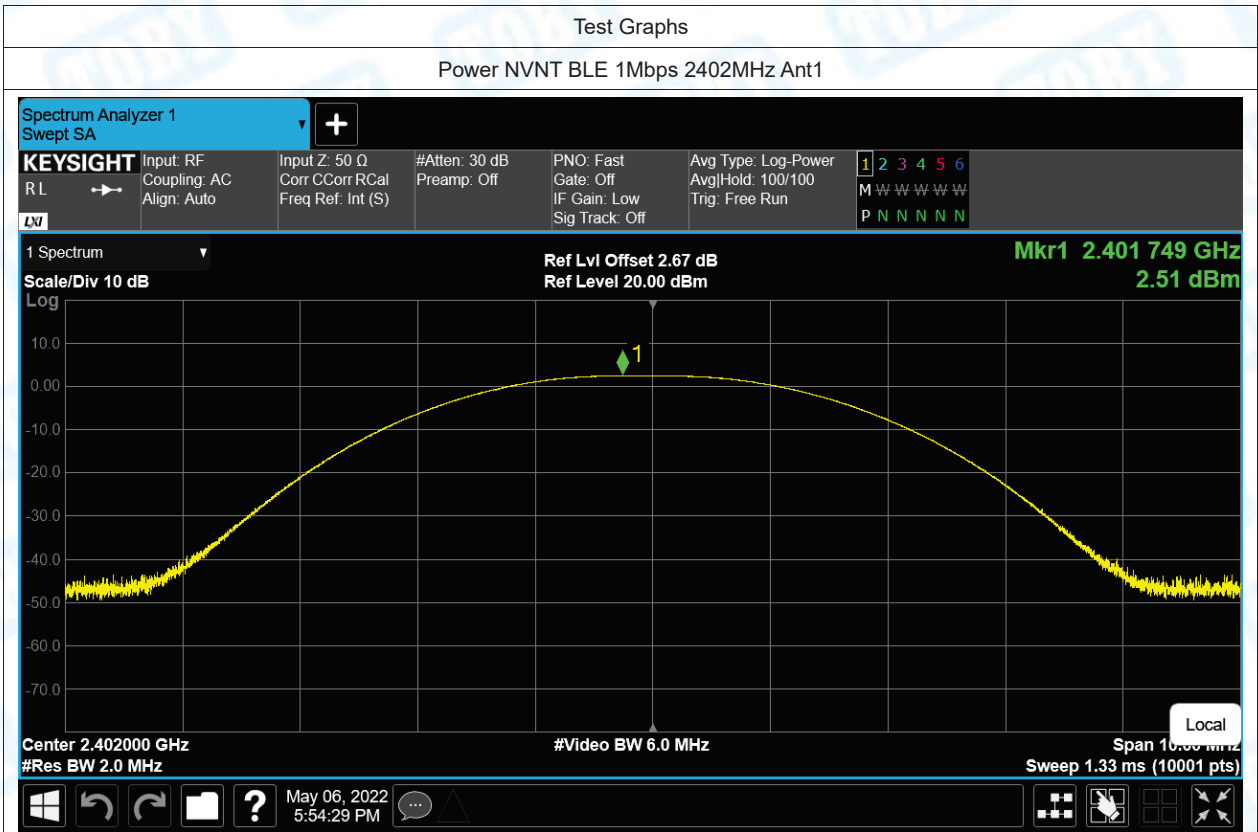





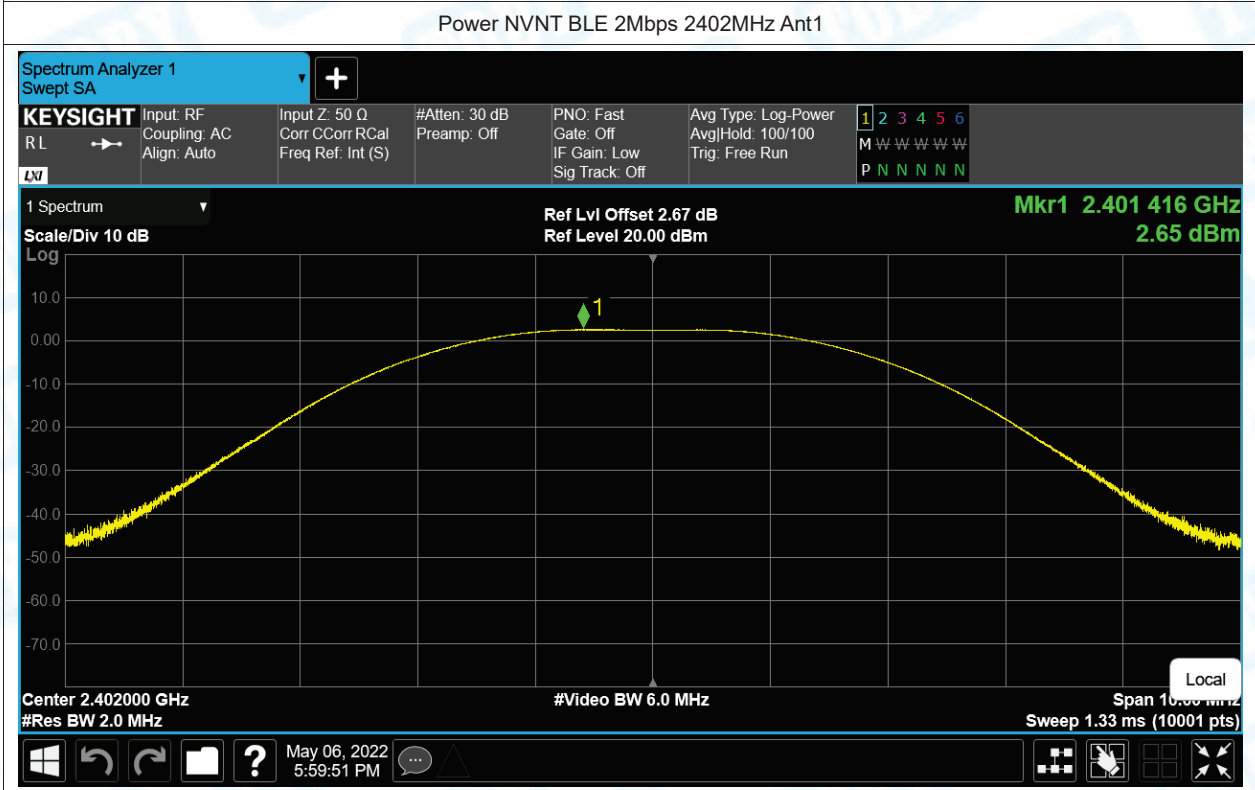
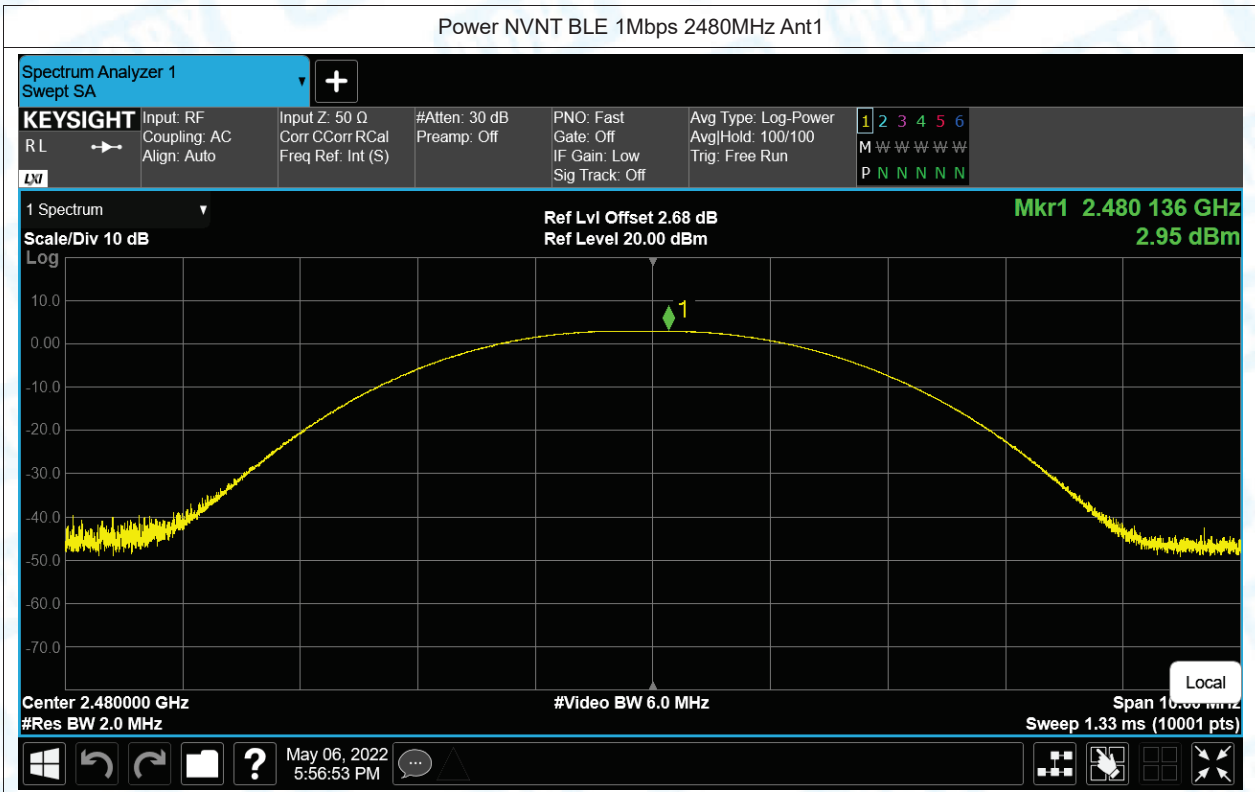


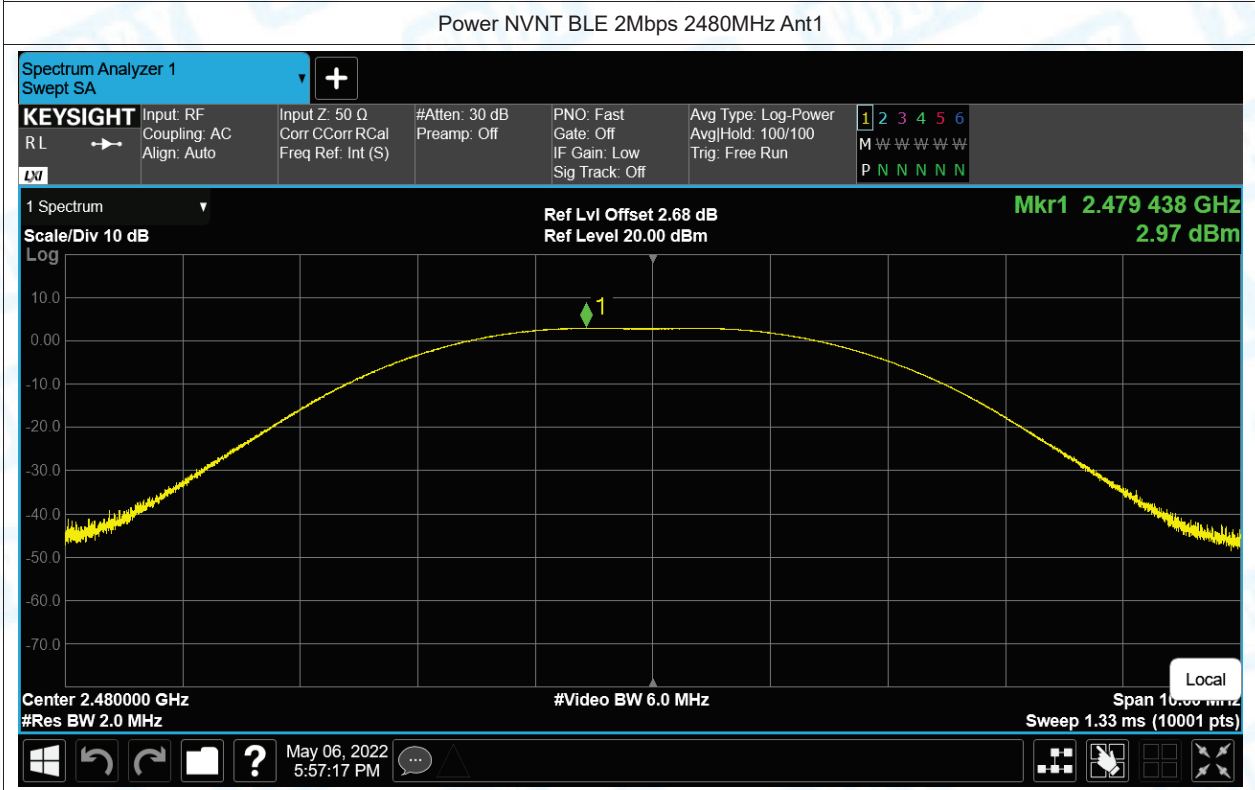
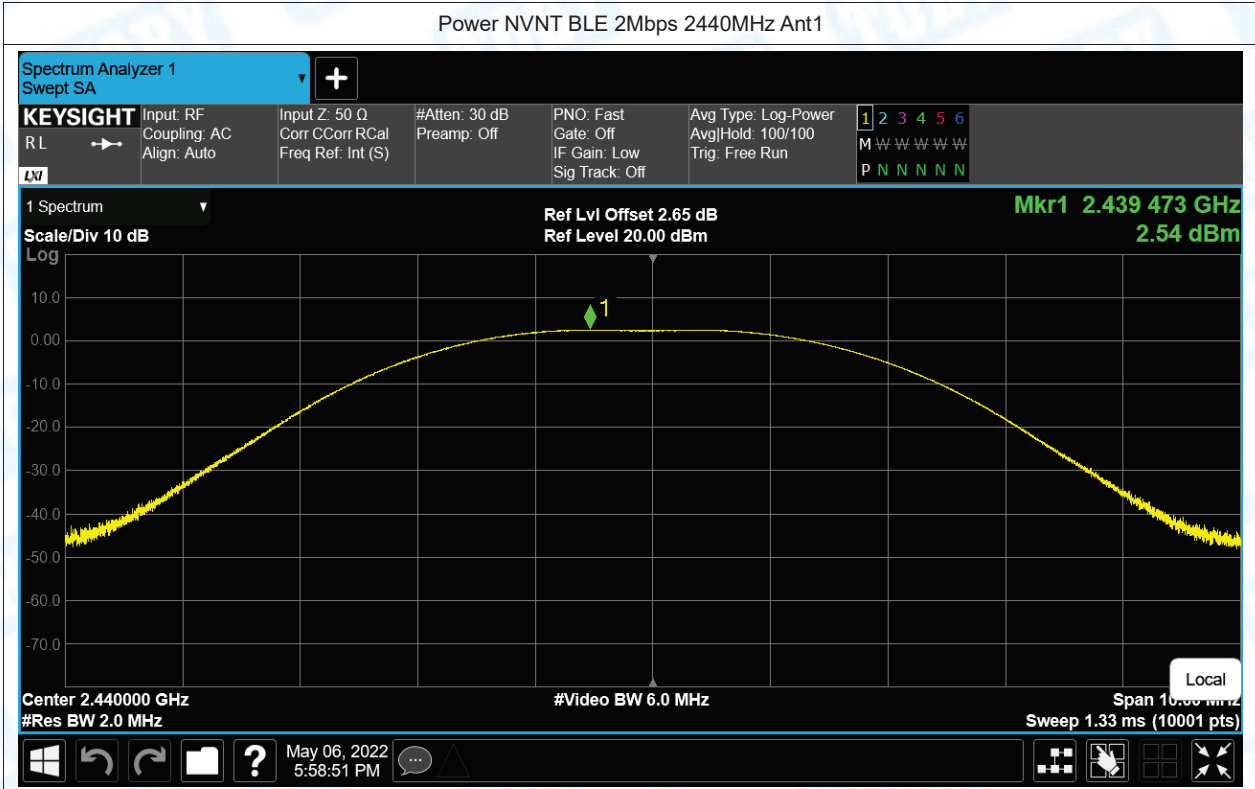


### 3.-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.65	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.69	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.66	0.5	Pass
NVNT	BLE 2Mbps	2402	Ant1	1.25	0.5	Pass
NVNT	BLE 2Mbps	2440	Ant1	1.37	0.5	Pass
NVNT	BLE 2Mbps	2480	Ant1	1.33	0.5	Pass

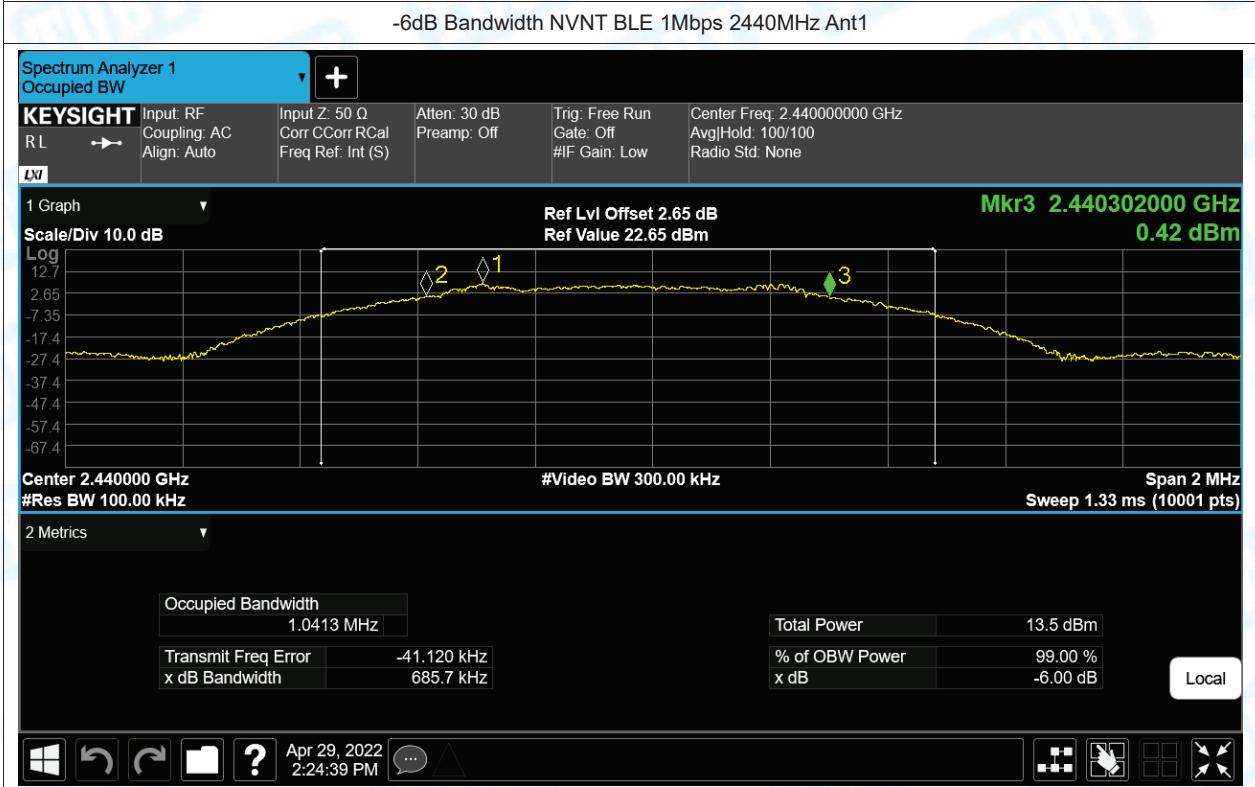
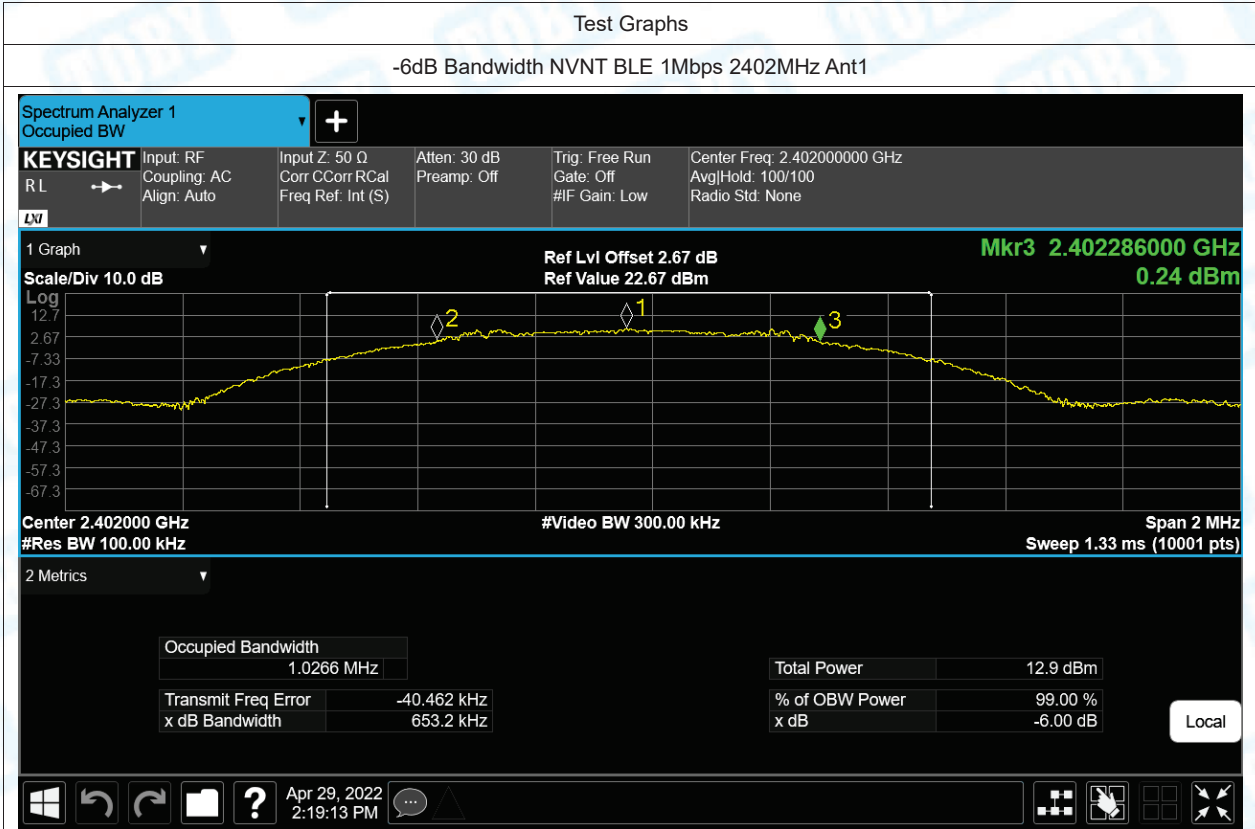


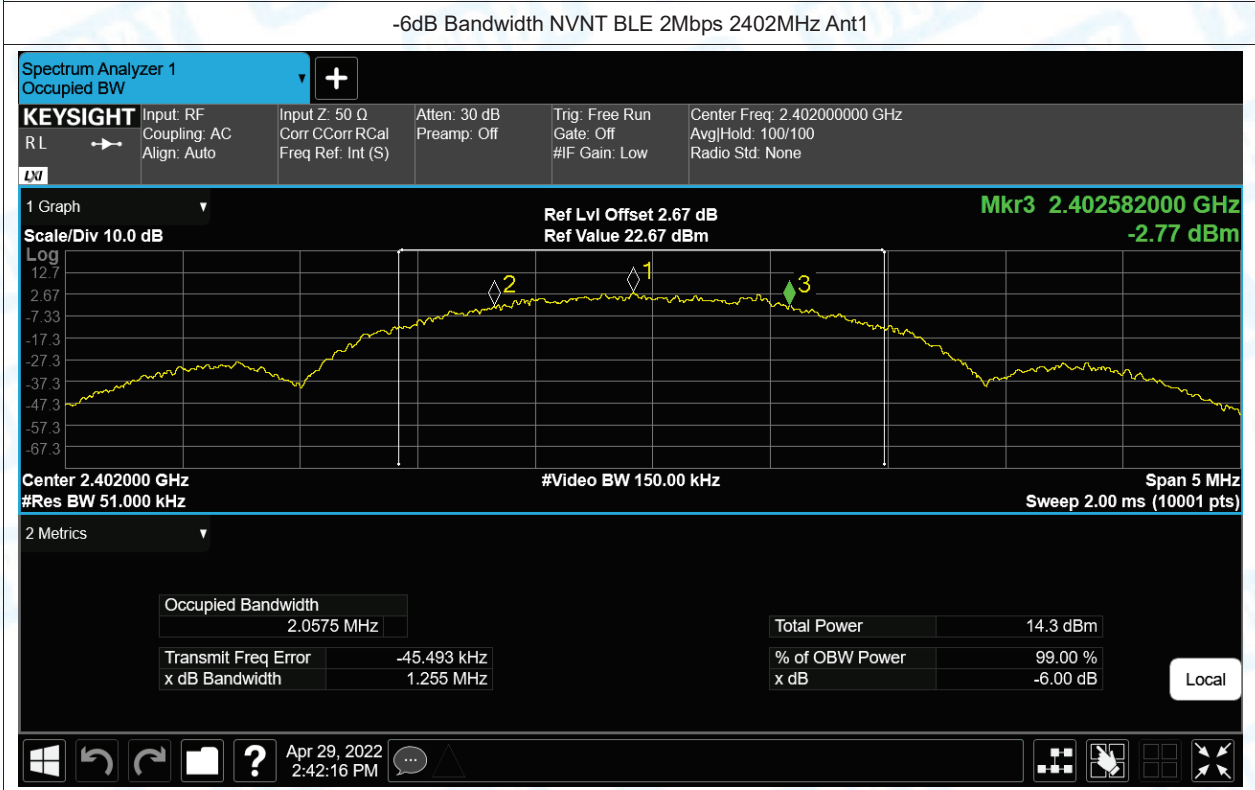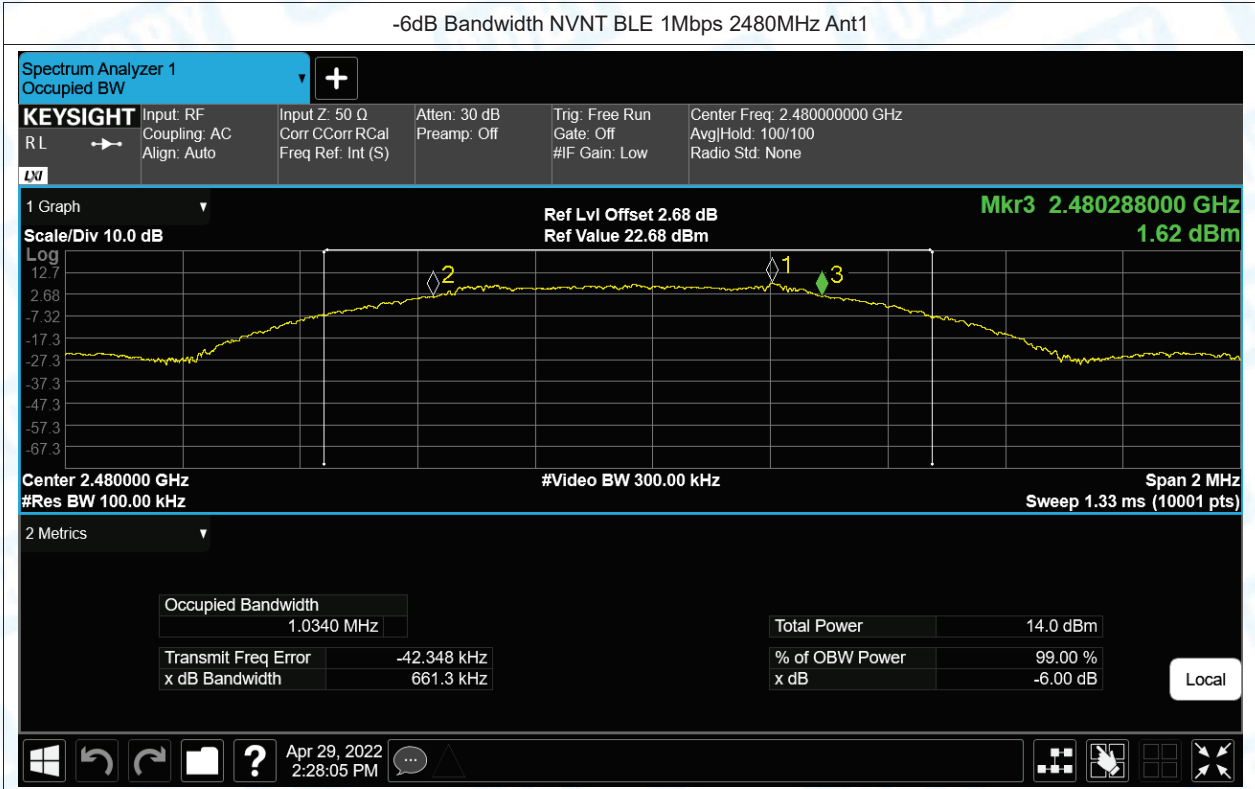

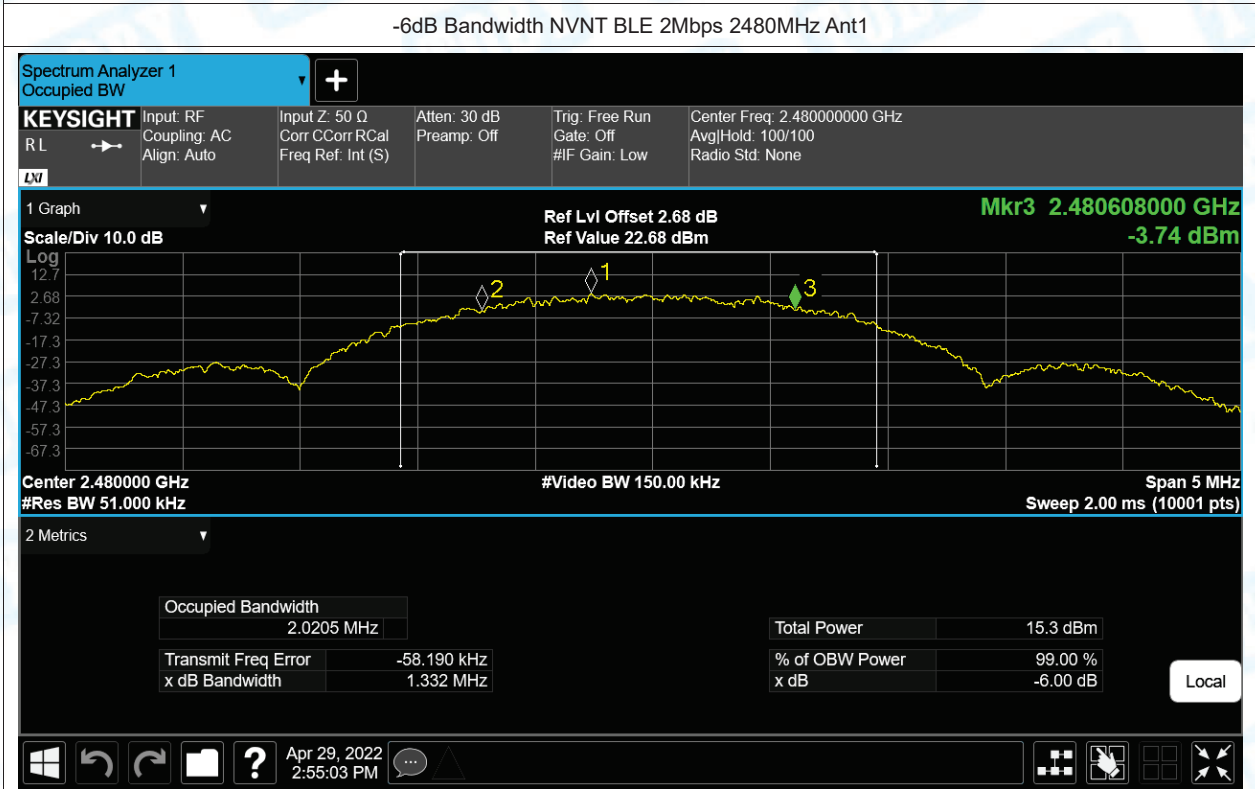
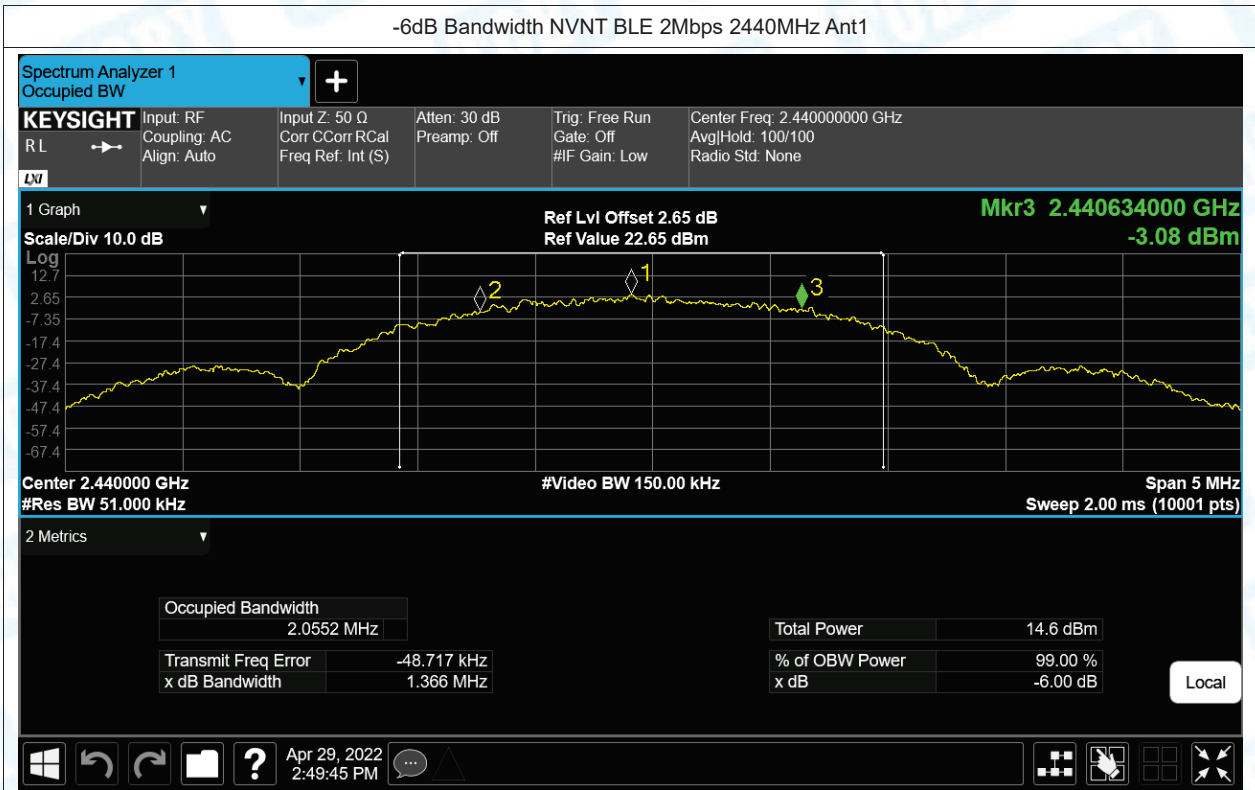




## 4.Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.021
NVNT	BLE 1Mbps	2440	Ant1	1.051
NVNT	BLE 1Mbps	2480	Ant1	1.021
NVNT	BLE 2Mbps	2402	Ant1	2.011
NVNT	BLE 2Mbps	2440	Ant1	2.025
NVNT	BLE 2Mbps	2480	Ant1	2.011

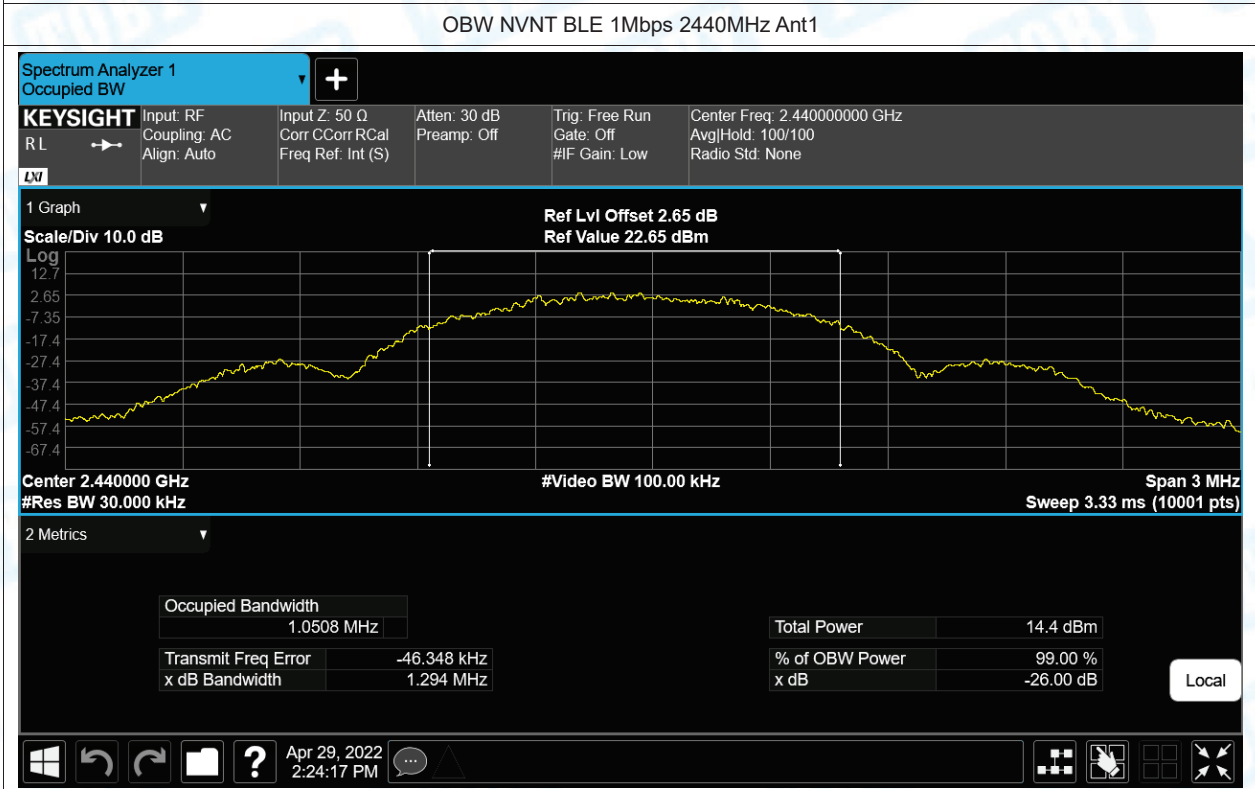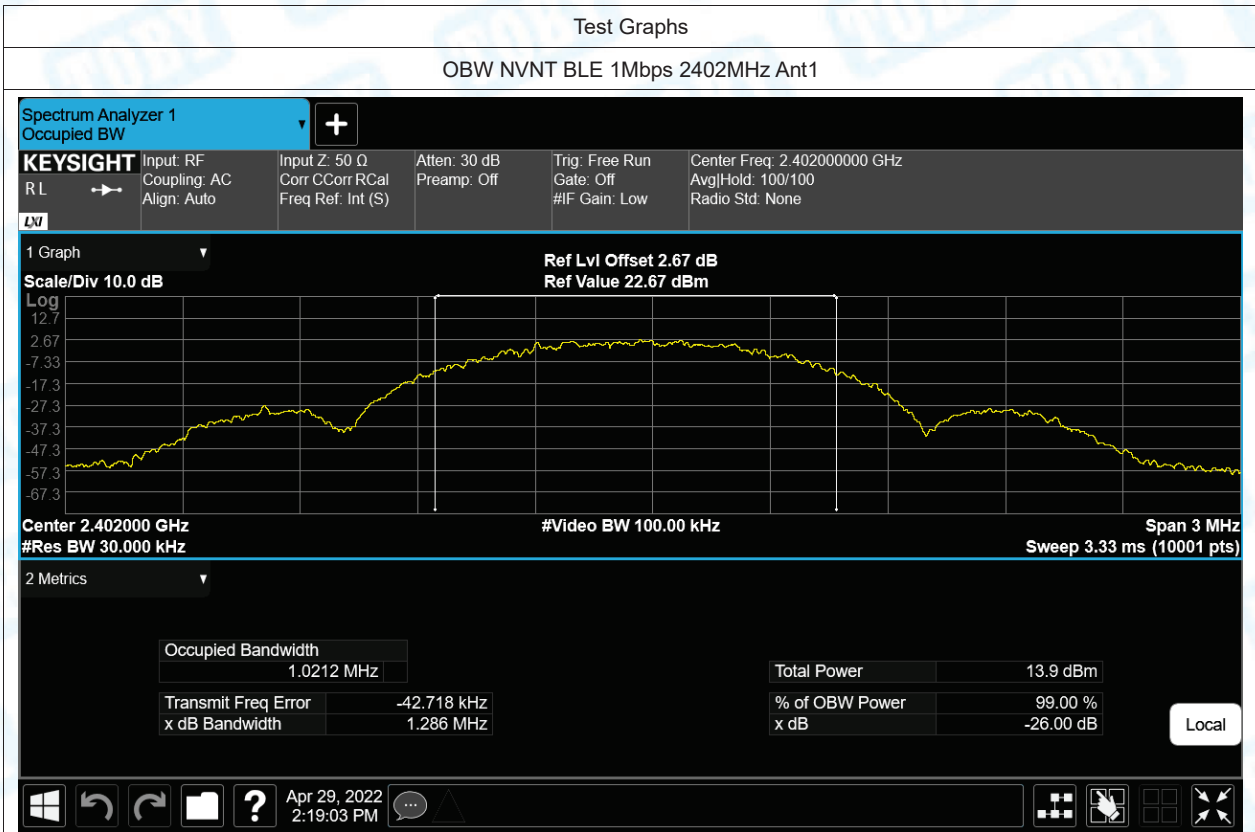





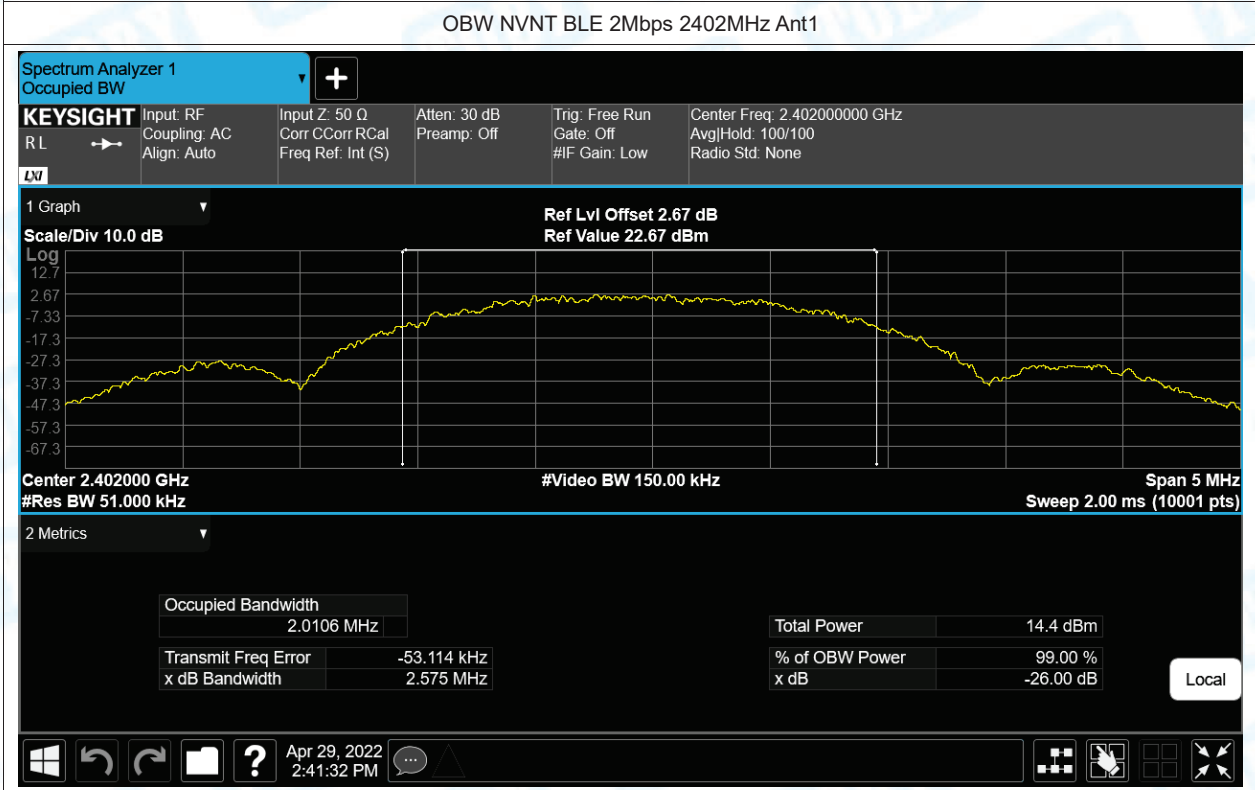
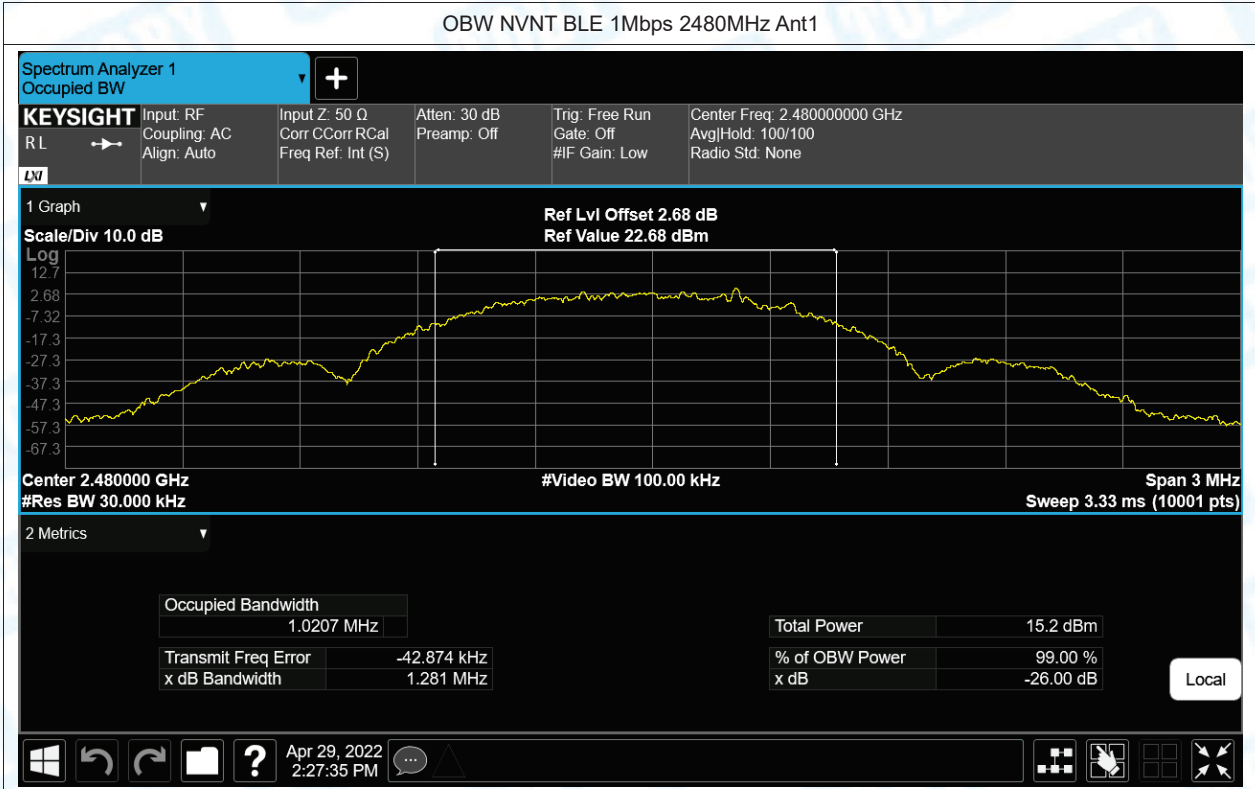


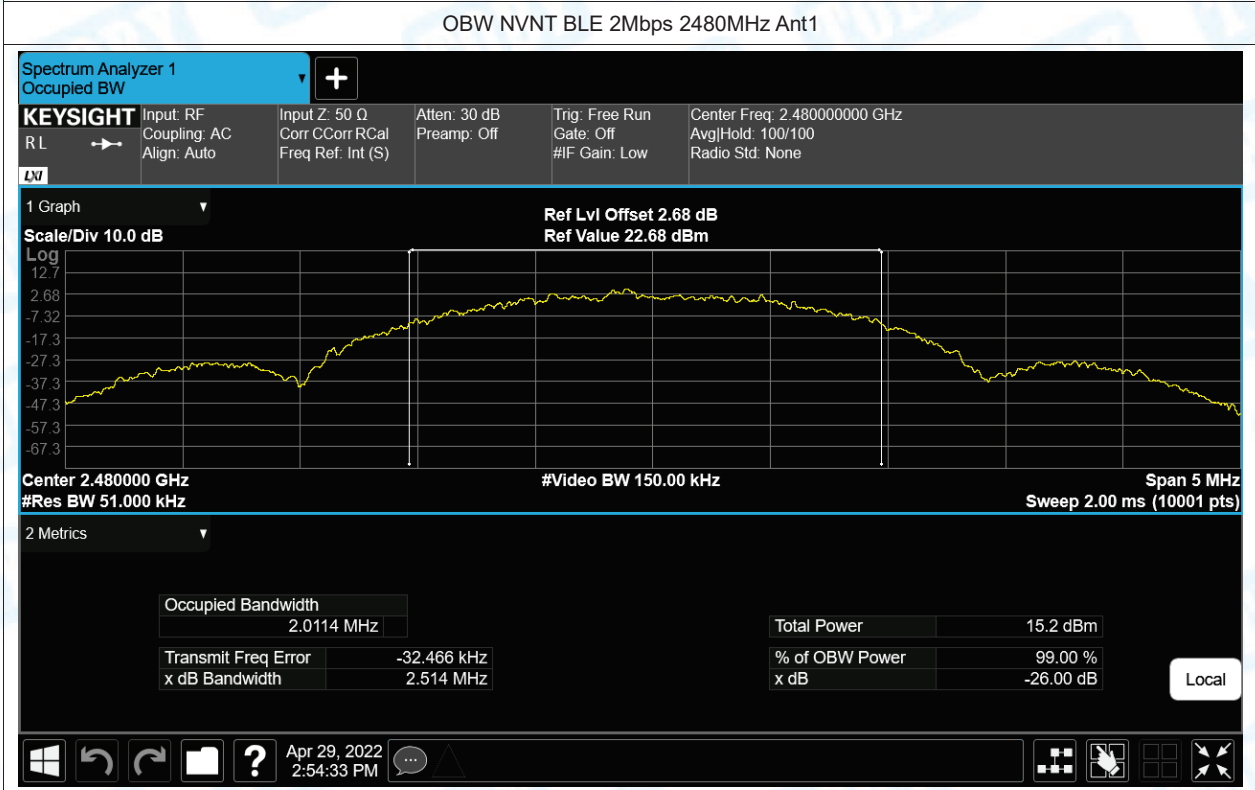
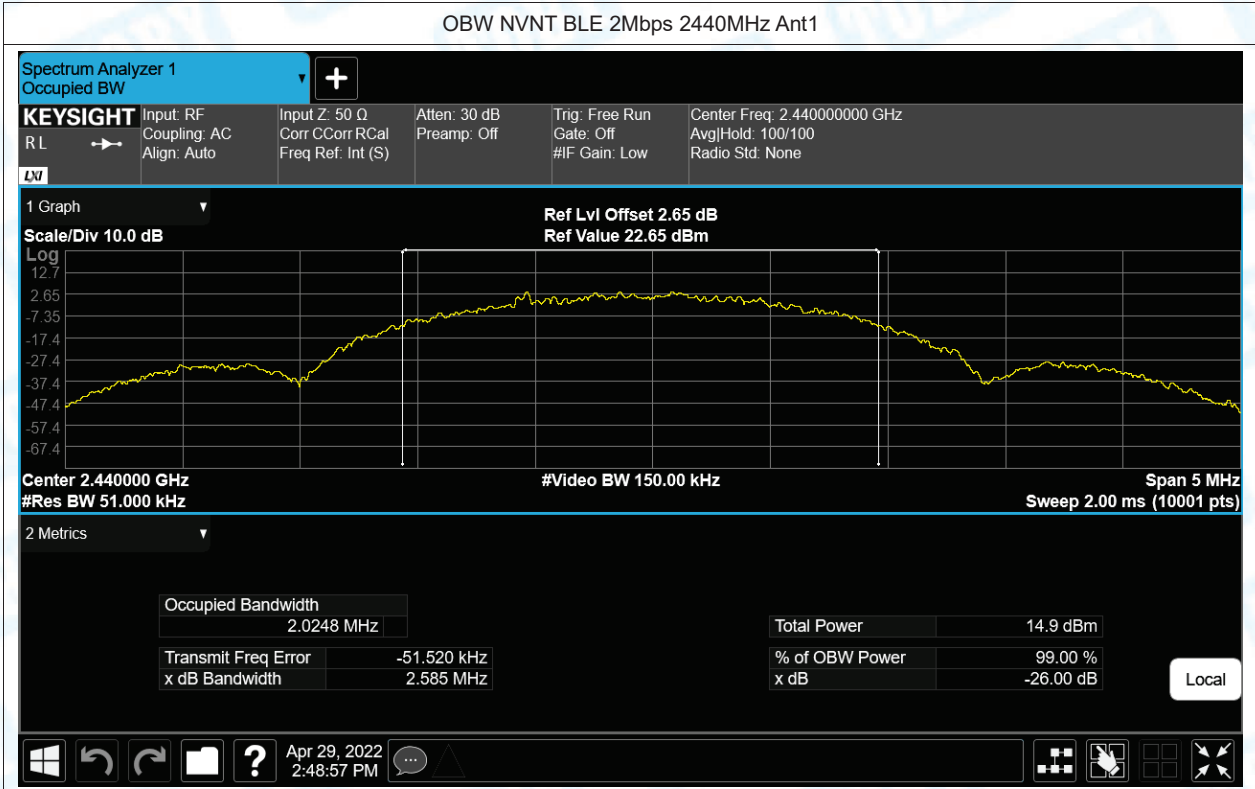


## 5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-2.914	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-0.247	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-1.62	8	Pass
NVNT	BLE 2Mbps	2402	Ant1	-5.419	8	Pass
NVNT	BLE 2Mbps	2440	Ant1	-4.685	8	Pass
NVNT	BLE 2Mbps	2480	Ant1	-4.087	8	Pass

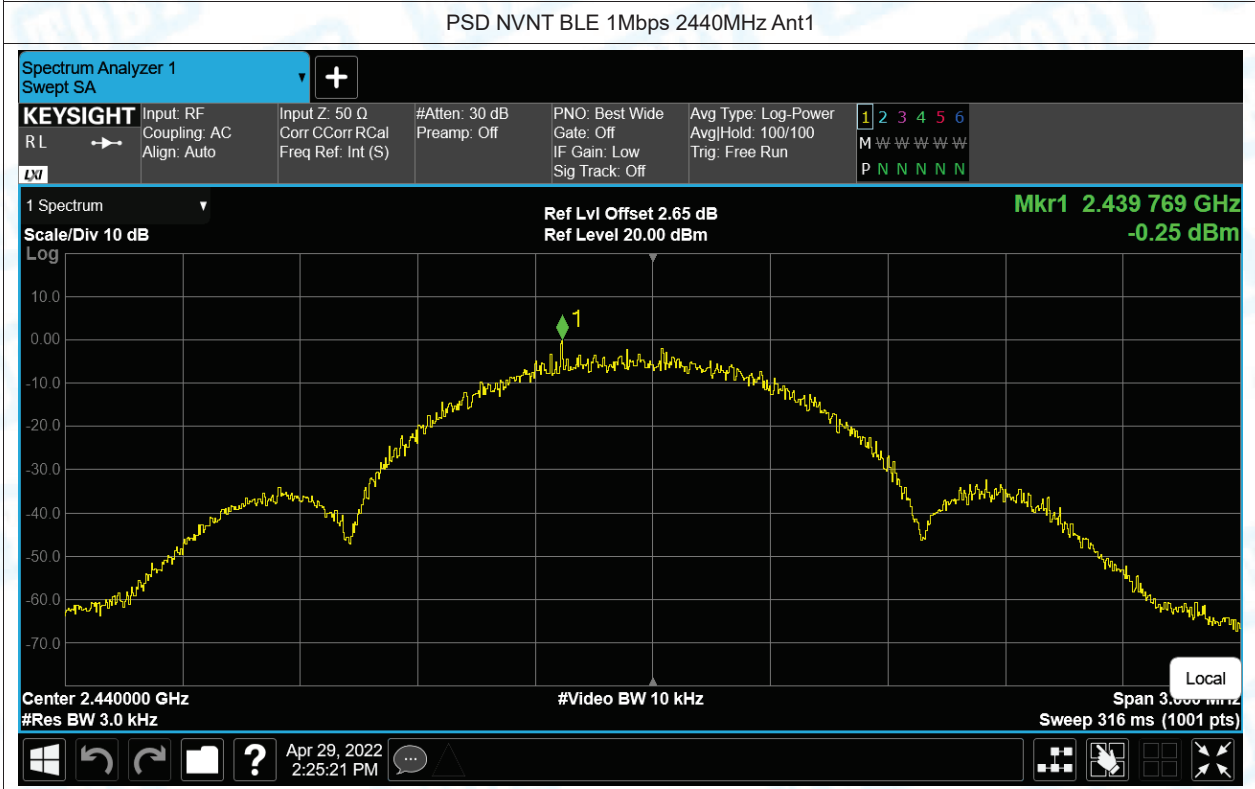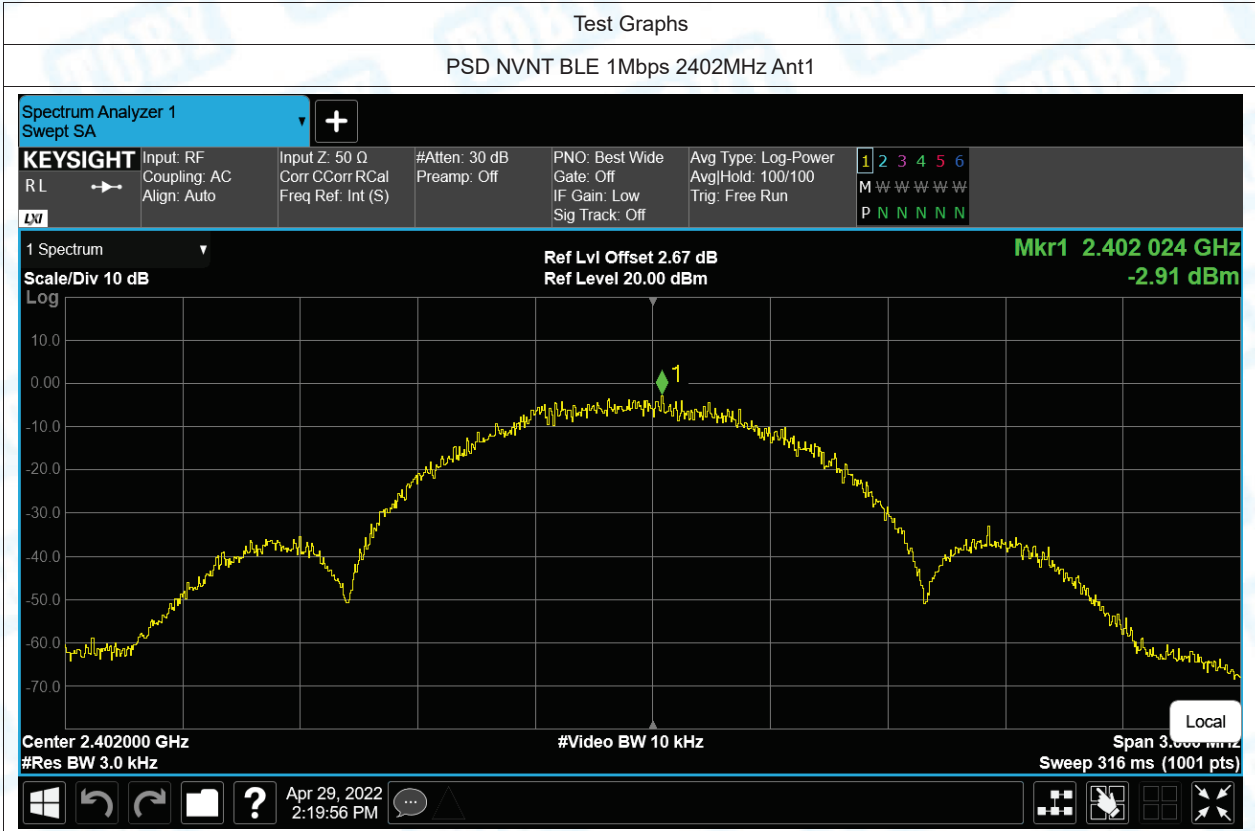

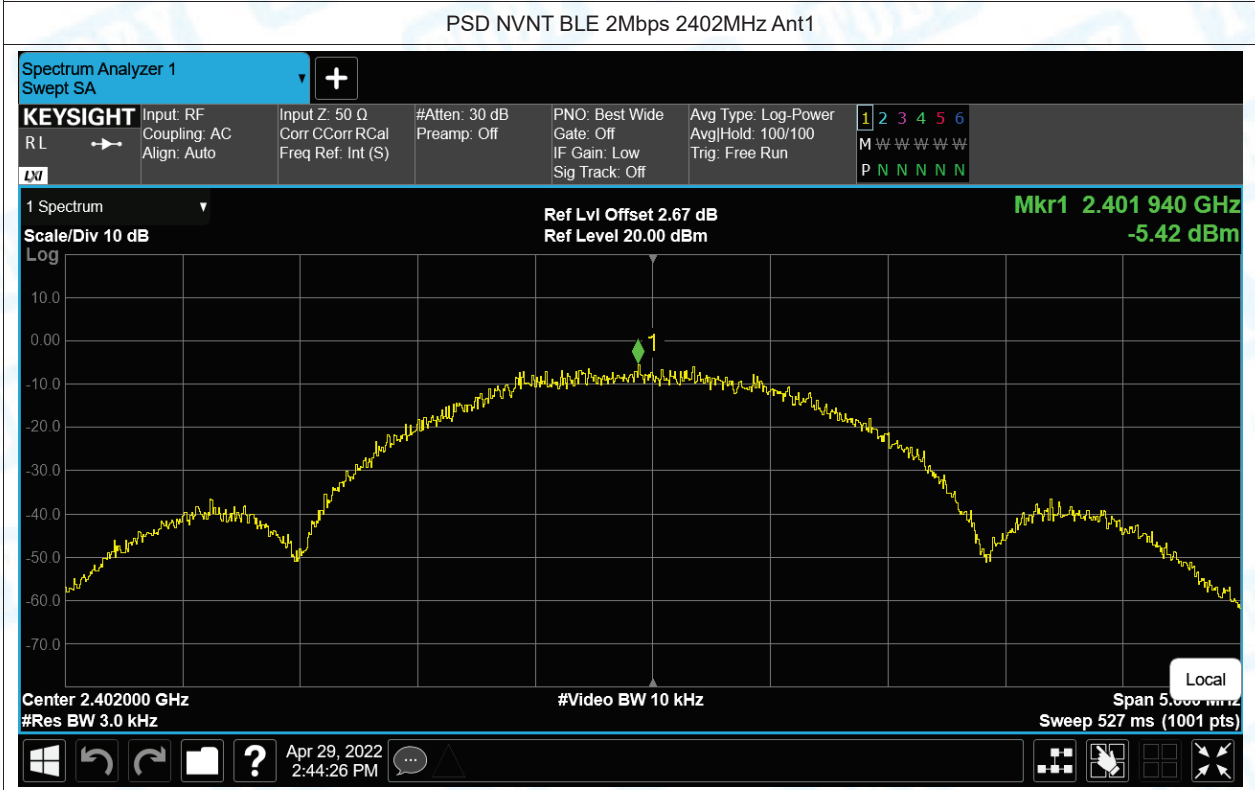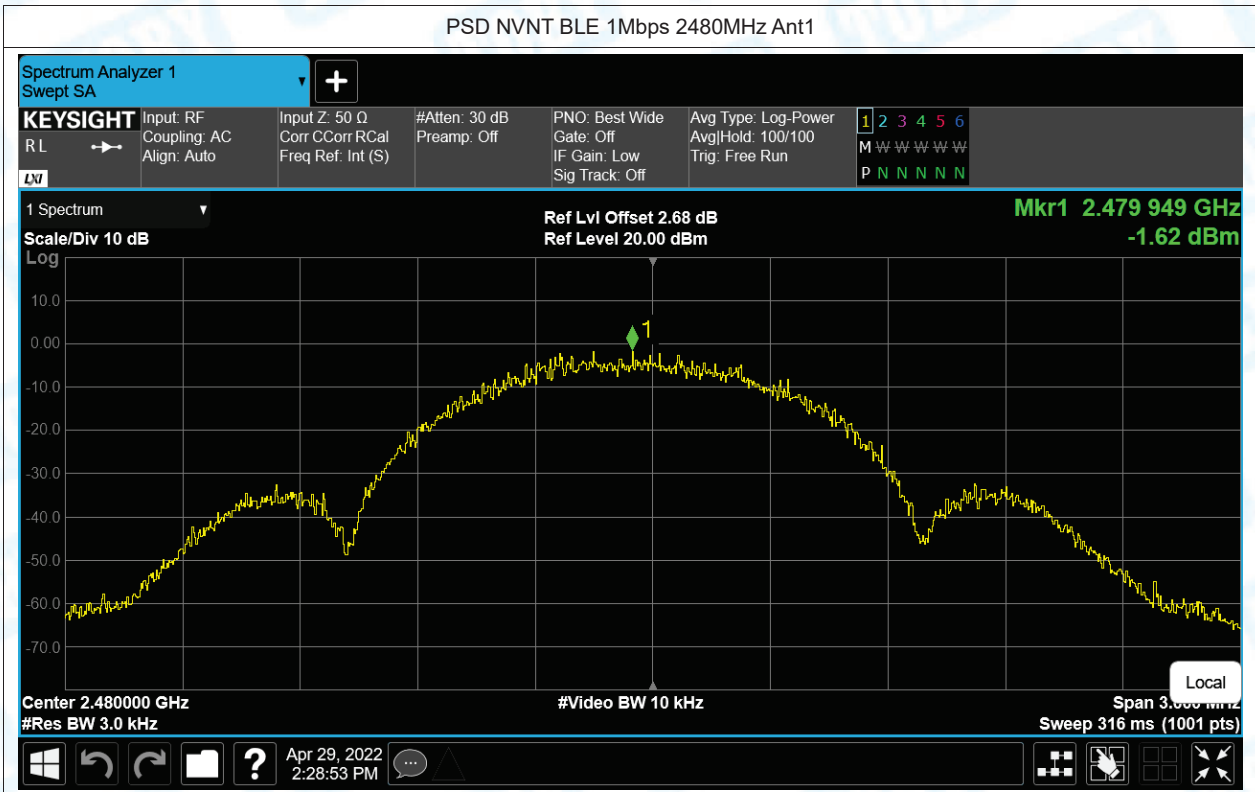

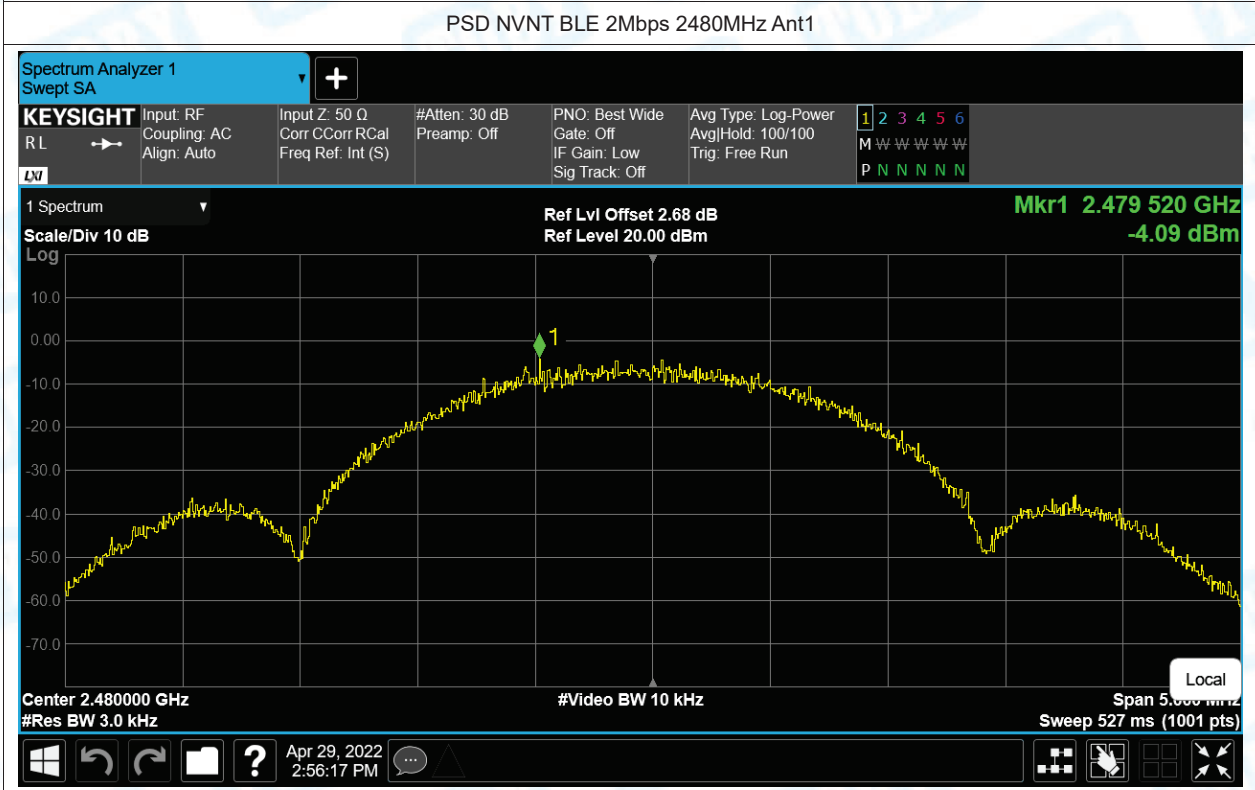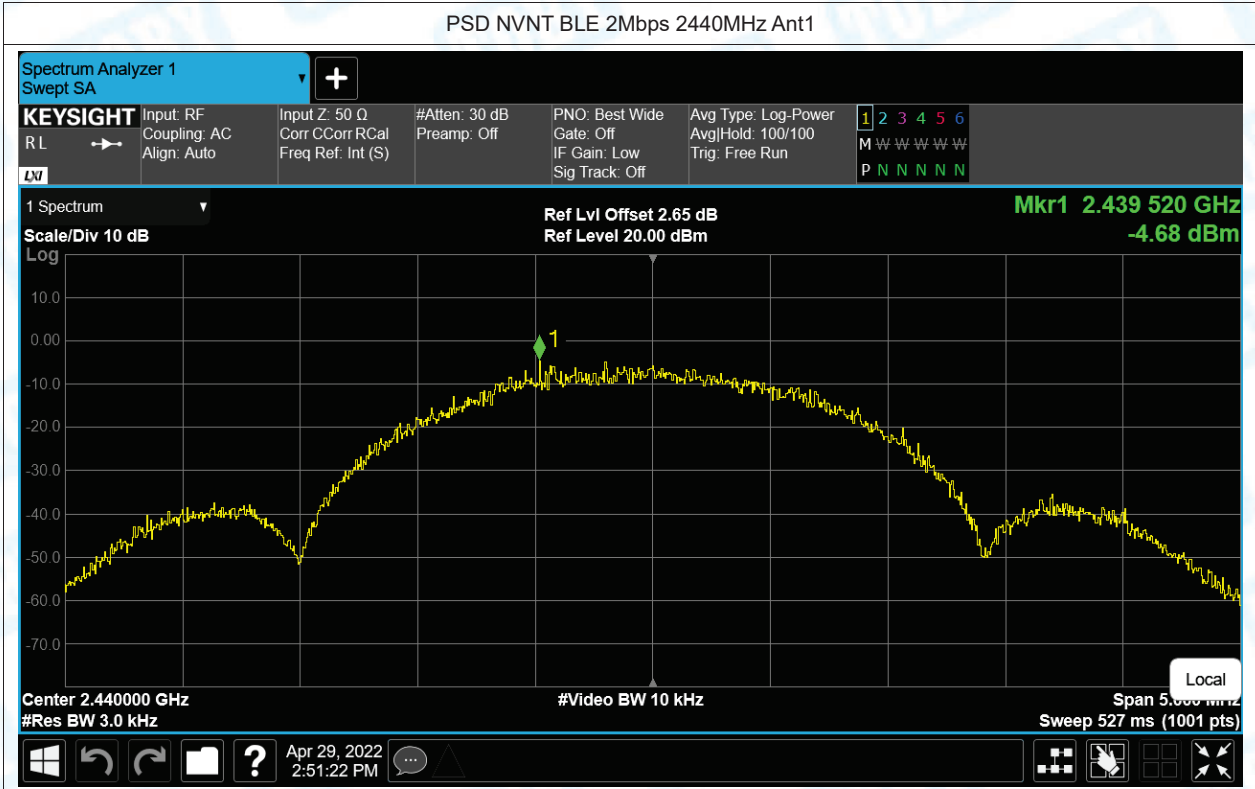


## 6.Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-62.51	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-63.62	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-60.85	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-61.69	-20	Pass

Test Graphs



Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref


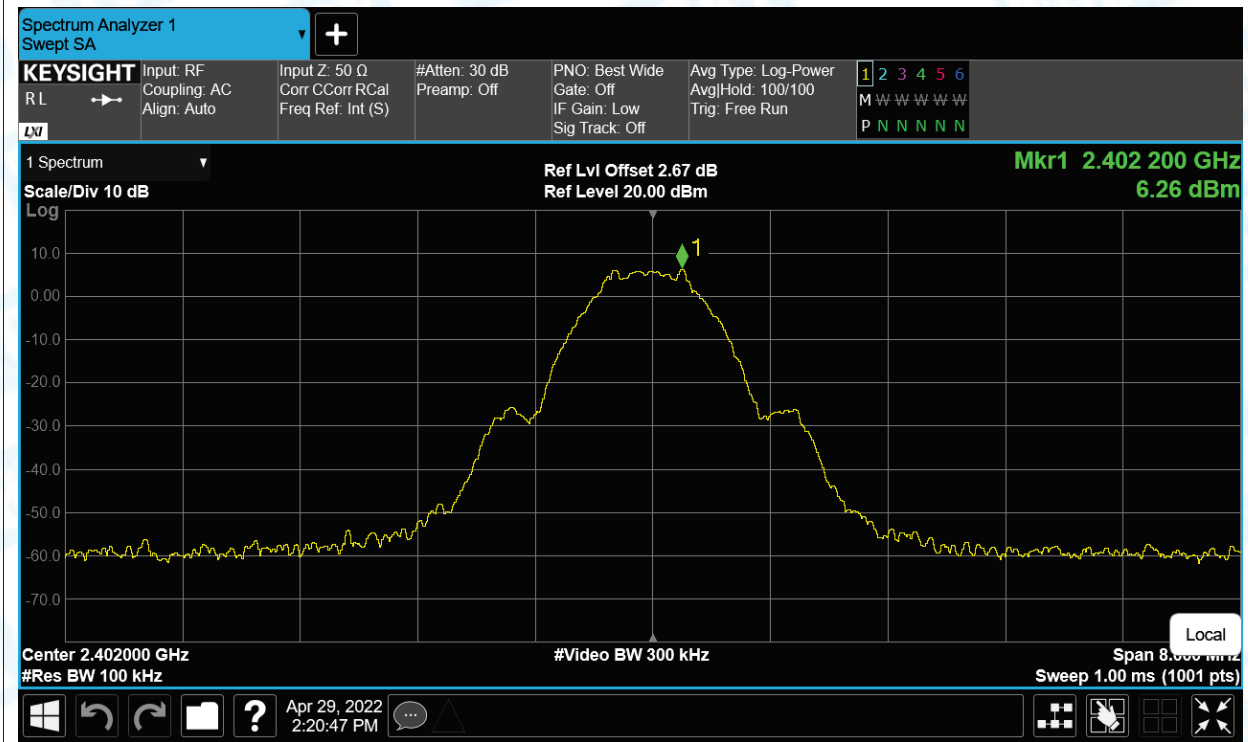




Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

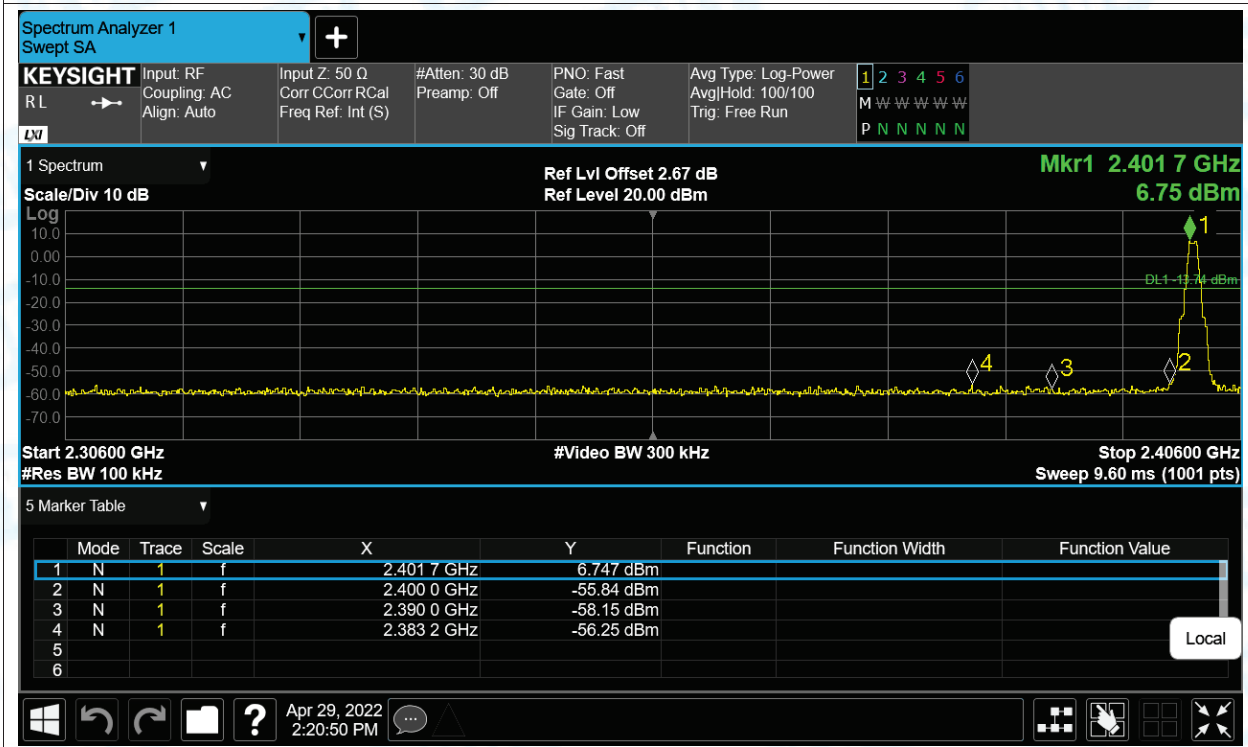



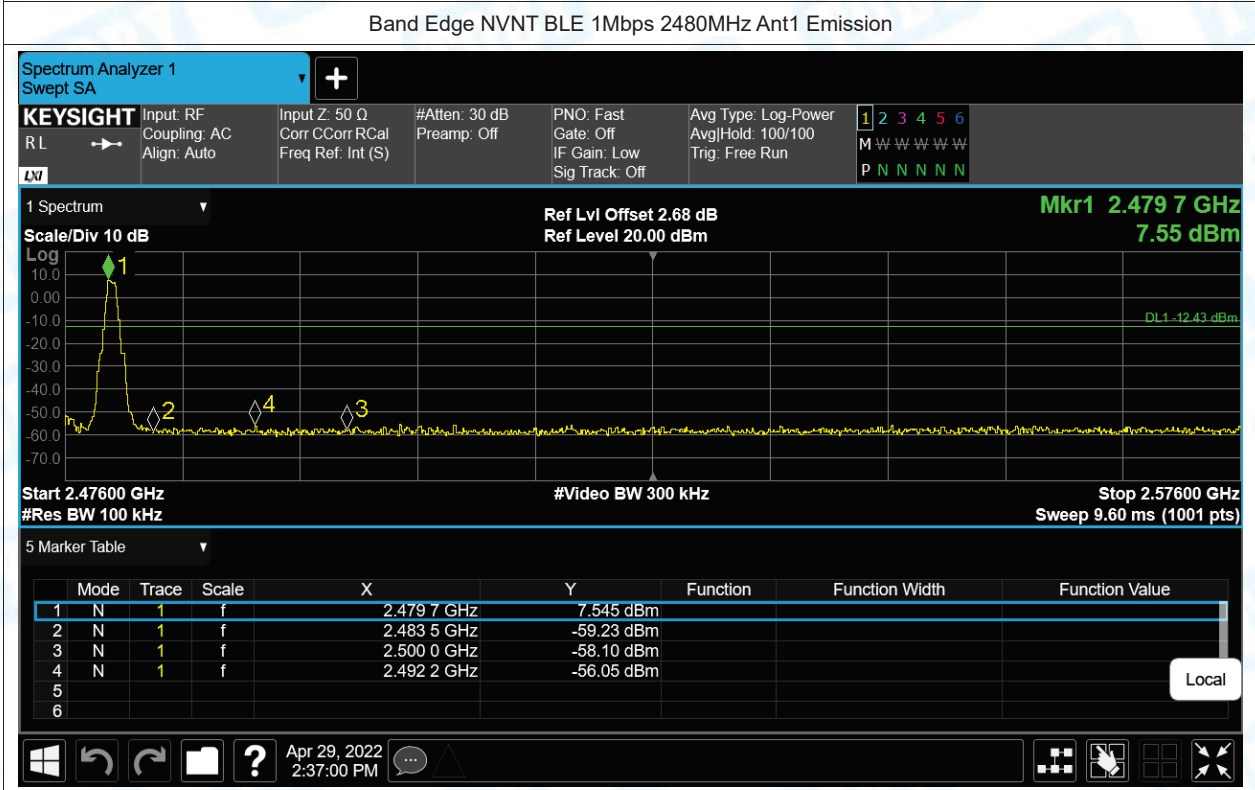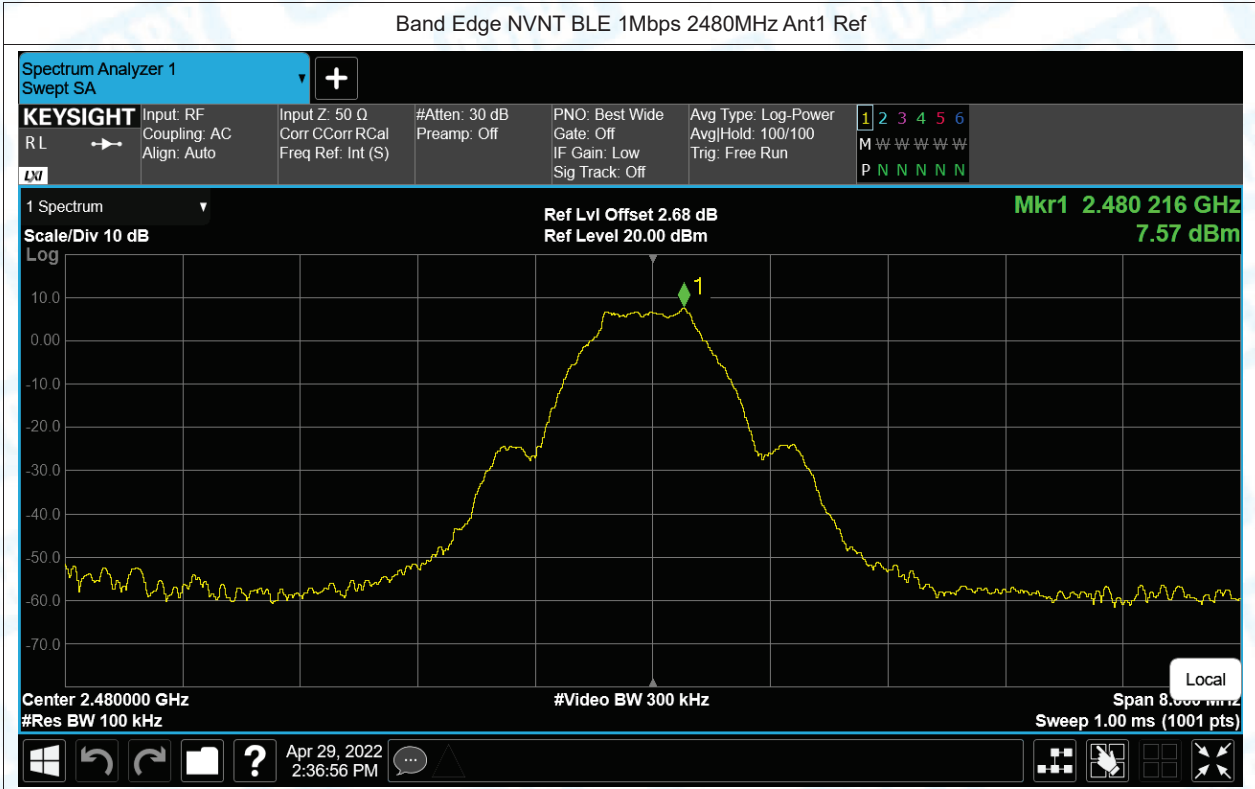

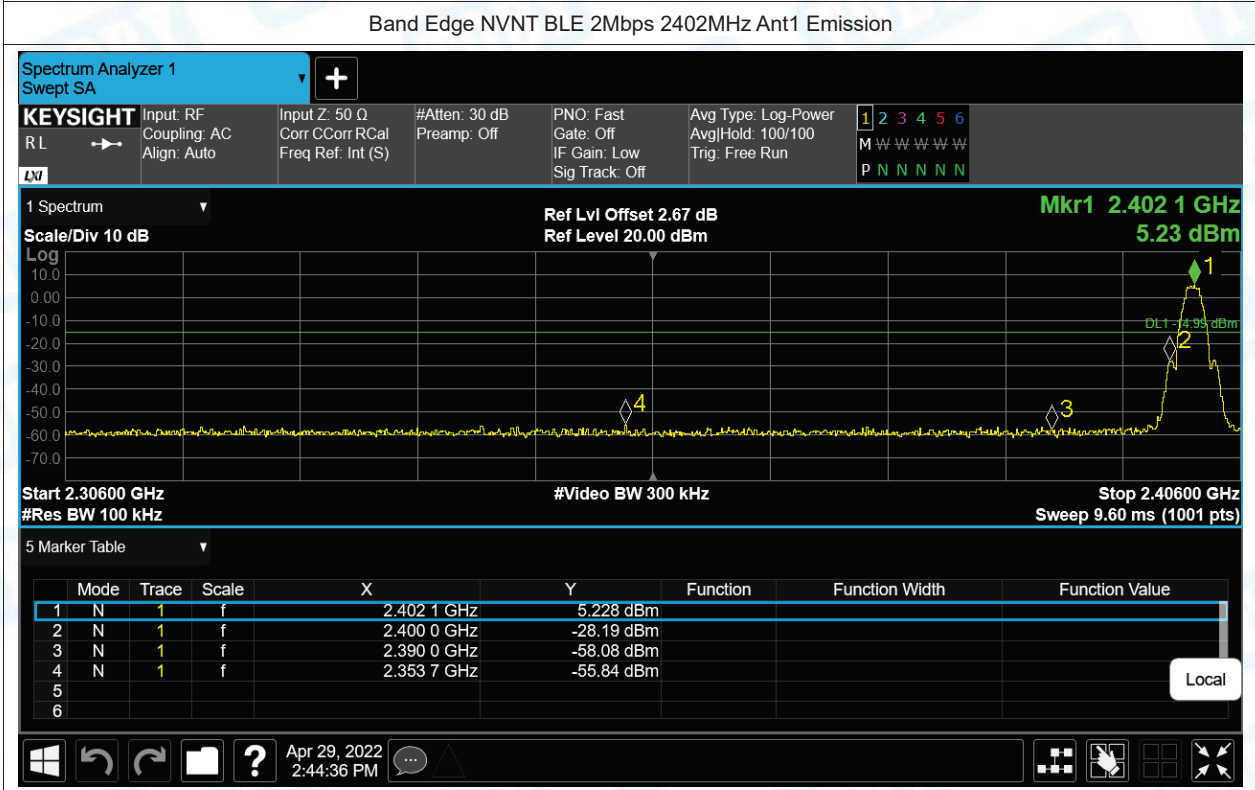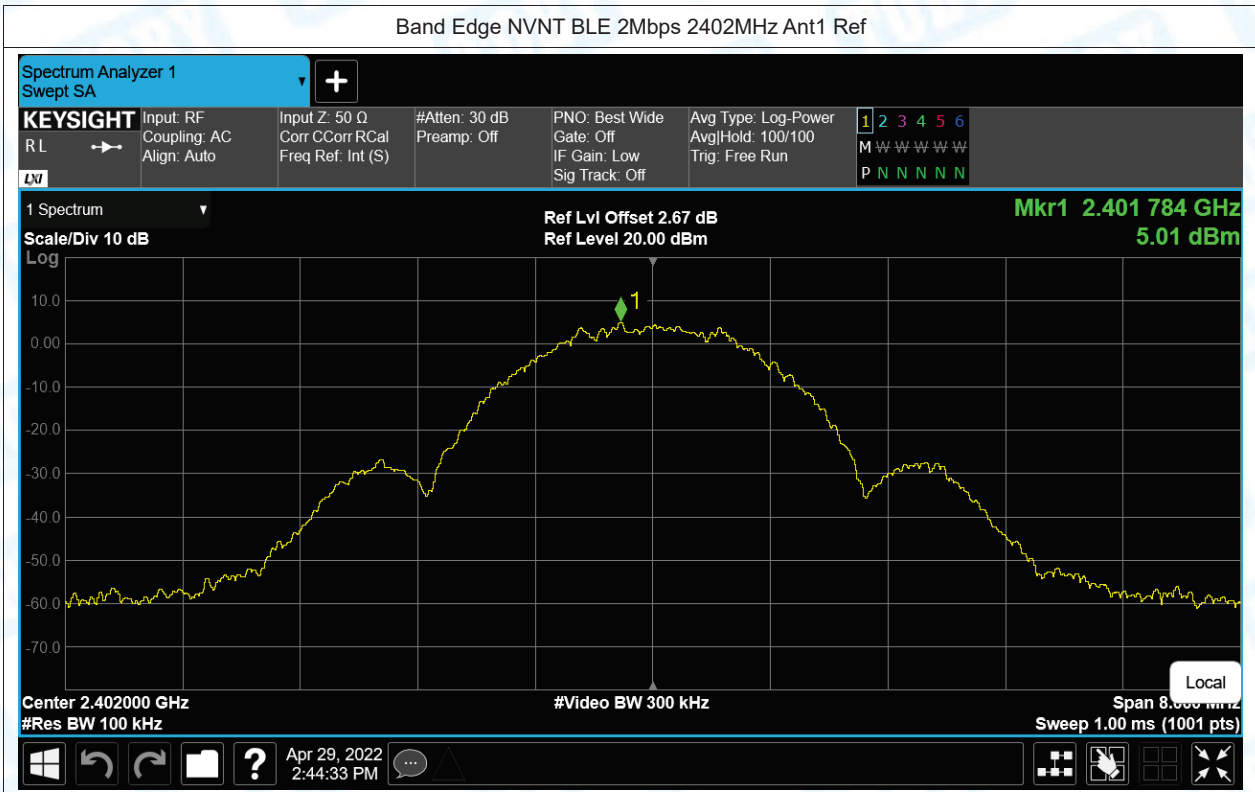

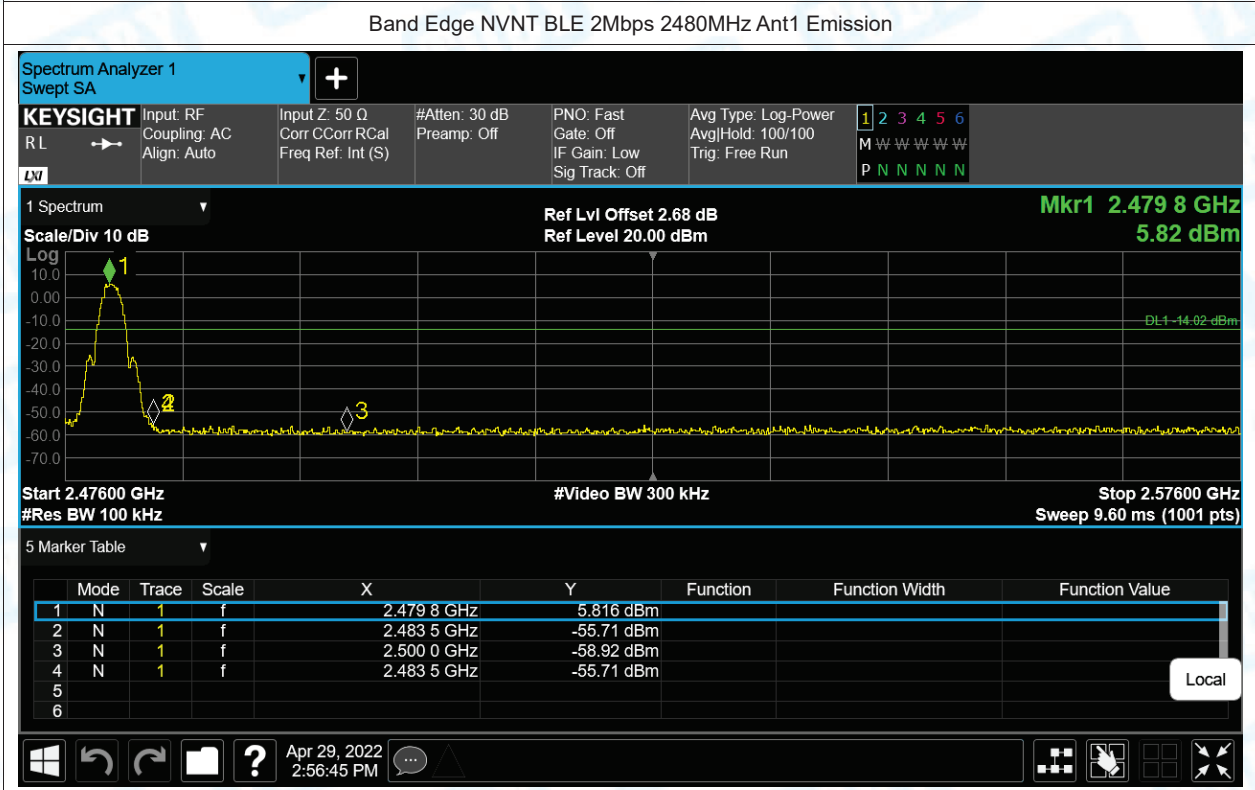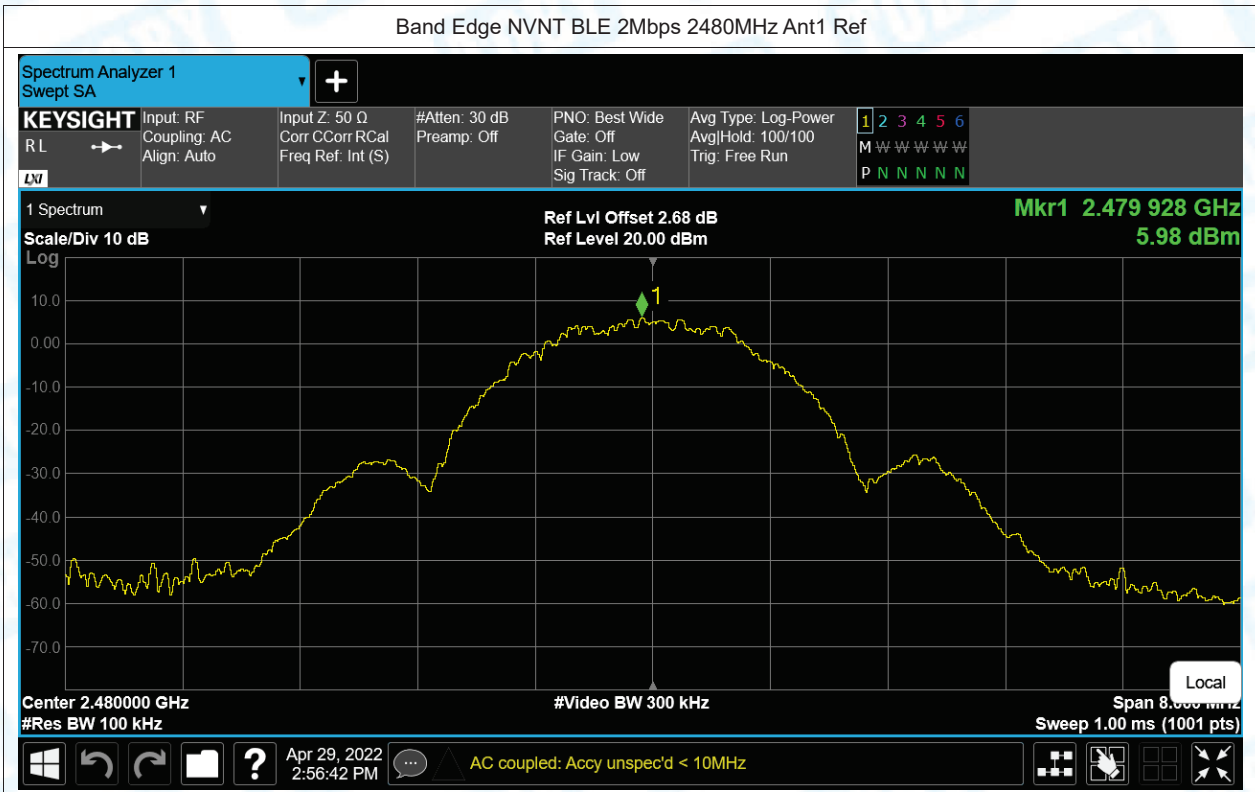


## 7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-45.37	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-46.46	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-47.56	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-44.41	-20	Pass
NVNT	BLE 2Mbps	2440	Ant1	-45.98	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-48.2	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

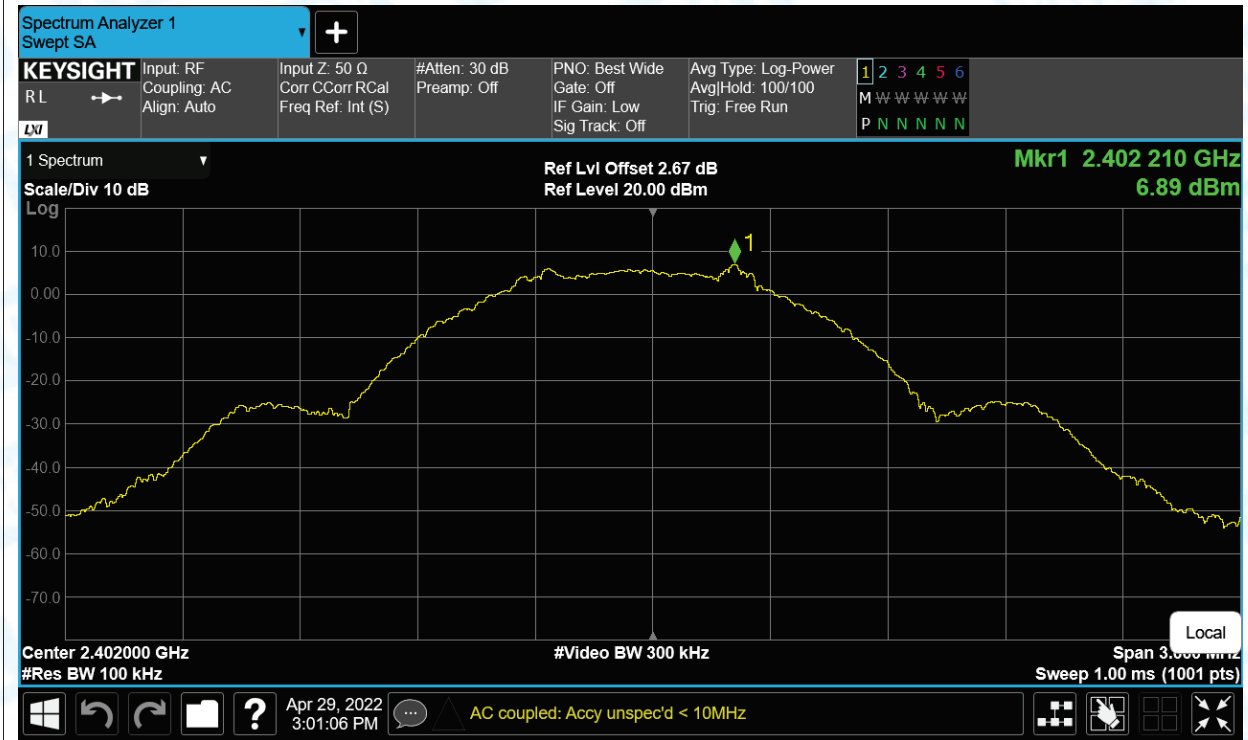


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

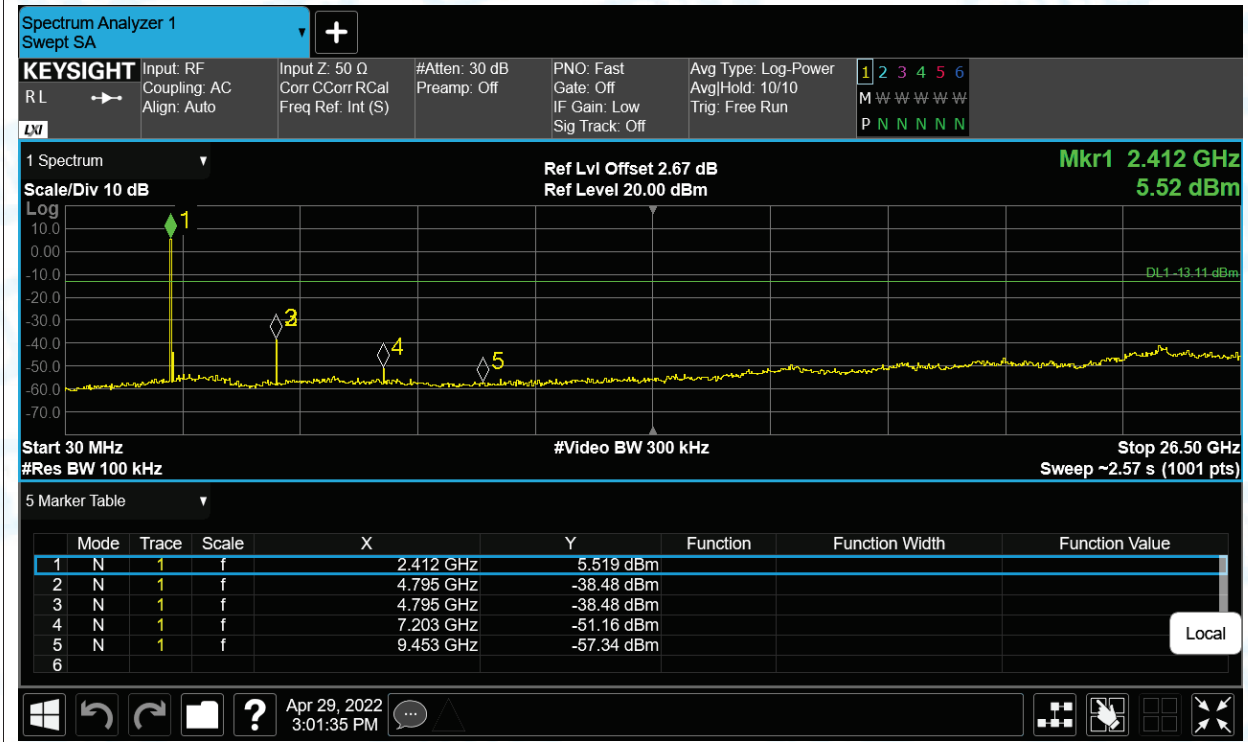


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Ref

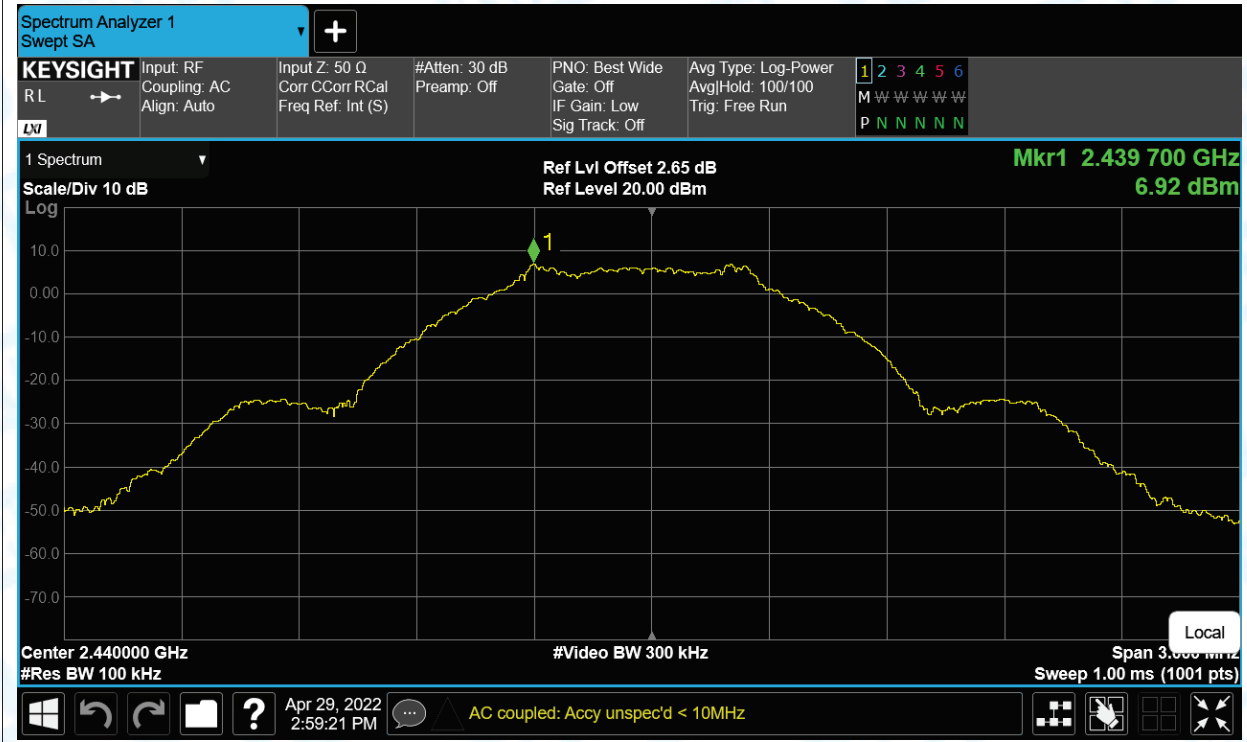


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Emission


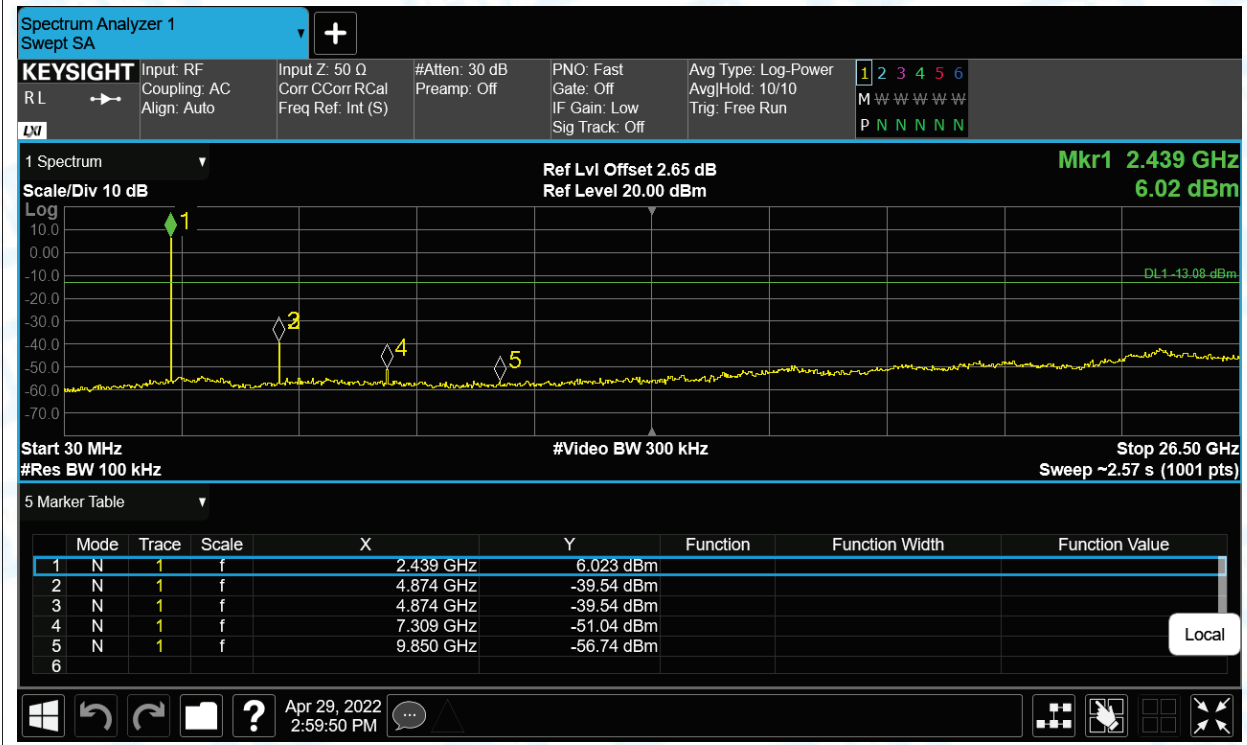


Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref


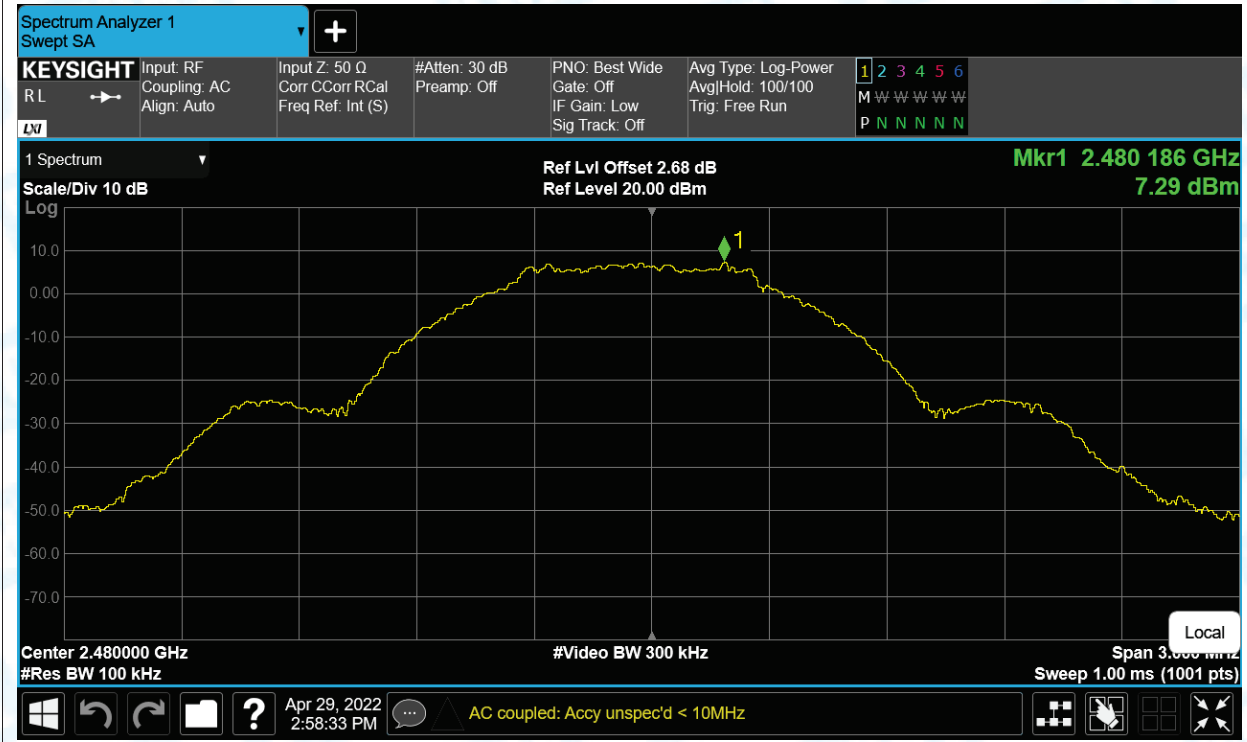




Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

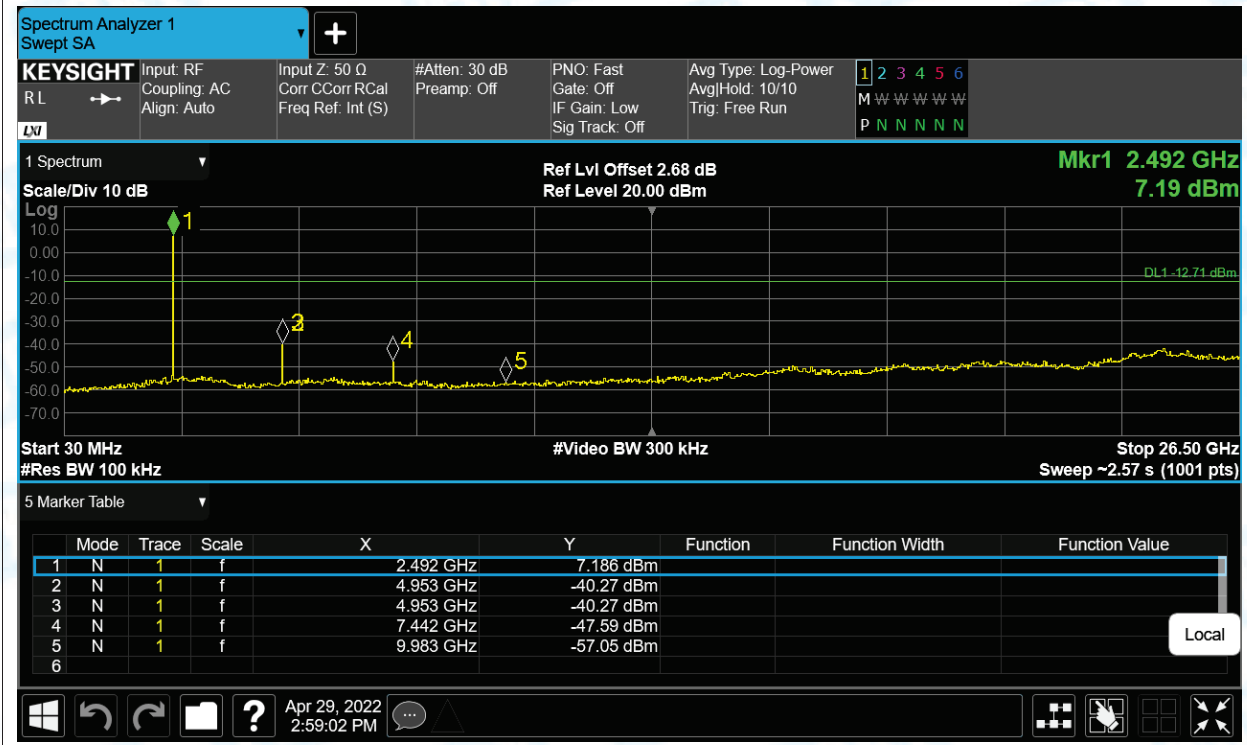

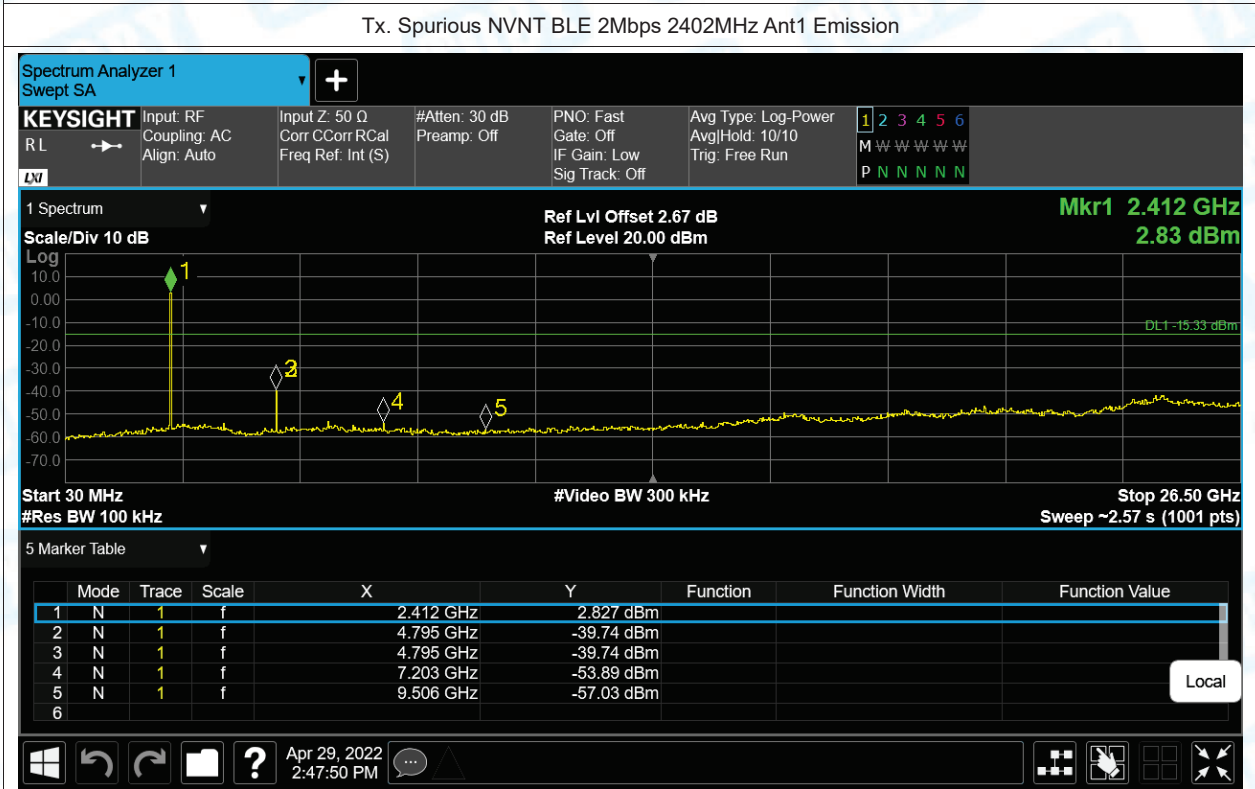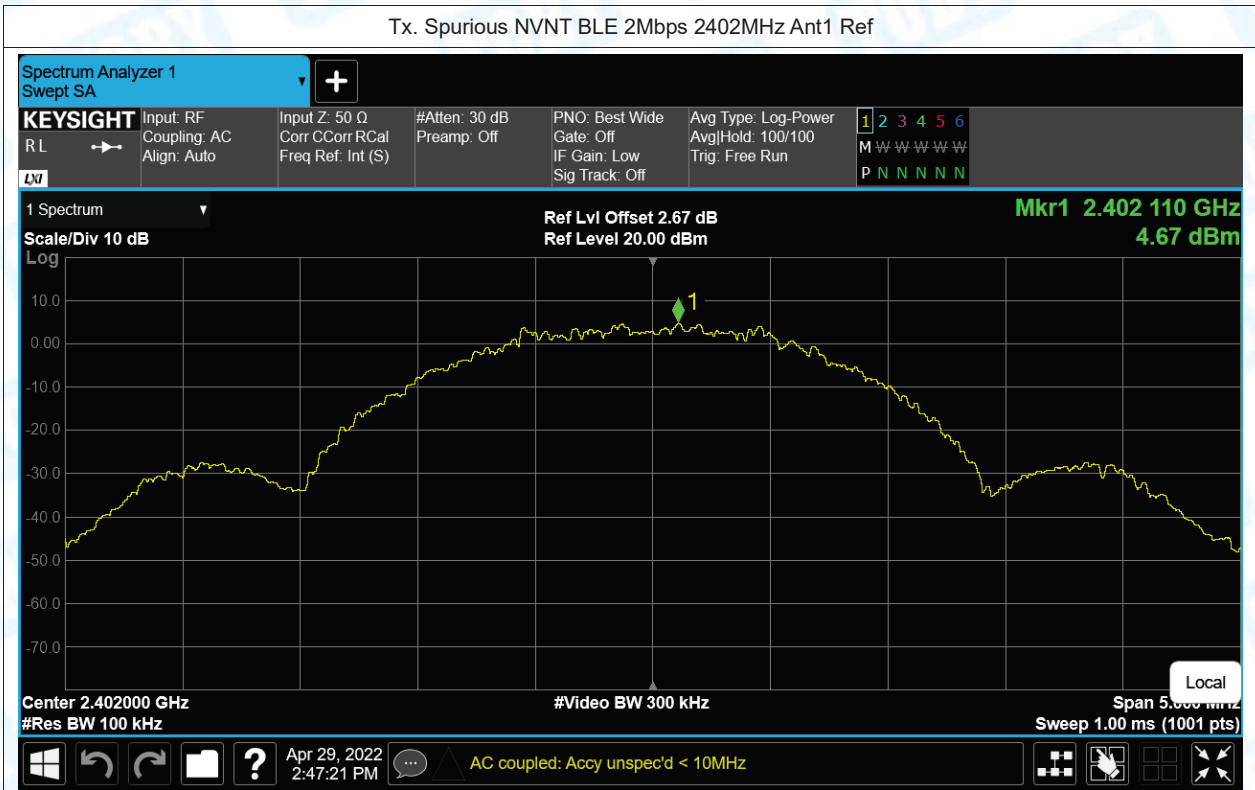



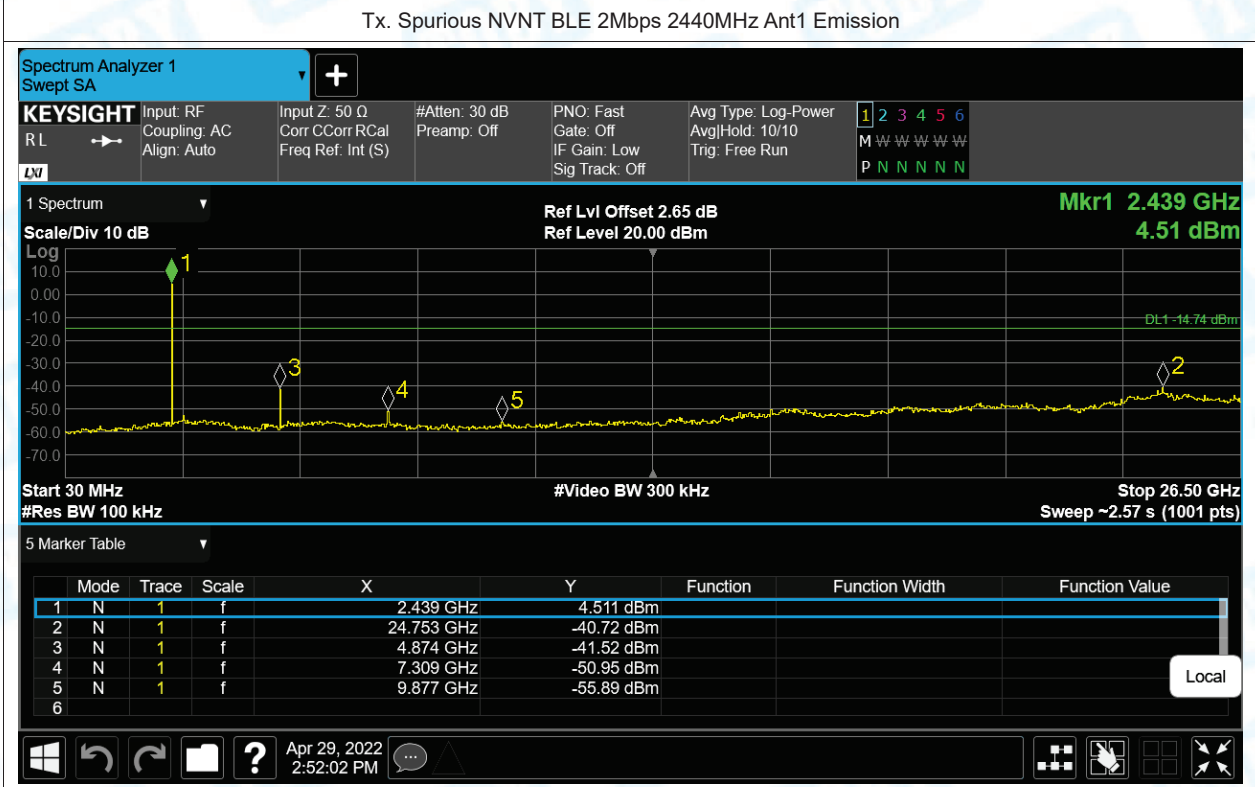
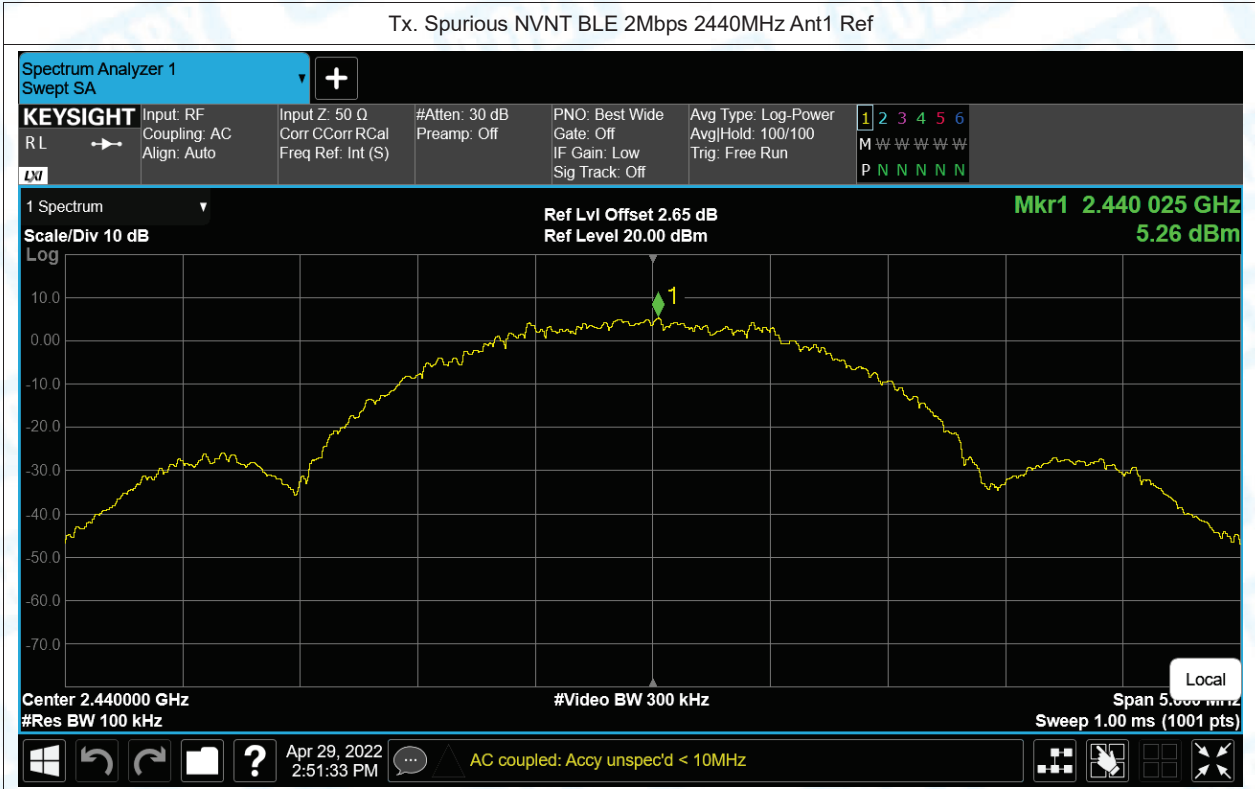


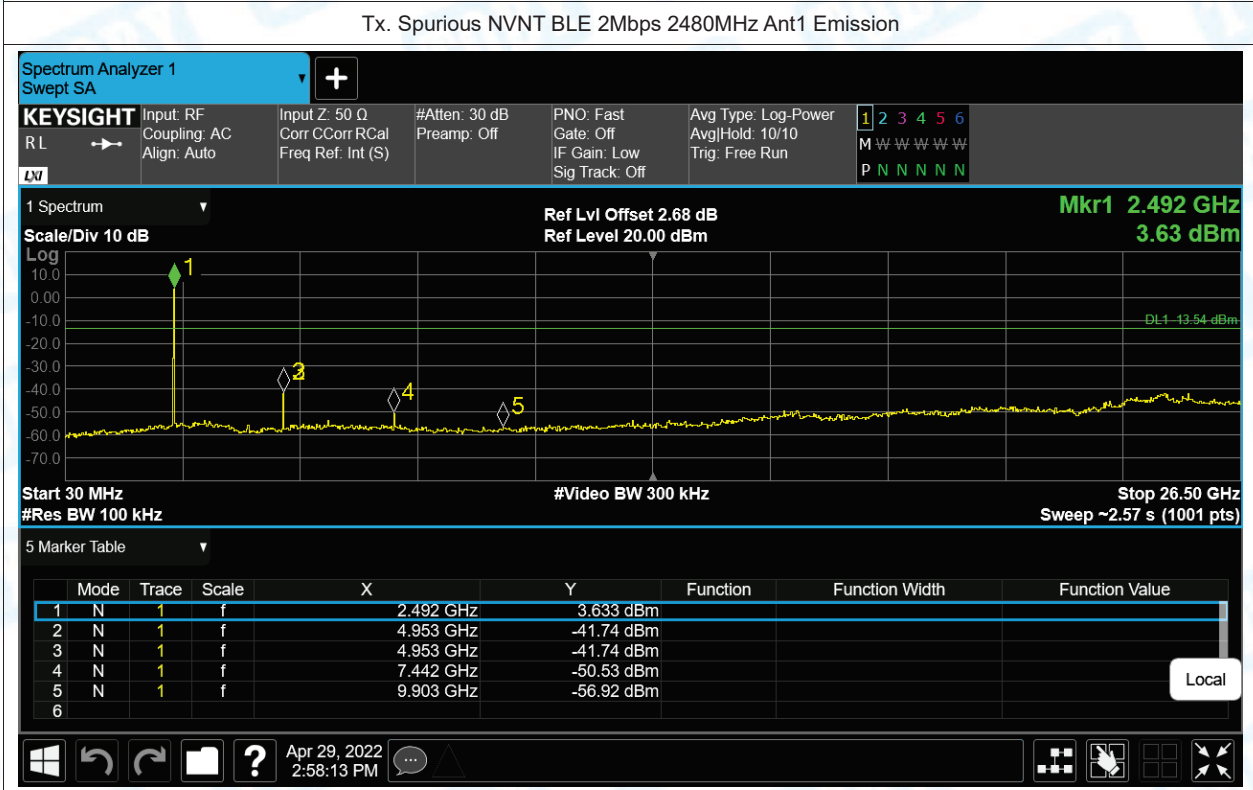
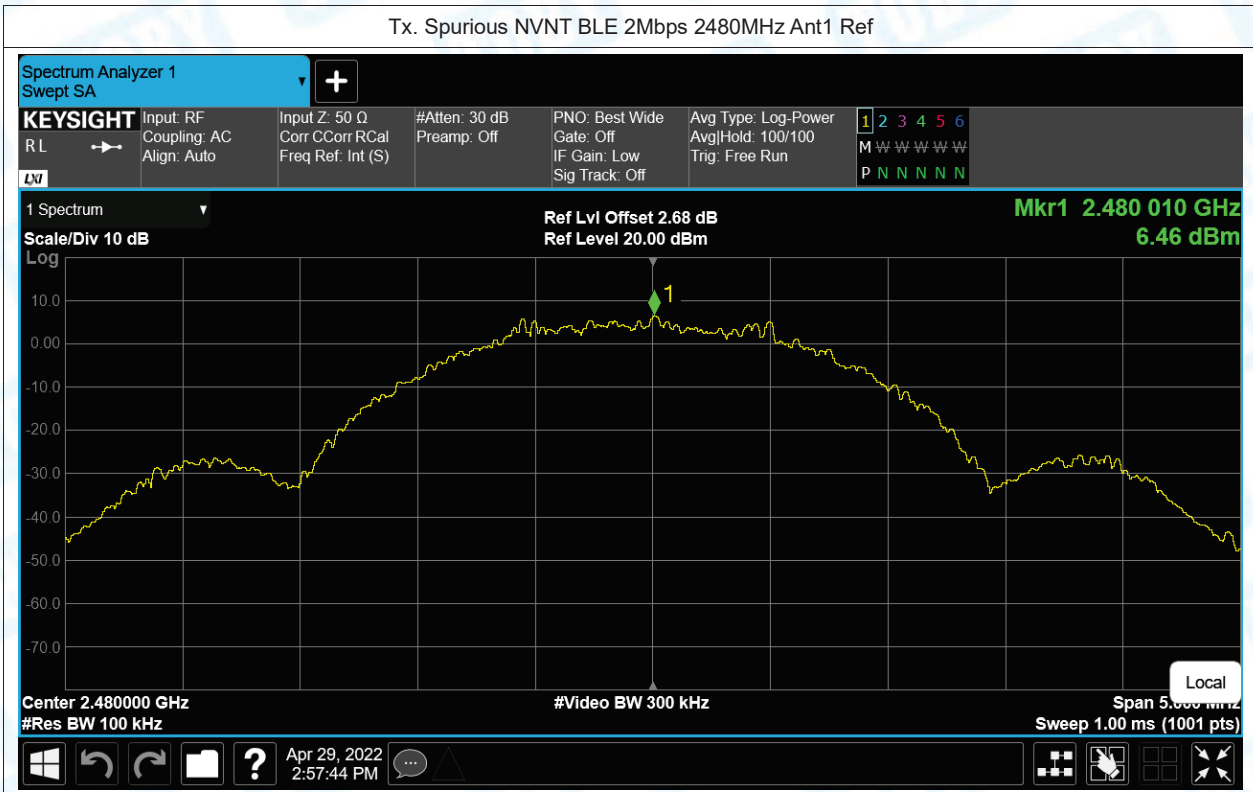


## 8.Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-48.25	2	49.01	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-58.14	2	39.12	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2328.72	-44.7	2	52.56	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2389.584	-57.95	2	39.31	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-47.89	2	49.37	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-57.99	2	39.27	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-46.98	2	50.28	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-56.86	2	40.4	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2494.36	-44.12	2	53.14	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2489.224	-55.9	2	41.36	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-48.02	2	49.24	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-57.76	2	39.5	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-47.15	2	50.11	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-58.14	2	39.12	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2384.784	-44.86	2	52.4	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2331.408	-57.66	2	39.6	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-49.62	2	47.64	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-57.96	2	39.3	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-44.32	2	52.94	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-52.26	2	45	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.56	-43	2	54.26	Peak	74	Pass
NVNT	BLE	2480	Ant1	2483.512	-52.26	2	45	Average	54	Pass

	2Mbps									
NVNT	BLE 2Mbps	2480	Ant1	2500	-49.13	2	48.13	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-57.75	2	39.51	Average	54	Pass

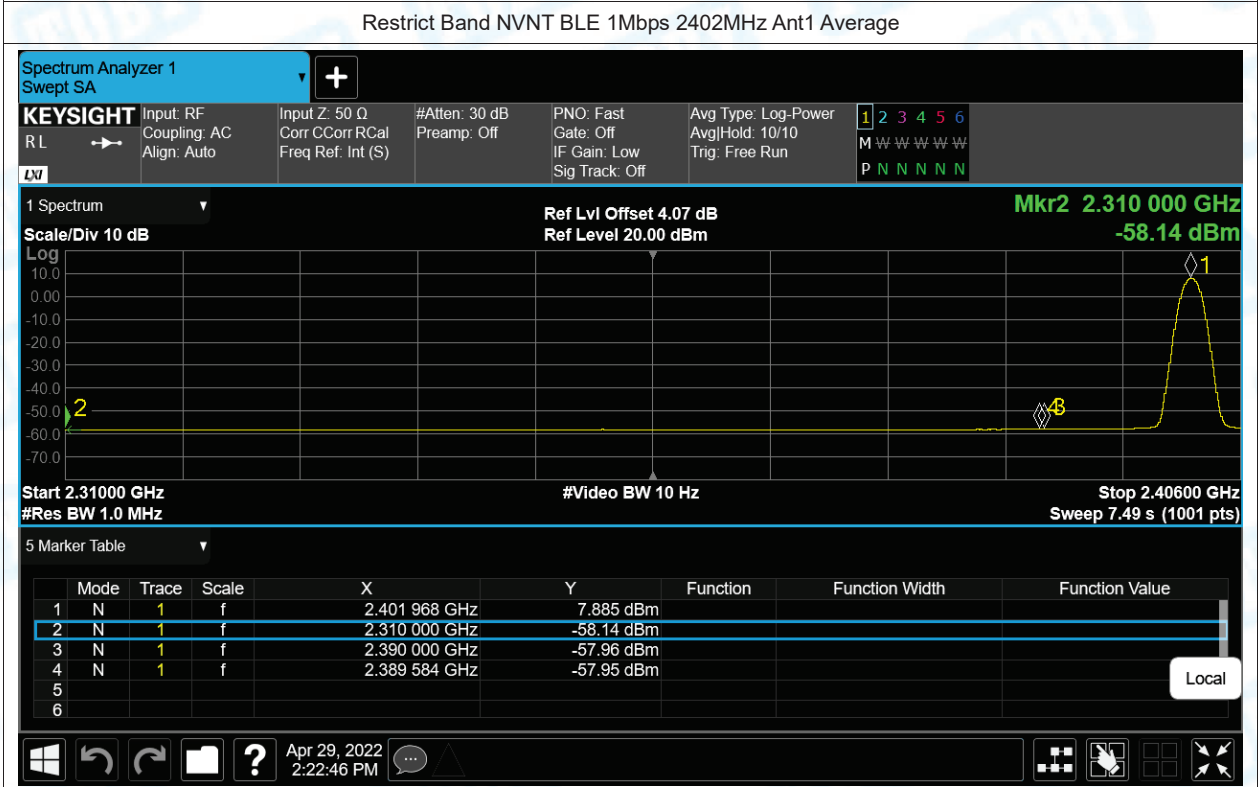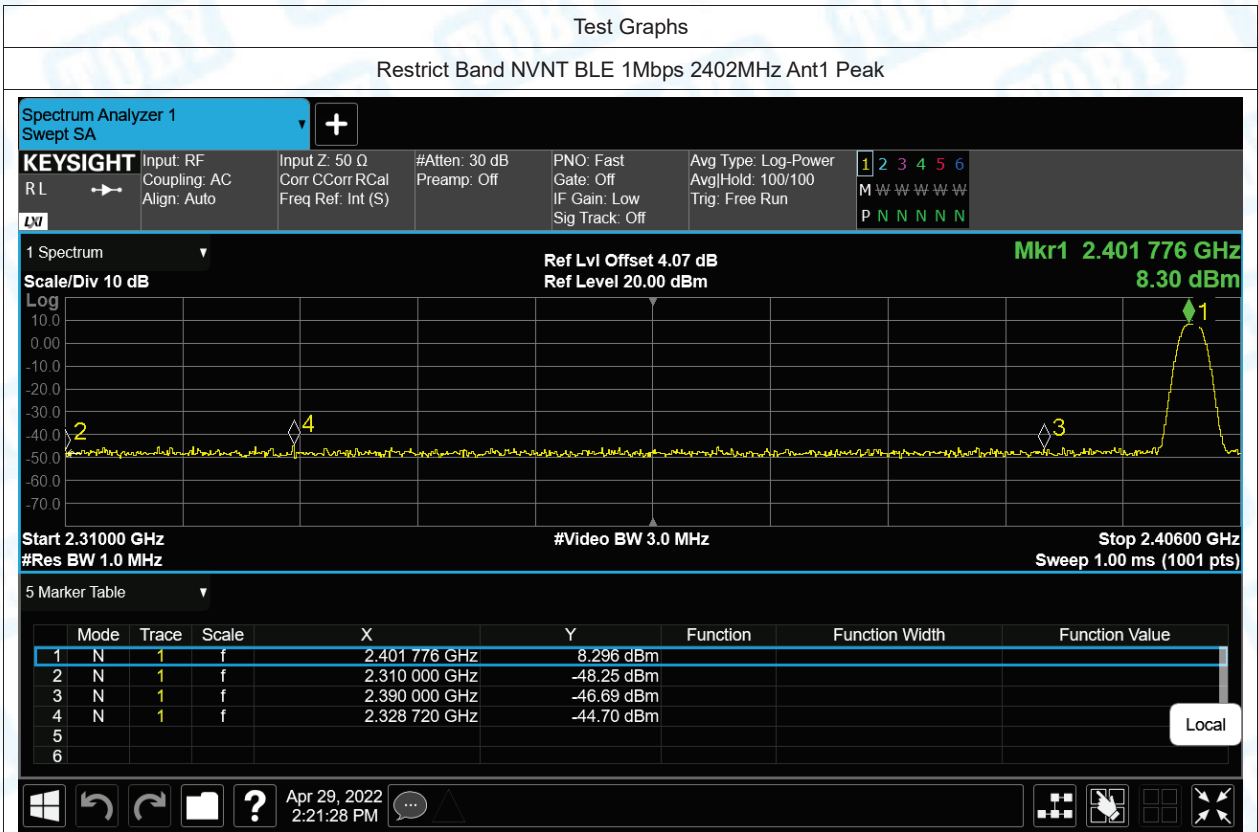

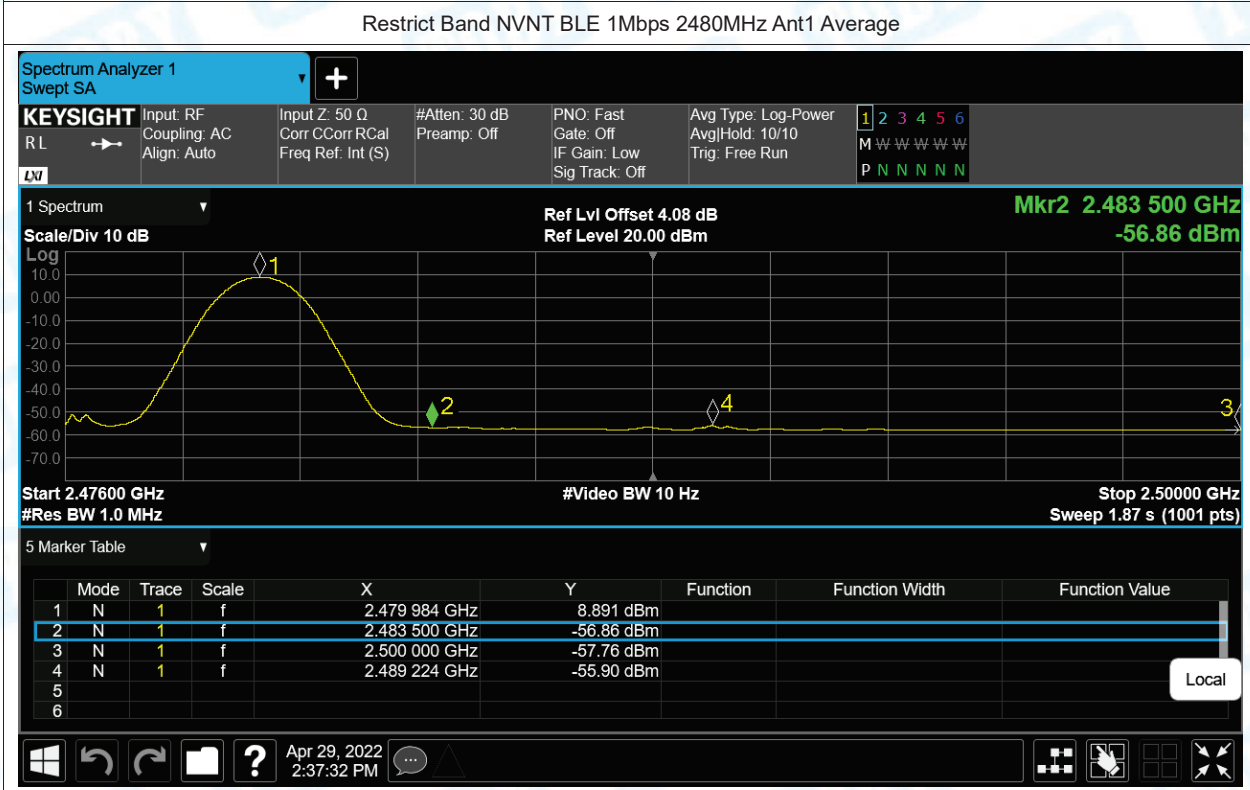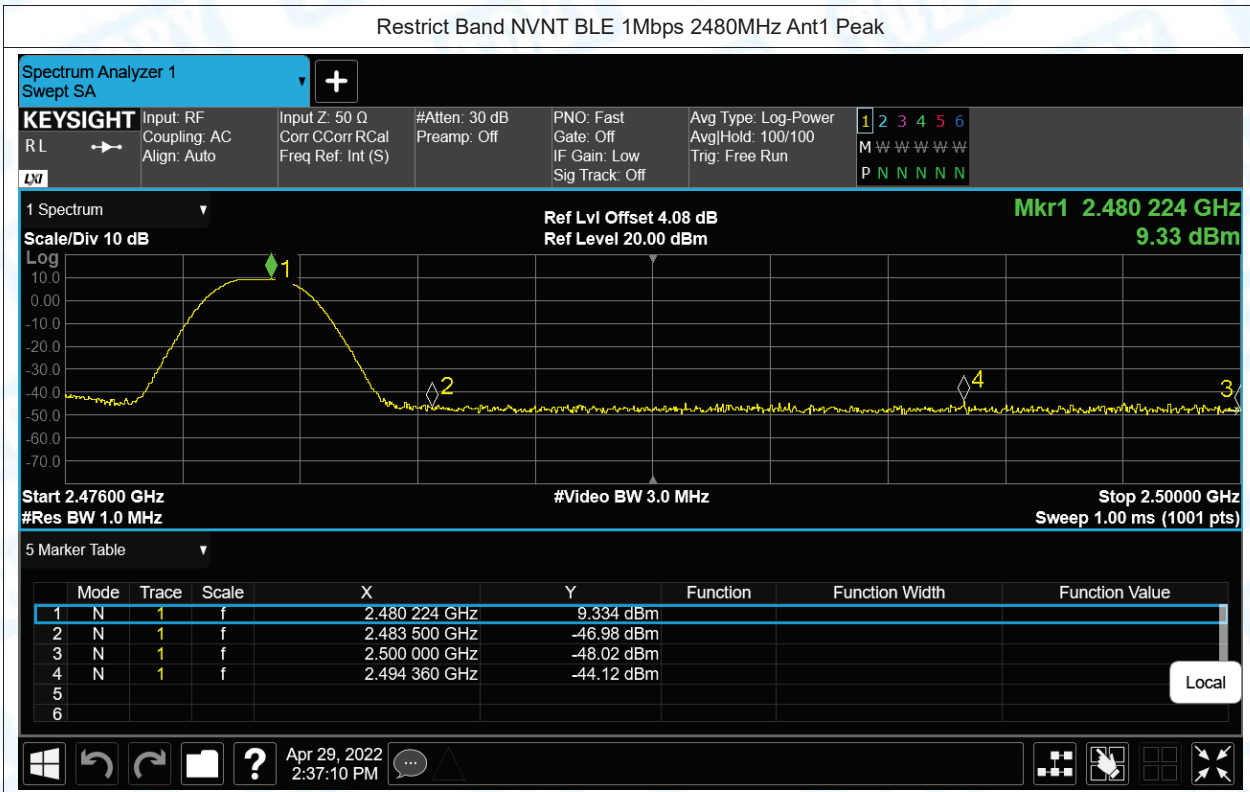

Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Peak

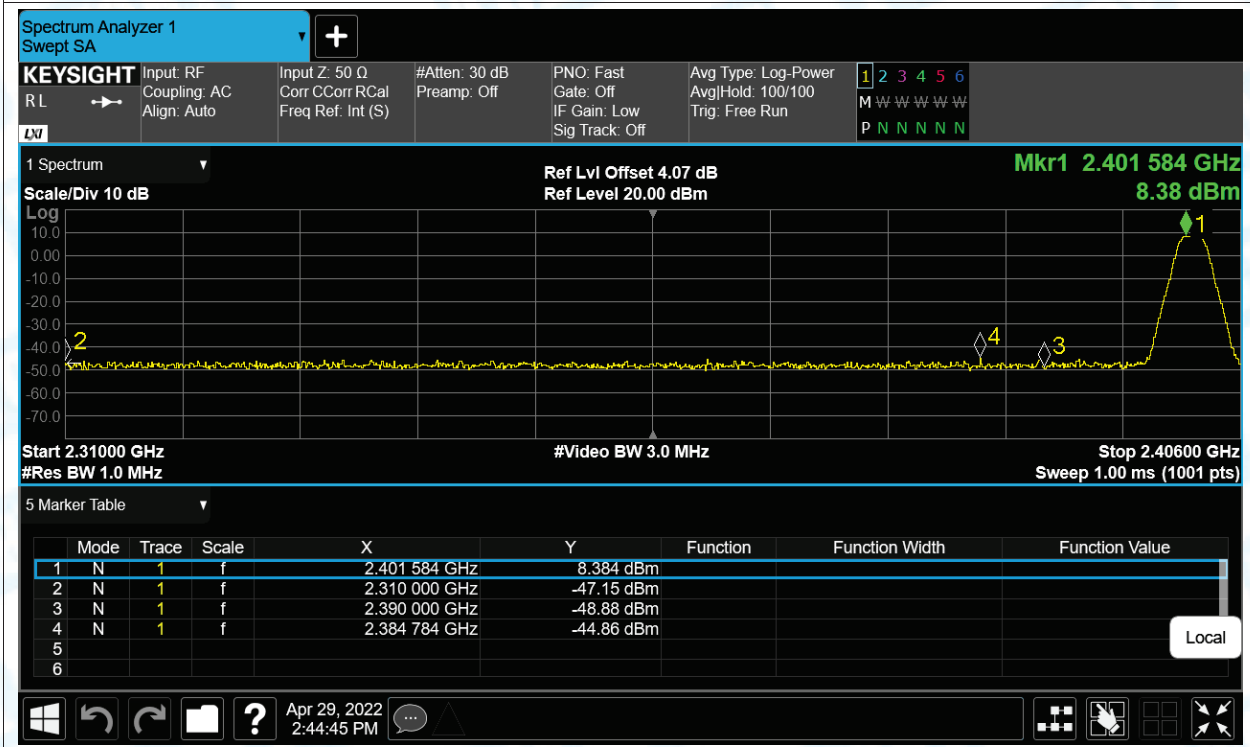

Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Average

