

# TEST REPORT

**Product Name** : 15W Car Wireless Charging Module  
**Brand Mark** : N/A  
**Model No.** : W015CN-09  
**Report Number** : BLA-EMC-202307-A3302  
**FCC ID** : 2AZX2-DB000001  
**Date of Sample Receipt** : 2023/7/13  
**Date of Test** : 2023/7/13 to 2023/8/4  
**Date of Issue** : 2023/8/4  
**Test Standard** : 47 CFR Part 15, Subpart C 15.215  
**Test Result** : Pass

Prepared for:

**An Energy Technology Co.,Ltd**  
**139 Huaye Road, Jintan District Changzhou City Jiang Su,213200 China**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**  
**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,**  
**Shenzhen, Guangdong Province, China**  
**TEL: +86-755-23059481**

Compiled by:

*Jozu*

Review by:

*Sueels*

Approved by:

*Blue Zheng*

Date:

2023/8/4



**REPORT REVISE RECORD**

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	2023/8/4	Original

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>4</b>
<b>2</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T. ....</b>	<b>5</b>
<b>4</b>	<b>TEST ENVIRONMENT .....</b>	<b>6</b>
<b>5</b>	<b>TEST MODE .....</b>	<b>6</b>
<b>6</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>7</b>	<b>DESCRIPTION OF SUPPORT UNIT .....</b>	<b>7</b>
<b>8</b>	<b>LABORATORY LOCATION .....</b>	<b>7</b>
<b>9</b>	<b>TEST INSTRUMENTS LIST .....</b>	<b>8</b>
<b>10</b>	<b>20DB BANDWIDTH .....</b>	<b>10</b>
10.1	BLOCK DIAGRAM OF TEST SETUP .....	10
10.2	TEST DATA .....	11
<b>11</b>	<b>RADIATED SPURIOUS EMISSIONS .....</b>	<b>12</b>
11.1	LIMITS .....	12
11.2	BLOCK DIAGRAM OF TEST SETUP .....	13
11.3	PROCEDURE .....	13
11.4	TEST DATA .....	15
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>		<b>20</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>		<b>21</b>

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
20dB Bandwidth	47 CFR Part 15.215	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.215	Pass
Radiated Spurious Emissions	47 CFR Part 15.215	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209	Pass

BlueAsia

## 2 GENERAL INFORMATION

<b>Applicant</b>	An Energy Technology Co.,Ltd
<b>Address</b>	139 Huaye Road, Jintan District Changzhou City Jiang Su,213200 China
<b>Manufacturer</b>	An Energy Technology Co.,Ltd
<b>Address</b>	139 Huaye Road, Jintan District Changzhou City Jiang Su,213200 China
<b>Factory</b>	An Energy Technology Co.,Ltd
<b>Address</b>	139 Huaye Road, Jintan District Changzhou City Jiang Su,213200 China
<b>Product Name</b>	15W Car Wireless Charging Module
<b>Test Model No.</b>	W015CN-09

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	N/A
<b>Software Version</b>	N/A
<b>Operation Frequency:</b>	118.1KHz
<b>Modulation type:</b>	ASK
<b>Antenna Type:</b>	Inductive loop coil Antenna
<b>Antenna Gain:</b>	0dBi (Max)
<b>Power supply</b>	Input: 16V DC~20V DC, 1.5A (max) Output: 15W

#### 4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	18Vdc

#### 5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Wireless charging	Keep the EUT in wireless charging mode

#### 6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

## 7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
Load	N/A	N/A	N/A	15W MAX

## 8 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co.,Ltd.  
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,  
China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

## 9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum Receiver	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16 2023/07/14	2023/07/15 2024/07/13
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16 2023/07/14	2023/07/15 2024/07/13
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14 2023/07/14	2023/07/13 2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16 2023/07/14	2023/07/15 2024/07/13
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A




<b>Test Equipment Of RF Conducted Test</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2023/06/30	2024/06/29
Spectrum	KEYSIGHT	N9010A	MY54330814	2023/06/30	2024/06/29
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2023/06/30	2024/06/29
Signal Generator	Agilent	N5181A	MY46240904	2023/08/02	2024/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2023/06/30	2024/06/29


## 10 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.215
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	Wireless charging
Test Mode (Final Test)	Wireless charging
Tester	Jozu
Temperature	25°C
Humidity	60%

### 10.1 BLOCK DIAGRAM OF TEST SETUP

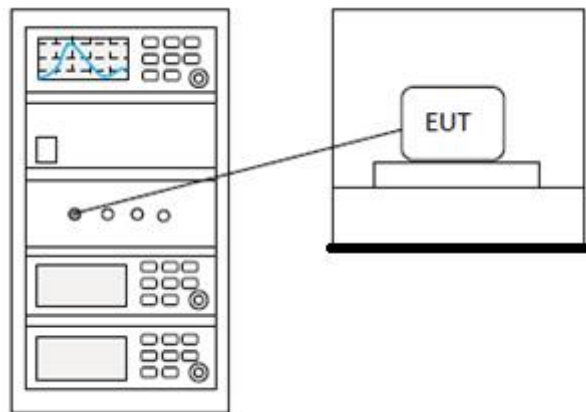

### 10.2 TEST DATA

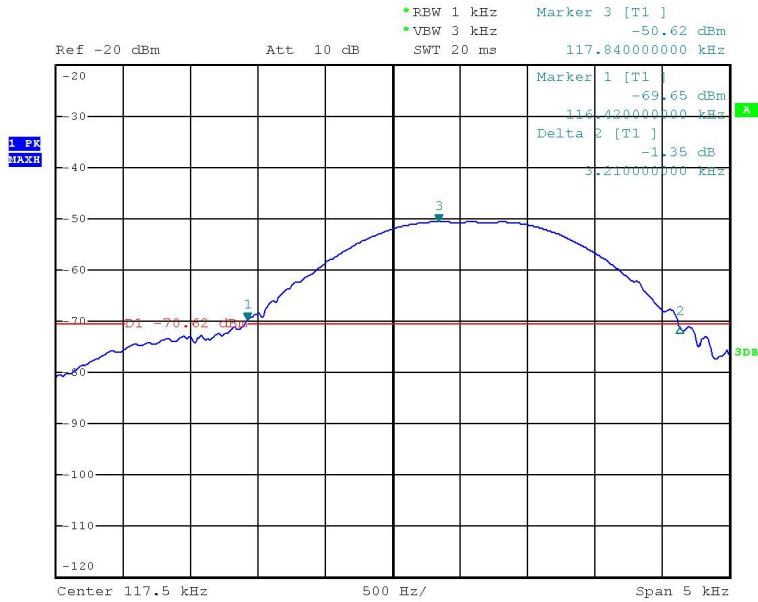

jjjj  
Date: 20.JUL.2023 17:03:55

20dB bandwidth (MHz)	Results
0.00321	Passed

## 11 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.215
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	Wireless charging
<b>Test Mode (Final Test)</b>	Wireless charging
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 11.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 11.2 BLOCK DIAGRAM OF TEST SETUP

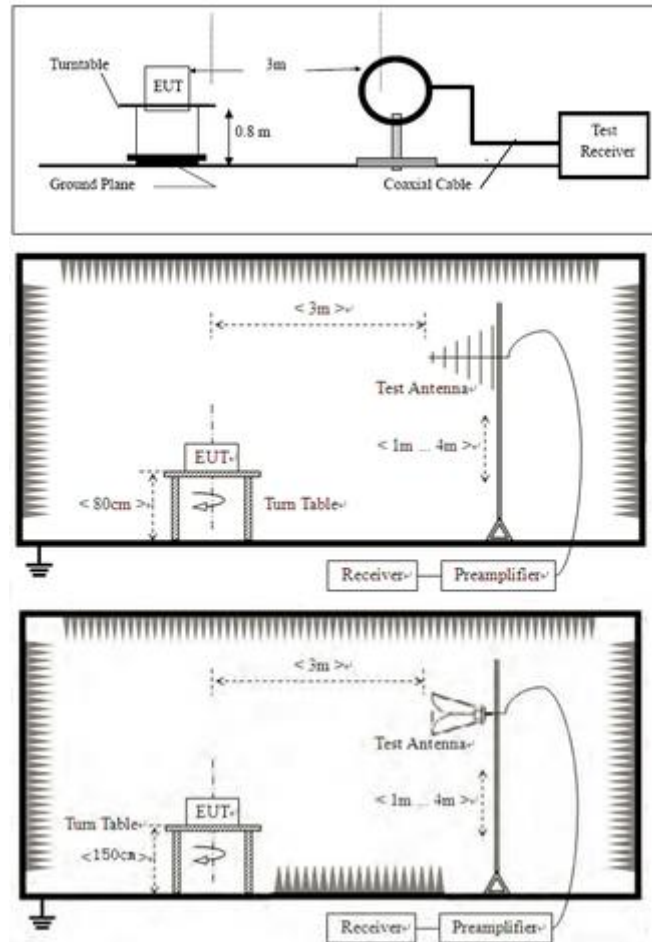

## 11.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

### 11.4 TEST DATA

9kHz-30MHz:

[TestMode: wireless charging]; [Polarity: x]

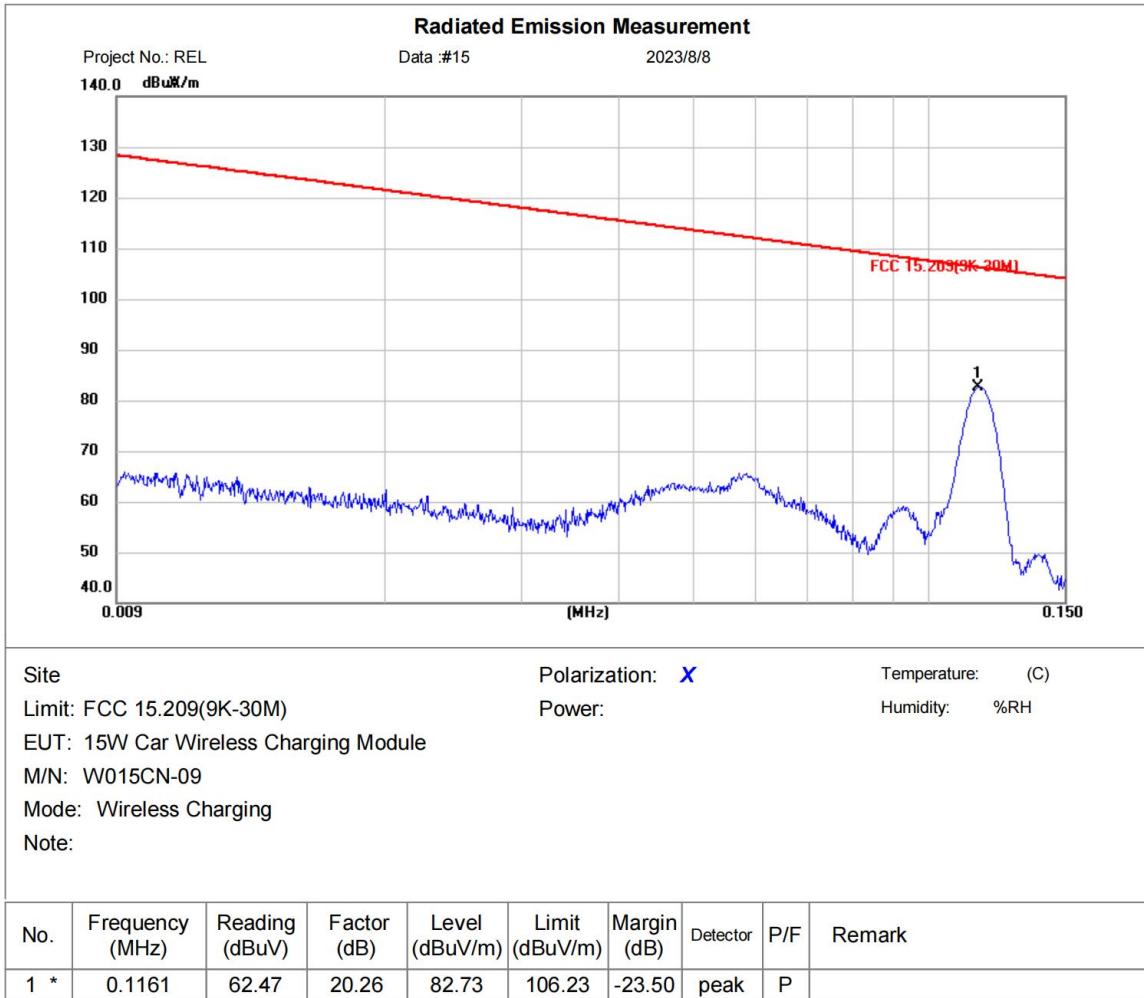

\*:Maximum data    x:Over limit    !:over margin


**Test Result: Pass**





30MHz-1GHz:


[TestMode: wireless charging]; [Polarity: Horizontal]

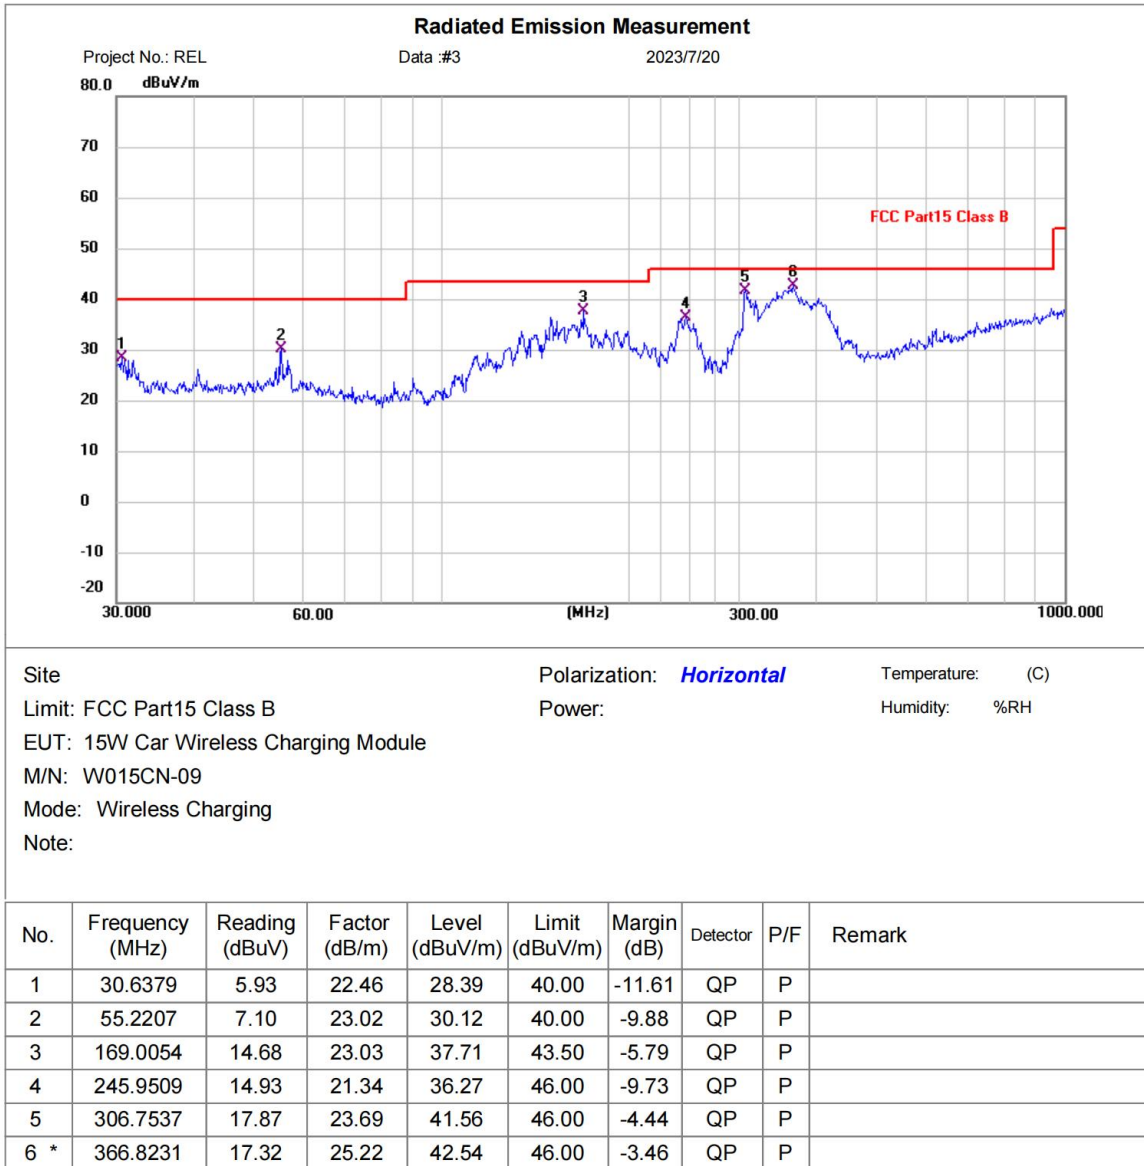

\*:Maximum data    x:Over limit    !:over margin

**Test Result: Pass**

[TestMode: wireless charging]; [Polarity: Vertical]

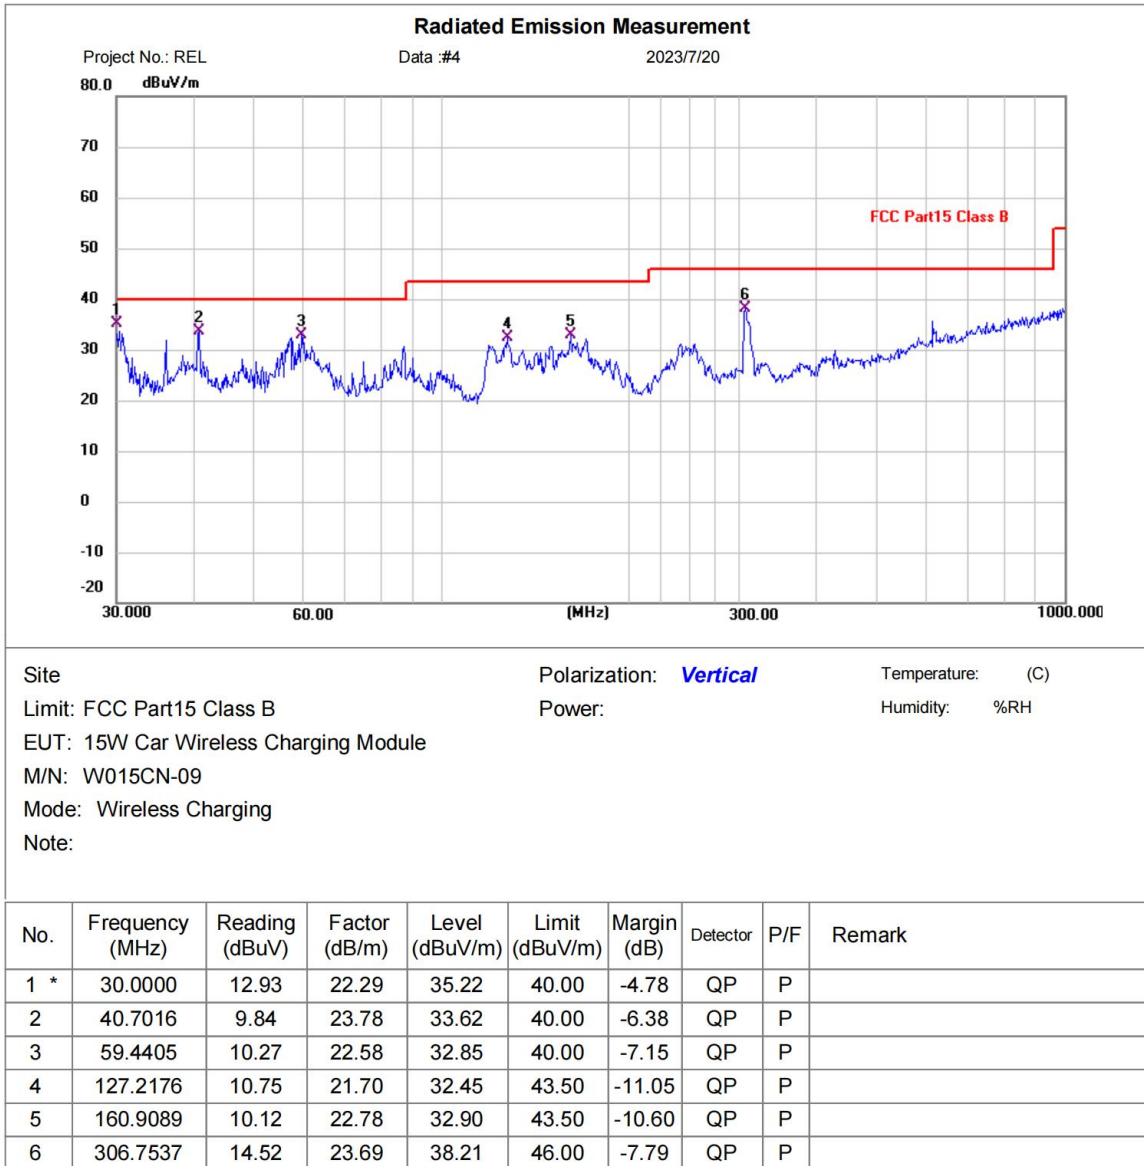

\*:Maximum data    x:Over limit    !:over margin

**Test Result: Pass**


Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### Radiated Spurious Emissions

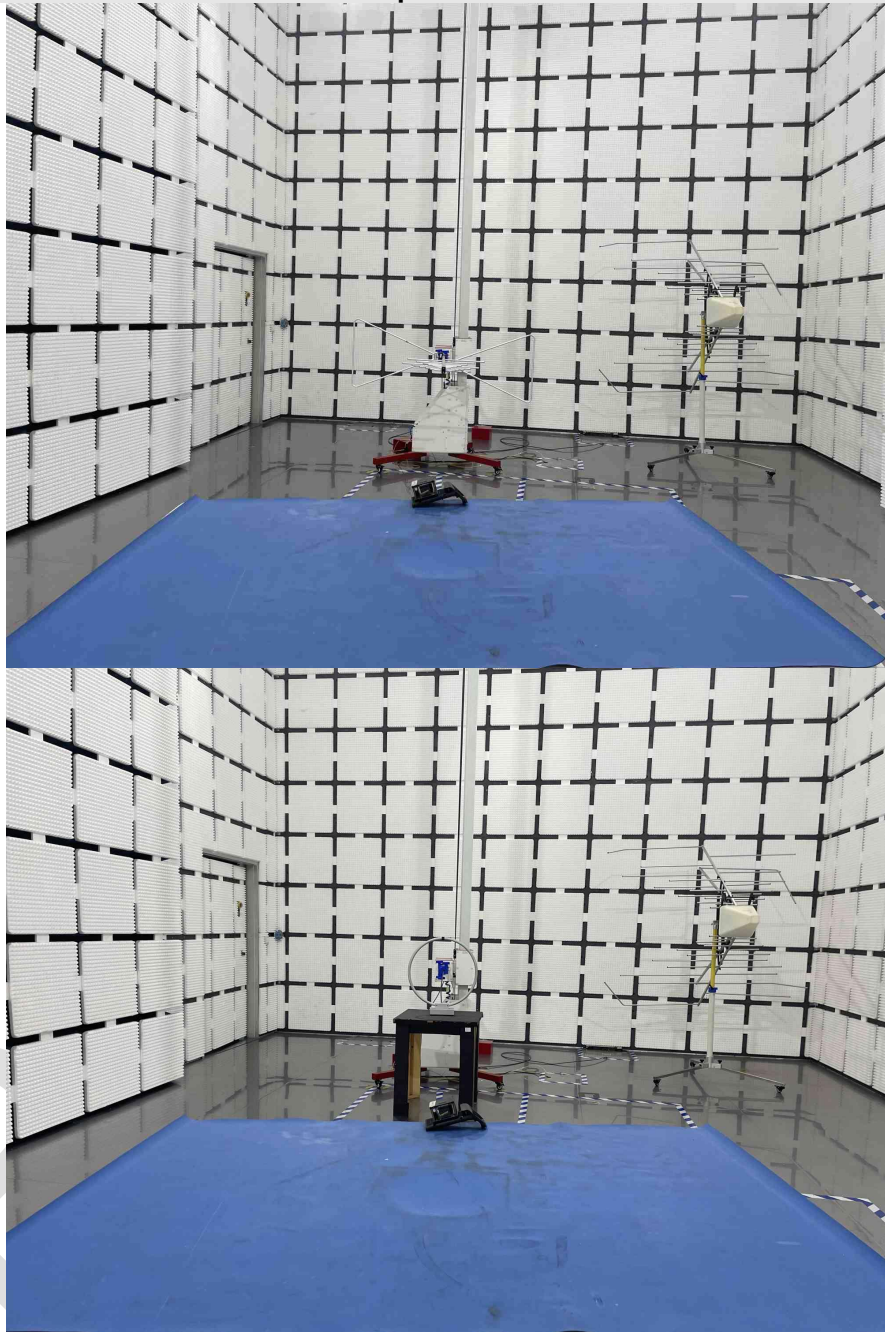

## APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202307-A3301

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.