


ANT 天线规格书
antenna
specification document

天线外观和尺寸：
Appearance and dimensions of the antenna:

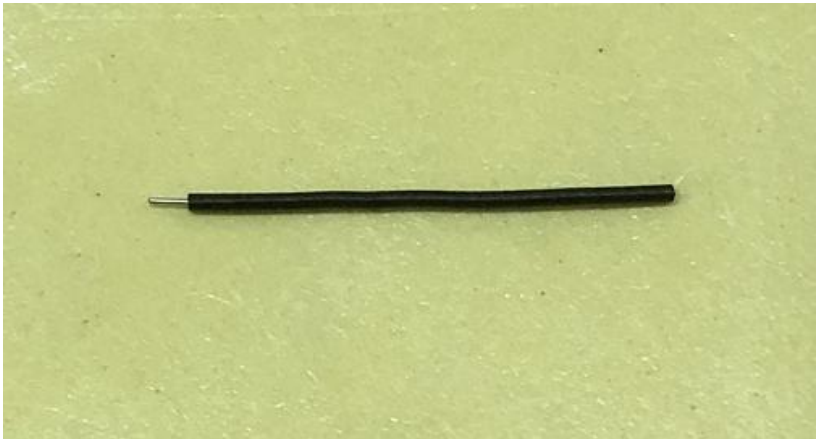


20mm*0.6mm




电气参数
Electrical parameters

工作频率working frequency	2400-2483.5MHz
峰值增益Peak gain	2 . 7 dBi
阻抗impedance	50 欧姆
极化方式Polarization mode	线性
方向图directional diagram	Omni-directional
使用环境service environment	-30 到 80℃

特性曲线
Characteristic curve

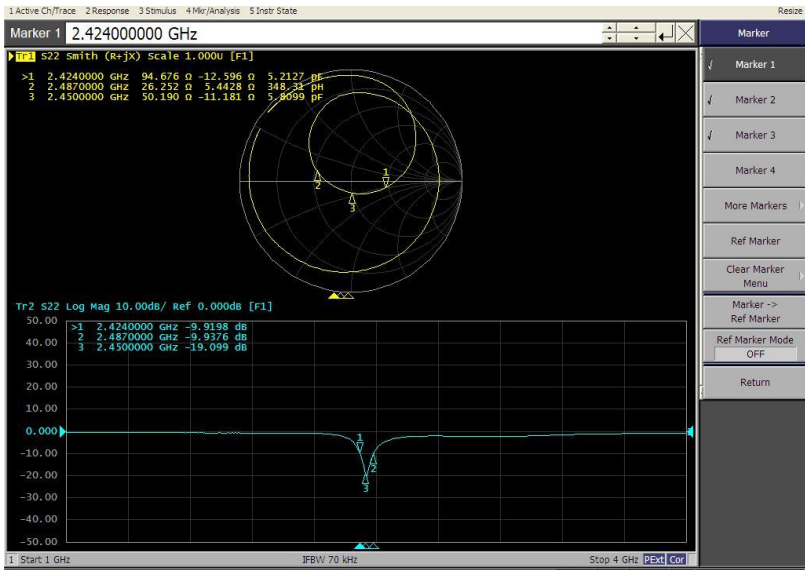


方向图
Radiation Pattern

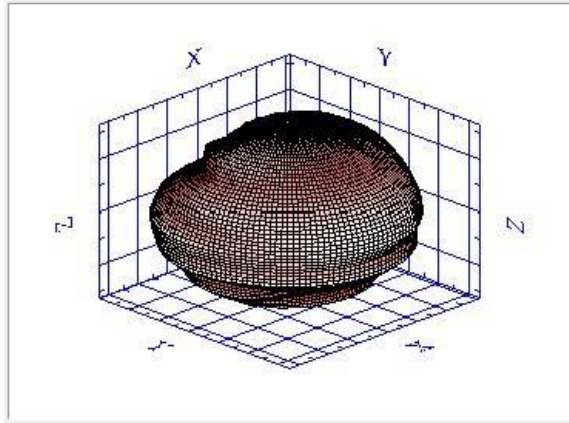


Frequency (MHz)	TRP (dBm)	Efficiency (%)
2450.00	-1.38	72.7
Peak EIRP (dBm)	Max. Power (dBm)	Directivity (dBi)
2.7	2.7	4.09
NHPRP +/- 45 (dBm)	Min. Power (dBm)	Average Gain (dB)
-2.41	-32.6	-1.38
NHPRP +/- 30 (dBm)	Avg. Power (dBm)	Upper Hem. (dBm)
-3.45	-1.13	-3.84
E-Theta Peak Gain (dBi)	Max. / Min. Ratio (dB)	Lower Hem. (dBm)
1.85	35.3	-5.02
E-Phi Peak Gain (dBi)	Max. / Avg. Ratio (dB)	Upper Hem. (%)
2.23	3.83	41.26
E-Total Peak Gain (dBi)	Min. / Avg. Ratio (dB)	Lower Hem. (%)
2.7	-31.47	31.45


XY Plane (+ Z View)

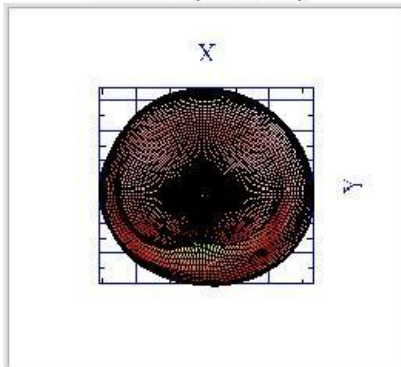


XZ Plane (- Y View)

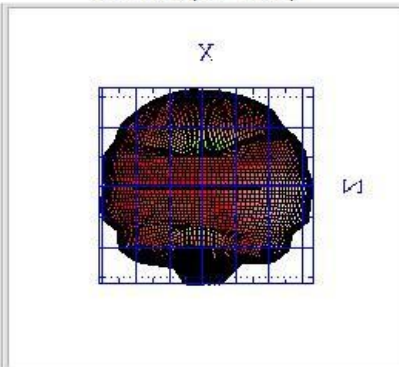


XZ Plane (+ Y View)

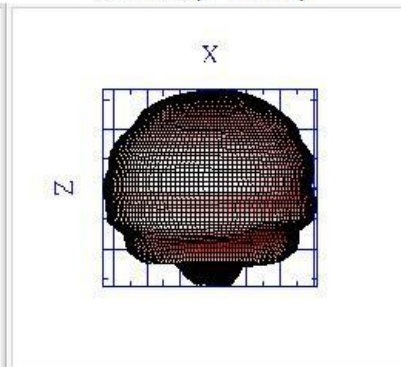

XY Plane (- Z View)

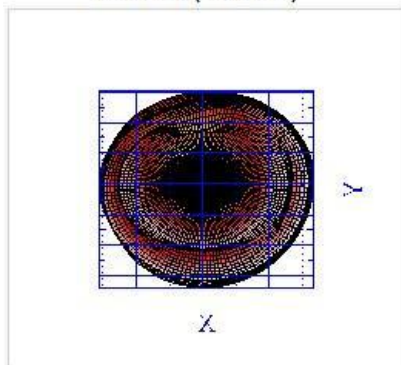

YZ Plane (+ X View)

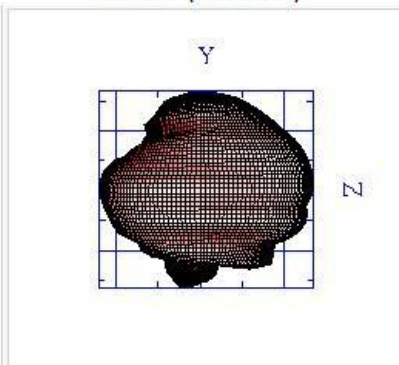

YZ Plane (- X View)

