

Applicant: JAEWONCNC Co.,Ltd

Product: Wireless USB Adapter

Model No.: WD-4512BT

Trademark: IROAD

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Termy long

Terry Tang

Manager

Dated: May 30, 2023

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2305186-02E Page 2 of 39

Date: 2023-05-30



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Page 3 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	13
5.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	13
7.0	6dB Bandwidth Measurement Bandwidth.	19
8.0	Maximum Peak Output Power	23
9.0	Power Spectral Density Measurement.	27
10.0	Out of Band Measurement	31
11.0	Antenna Requirement	36
12.0	FCC ID Label.	37
13.0	Photo of Test Setup and EUT View.	38

Date: 2023-05-30



Page 4 of 39

General Details 1.0

Test Lab Details 1.1

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

(755) 83448688 Telephone: Fax: (755) 83442996

1.2 Applicant Details

Applicant: JAEWONCNC Co.,Ltd

Address: A-501~510, 517, H-Businesspark, 25, Beobwon-ro 11-gil, Songpa-gu, Seoul, Republic of

Korea

Telephone: Fax:

1.3 Description of EUT

Product: Wireless USB Adapter Manufacturer: JAEWONCNC Co.,Ltd

Address: A-501~510, 517, H-Businesspark, 25, Beobwon-ro 11-gil, Songpa-gu, Seoul,

Republic of Korea

IROAD Trademark: Additional Trademark: N/A

Model Number: WD-4512BT

Additional Model Number: N/A

Hardware Version: V1.0 Software Version: V1.0

Serial No.: N/A

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Input Voltage: DC5.0V, 500mA, 2.5W

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2023-05-16 to 2023-05-30

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2023-05-30



Page 5 of 39

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2022-07-15	2023-07-14
RF Cable	Zhengdi	7m		2022-07-15	2023-07-14
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-05-30



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	Pass	Complies
CC Part 15, Paragraph 15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	Pass	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	Pass	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit:	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 39


Report No.: TW2305186-02E

Date: 2023-05-30



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

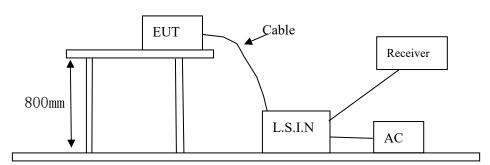

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Wireless USB Adapter	JAEWONCNC Co.,Ltd	WD-4512BT	2BA5E-WD4512BT

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2305186-02E Page 9 of 39

Date: 2023-05-30



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
PC	Dell	P54G	DC19V, 3.3A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2023-05-30



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

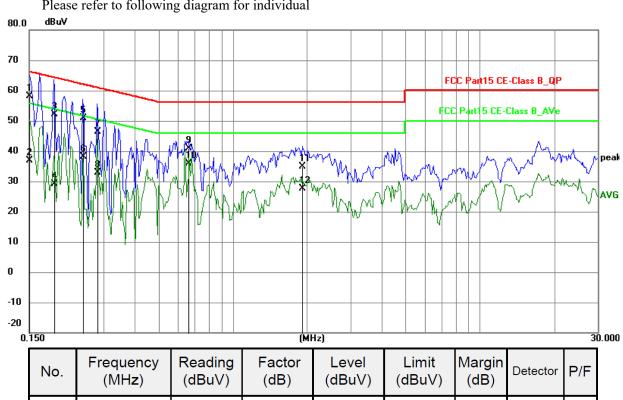

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	48.26	9.79	58.05	66.00	-7.95	QP	Р
2	0.1500	26.98	9.79	36.77	56.00	-19.23	AVG	Р
3	0.1890	42.37	9.76	52.13	64.08	-11.95	QP	Р
4	0.1890	19.25	9.76	29.01	54.08	-25.07	AVG	Р
5	0.2475	41.06	9.75	50.81	61.84	-11.03	QP	Р
6	0.2475	28.31	9.75	38.06	51.84	-13.78	AVG	Р
7	0.2833	36.67	9.76	46.43	60.72	-14.29	QP	Р
8	0.2833	23.20	9.76	32.96	50.72	-17.76	AVG	J
9	0.6609	31.16	9.78	40.94	56.00	-15.06	QP	Р
10	0.6609	26.07	9.78	35.85	46.00	-10.15	AVG	Р
11	1.9089	25.07	9.80	34.87	56.00	-21.13	QP	Р
12	1.9089	17.75	9.80	27.55	46.00	-18.45	AVG	Р

Date: 2023-05-30



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

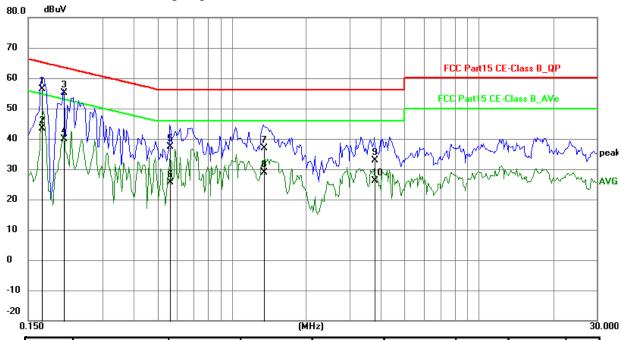

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	46.65	9.77	56.42	64.98	-8.56	QP	Р
2	0.1695	33.53	9.77	43.30	54.98	-11.68	AVG	Р
3	0.2085	45.30	9.75	55.05	63.26	-8.21	QP	Р
4	0.2085	30.01	9.75	39.76	53.26	-13.50	AVG	Р
5	0.5633	27.56	9.77	37.33	56.00	-18.67	QP	Р
6	0.5633	15.92	9.77	25.69	46.00	-20.31	AVG	Р
7	1.3512	27.21	9.79	37.00	56.00	-19.00	QP	Р
8	1.3512	18.99	9.79	28.78	46.00	-17.22	AVG	Р
9	3.7917	23.06	9.88	32.94	56.00	-23.06	QP	Р
10	3.7917	16.15	9.88	26.03	46.00	-19.97	AVG	Р

Report No.: TW2305186-02E Page 12 of 39

Date: 2023-05-30




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

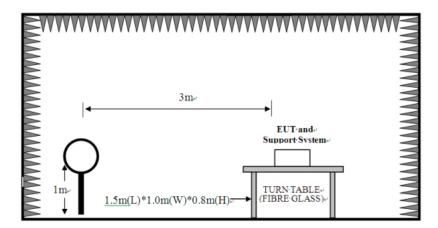


Date: 2023-05-30



For radiated emissions from 30MHz to1GHz

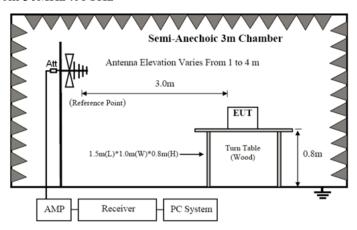

For radiated emissions above 1GHz

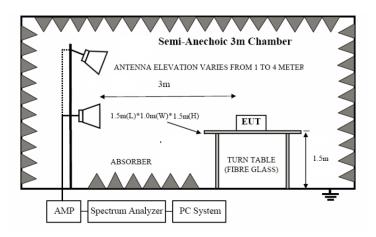

- 6.2 Configuration of the EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2305186-02E Page 14 of 39

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

Date: 2023-05-30

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Page 15 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

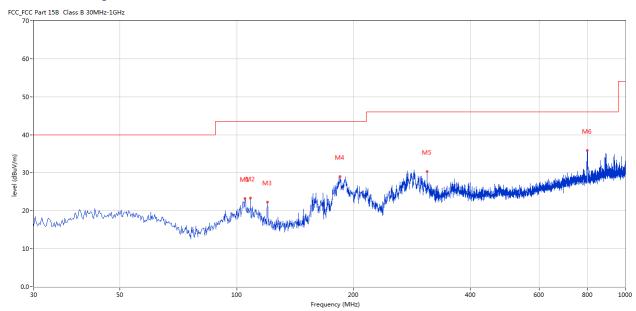

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	104.914	23.16	-13.23	43.5	-20.34	Peak	275.00	100	Horizontal	Pass
2	108.550	23.37	-13.46	43.5	-20.13	Peak	278.00	100	Horizontal	Pass
3	119.945	22.32	-15.32	43.5	-21.18	Peak	246.00	100	Horizontal	Pass
4	184.434	28.95	-14.99	43.5	-14.55	Peak	351.00	100	Horizontal	Pass
5	308.805	30.27	-10.85	46.0	-15.73	Peak	194.00	100	Horizontal	Pass
6	798.048	35.92	-3.02	46.0	-10.08	Peak	4.00	100	Horizontal	Pass

Page 16 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	103.944	29.75	-13.33	43.5	-13.75	Peak	109.00	100	Vertical	Pass
2	166.008	28.08	-16.10	43.5	-15.42	Peak	218.00	100	Vertical	Pass
3	183.707	29.79	-14.96	43.5	-13.71	Peak	237.00	100	Vertical	Pass
4	264.439	28.48	-11.82	46.0	-17.52	Peak	73.00	100	Vertical	Pass
5	486.756	31.52	-7.22	46.0	-14.48	Peak	307.00	100	Vertical	Pass
6	599.733	32.88	-4.98	46.0	-13.12	Peak	263.00	100	Vertical	Pass

Report No.: TW2305186-02E Page 17 of 39

Date: 2023-05-30



Operation Mode: Transmitting under Low Channel (2402MHz)

	8	,	
Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804	48.9 (PK)	Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2440MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4880	48.3 (PK)	Н	74(Peak)/ 54(AV)
4880		V	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: TW2305186-02E Page 18 of 39

Date: 2023-05-30



Operation Mode: Transmitting under High Channel (2480MHz)

	0 0	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Page 19 of 39


Report No.: TW2305186-02E

Date: 2023-05-30



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Date: 2023-05-30




Page 20 of 39

6dB BW

Mada	TX	Frequency	ANIT	ANT 6dB Bandwidth (MHz)		Verdict	
Mode Type		(MHz)	ANI	Result	Limit	verdict	
		2402	1	0.717	>=0.5	Pass	
1M	SISO	2440	1	0.717	>=0.5	Pass	
		2480	1	0.726	>=0.5	Pass	

Date: 2023-05-30



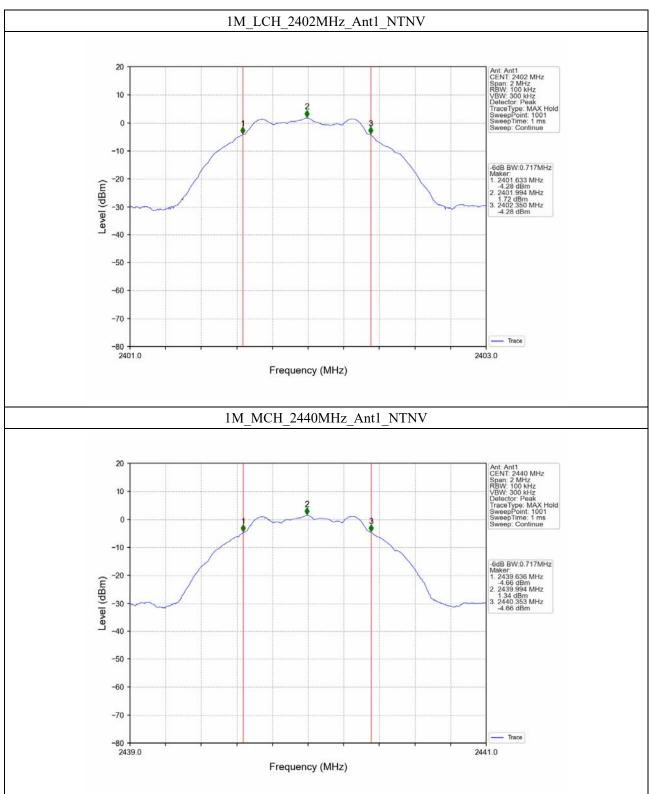

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 22 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



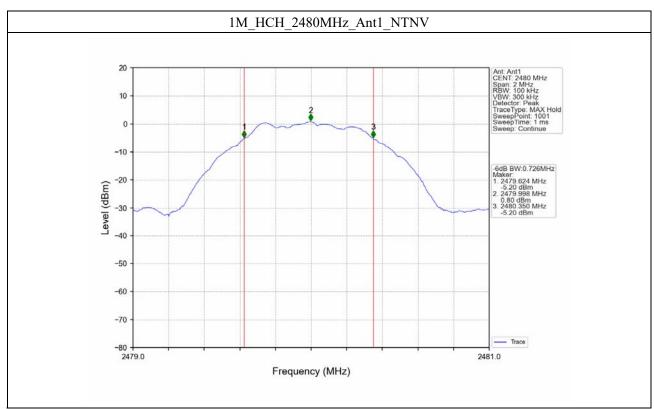


Date: 2023-05-30



Page 23 of 39

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Spectrum connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak and AV power were measured.

Report No.: TW2305186-02E Page 24 of 39

Date: 2023-05-30



8.4Test Results

Mode TX		Frequency	Maximum Peak Conduc	ted Output Power (dBm)	Verdict
Mode	Type	(MHz)	ANT1	Limit	verdict
		2402	2.35	<=30	Pass
1M	SISO	2440	1.97	<=30	Pass
		2480	1.47	<=30	Pass


Mada	Mode TX Free		cy Maximum AV Conducted Output Power (dBm)		Verdict
Mode	Type	(MHz)	ANT1	Limit	verdict
		2402	-1.65	<=30	Pass
1M	SISO	2440	-2.03	<=30	Pass
		2480	-2.53	<=30	Pass
	•				•

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

Date: 2023-05-30



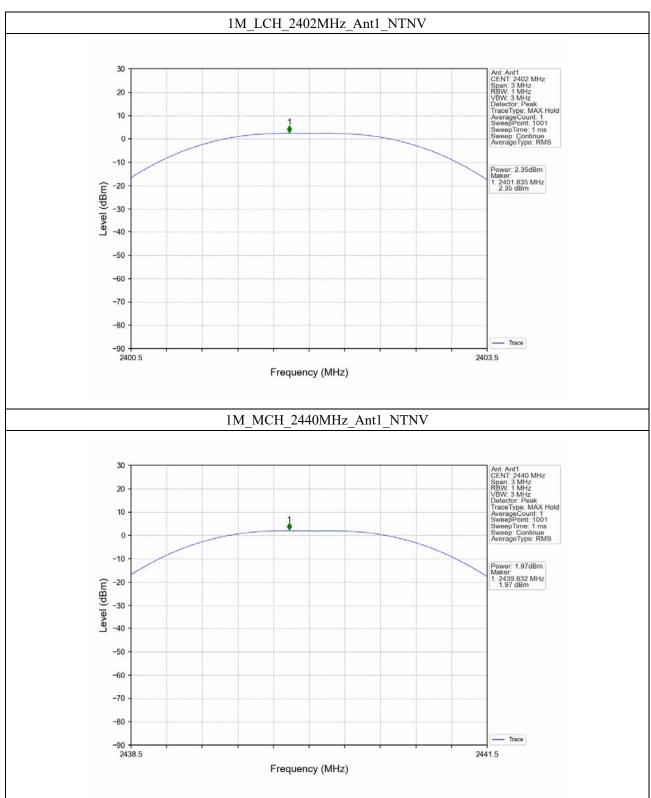

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 26 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



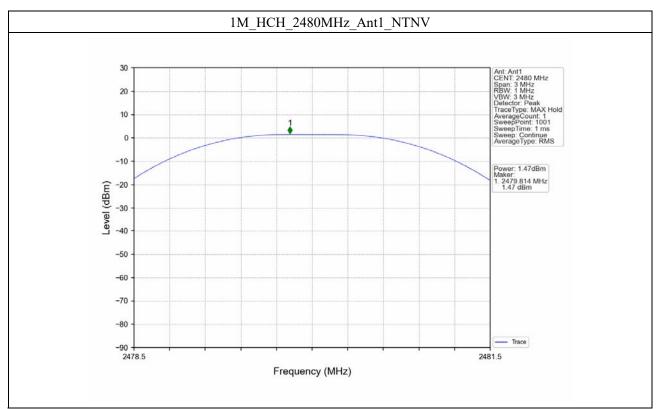


Report No.: TW2305186-02E Page 27 of 39

Date: 2023-05-30



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 3 kHz.
- 3. Set the VBW \geq 10 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Date: 2023-05-30



Page 28 of 39

9.4Test Result


Mode	TX	Frequency	Maximum PS	D (dBm/3kHz)	Verdict	
Mode	Type	(MHz)	ANT1	ANT1 Limit		
		2402	-12.30	<=8	Pass	
1M	SISO	2440	-12.84	<=8	Pass	
		2480	-13.62	<=8	Pass	
				•	•	

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Date: 2023-05-30



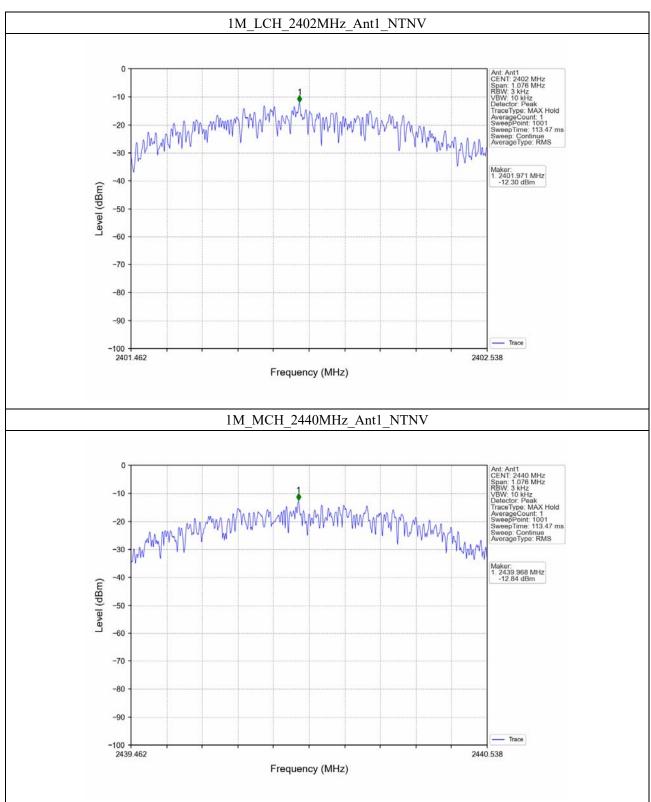

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 30 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



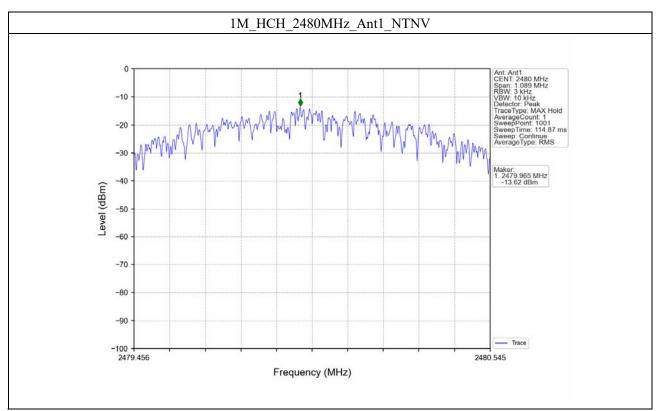


Page 31 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.


Modo	Mode TX Frequency AN		ANT	Level of Reference	Limit	Verdict	
Mode	Type	(MHz)	ANI	(dBm)	(dBm)	verdict	
		2402	1	1.66	-18.34	Pass	
1M	SISO	2440	1	1.66	-18.34	Pass	
		2480	1	1.66	-18.34	Pass	

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

The report refers only to the sample tested and does not apply to the bulk.

Date: 2023-05-30



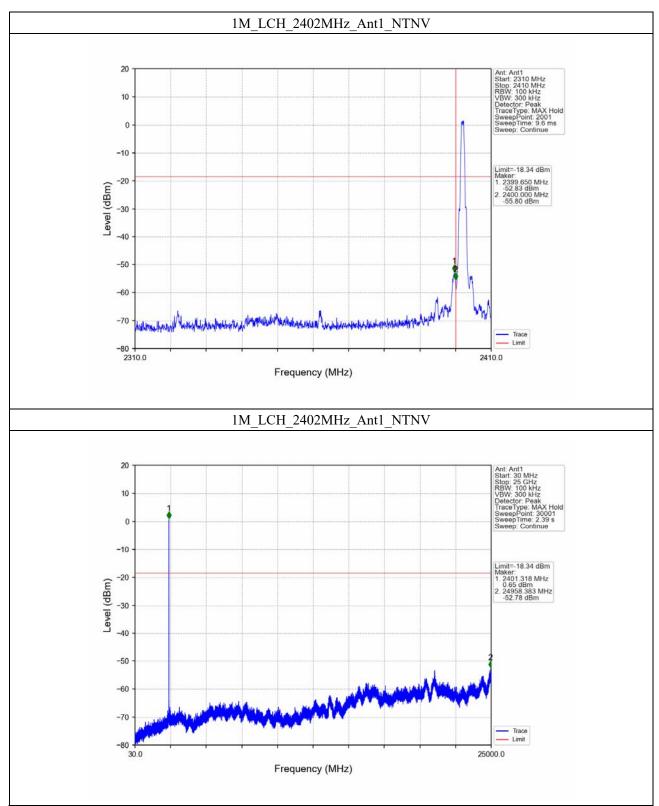

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-05-30



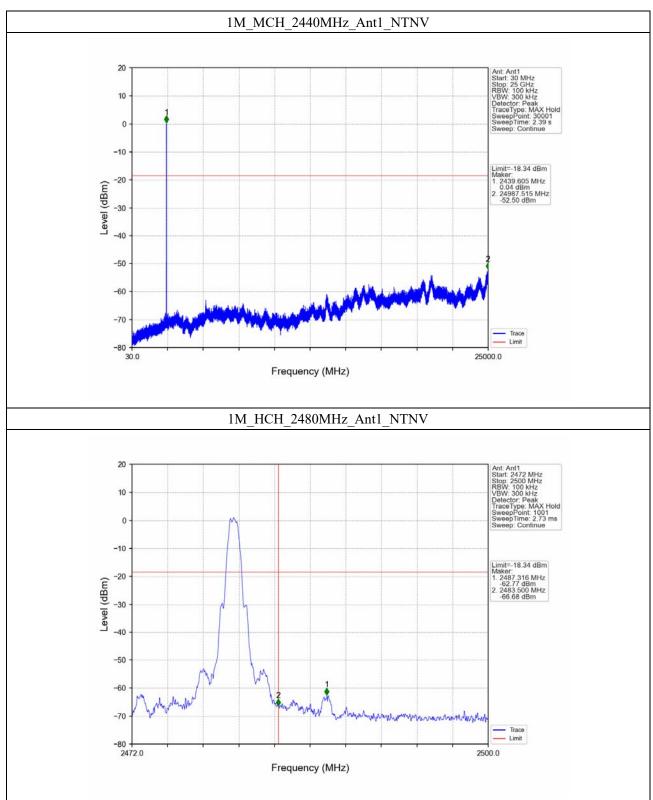

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 34 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



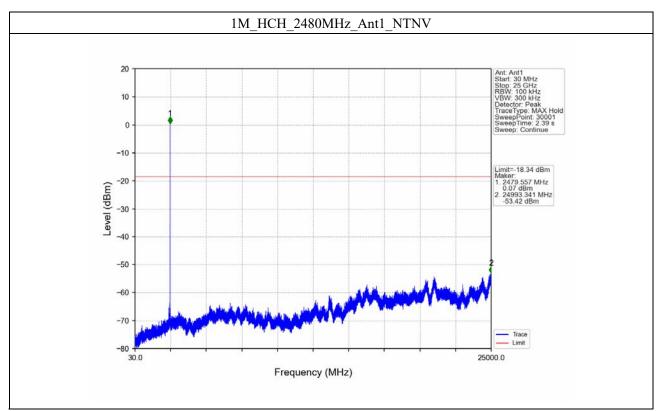

Date: 2023-05-30



Page 35 of 39

Restricted band Measurement

EUT	Wireless I	USB Adapter	Model	WD-4512BT		
Mode	Keeping 7	Transmitting	Test Voltage	DC5.0V		
Temperature	24 0	deg. C,	Humidity	56% RH		
Test Result:	I	Pass	Detector	PK		
		Horiz	ontal			
2390	PK (dBμV/m)	41.9	T ::4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		
	Vertical					
2390	PK (dBμV/m)	41.4	T: '4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		

Restricted band Measurement

Restricted band Medstroment						
EUT	Wireless	USB Adapter	Model	WD-4512BT		
Mode	Keeping	g Transmitting	Test Voltage	DC5.0V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	Horizontal					
2483.5	PK (dBμV/m)	55.0	T: '4	74(dBμV/m)		
	AV (dBμV/m)	45.1	Limit	54(dBμV/m)		
	Vertical					
2483.5	PK (dBμV/m)	48.7	T: '/	74(dBμV/m)		
	AV (dBμV/m)	Limit		$54(dB\mu V/m)$		

Date: 2023-05-30



Page 36 of 39

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The gain of the antennas is -1.5dBi (Get from the antenna specification provided the manufacturer)

Report No.: TW2305186-02E Page 37 of 39

Date: 2023-05-30




12.0 FCC ID Label

FCC ID: 2BA5E-WD4512BT

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

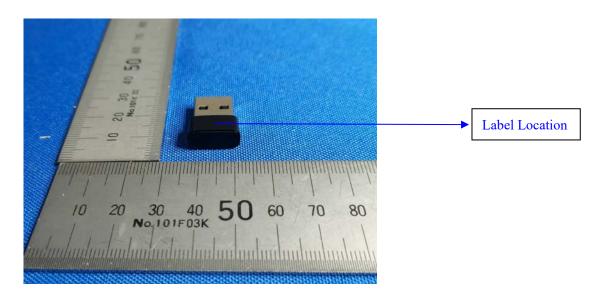

Page 38 of 39

Report No.: TW2305186-02E

Date: 2023-05-30



13.0 Photo of testing


Conducted Emission Test Setup:



Date: 2023-05-30



Radiated Emission Test Setup:

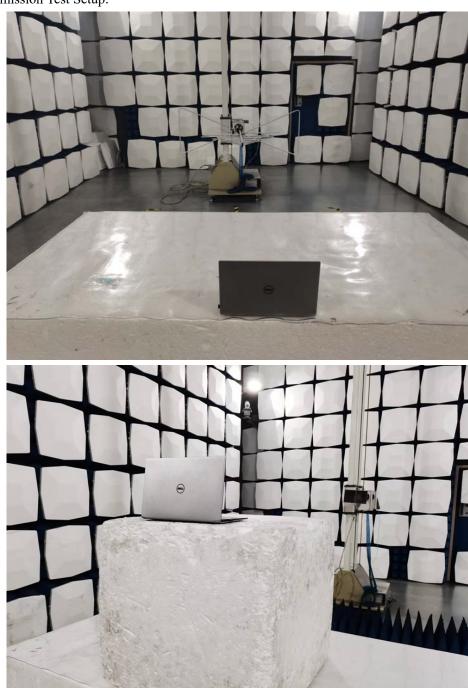

Photographs - EUT

Please refer test report TW2305186-01E

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.