




150PS HDQPSK Signal at 173.975MHz

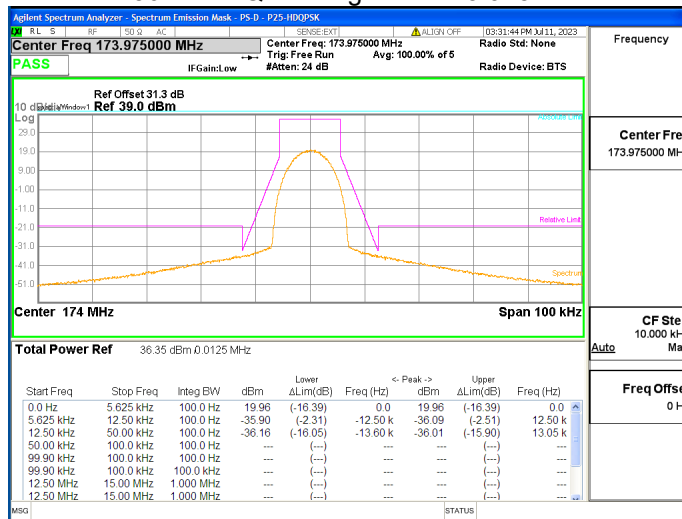


150PS HDQPSK Signal at 163MHz

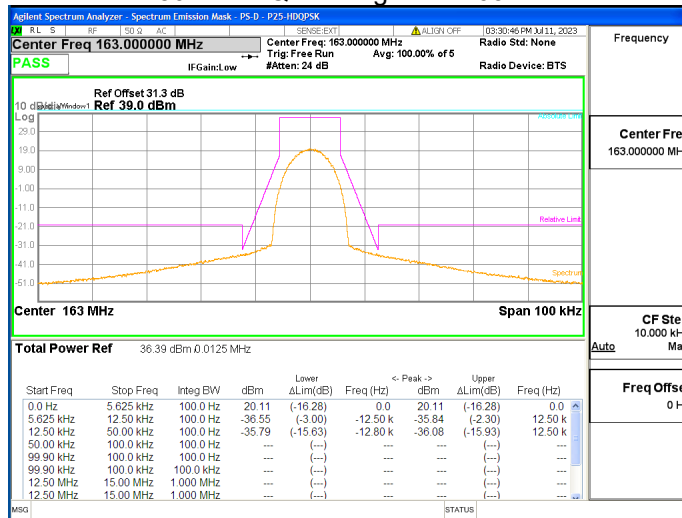


150PS HDQPSK Signal at 152.025MHz

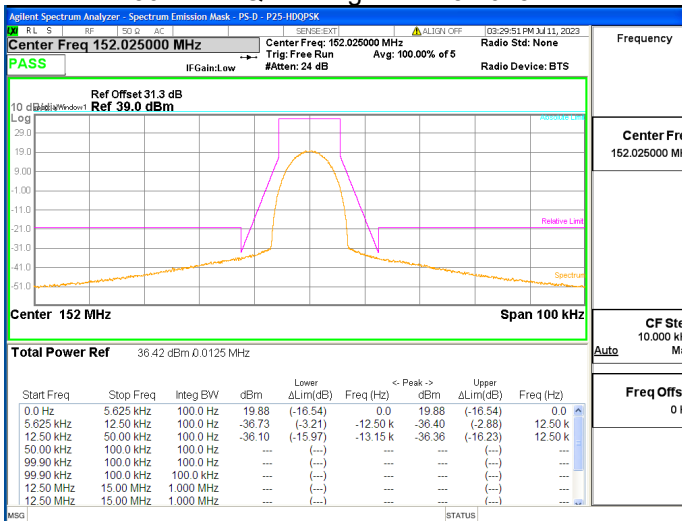


150PS CQPSK Signal at 173.975MHz ALC

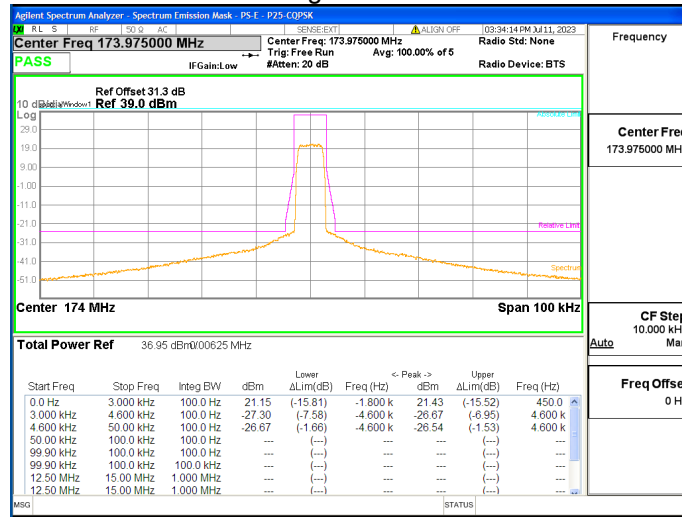


150PS CQPSK Signal at 163MHz ALC

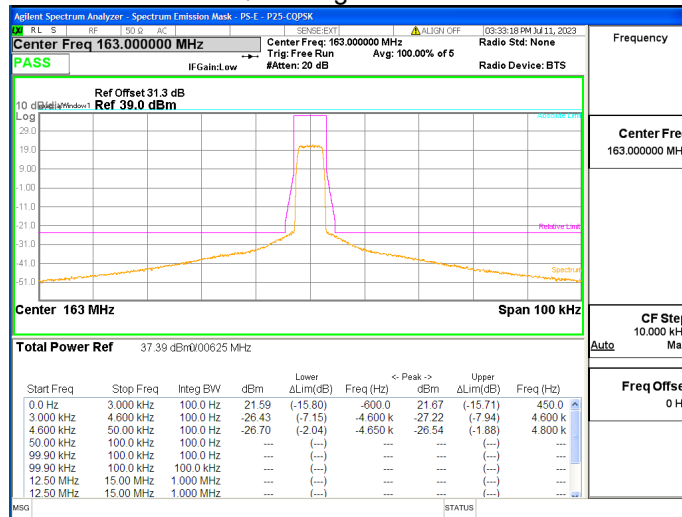


150PS CQPSK Signal at 152.025MHz ALC

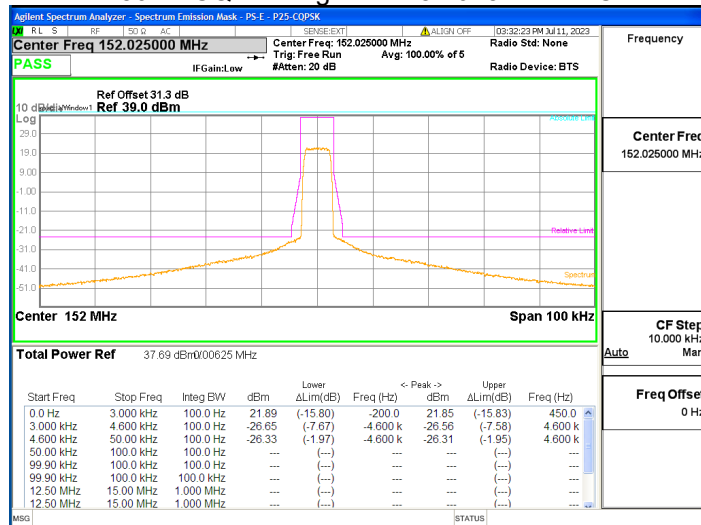


150PS C4FM Signal at 173.975MHz ALC

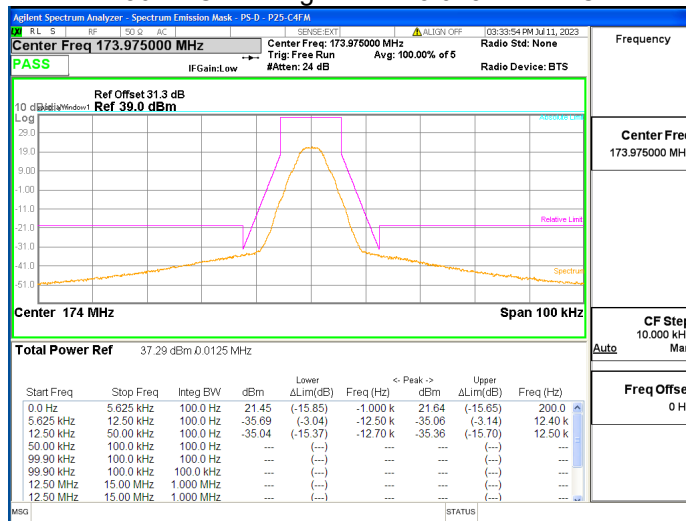


150PS C4FM Signal at 163MHz ALC

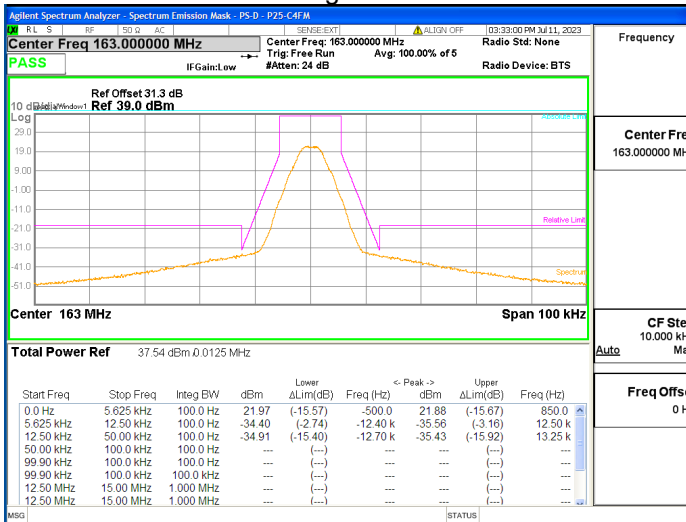


150PS C4FM Signal at 152.025MHz ALC

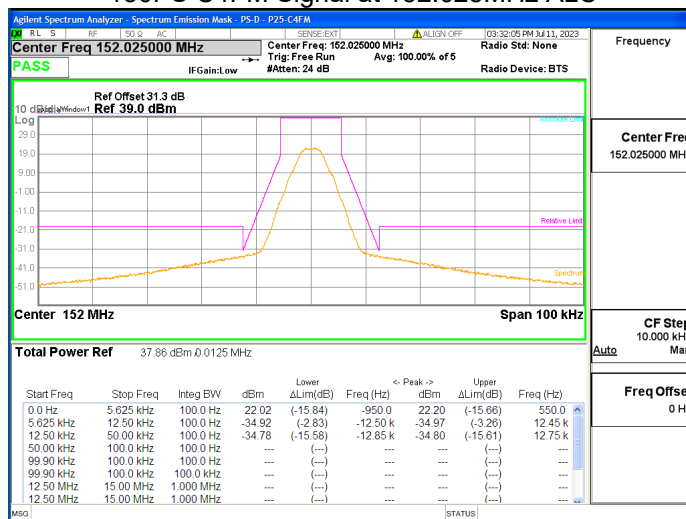

150PS HDQPSK Signal at 173.975MHz ALC

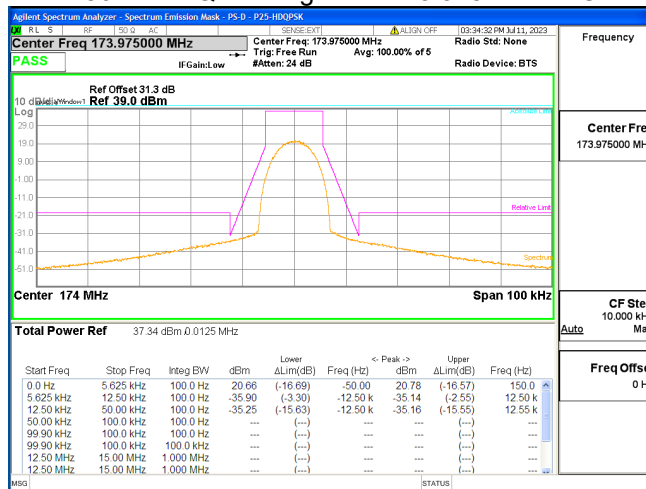

150PS HDQPSK Signal at 163MHz ALC

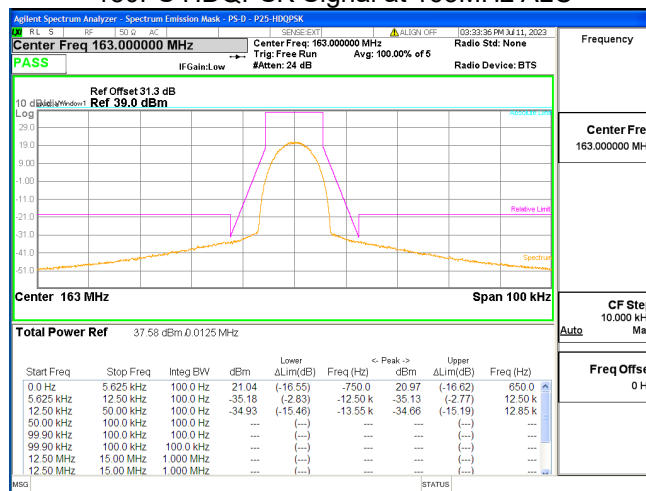

150PS HDQPSK Signal at 152.025MHz ALC



5 Input/Output Power and Amplifier/Booster Gain


Governing Doc	FCC Part 90.219	Room Temperature (°C)	20.5		
Test Procedure	ANSI/TIA-603- E; FCC KDB 935210 D05, v01r03	Relative Humidity (%)	38.6		
Test Location	Richmond	Barometric Pressure (kPa)	101.8		
Test Engineer	Jack Qin	Date	July 11, 2023		
EUT Voltage	☒ +48VDC ☐ 120VAC @ 60Hz				
Test Equipment Used	Manufacturer	Model	Serial Number	Calibration date	Calibration due
Signal Generator	Keysight	N5172B	MY53050270	Oct 9, 2021	Oct 9, 2023
Spectrum Analyzer	Keysight	N9010A	MY50520285	Oct 11, 2021	Oct 11, 2023
Span:	☒ Max Gain Frequency $\pm$ 1500kHz				
Detector:	☒ Peak				
RBW/VBW:	☒ 100k Hz/ 300 kHz				
Type of Facility:	☒ Tabletop				
Distance:	☒ Direct				
Maximum booster gain is 49.24 dB.					
Compliant ☒ Non-Compliant ☐ Not Applicable ☐					

Test Setup

Description of test set-up:

The procedure used was ANSI/TIA-603-E-2016 and FCC KDB 935210 D05 Indus Booster Basic Meas v01r02:. A CW tone was input at the frequency where the system gain is the maximum in the pass band, with the nominal input power level. The spectrum analyzer was connected to the output RF port via a 50 Ohm 30 dB attenuator. The maximum hold trace and peak detector was used to capture the output power. The output power minus the input power equals to the booster gain in dB.

The EUT was set to **Operation Mode #1 with configuration Mode #1.**



Prepared by: LabTest Certification Inc.
Date Issued: 2024-03-18
Project No.: 22063

Client: Avari Wireless Inc.
Report No.: 20.01.22063-1
Revision No.: 0

Test Data

Test Band	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Gain (dB)
800PS	860	-11.6	36.91	48.51
UHF PS	465	-12.2	37.04	49.24
VHF PS	163	-11.2	36.98	48.18

6 Out-Of-Band / Out-Of-Block Intermodulation and Spurious Emissions

Governing Doc	FCC Part 90.219	Room Temperature (°C)	20.5
Test Procedure	ANSI/TIA-603- E; FCC KDB 935210 D05, v01r03	Relative Humidity (%)	38.6
Test Location	Richmond	Barometric Pressure (kPa)	101.8
Test Engineer	Jack Qin	Date	July 11, 2023
EUT Voltage	☒ +48VDC ☐ 120VAC @ 60Hz		
Test Equipment Used	Manufacturer	Model	Serial Number
Signal Generator	Keysight	N5172B	MY53050270
Spectrum Analyzer	Keysight	N9010A	MY50520285
Calibration date	Calibration due		
Frequency Range:	☒ Max Gain Frequency $\pm$ 50kHz		
Detector:	☒ Average		
RBW/VBW:	☒ 100/910Hz		
Type of Facility:	☒ Tabletop		
Distance:	☒ Direct		
On 700 band, 800 band and UHF band: The intermodulation product of 2 tone is below the -13dBm emission limit with input power - 0.5 dB below AGC threshold - 2 dB below AGC threshold - 3 dB above AGC threshold			
Compliant ☒ Non-Compliant ☐ Not Applicable ☐			

Test Setup

Description of test set-up:

The procedure used was ANSI/TIA-603-E-2016. Two tones (CW) method was used. The input power to the amplifier was set at maximum drive level by combining the two tones. The two tones were chosen in such a way (1) the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

Based on FCC KDB 935210 D05 Indus Booster Basic Meas v01r03: 2019, the two tone was located on either side of the maximum gain frequency in the passing band, and separated with the available spacing, which is 12.5kHz.

Measurements were performed with modulated -tone at identical input amplitude which produced integrated maximum rated output power.


The EUT was set to **Operation Mode #1 with configuration Mode #1.**

```


    graph LR
        VSG[Vector Signal Generator] --> AE1[AE1]
        AE1 -- Fiber --> EUT[EUT]
        EUT --> ATT[30dB Attenuator]
        ATT --> SA[Spectrum Analyzer]
    
```

Test Data


800PS at 860 MHz Input Power 2 dB Below ALC Threshold

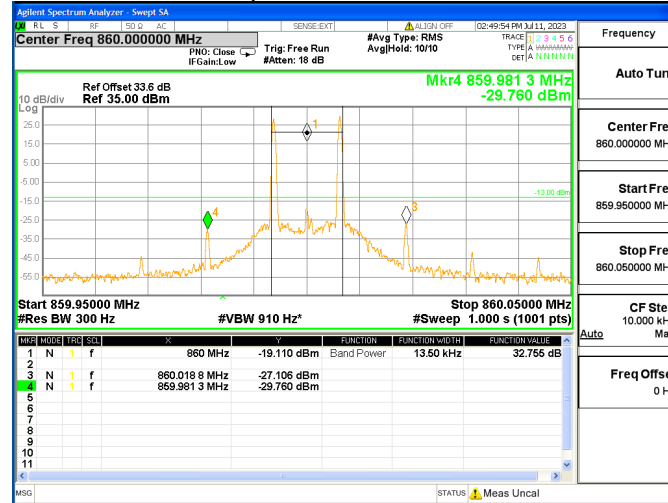


800PS at 860 MHz Input Power 3 dB Above ALC Threshold

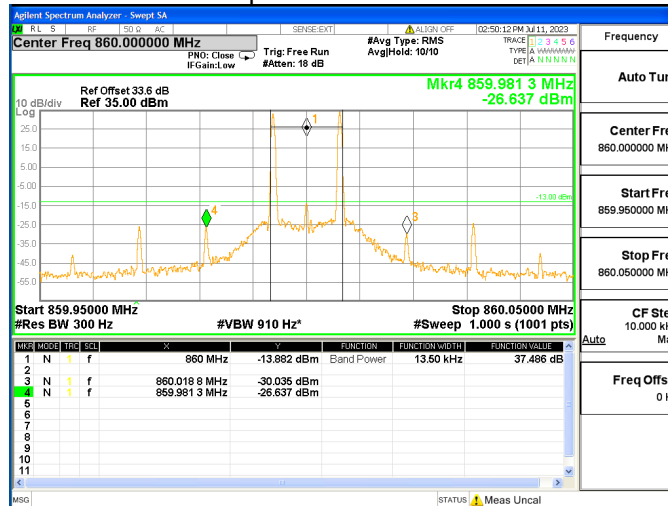


800PS at 860 MHz Input Power 0.5 dB Below ALC Threshold

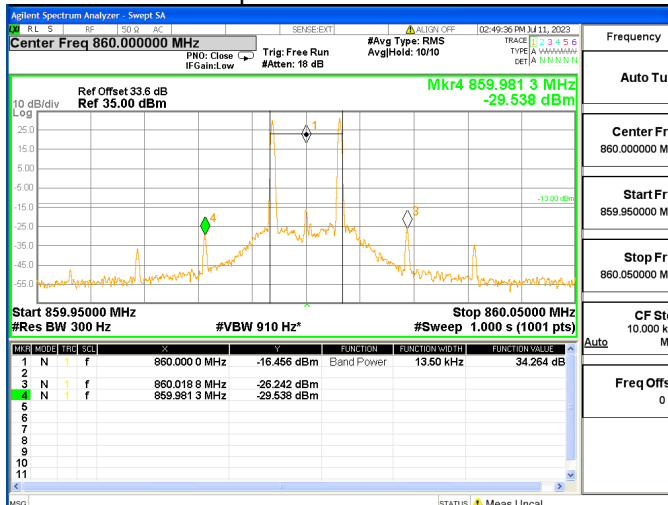


450PS at 465 MHz Input Power 2 dB Below ALC Threshold

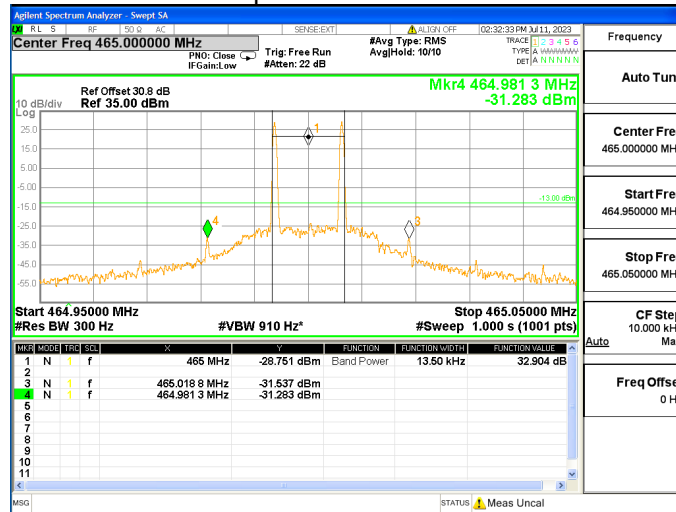


450PS at 465 MHz Input Power 3 dB Above ALC Threshold

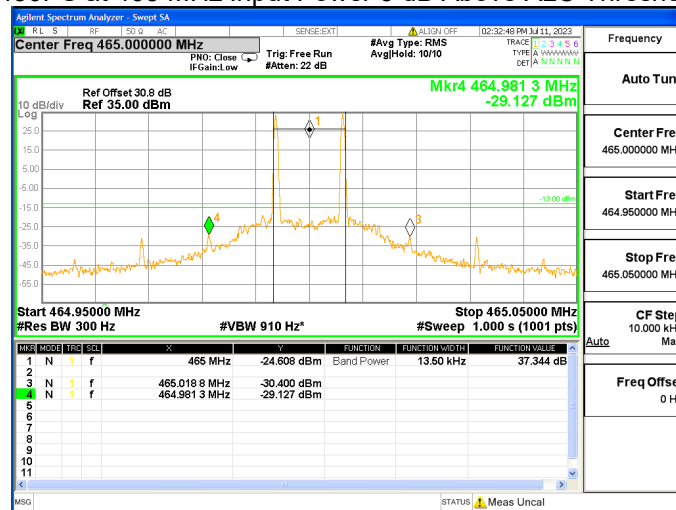


450PS at 465 MHz Input Power 0.5 dB Below ALC Threshold

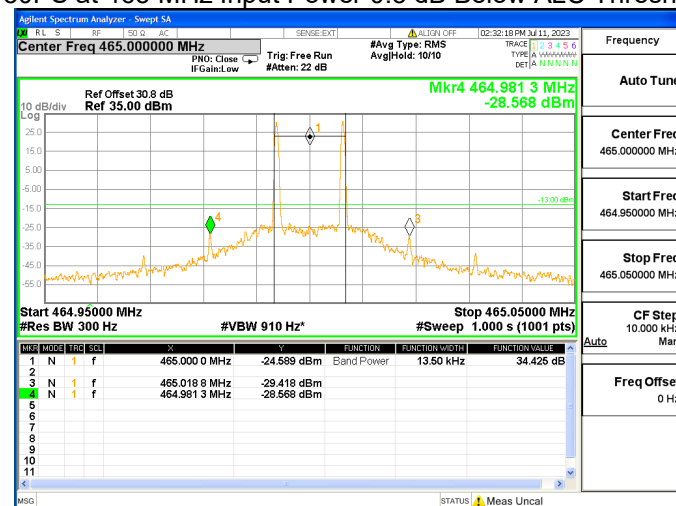


150PS at 163 MHz Input Power 2 dB Below ALC Threshold

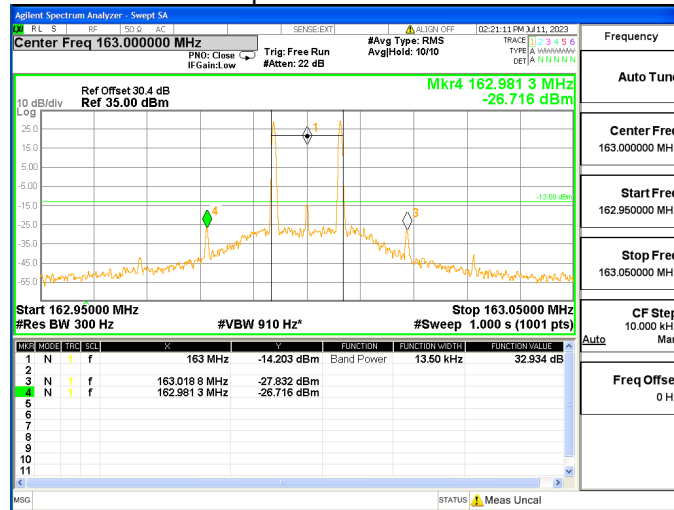


150PS at 163 MHz Input Power 3 dB Above ALC Threshold

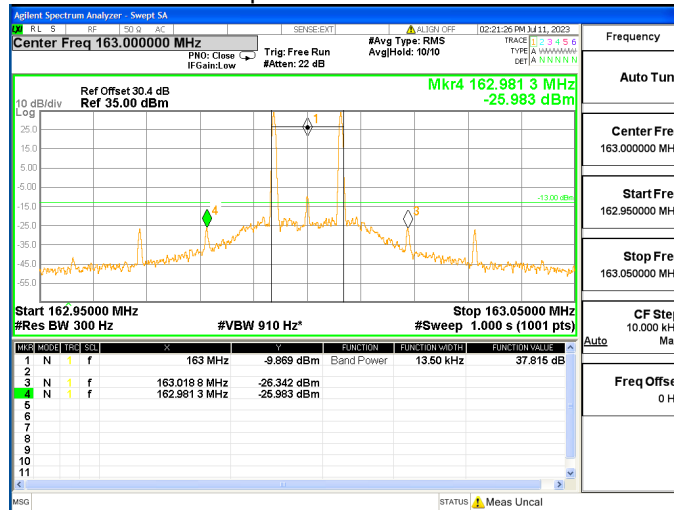


150PS at 163 MHz Input Power 0.5 dB Below ALC Threshold

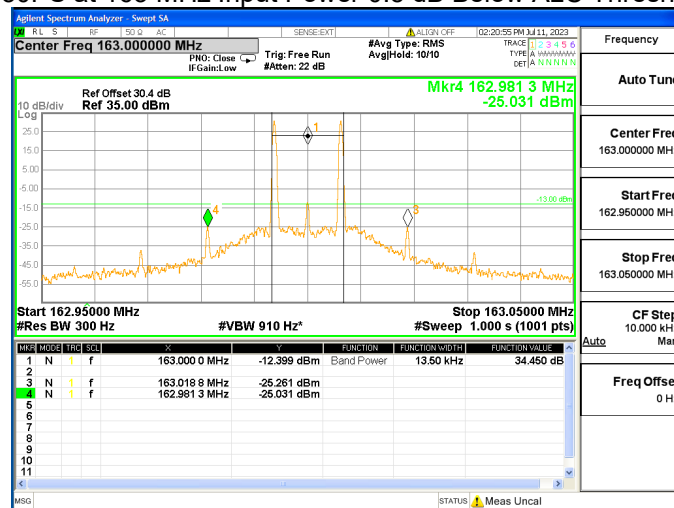


800PS 868.975MHz Spurious Emissions Range 1

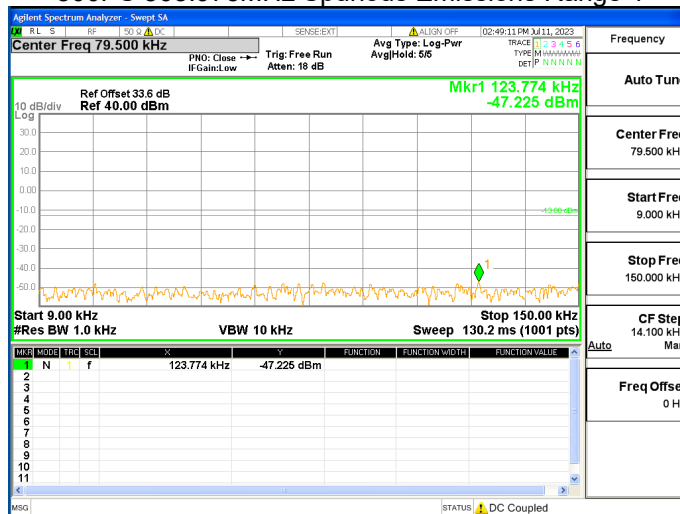


800PS 868.975MHz Spurious Emissions Range 2

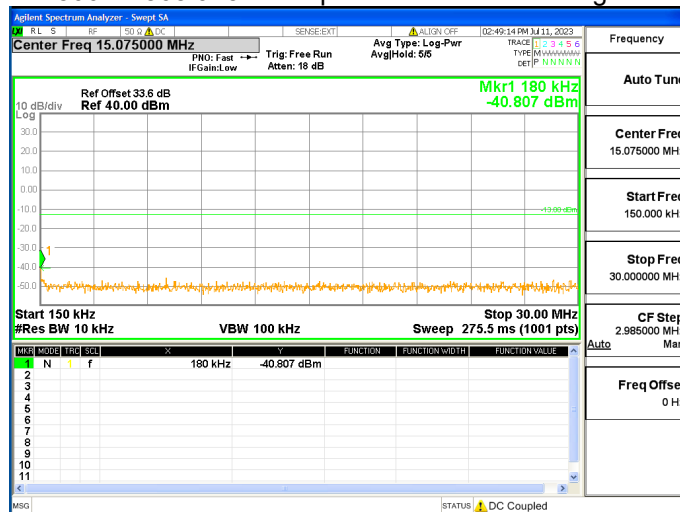


800PS 868.975MHz Spurious Emissions Range 3

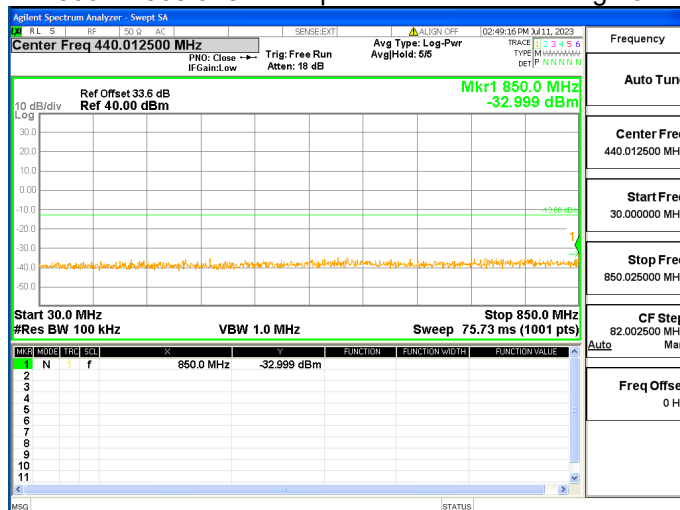


800PS 868.975MHz Spurious Emissions Range 4

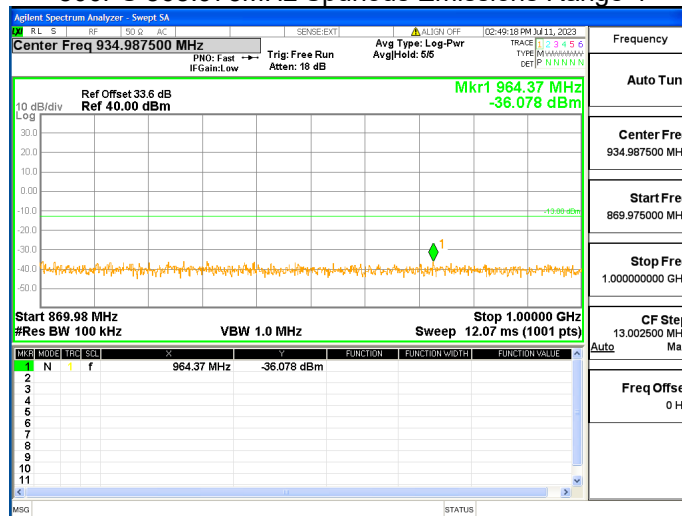


800PS 868.975MHz Spurious Emissions Range 5

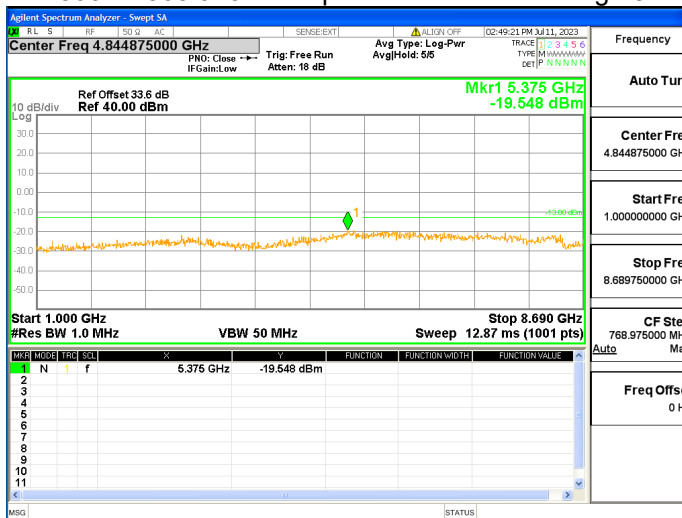


800PS 860MHz Spurious Emissions Range 1

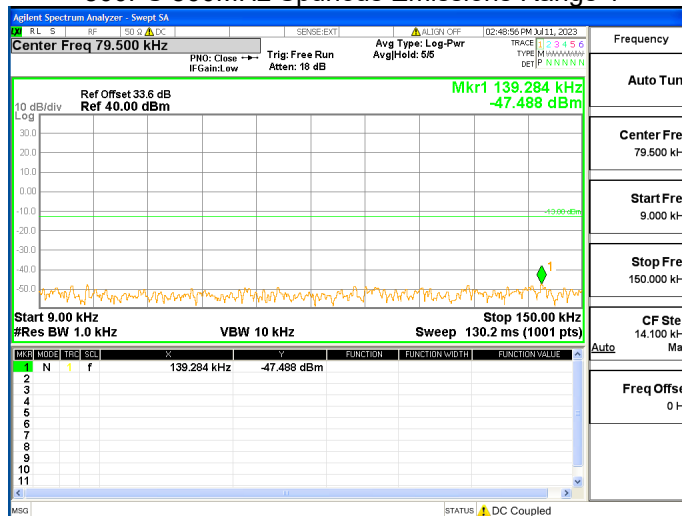


800PS 860MHz Spurious Emissions Range 2

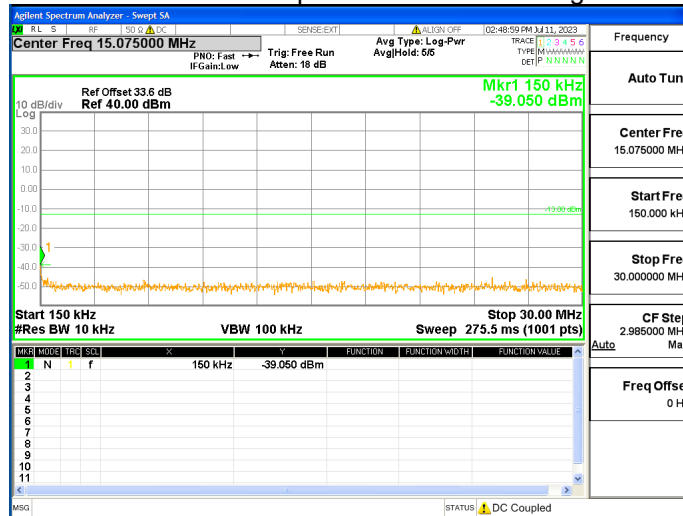


800PS 860MHz Spurious Emissions Range 3

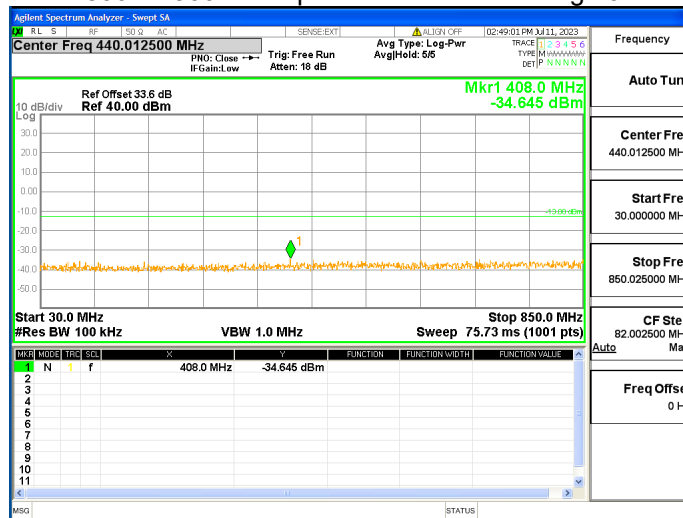


800PS 860MHz Spurious Emissions Range 4

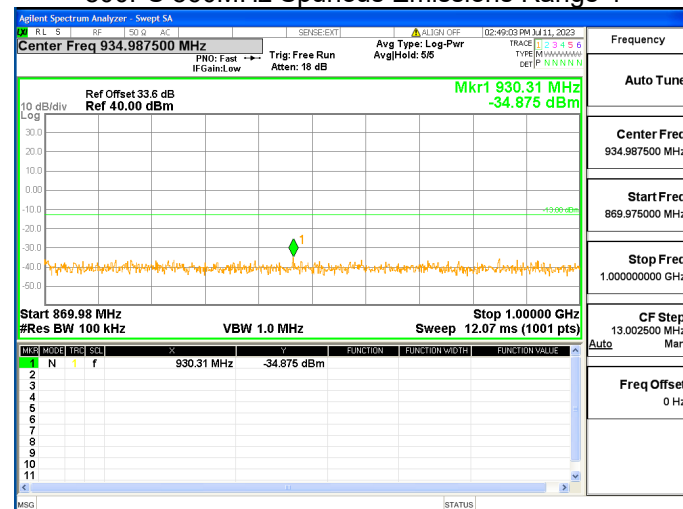


800PS 860MHz Spurious Emissions Range 5

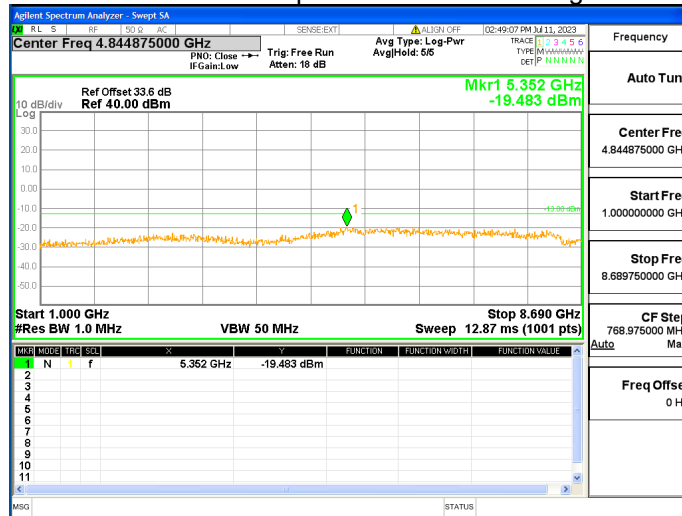


800PS 851.025MHz Spurious Emissions Range 1

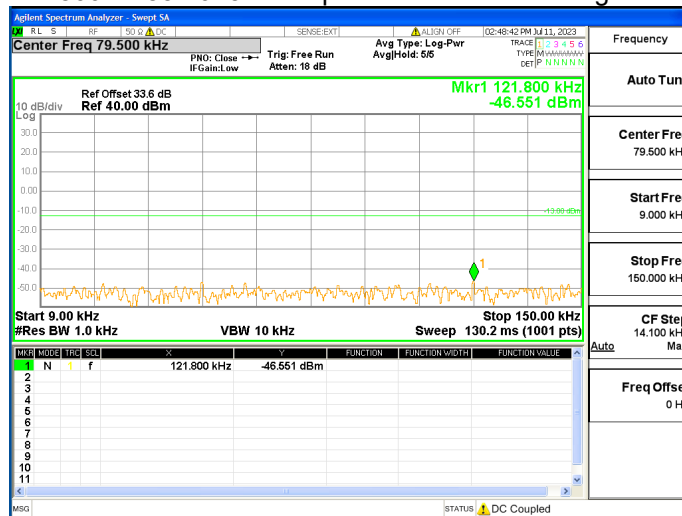


800PS 851.025MHz Spurious Emissions Range 2

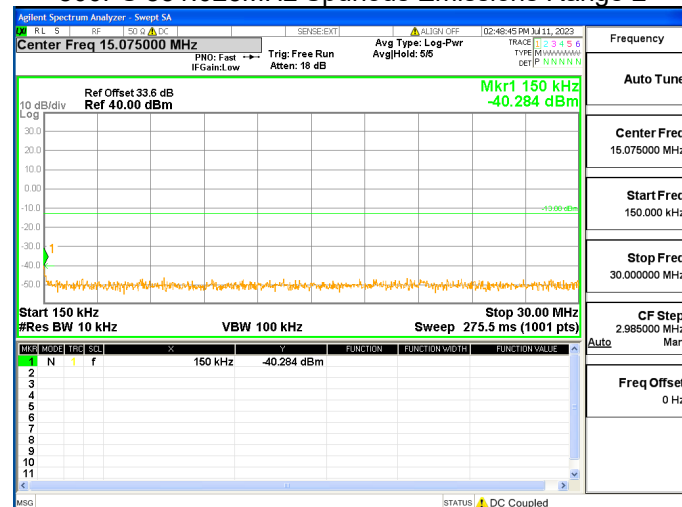


800PS 851.025MHz Spurious Emissions Range 3

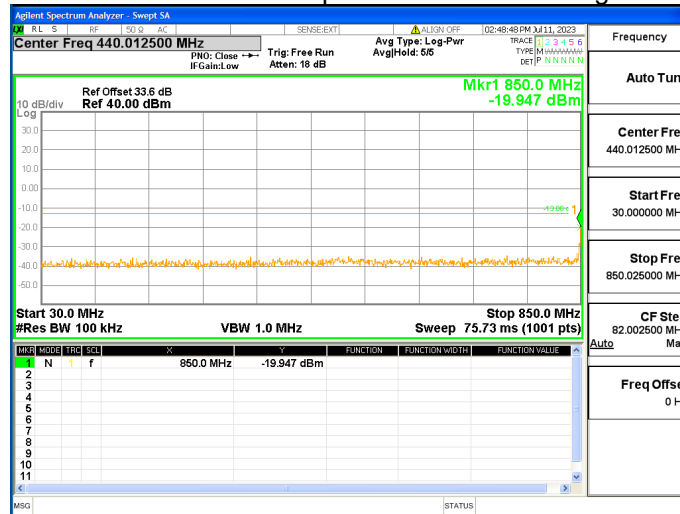


800PS 851.025MHz Spurious Emissions Range 4

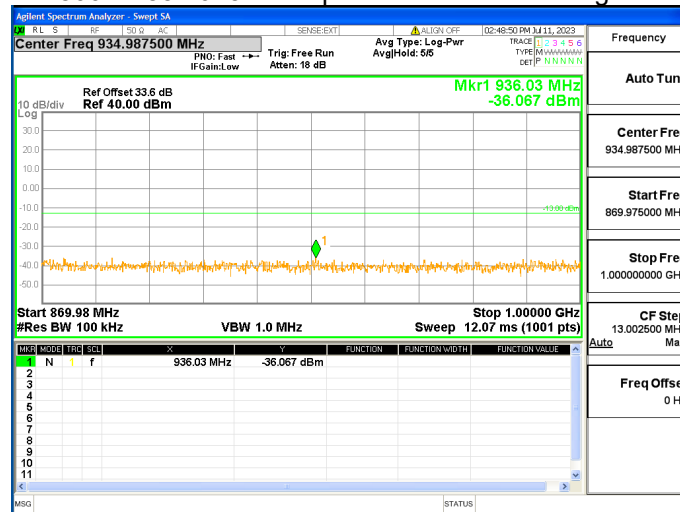


800PS 851.025MHz Spurious Emissions Range 5

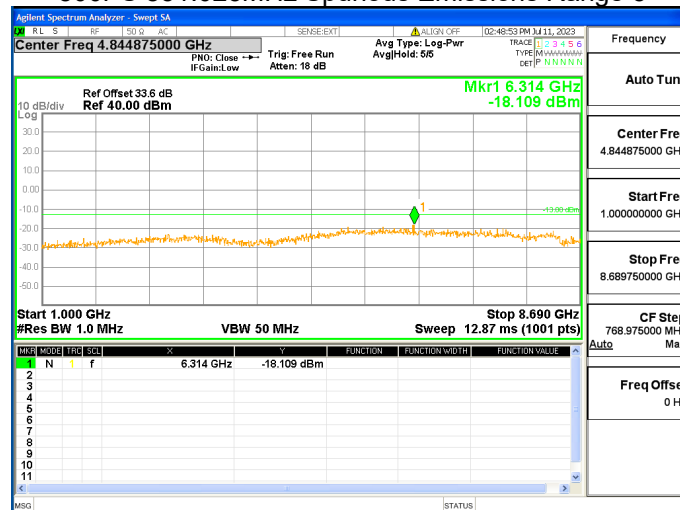


450PS 479.975MHz Spurious Emissions Range 1

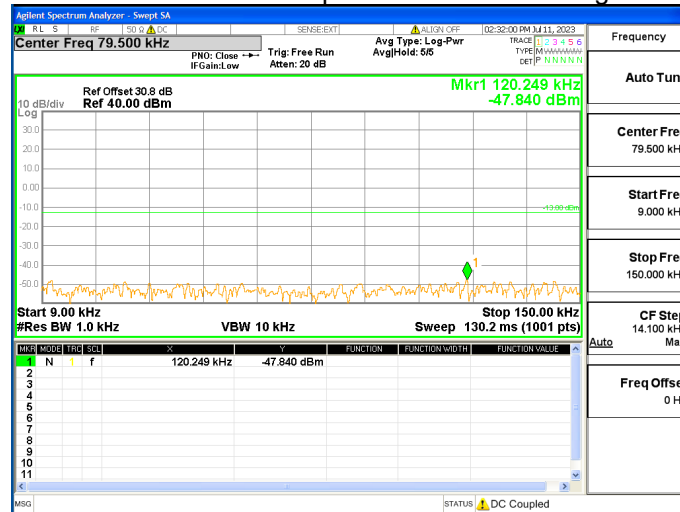


450PS 479.975MHz Spurious Emissions Range 2

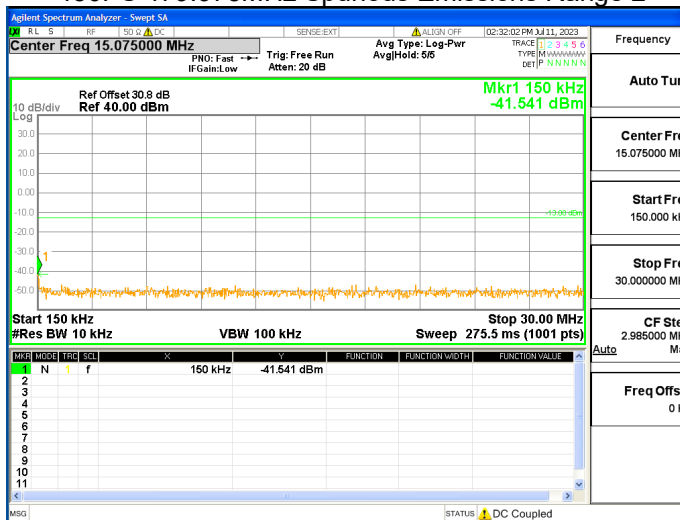


450PS 479.975MHz Spurious Emissions Range 3

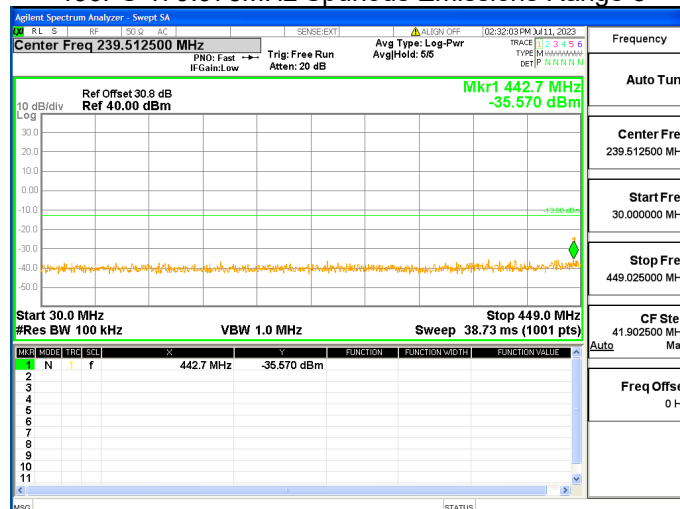


450PS 479.975MHz Spurious Emissions Range 4

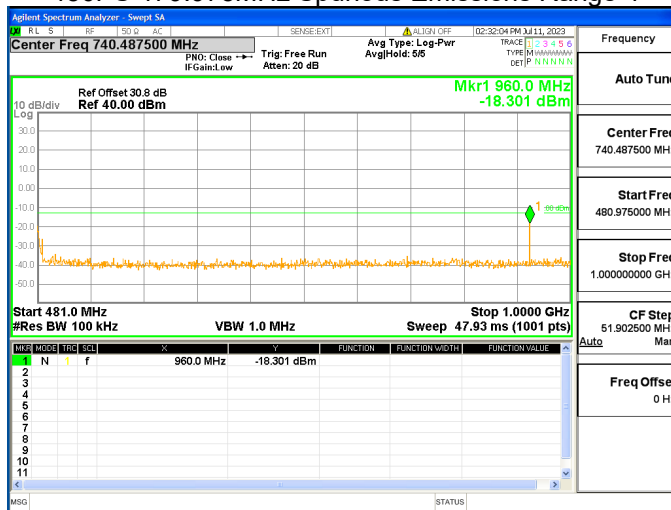


450PS 479.975MHz Spurious Emissions Range 5

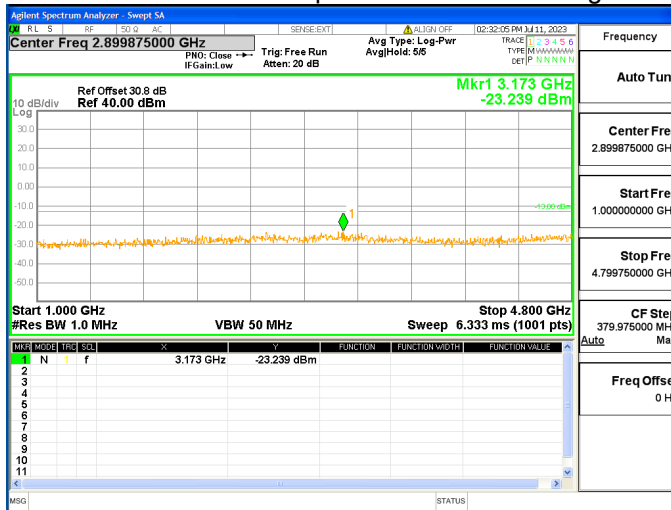


450PS 465MHz Spurious Emissions Range 1

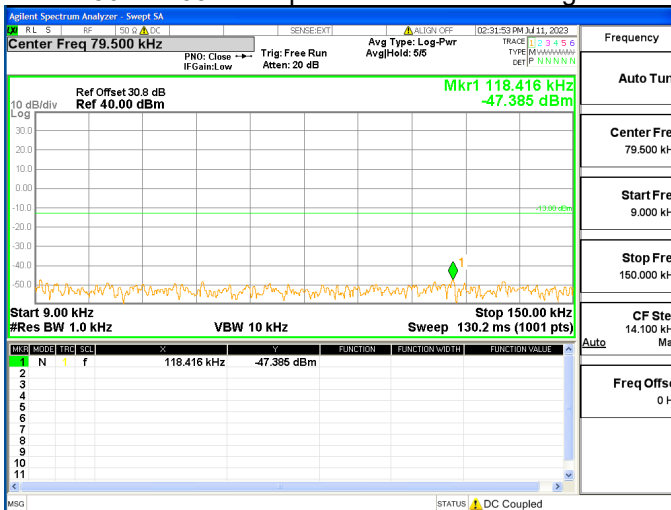


450PS 465MHz Spurious Emissions Range 2

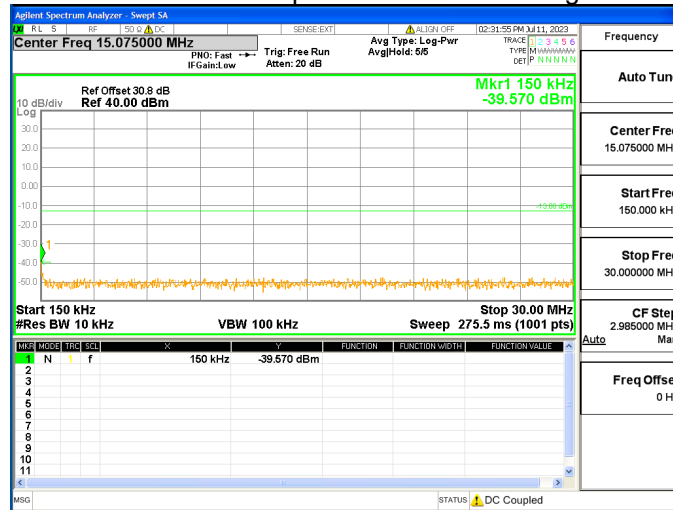


450PS 465MHz Spurious Emissions Range 3

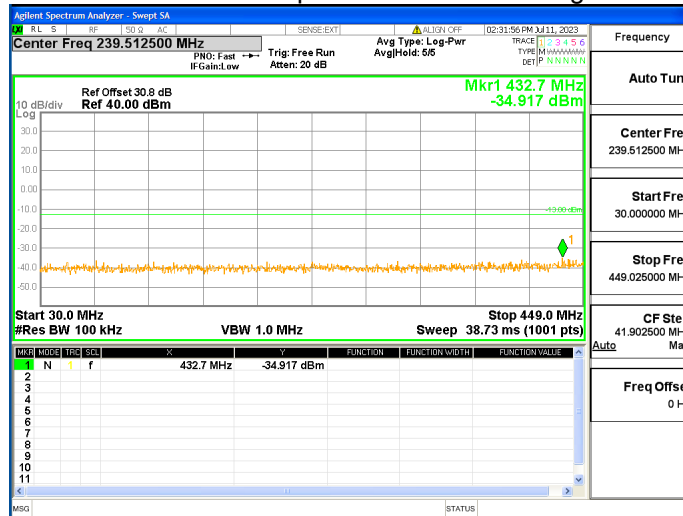


450PS 465MHz Spurious Emissions Range 4

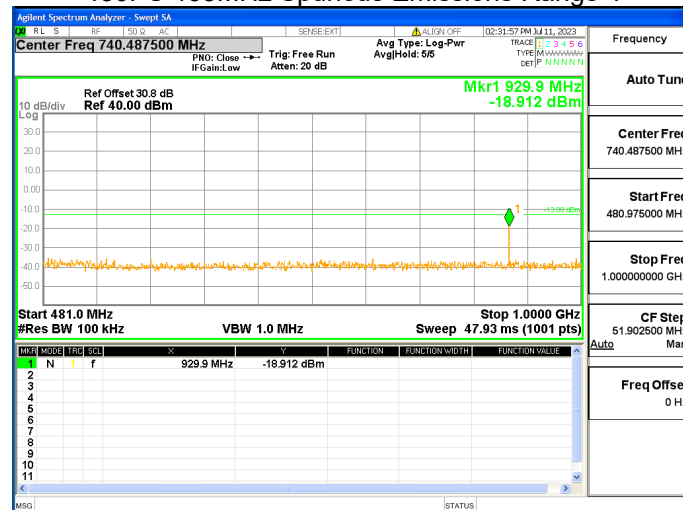


450PS 465MHz Spurious Emissions Range 5

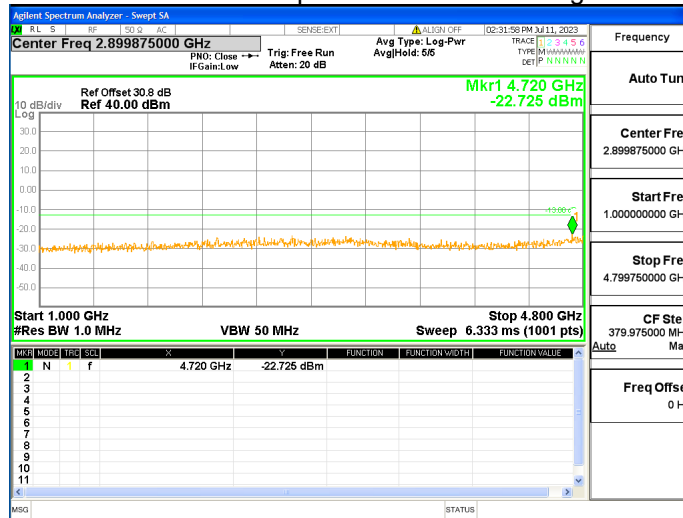


450PS 450.025MHz Spurious Emissions Range 1

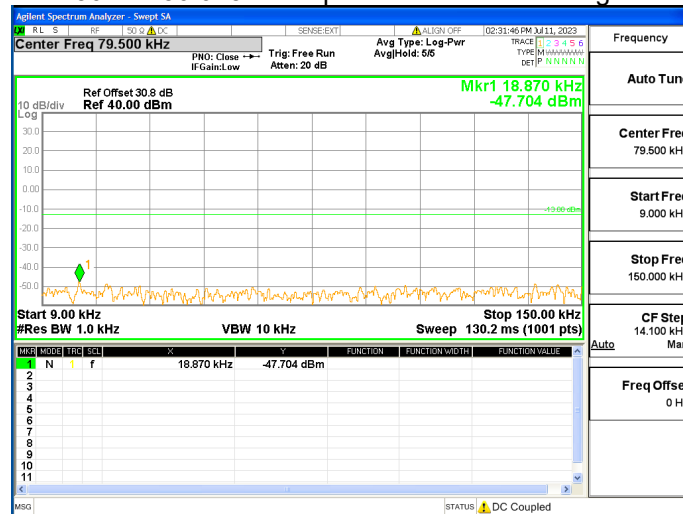


450PS 450.025MHz Spurious Emissions Range 2

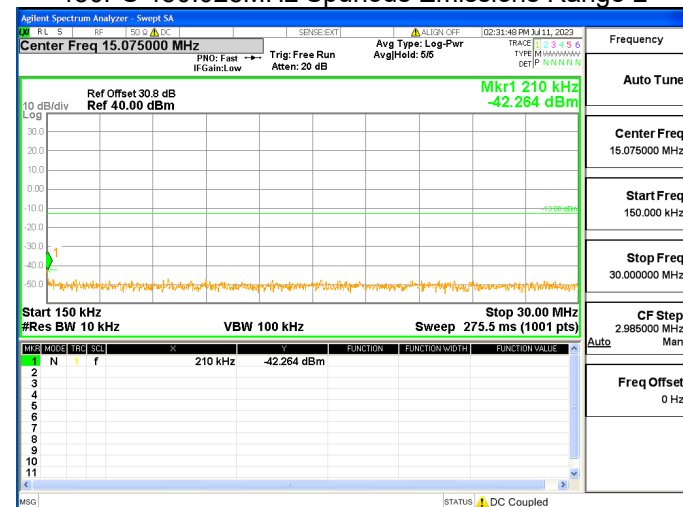


450PS 450.025MHz Spurious Emissions Range 3

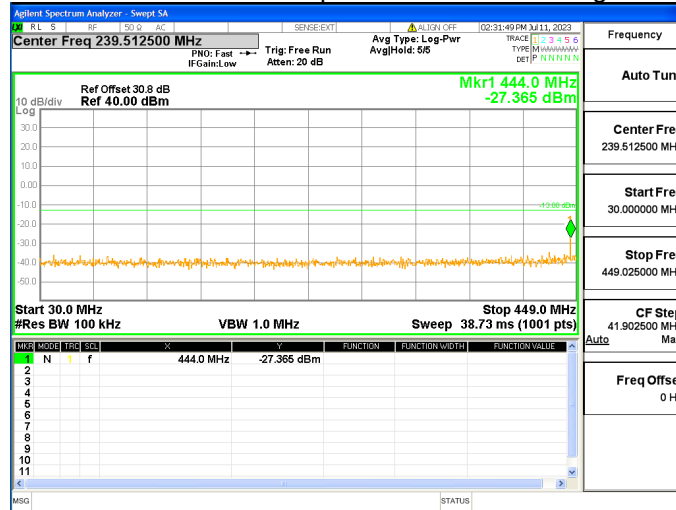


450PS 450.025MHz Spurious Emissions Range 4

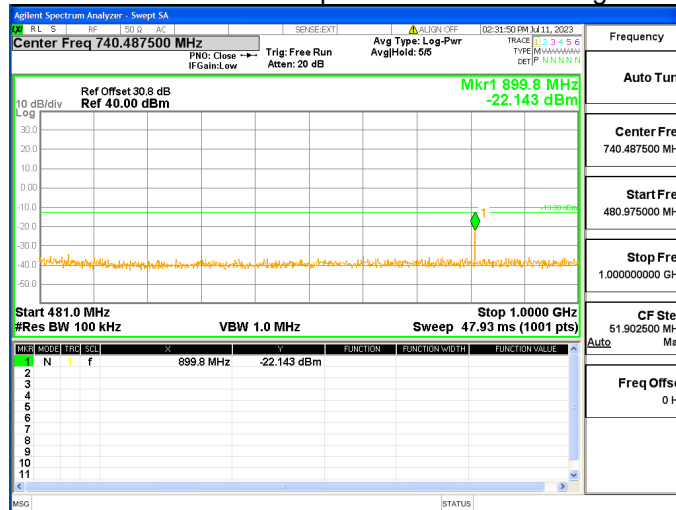


450PS 450.025MHz Spurious Emissions Range 5

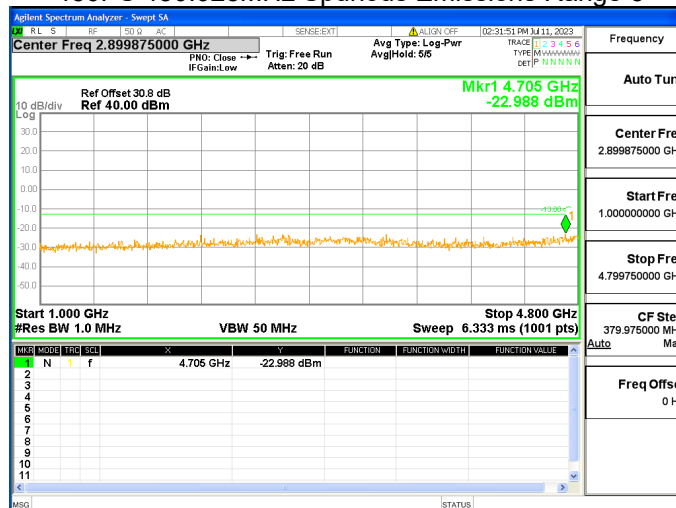


150PS 173.975MHz Spurious Emissions Range 1

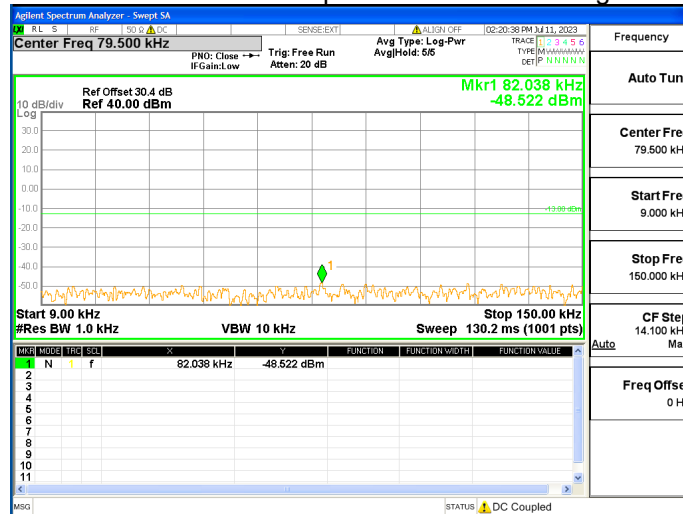


150PS 173.975MHz Spurious Emissions Range 2

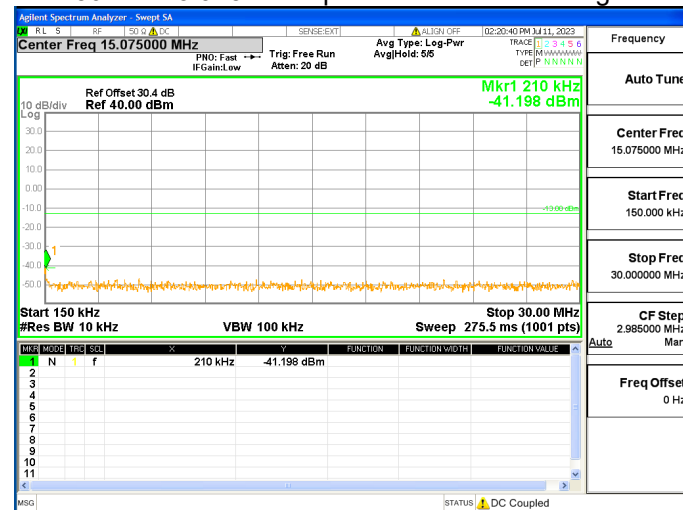


150PS 173.975MHz Spurious Emissions Range 3

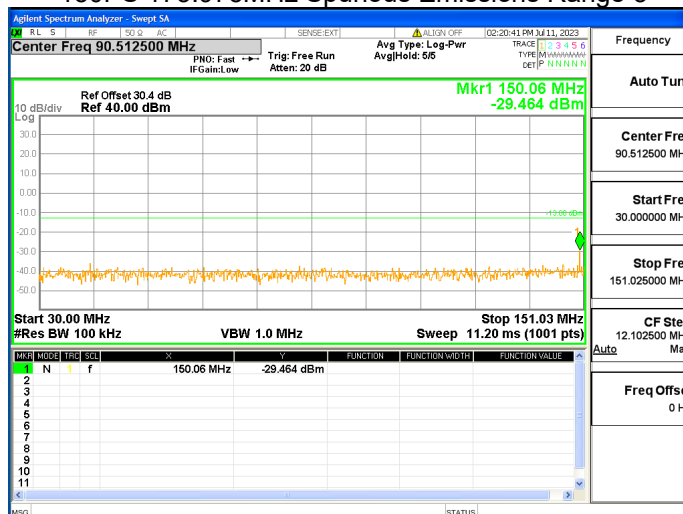


150PS 173.975MHz Spurious Emissions Range 4

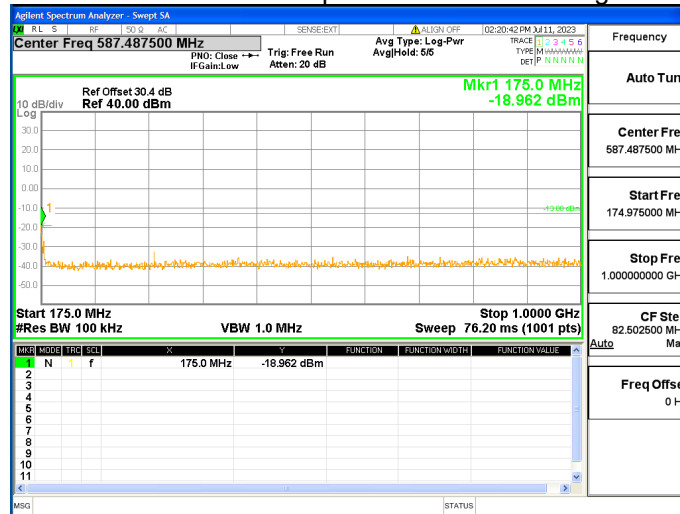


150PS 173.975MHz Spurious Emissions Range 5

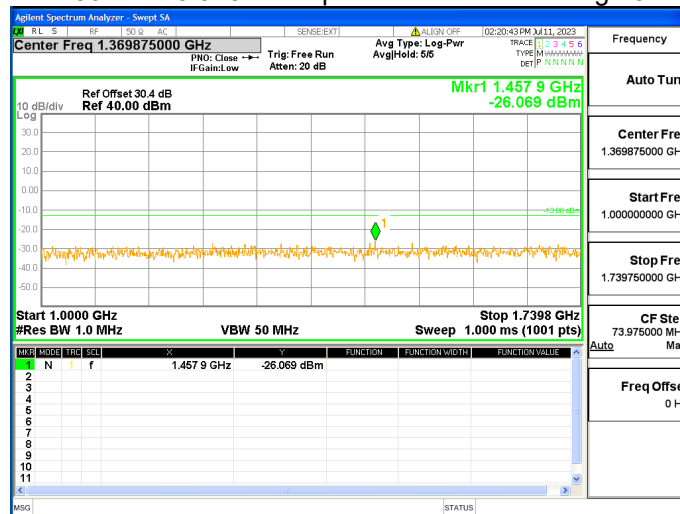


150PS 163MHz Spurious Emissions Range 1

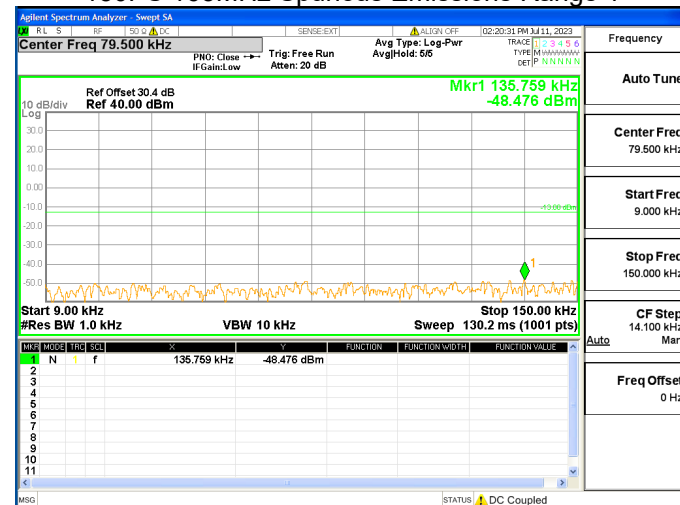


150PS 163MHz Spurious Emissions Range 2

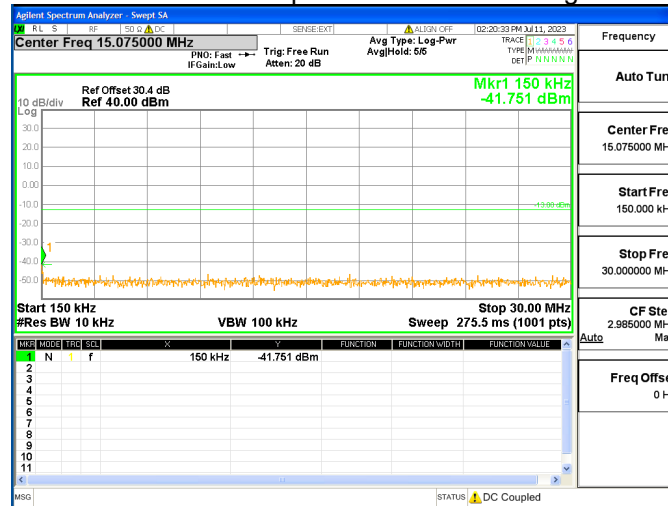


150PS 163MHz Spurious Emissions Range 3

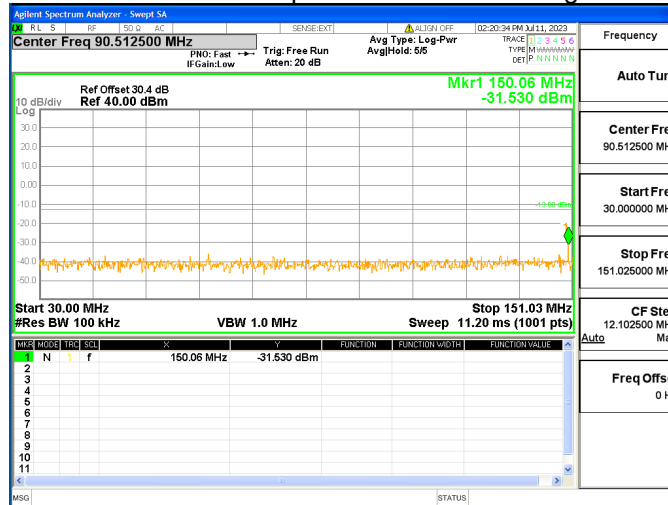


150PS 163MHz Spurious Emissions Range 4

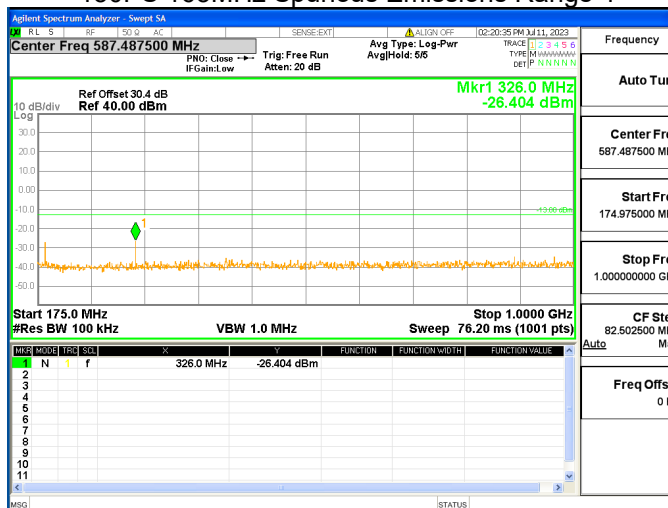


150PS 163MHz Spurious Emissions Range 5

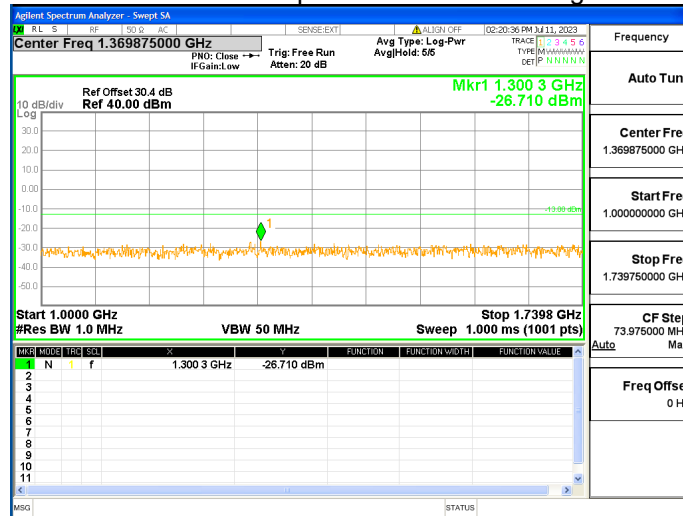


150PS 152.025MHz Spurious Emissions Range 1

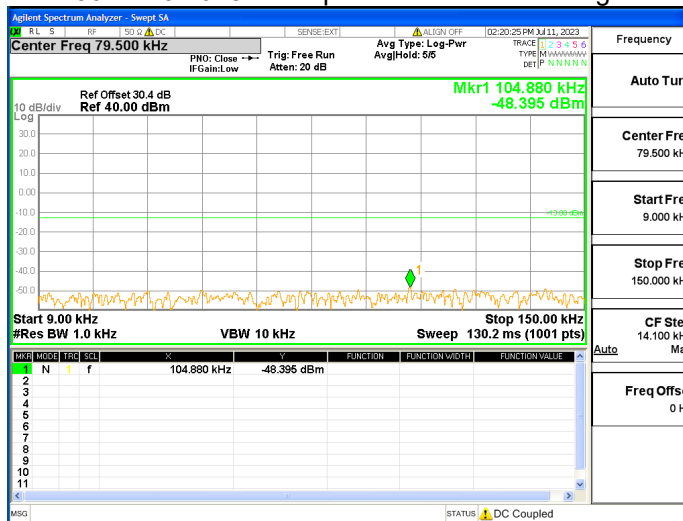


150PS 152.025MHz Spurious Emissions Range 2

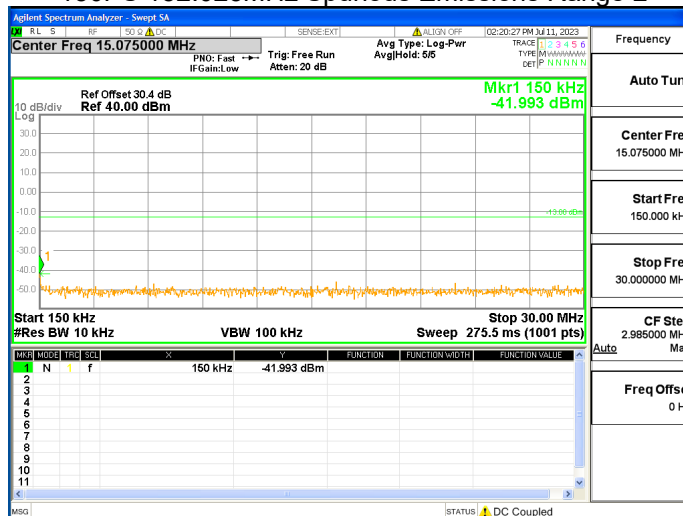


150PS 152.025MHz Spurious Emissions Range 3

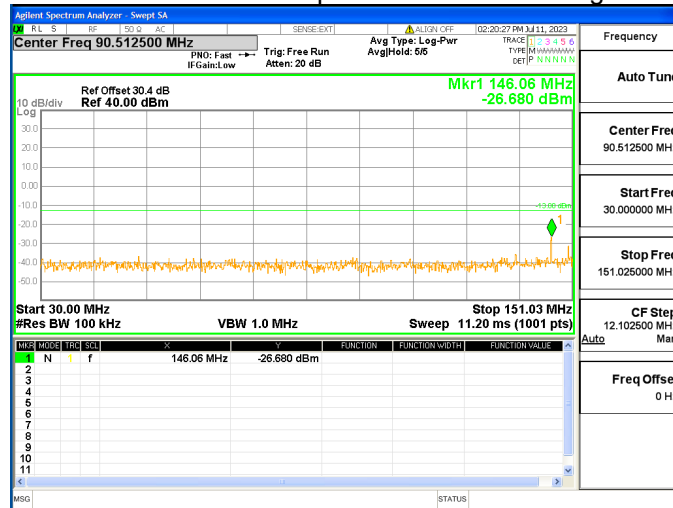

150PS 152.025MHz Spurious Emissions Range 4

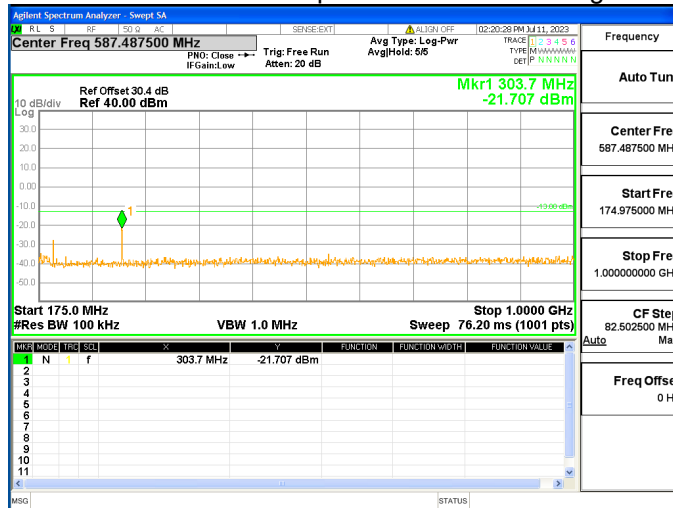

150PS 152.025MHz Spurious Emissions Range 5

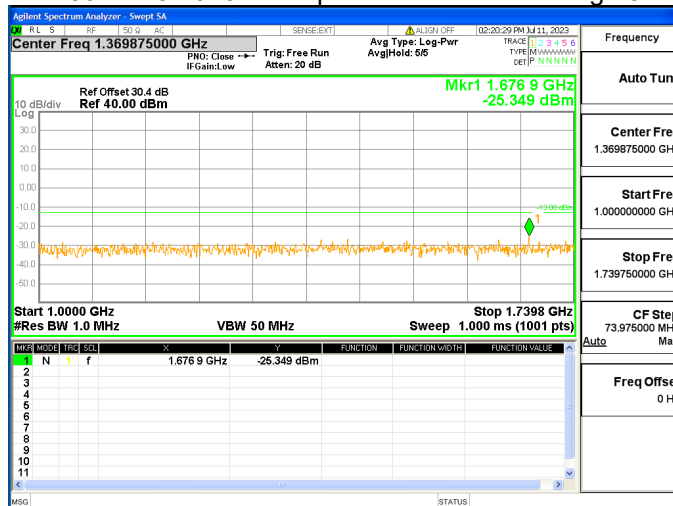

7 Noise Figure

Governing Doc	FCC Part 90.219	Room Temperature (°C)	20.5
Test Procedure	ANSI/TIA-603- E; FCC KDB 935210 D05, v01r03	Relative Humidity (%)	38.6
Test Location	Richmond	Barometric Pressure (kPa)	101.8
Test Engineer	Jack Qin	Date	July 11, 2023
EUT Voltage	☒ +48VDC ☐ 120VAC @ 60Hz		
Test Equipment Used	Manufacturer	Model	Serial Number
Signal Generator	Keysight	N5172B	MY53050270
Spectrum Analyzer	Keysight	N9010A	MY50520285
Calibration date	Oct 9, 2021		
Calibration due	Oct 9, 2023		
Frequency Range:	☒ 2 times of the passband on each band		
Detector:	☒ Average		
RBW:	☒ 910 kHz		
Type of Facility:	☒ Tabletop		
Distance:	☒ Direct		
Noise Figure on each band is less than the 9 dB required.			
Compliant ☒ Non-Compliant ☐ Not Applicable ☐			

Test Setup

Description of test set-up:

Based on FCC KDB 935210 D05 Indus Booster Basic Meas v01r03: 2019, the system maximum gain and the noise density is measured. Measurements were performed within the EUT's passband.

The noise figure is then calculated by $NF = NP - Gain + KTB \text{ Noise}$; where

NP is in band noise power per Herz,

Gain is measured at the maximum noise frequency with -55 dBm input signal in UL.

KTB Noise is 174dBm/Hz.

The EUT was set to **Operation Mode #1 with configuration Mode #1.**

```

    graph LR
        SA[Spectrum Analyzer] --- AE1[AE1]
        AE1 --- Fiber[Fiber]
        Fiber --- EUT[EUT]
        EUT --- Ter[50 ohm Terminator]
    
```

Prepared by: LabTest Certification Inc.
Date Issued: 2024-03-18
Project No.: 22063

Client: Avari Wireless Inc.
Report No.: 20.01.22063-1
Revision No.: 0

Test Data

Test Band	Gain (dB)	kTB (dBm/Hz)	Measured Value (dBm/Hz)	Noise Figure (dB)
800PS	55.7	174	-112.2	6.1
UHF PS	55.7	174	-111.9	6.4
VHF PS	56.8	174	-109.5	7.7

Prepared by: LabTest Certification Inc.
Date Issued: 2024-03-18
Project No.: 22063

Client: Avari Wireless Inc.
Report No.: 20.01.22063-1
Revision No.: 0

8 Frequency Stability

The DMU and RU37 are synchronized to the same reference clock. Therefore there is no frequency error after down and up frequency conversion are performed.

The frequency stability check is not applicable to the EUT.

9 Radiated Emissions – Enclosure


9.1 Radiated Emissions 30 MHz – 1 GHz

Standard	FCC Part 15/B				
Basic Standard(s)	ANSI C63.4, CISPR 16-2-1				
Tested by	Jack Qin				
Test date	July 12, 2023				
Test location	in SAC, Richmond				
Test Equipment	Manufacturer	Model	LabTest ID	Calibration date	Calibration due
EMC Analyzer	Keysight Technologies	N9038A	702	02-Nov-2022	01-Nov-2023
Broadband Antenna	Sunol	JB1	371	24-Oct-2022	24-Oct-2024
Applied limit	Radiated Emission FCC/IC Class B Limit at 3 Meters				
	Frequency (MHz)		Quasi-peak (dB μV/m)		
	30 – 88		40		
	88 – 216		43.5		
	216 - 960		46		
	960 – 1000		54		
	Note 1. The lower limit shall apply at the transition frequency Note 2. Additional provisions may be required for cases where interference occurs				
Test set-up description	☒	Equipment on a table of 80 cm height			
	☐	Equipment on the floor (insulated from ground plane)			
	☐	Other:			
Test method applied	☒	OATS or SAC with measurement distance [m]: ☒ 3 ☐ 10			
	☐	FAR CISPR 16-2-3 with measurement distance [m]: 3			
	☐	FAR IEC 61000-4-22 with measurement distance [m]: 3			
	☐	TEM Waveguide according to IEC 61000-4-20			
Supplementary test set-up	☒	Measurements were made in semi-anechoic chamber that complies to CISPR 16. Preliminary (peak) measurements. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak detector below 1GHz and average detector above 1GHz) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.			

Supplementary information	• If the highest internal frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. • If the highest internal frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. • If the highest internal frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. • If the highest internal frequency of the EUT is above 1 GHz, the measurement shall be made up to 6 GHz. • Where the highest internal frequency is not known, tests shall be performed up to 6 GHz.
VERDICT: PASS	

Test Method
This test measures the radiating levels from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Testing was performed in accordance with the test standard(s) referenced in the test summary section of this report. The Equipment Under Test (EUT) was configured based upon the requirements of the applicable test standard. Initially, the primary emission frequencies are identified by positioning a broadband receive antenna three meter from the EUT. A scan was made with an EMC Analyzer, controlled by EMC Test Software, Tile7! with the receiver in the peak mode. The receiver IF bandwidth was 120 kHz and scan step was less than 30kHz. To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to produce horizontal and vertical polarities while the turntable is rotated to determine the worst emitting configuration. Measurements were then made using CISPR quasi peak when the peak readings were within 10dB of the limit line. The numerical results are included herein to demonstrate compliance.

Test Setup
The EUT was placed on a 0.8m non-conducting table above a ground reference plane (GRP).

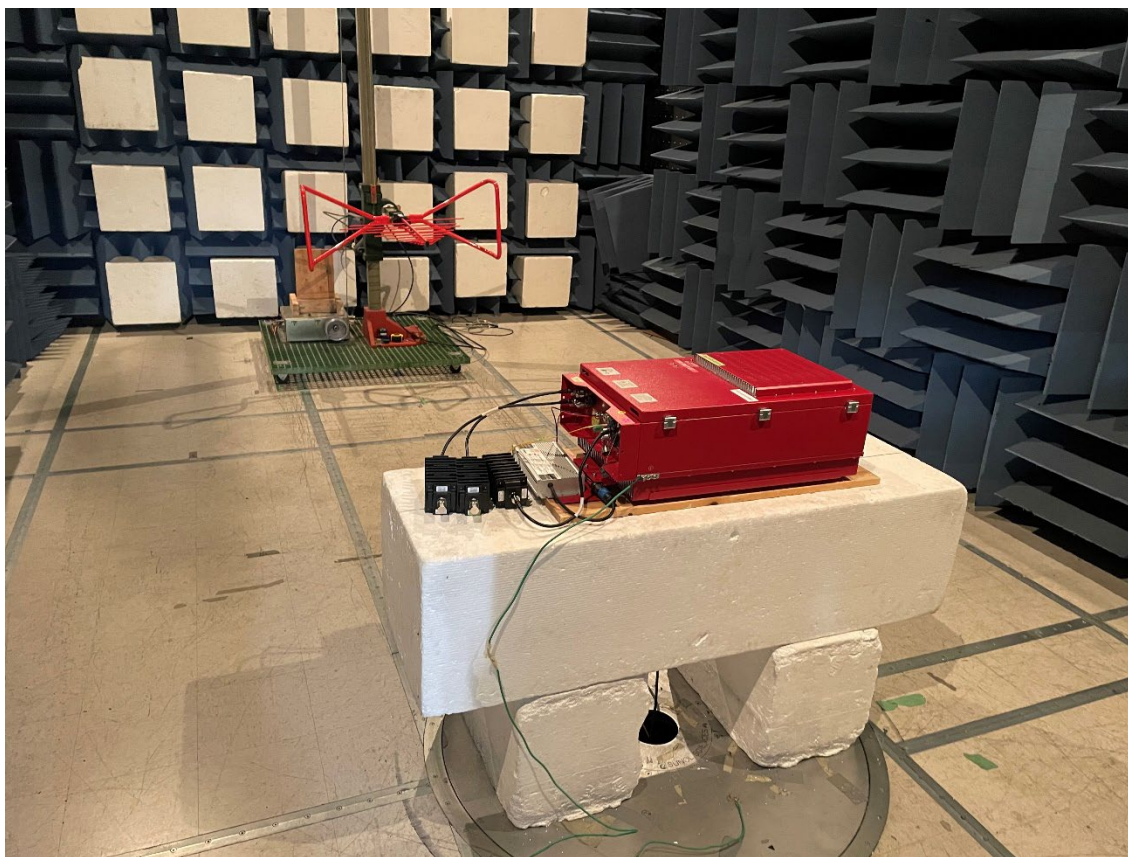


Measurement data and Plot

Note:

- 1) The test results below show that EUT pass the tests with Class B limit. As Class B limit is more restrictive than Class A limit, consequently the EUT pass the tests with Class A limit.
- 2) Quasi-peak (dBuV/m) = Raw Quasi-peak (dBuV) + Antenna Factor (dB/m) + Correction Factor (dB)
Correction Factor (dB) = Cable loss(dB)
- 3) The emissions that exceed the limit were emitted from the transmitter, which is not required by the standard in this section.

Radiated Emission 30 MHz - 1000MHz, 120V/60Hz, FCC Class B Limit

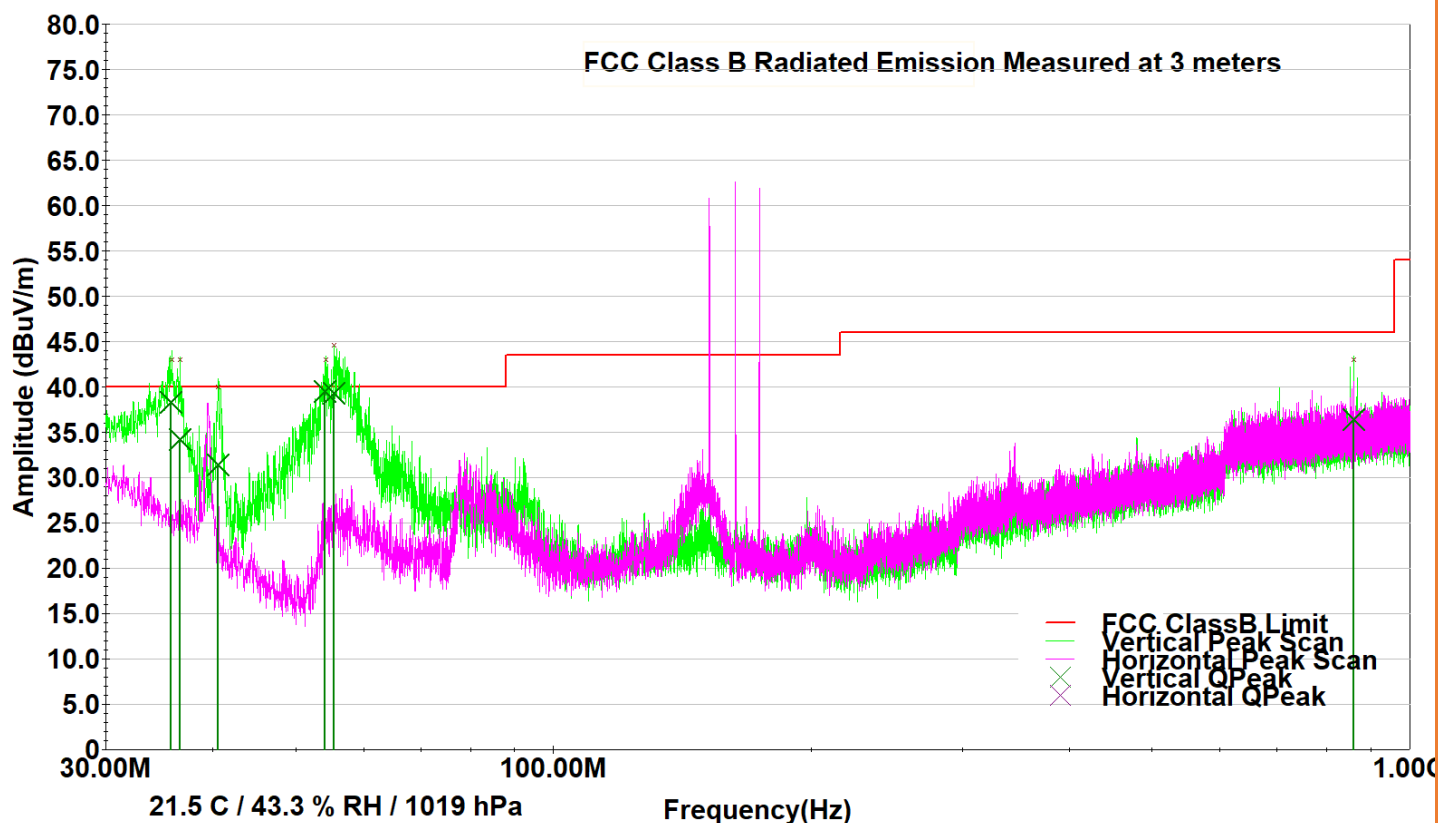

Frequency	Antenna Polarization	Raw QPeak	Antenna Factor	Correction Factor	QPeak	Margin	Limit
MHz	V/H	dBuV	dB/m	dB	dBuV/m	dB	dBuV/m
35.76	V	16.9	20.8	0.7	38.3	1.7	40
36.62	V	13.4	20.1	0.7	34.2	5.8	40
40.533	V	13.4	17.2	0.7	31.4	8.6	40
54.14725	V	27.3	11.4	0.8	39.5	0.5	40
55.46825	V	27.2	11.3	0.8	39.3	0.7	40
860.0047	V	7.6	25.9	2.9	36.4	9.6	46

9.2 Radiated Emissions above 1 GHz


Standard	FCC Part 15/B													
Basic Standard(s)	ANSI C63.4, CISPR 16-2-1													
Tested by	Jack Qin													
Test date	July 12, 2023													
Test location	in SAC, Richmond													
Test Equipment	Manufacturer	Model	LabTest ID	Calibration date	Calibration due									
EMC Analyzer	Keysight Technologies	N9038A	702	02-Nov-2022	01-Nov-2023									
Horn Antenna	A.H Systems	SAS-571	227C	13-Sept-2022	13-Sept-2024									
RF Preamplifier	Agilent	8449B	273	IHC ⁶	IHC ⁶									
RF Cable	A.H. Systems	SAC-26G-3	227D	IHC ⁶	IHC ⁶									
Applied limit	<table border="1"> <thead> <tr> <th colspan="3">Radiated Emission FCC/IC Class B Limit at 3 Meters</th> </tr> <tr> <th>Frequency (GHz)</th><th>Average (dBμV/m)</th><th>Peak (dBμV/m)</th> </tr> </thead> <tbody> <tr> <td>> 1</td><td>54</td><td>74</td> </tr> </tbody> </table>					Radiated Emission FCC/IC Class B Limit at 3 Meters			Frequency (GHz)	Average (dB μ V/m)	Peak (dB μ V/m)	> 1	54	74
Radiated Emission FCC/IC Class B Limit at 3 Meters														
Frequency (GHz)	Average (dB μ V/m)	Peak (dB μ V/m)												
> 1	54	74												
Test set-up description	☒ Equipment on a table of 80 cm height ☐ Equipment on the floor (insulated from ground plane) ☐ Other:													
Operating modes of EUT	The EUT is configured as "Dive Mode", the wireless charger is powered by 120V/60Hz or 230V/50Hz.													
Test method applied	☐ OATS or SAC with measurement distance [m]: ☒ 3 ☐ 10 ☒ FAR CISPR 16-2-3 with measurement distance [m]: 3 ☐ FAR IEC 61000-4-22 with measurement distance [m]: 3 ☐ TEM Waveguide according to IEC 61000-4-20													
Supplementary test set-up	☒ Measurements were made in FAR chamber that complies to CISPR 16. Preliminary (peak) measurements. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak detector below 1GHz and average detector above 1GHz) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.													

Supplementary information	• If the highest internal frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. • If the highest internal frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. • If the highest internal frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. • If the highest internal frequency of the EUT is above 1 GHz, the measurement shall be made up to 6 GHz. • Where the highest internal frequency is not known, tests shall be performed up to 6 GHz.
VERDICT: PASS	

Test Method
This test measures the radiating levels from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Testing was performed in accordance with the test standard(s) referenced in the test summary section of this report. The Equipment Under Test (EUT) was configured based upon the requirements of the applicable test standard. Initially, the primary emission frequencies are identified by positioning a broadband receive antenna three meter from the EUT. A scan was made with an EMC Analyzer, controlled by EMC Test Software, Tile7!, with the receiver in the peak mode. The receiver IF bandwidth was 1000 kHz and scan step was less than 300 kHz. To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to produce horizontal and vertical polarities while the turntable is rotated to determine the worst emitting configuration. Measurements were then made using CISPR quasi peak when the peak readings were within 10dB of the limit line. The numerical results are included herein to demonstrate compliance.

Test Setup


The EUT was placed on an 80 cm non-conducting table above a ground reference plane (GRP).

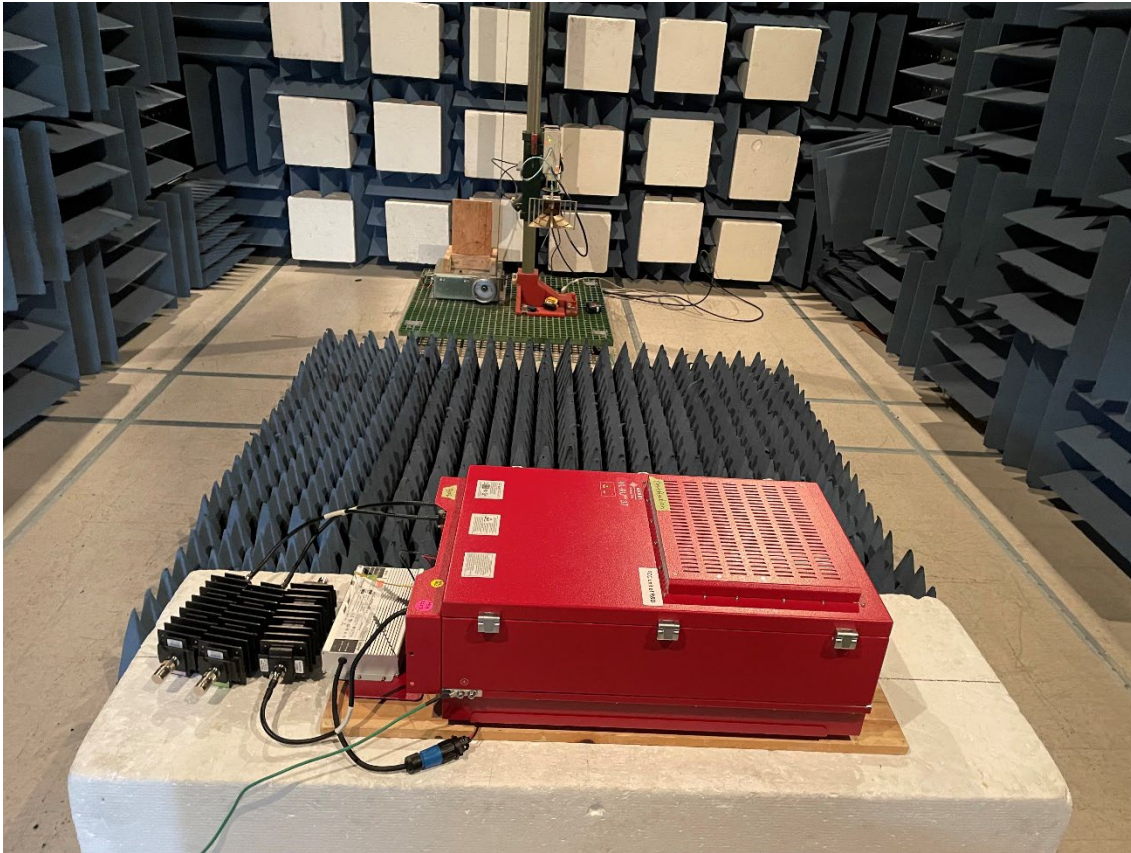

Measurement data and Plot

- Note:
- 1) The test results below show that EUT pass the tests with Class B limit. As Class B limit is more restrictive than Class A limit, consequently the EUT pass the tests with Class A limit.
 - 2) Quasi-peak (dBuV/m) = Raw Quasi-peak (dBuV) + Antenna Factor (dB/m) + Correction Factor (dB)
Correction Factor (dB) = Cable loss(dB) + Preamp Gain(dB)

Radiated Emission 1 GHz – 18 GHz, 120V/60Hz, FCC Class B Limit

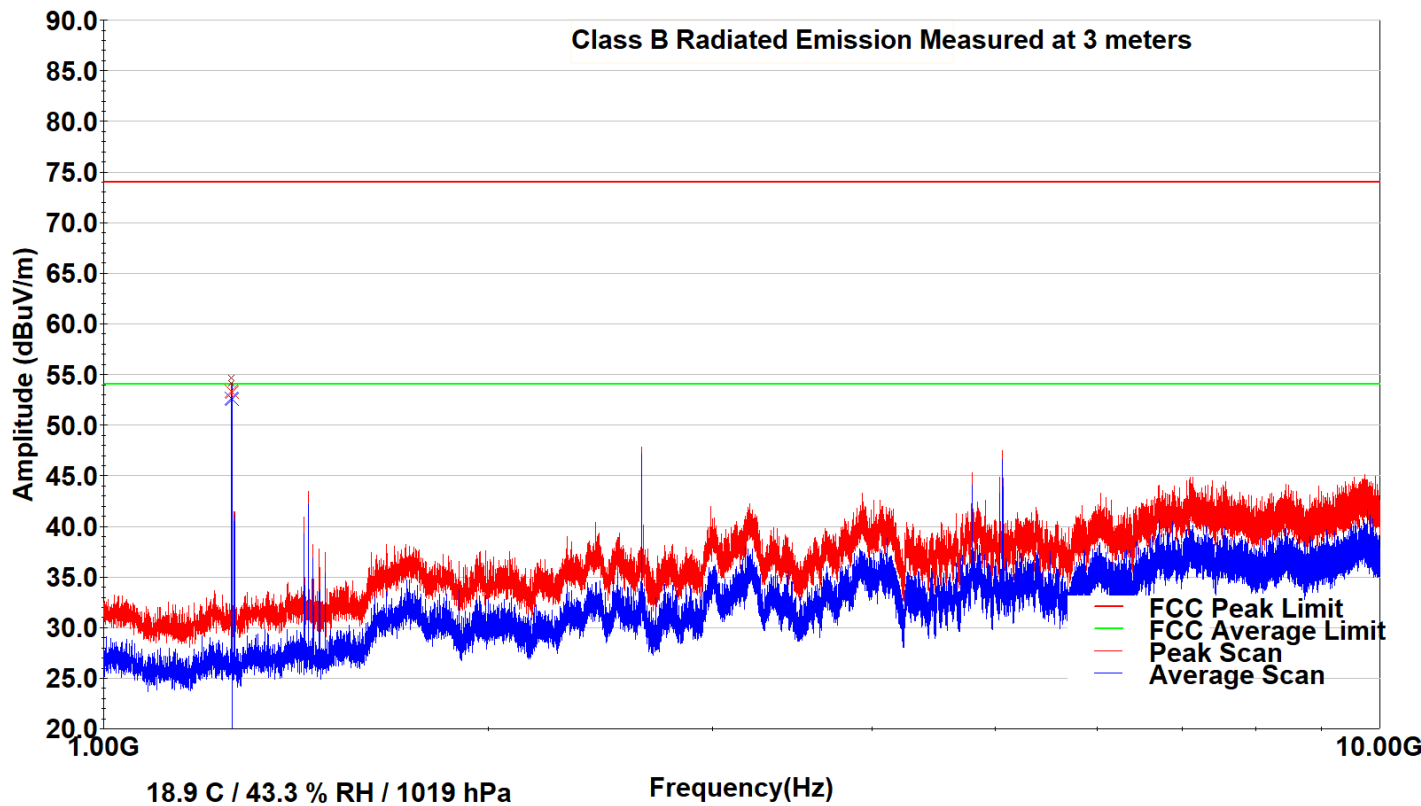

Frequency	Antenna Polarization	Antenna Factor	Correction Factor	Average	Average Margin	Average Limit	Peak	Peak Margin	Peak Limit
MHz	V/H	dB/m	dB	dBuV/m	dB	dBuV/m	dBuV/m	dB	dBuV/m
1260.2	H	24.7	-29.7	52.6	1.4	54	53.	20.7	74
1260	V	24.7	-29.7	52.7	1.3	54	53.379	20.6	74

10 Conducted Emissions at AC Power Port


Standard	FCC Part 15/B																			
Basic Standard(s)	ANSI C63.4, CISPR 16-2-1																			
Tested by	Jack Qin																			
Test date	July 12, 2023																			
Test location	in SAC, Richmond																			
Test Equipment	Manufacturer	Model	LabTest ID	Calibration date	Calibration due															
EMC Analyzer	Keysight Technologies	N9038A	702	02-Nov-2022	01-Nov-2023															
LISN	Com-Power	LI-150A	1527	13-Apr-23	13-Apr-25															
LISN	Com-Power	LI-150A	1528	13-Apr-23	13-Apr-25															
Applied limit	<table border="1"> <thead> <tr> <th colspan="3">AC Port Conducted Emission FCC/IC/CE Class B Limit</th> </tr> <tr> <th>Frequency (MHz)</th><th>Quasi-Peak (dBμV)</th><th>Average (dBμV)</th></tr> </thead> <tbody> <tr> <td>0.15 - 0.50</td><td>66 to 56</td><td>56 to 46</td></tr> <tr> <td>0.50 – 5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> Note 1. The lower limit shall apply at the transition frequencies. Note 2. The limit decreases linearly with the logarithm of the frequency in the 0.15 to 0.50 MHz					AC Port Conducted Emission FCC/IC/CE Class B Limit			Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)	0.15 - 0.50	66 to 56	56 to 46	0.50 – 5	56	46	5-30	60	50
AC Port Conducted Emission FCC/IC/CE Class B Limit																				
Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)																		
0.15 - 0.50	66 to 56	56 to 46																		
0.50 – 5	56	46																		
5-30	60	50																		
Test set-up description	☒ Set-up Type A (40 cm distance to vertical ground plane, 80 cm over ground plane) ☐ Set-up Type B (40 cm distance to horizontal ground plane) ☐ Floor standing equipment set-up (10 cm over ground plane) ☐ Other:																			
Test method applied	☒ Artificial mains network (AMN) ☐ Voltage Probe																			
VERDICT: PASS																				

Test Method

This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Testing was performed in accordance with the test standard(s) referenced in the test summary section of this report. The Equipment Under Test (EUT) was configured based upon the requirements of the applicable test standard. Initially a scan was made with an EMC Analyzer, controlled by EMC Test Software, Tile7!, from 150 kHz to 30 MHz on each phase with the receiver in the peak mode. The measuring bandwidth was set up 9 kHz. Measurements were then made using CISPR16-1 quasi peak and averaging detectors when the peak readings were within 10dB of the Quasi-peak limit line.

Test Setup

The EUT was placed on a 0.8m non-conducting table above GRP.

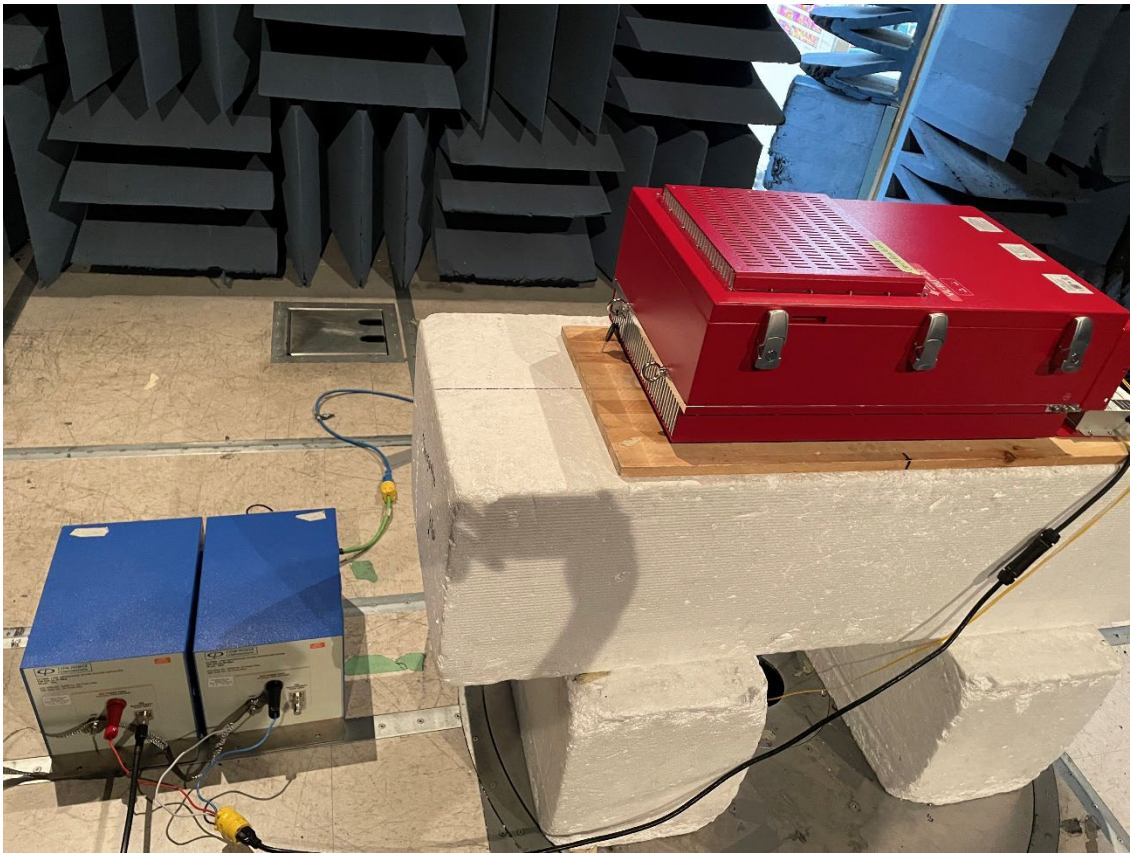


Measurement data and Plot

Note:


- 1) The test results below show that EUT pass the tests with Class B limit. As Class B limit is more restrictive than Class A limit, consequently the EUT pass the tests with Class A limit.
- 2) Conducted Emission (dBUV) = Measured Emission (dBUV) + Correction Factor (dB)
Correction Factor (dB) = LISN Transduce Factor (dB) + Cable loss(dB) + 20 dB limiter(dB)

Conducted Emission 150 kHz - 30MHz Class B, 120V/60Hz AC Main L1

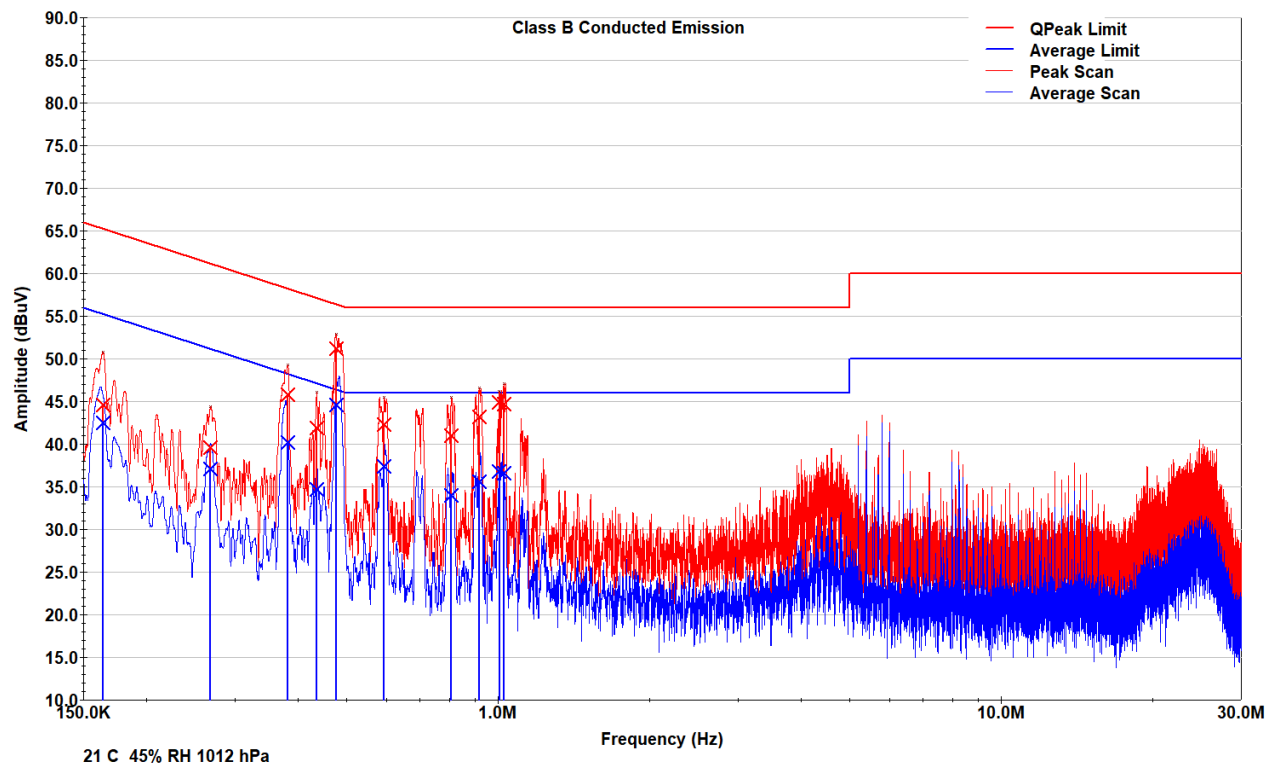

Frequency	Correction Factor	QPeak	QPeak Margin	QPeak Limit	Average	Average Margin	Average Limit
MHz	dB	dBuV	dB	dBuV	dBuV	dB	dBuV
0.164	20.627	44.6	20.67	65.27	42.514	12.75	55.27
0.269	20.616	39.64	21.53	61.16	37.113	14.05	51.16
0.382	20.585	45.82	12.42	58.24	40.212	8.03	48.24
0.436	20.572	41.86	15.28	57.14	34.726	12.41	47.14
0.476	20.571	51.24	5.16	56.4	44.639	1.76	46.4
0.594	20.568	42.33	13.67	56	37.371	8.63	46
0.808	20.562	40.98	15.02	56	33.996	12	46
0.918	20.569	43.16	12.84	56	35.639	10.36	46
1.006	20.576	44.89	11.11	56	36.848	9.15	46
1.027	20.578	44.68	11.32	56	36.581	9.42	46

Conducted Emission 150 kHz - 30MHz Class B, 120V/60Hz AC Main L2

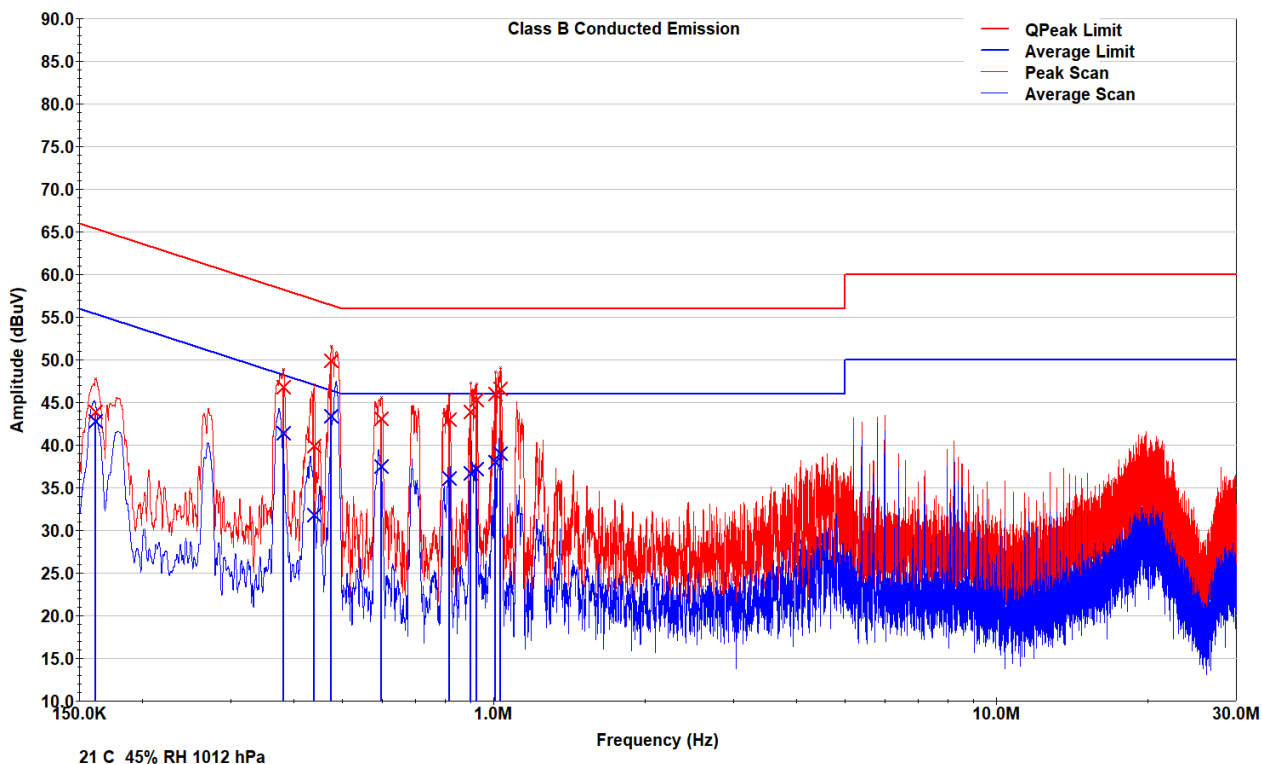

Frequency	Correction Factor	QPeak	QPeak Margin	QPeak Limit	Average	Average Margin	Average Limit
MHz	dB	dBuV	dB	dBuV	dBuV	dB	dBuV
0.162	20.627	43.85	21.52	65.38	42.805	12.57	55.38
0.381	20.585	46.82	11.43	58.25	41.428	6.82	48.25
0.439	20.571	39.85	17.22	57.07	31.76	15.31	47.07
0.476	20.571	49.91	6.49	56.41	43.367	3.04	46.41
0.598	20.568	43.1	12.9	56	37.541	8.46	46
0.816	20.561	43	13	56	36.124	9.88	46
0.901	20.567	43.86	12.14	56	36.734	9.27	46
0.925	20.569	45.31	10.69	56	37.178	8.82	46
1.009	20.576	46.04	9.96	56	37.955	8.04	46
1.032	20.578	46.64	9.36	56	39.01	6.99	46

Annex

Annex 1 – Measurement Uncertainties

The tables below show measurement uncertainties of the EMC test set-ups. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Emission tests		Uncertainty	U _{CISPR}
RF Conducted disturbance (mains port) 150kHz – 30MHz	AMN:LIN-120C	dB	3,44dB
	AMN:	dB	
	AMN:	dB	
Radiated Emissions; 30MHz – 300MHz(Horz.)		dB	5,34dB
Radiated Emissions; 30MHz – 300MHz(Vert.)		dB	6,32dB
Radiated Emissions; 300MHz – 1000MHz(Horz.)		dB	5,34dB
Radiated Emissions; 300MHz – 1000MHz(Vert.)		dB	6,32dB
Radiated Emissions; 1000MHz – 6000MHz(Horz.)		dB	5,18dB
Radiated Emissions; 1000MHz – 6000MHz(Vert.)		dB	5,18dB
LF Harmonic current emissions		%	n/a
LF Voltage Fluctuations		%	n/a

Annex 2 - ISO 17025 ACCREDITATION CERTIFICATE

For complete scope of certification use

<https://labtestcert.com/wp-content/uploads/2023/07/LabTestCertificationCertScope-V017.pdf>

END OF REPORT

ISO 17025 ACCREDITED

ONE STOP GLOBAL CERTIFICATION SOLUTIONS

ISO 17020 ACCREDITED
205 – 8291 92 Street, Delta, BC
V4G 0A4, Canada
Phone: 604-247-0444
Fax: 604-247-0442
www.labtestcert.com

ISO 17065 ACCREDITED