




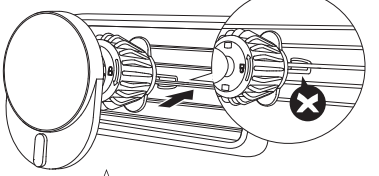
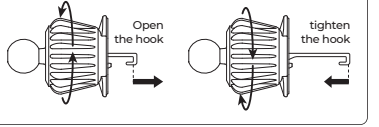






3.1101.622224.0000000



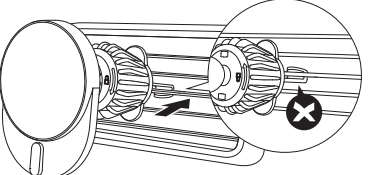









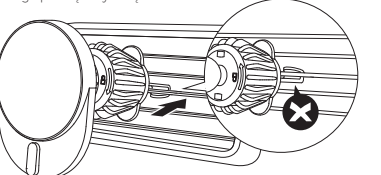
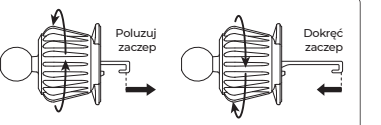






原材料 机乐堂 JR-ZS409 磁吸无线充支架 中英波 说明书

尺寸: 60x90mm

材质: 105g铜版纸+正反单色印刷+风琴折

封面

<p><b>JOYROOM</b></p>  <p><b>User Manual</b> EN PL CN JR-ZS409 Magnetic Wireless Car Charger Holder</p>	<p>EN English</p> <p><b>Parameters</b> Model: JR-ZS409 Name: Magnetic Wireless Car Charger Holder Material: PC+ABS Input: 5V m 2A 9V m 2A 12V m 2A Output: 5W/7.5W/10W/15W (MAX) Input port: Type-C Applicable phone size: 4.7-7.0"</p> <p><b>Accessory kit</b> Metal ring x1, Separation film x1, Cleaning kit x1, Alignment card x1</p> <p><b>Product diagram</b></p>  <p>Wireless charging area ..... Nut LED Light .....</p>	<p>EN Operation steps</p> <p>1. Put the ball head into the nut first, then insert it into the socket on the back of the holder, tighten the nut.</p>  <p>2. Install the vent hook onto the air vent, adjust to desired angle.</p>   <p>Open the hook ..... tighten the hook</p>	<p>EN 3. Use the Type-C charging cable in the package to connect the holder and the car charger.</p>  <p>4. Place your phone. It will be securely attached to the charger holder with its auto alignment function.</p> 	<p>EN Operation steps (metal ring)</p> <p>1. Open the cleaning kit, wipe clean the back surface of your phone.</p>  <p>2. Paste the transparent separation film onto the center of the phone back.</p>  <p>3. Adhere the metal ring onto the center of the phone back by use of the alignment card.</p>  <p>Note: Just make sure the upper and lower scales as well as the left and right scales of the alignment card are equal, the metal ring will be adhered to the center.</p>  <p><b>Reminder: The product can be used directly with IP mag-safe phones with/without a magnetic case. For other phones and cases, a metal ring is required.</b></p>	<p>EN Warranty Card</p> <p>User Name: _____ User Tel: _____ User address (with postcode): _____</p> <p>Purchase date: _____ Invoice No.: _____ Dealer Name: _____ Dealer Tel: _____ Dealer Address (with postcode): _____</p> <p><b>Warranty</b> A. If there is performance failure on this product and it's not caused by human error, we will provide a 12-month free warranty service for consumers from the date of purchase. B. Warranty exceptions: * Human damage; * Expired warranty period; * Failure to provide valid purchase certificate; * Product damage caused by failure to follow the use, maintenance and care instructions; * Product damage caused by disassembling or repairing the product without authorization, or immersing the product in water; * Damage caused by force majeure.</p>	<p>CN 保修卡</p> <p>用户姓名: _____ 用户电话: _____ 用户地址(含邮编): _____</p> <p>购机日期: _____ 发票编号: _____ 销售单位名称: _____ 销售单位电话: _____ 销售单位地址(含邮编): _____</p> <p><b>保修服务说明</b> A. 在正常使用本产品过程中,如果本产品出现非人为损坏的性能故障,自购买之日起,消费者享受免费保修服务,保修期为12个月。 B. 有下列情况之一,消费者不能享受免费保修服务: * 人为损坏; * 超过保修期; * 不提供有效的购买凭证; * 未按说明书要求使用、维护、保养而造成产品损坏; * 未经授权使用拆卸、维修产品,或产品浸水; * 其他不可抗力造成的损坏。</p> <p>3101.622224.0000000</p>	<p>PL Karta Gwarancyjna</p> <p>Nazwa użytkownika: _____ Nr tel. użytkownika: _____ Adres użytkownika (z kodem pocztowym): _____</p> <p>Data zakupu: _____ Nr faktury: _____ Nazwa dystrybutora: _____ Nr tel. dystrybutora: _____ Adres dystrybutora (z kodem pocztowym): _____</p> <p><b>Instrukcje dotyczące serwisu gwarancyjnego:</b> A. Jeśli doszło do usterki produktu niepowodowanej błędem użytkownika, producent zapewnia 12-miesięczny okres bezpłatnej gwarancji, licząc od daty zakupu. B. Wyłączenie gwarancji: * Uszkodzenia spowodowane przez użytkownika; * Okres gwarancji upłynął; * Brak przedstawienia ważnego dowodu zakupu; * Uszkodzenie produktu wynikające z nieprzestrzegania instrukcji użytkowania, konserwacji i zaleceń pielęgnacji; * Uszkodzenie produktu spowodowane demontażem lub naprawą produktu bez autoryzacji lub zanurzeniem produktu w wodzie; * Uszkodzenie na skutek działania siły wyższej.</p>
--	--	--	---	---	--	--	---

<p>CN 中文</p> <p><b>产品参数</b> 产品型号: JR-ZS409 产品名称: 磁吸无线充支架 产品材质: PC+ABS 输入: 5V m 2A 9V m 2A 12V m 2A 输出: 5W/7.5W/10W/15W (MAX) 输入接口: Type-C 适用尺寸: 4.7-7.0英寸</p> <p><b>配件包</b> 引导片*1、隔离膜*1、酒精包*1、定位贴*1</p> <p><b>产品图示</b></p>  <p>无线充电区域 ..... 螺母 指示灯 .....</p>	<p>CN 安装步骤</p> <p>1. 将出风口球头放入螺母内,再插入到支架背部螺栓,拧紧螺母;</p>  <p>2. 将物字安装在汽车出风口上,调整合适的角度;</p>   <p>打开 ..... 收紧</p>	<p>CN 3. 将Type-C数据线插入产品充电口,连接车载充电器接通电源。</p>  <p>4. 手机靠近无线充支架,磁性吸引,开始充电。</p> 	<p>CN 引导片安装步骤</p> <p>1. 打开配件酒精包,将手机外壳擦拭干净;</p>  <p>2. 先将透明隔离膜粘贴至手机外壳中心;</p>  <p>3. 再利用定位贴降引导片贴至手机壳中心。</p>  <p><b>注意:</b> 只要确保定位贴上下刻度相等,左右刻度相等,即可将引导片贴至手机中心。</p>  <p><b>提示:</b> 苹果magsafe手机不带壳或者带磁吸壳,可以直接使用;其它手机或者非磁吸壳,请搭配引导片使用。</p>	<p>PL Polski</p> <p><b>Parametry</b> Model: JR-ZS409 Nazwa: Uchwyt magnetyczny z ładowarką bezprzewodową Materiał: PC+ABS Węjskie: 5V m 2 A 9 V m 2 A 12 V m 2 A Moc wyjściowa: 5 W / 7.5 W / 10 W / 15 W (maks) Złącze wejściowe: Typ C Pasujące wielkości telefonów: 4,7-7 inch</p> <p><b>Pakiet składników</b> Metalowy pierścień*1, Folia oddzielająca*1, Zestaw czyszczący*1, Karta wyrównania*1</p> <p><b>Schemat produktu</b></p>  <p>Pole ładowania bezprzewodowego ..... Nakrętka Kontrolka LED .....</p>	<p>PL Kroki działania</p> <p>1. Najpierw włóż głowicę kulową do nakrętki, a następnie włóż ją do gniazda z tyłu uchwytu i dokręć nakrętkę.</p>  <p>2. Zamontuj hak wentylacyjny na otworze wentylacyjnym i ustaw go pod żądanym kątem.</p>   <p>Poluzuj zaczep ..... Dokręć zaczep</p>	<p>PL 3. Podłącz kabel ładujący typu C znajdujący się w opakowaniu, aby połączyć uchwyt z ładowarką samochodową.</p>  <p>4. Umieść telefon w uchwycie, może on skutecznie przyciągnąć telefon za pomocą magnesu.</p> 	<p>PL Kroki działania (metalowy pierścień)</p> <p>1. Otwórz zestaw czyszczący, wytrzyj tył telefonu do czysta.</p>  <p>2. Wklej folię oddzielającą na środku tylnej części telefonu.</p>  <p>3. Wklej metalowy pierścień na środku tylnej części telefonu za pomocą karty wyrównującej.</p>  <p><b>Uwaga:</b> Jeśli górna i dolna skala, lewa i prawa skala karty wyrównującej są równe, metalowy pierścień zostanie wklejony na środku telefonu.</p>  <p><b>Ciepłe przypomnienie: Kompatybilny z IP phone mag-safe series i magnetycznymi etui. W przypadku innych telefonów i etui niemagnetycznych wymagany jest metalowy pierścień.</b></p>
---	--	--	---	---	---	---	---

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.