



REPORT

For

Alpha Technologies Ltd.

7700 Riverfront Gate
Burnaby, BC, V5J 5M4, Canada

Date of Issue: October 3, 2023
Report No.: 20.01.22053-1
Project No.: 22053
Equipment: WiFi/BT radio module for use in Alpha Equipment
Model No.: GL0005322

ONE STOP GLOBAL CERTIFICATION SOLUTIONS

ISO 17025 ACCREDITED

ISO 17020 ACCREDITED

ISO 17065 ACCREDITED

205 – 8291 92 Street, Delta, BC
V4G 0A4, Canada
Phone: 604-247-0444
Fax: 604-247-0442
www.labtestcert.com

TABLE OF CONTENTS

TEST REPORT	3
47 CFR § 15.247, RSS-247	3
Revision History.....	4
Result Summary	4
Description of Equipment Under Test and Variant Models	6
Radio Device Under Test Description	7
EUT Internal Operating Frequencies.....	7
Client Equipment Used During Test.....	8
Software and Firmware	8
Input/Output Ports	8
Power Interface	8
EUT Operation Modes.....	9
EUT Configuration Modes	9
Duty Cycle Measuement of the EUT	9
Test Equipment Verified for Function	10
Measurement Uncertainty	10
1- Antenna Requirement	11
Test Methods	11
Test Results	11
2- 6dB Bandwidth Measurement	12
Test Method	12
Test Setup.....	12
Test Results	13
3- Radiated Peak Power Measurement.....	15
Test Method	15
Test Setup.....	16
Test Results	16
4- Power Spectral Density	17
Test Method	17
Test Setup.....	18
Test Results	18
5- Band Edge and Out of Band Emissions	20
Test Method	20
Test Setup.....	21
Test Results	21
6- Radiated Spurious Emissions	22
Test Method	23
Test Setup.....	23
Test Results	25
7- Radiated Restricted Band Edge Measurement.....	31
Test Method	32
Test Setup.....	32
Test Results	33

TEST REPORT

47 CFR § 15.247, RSS-247

RSS-247 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
47 CFR § 15.247 - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.

Report No.	20.01.22053-1
Compiled by	Zara Vali 
Approved by	David Johanson 
Date of issue	October 3, 2023
Laboratory information:	
Testing Laboratory	LabTest Certification Inc.
Address	<u>Delta Lab</u> : Unit 205 – 8291 92ST. Delta, B.C. V4G 0A4, Canada <u>Richmond Lab</u> : Unit 3128-20800 Westminster HWY, Richmond, B.C. V6V 2W3 Canada
FCC Site Registration No.:	CA5970
IC Site Registration No.:	5970A-2
Applicant's name	Alpha Technologies Ltd.
Address	7700 Riverfront Gate, Burnaby, BC, V5J 5M4, Canada https://www.alpha.ca/
Manufacturer's Name	Same as Applicant
Address	Same as Applicant
Test item description :	
Trade Mark	NA
Equipment name:	WiFi/BT radio module for use in Alpha Equipment
Model number	GL0005322
Serial Number	proto-009
FCC ID	2BA9E-GL0005322
IC ID	30668-GL0005322
Possible test case verdicts:	
- test case does not apply to the test object	NA

- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
Testing:	
Date of receipt of test item	June 19, 2023
Date (s) of performance of tests.....	June 19 -29, 2023

Revision History

Revision	Date	Reason For Change	Author
0	28 August 2023	Initial Data	Zara Vali
1	3 October 2023	Duty cycle measurements added	Zara Vali

Result Summary

The tests indicated in result summary were performed on the product constructed as described below. The test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test method, a list of the actual test equipment used, documentation photos, results, and raw data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

The compliance status is a judgment based on the direct measurements and calculated highest emissions to appropriate standard limits. Measurement uncertainty values, provided on calibration certificates, were not used in the judgment of the final status of compliance.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. LabTest does not make any claims of compliance for samples or variants which were not tested.

47 CFR § 15.247 and RSS-247			
Test Type	Standard	Test Method	Result
6dB Bandwidth Measurement	FCC Part 15.247 (a) (2) RSS-247 5.2 RSS Gen, Issue 5	KDB 558074 D01 v05r02 ANSI C63.10:2013	Pass
Radiated Peak Power Measurement	FCC 15.247 (b)(3) RSS-247 5.4 (d) RSS Gen, Issue 5	KDB 558074 D01 v05r02 ANSI C63.10:2013	Pass
Power Spectral Density	FCC 15.247(e) RSS-247 5.2 RSS Gen, Issue 5	KDB 558074 D01 v05r02 ANSI C63.10: 2013	Pass
Band Edge and Out of Band Emissions	FCC Part 15.247 (d) RSS-247 5.5 RSS Gen, Issue 5	KDB 558074 D01 v05r02 ANSI C63.10: 2013	Pass
Radiated Spurious Emissions	FCC Part 15.209 RSS-Gen Issue 5	ANSI C63.10: 2013	Pass
Radiated Restricted Band Edge Measurement	FCC Part 15. 247 (d) FCC Part 15. 205 FCC Part 15. 209 RSS-247 5.5	ANSI C63.10: 2013	Pass
General			
Antenna Requirement	FCC Part 15.203 RSS-Gen Issue 5	Inspection	Pass
Non-standard test method	NA		

Description of Equipment Under Test and Variant Models


Description:

WiFi/BT radio module for use in Alpha Equipment

Alpha Communication Module utilizing Murata Type 1MW W-LAN Bluetooth module and Abracon PRO-EX-347 Antenna.



Module shown with antenna Abracon PRO-EX-347 attached with support cable.

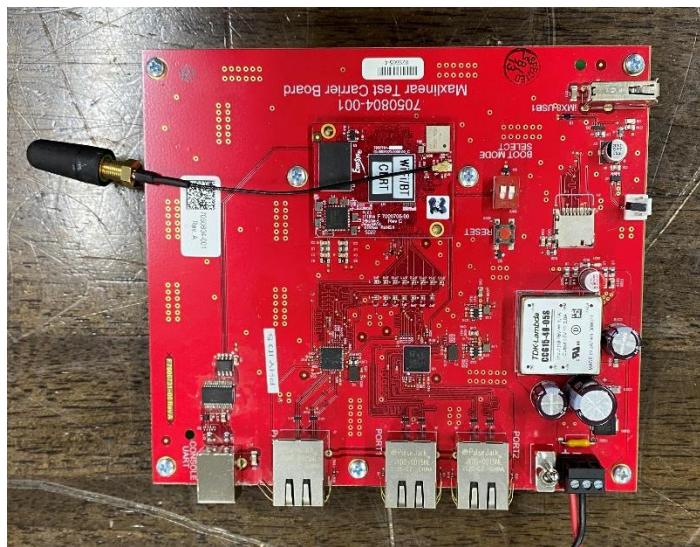

Module shown installed in Carrier PCB.
Antenna Abracon PRO-EX-347 attached with support cable.

Variant Models:

The following variant models were not tested as part of this evaluation, but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. LabTest does not make any claims of compliance for samples or variants which were not tested.

None

Radio Device Under Test Description

Application for	WiFi/BT radio module for use in Alpha Equipment
Operating Transmit Frequency	2.402 - 2.480 GHz
Operating Receive Frequency	2.402 - 2.480 GHz
Number of Channels	40
Maximum EIRP (mW)	0.94171883
Modulation Type	GFSK
Data Rate	1 Mbps
Antenna Type/Gain	3 dBi
Operating condition	-30 to 85 °C
Dimension (W X D X H)	140 mm X 158 mm X 17 mm
Supply Voltage:	5Vdc @ > 0.5Amps
If DC Power:	<input type="checkbox"/> Internal Power Supply <input checked="" type="checkbox"/> External Power Supply or AC/DC adapter <input type="checkbox"/> Battery <ul style="list-style-type: none"> <input type="checkbox"/> Nickel Cadmium <input type="checkbox"/> Alkaline, 4 X AA <input type="checkbox"/> Nickel-Metal Hydride <input type="checkbox"/> Lithium-Ion <input type="checkbox"/> Other

EUT Internal Operating Frequencies

#	Frequency (MHz)	Description
1	2.402-2.480 GHz	BLE
2	24 MHz	Crystal on the SOM PCB
3	32.768 kHz	Crystal on the SOM PCB

Client Equipment Used During Test

#	Product Type	Manufacturer	Model	Comments
1	WiFi/BT module	Alpha Technologies Ltd.	GL0005322	EUT
2	Switching mode power supply (AD/DC power adaptor)	Triad	WSX240-1000	AE
3	Laptop	Lenovo	ThinkPad	AE

Abbreviations:
 EUT - Equipment Under Test,
 AE - Auxiliary/Associated Equipment, or
 SIM - Simulator (Not Subjected to Test)

Software and Firmware

#	Description	Version
1	Murata RF Test Tool	Version 1.21

Abbreviations:
 EUT - Equipment Under Test,
 AE - Auxiliary/Associated Equipment, or
 SIM - Simulator (Not Subjected to Test)

Input/Output Ports

Port #	Name	Type*	Cable Max. >3m	Cable Shielded	Comments
1	Enclosure Port				
2	Antenna Port				

*Note: AC = AC Power Port DC = DC Power Port N/E = Non-Electrical

I/O = Signal Input or Output Port (Not Involved in Process Control)

TP = Telecommunication Ports

Power Interface

Mode #	Voltage	Current	Frequency (DC/AC-Hz)	Phases (#)	Comments
1	5 VDC	0.5Amps	DC	-	Provided by AD/DC power adaptor

EUT Operation Modes


Mode #	Description
1	BLE mode: EUT is transmitting in the BLE mode.

EUT Configuration Modes

Mode #	Description
1	EUT is connected to AC/DC power adaptor.

Duty Cycle Measurement of the EUT

The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak or average per the guidance of Section 6.0 b) of KDB 558074 D01v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

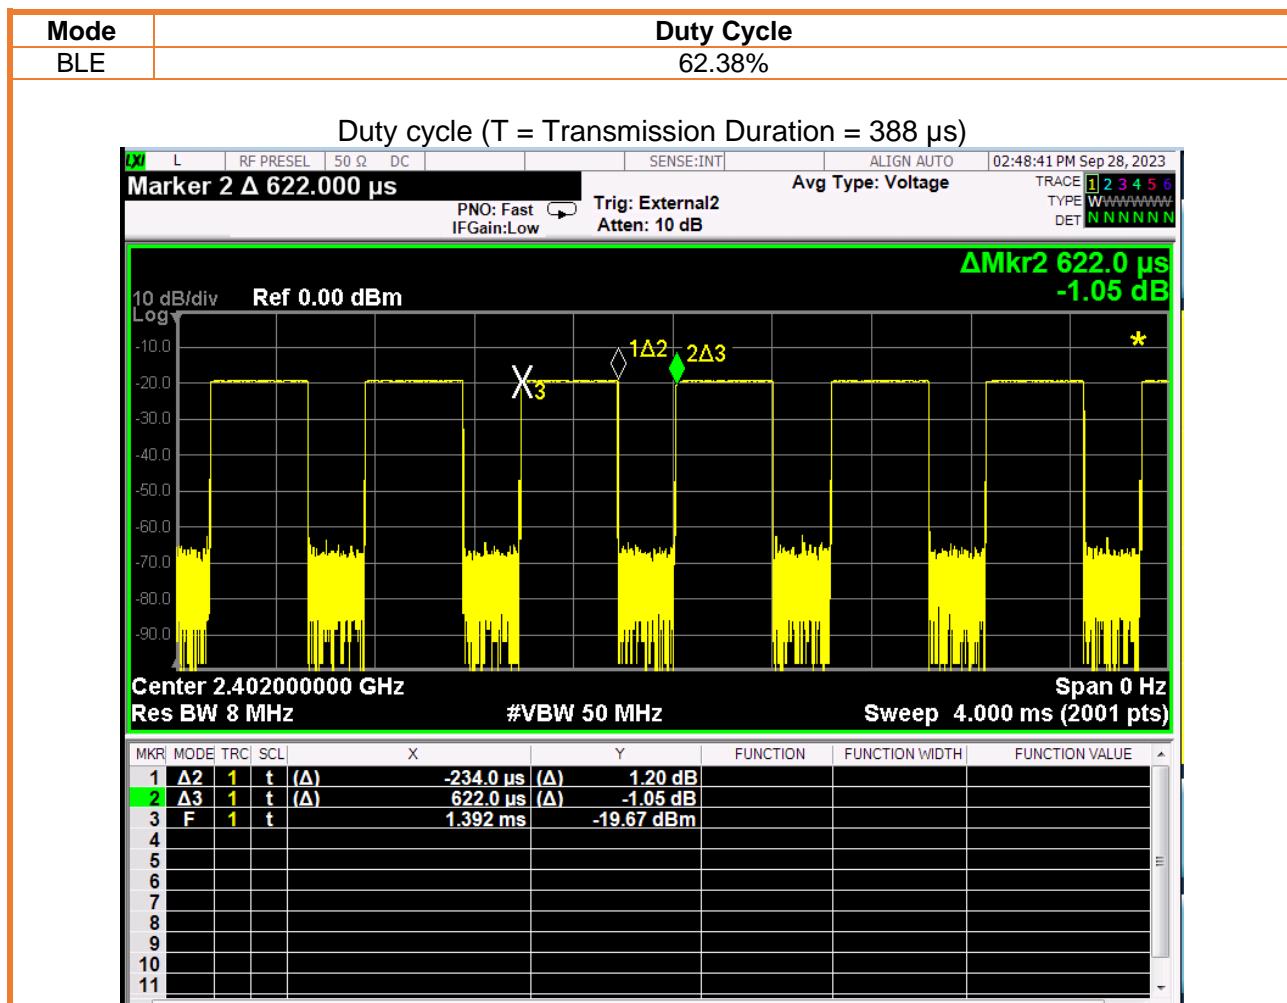

Test Equipment Verified for Function

Model #	Description	Checked Function	Results
N9038A	Spectrum Analyzer	Frequency and Amplitude	Connected 50MHz and -20 dBm Ref_sigal and checked OK.
JB1	Antenna, 30 to 2000MHz	Checked structure	Normal – no damage.
SAS-571	Antenna, 1 to 18GHz	Checked structure	Normal – no damage.
SAS-572	Antenna, 18 to 26.5 GHz	Checked structure	Normal – no damage.
AL-130	Antenna, 9kHz to 30MHz	Checked structure	Normal – no damage.

Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests:

Parameter	Uncertainty
Radio Frequency	± 1 ppm
Total RF Power: Conducted	± 1 dB
RF Power Density: Conducted	± 2.75 dB
Spurious Emissions: Conducted	± 3.0 dB
Temperature	± 1.0 °C
Humidity	± 5.0 %
DC and Low Frequency Voltages	± 3.0 %
Radiated Emission, 30 to 6,000MHz	± 4.93 dB
Conducted Measurements, 0.15 to 30MHz	± 3.52 dB

Uncertainty figures are valid to a confidence level of 95%.

1- Antenna Requirement

Standard	47 CFR Part 15.203 RSS-Gen Issue 5	Room Temperature (°C)	24.4
Test Method	Inspection	Relative Humidity (%)	45.9
Test Location	Richmond Lab	Barometric Pressure (hPa)	1013.5
Test Engineer	Zara Vali	Date of Test	June 19, 2023
Compliant <input checked="" type="checkbox"/>		Non-Compliant <input type="checkbox"/>	Not Applicable <input type="checkbox"/>

Test Methods

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Test Results

According to the above sections, Abracan PRO-EX-347 is considered sufficient to comply with the provisions of these section. Please see EUT photos for details.

2- 6dB Bandwidth Measurement

Standard	FCC Part 15.247 (a) (2) RSS-247 5.2 RSS Gen, Issue 5	Room Temperature (°C)	24.4		
Test Method	KDB 558074 D01 v05r02 ANSI C63.10:2013	Relative Humidity (%)	45.9		
Test Location	Richmond lab	Barometric Pressure (hPa)	1013.5		
Test Engineer	Zara Vali	Date of Test	June 21, 2023		
<hr/>					
Test Equipment	Manufacturer	Model	Identifier	Calibration	Calibration due
EMC Analyzer	Keysight	N9038A	702	02 November, 2022	02 November, 2023
Attenuator	Mini-Circuit	VAT-20+	n/a	IHC ¹	IHC ¹
<hr/>					
Note1) In House Calibration					
<hr/>					
According to FCC 15.247 (a) (2) and RSS-247 5.2, the minimum 6 dB bandwidth shall be at least 500 kHz.					
<hr/>					
Compliant <input checked="" type="checkbox"/>		Non-Compliant <input type="checkbox"/>		Not Applicable <input type="checkbox"/>	

Test Method

1. The spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to 6.
2. Set RBW = 100 kHz
3. VBW = 3 x RBW
4. Detector = Peak
5. Trace mode = Max Hold
6. Allow the trace to be stabilized.


Test Setup




EUT was connected directly to the spectrum analyzer with a 20 dB attenuator.
The EUT was set to **Operation Mode #1 with configuration Mode #1**.

Test Results


Test mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6 dB Bandwidth (KHz)	99% OBW (MHz)	Limit (KHz)
BLE	1	00	2402	716.8	1.0913	500
BLE	1	20	2442	717.5	1.0913	500
BLE	1	39	2480	721.4	1.0910	500

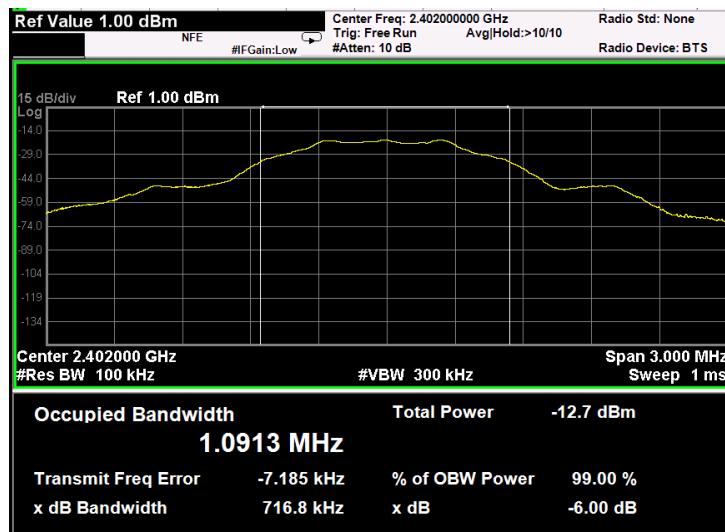

Channel 00: 2402 MHz

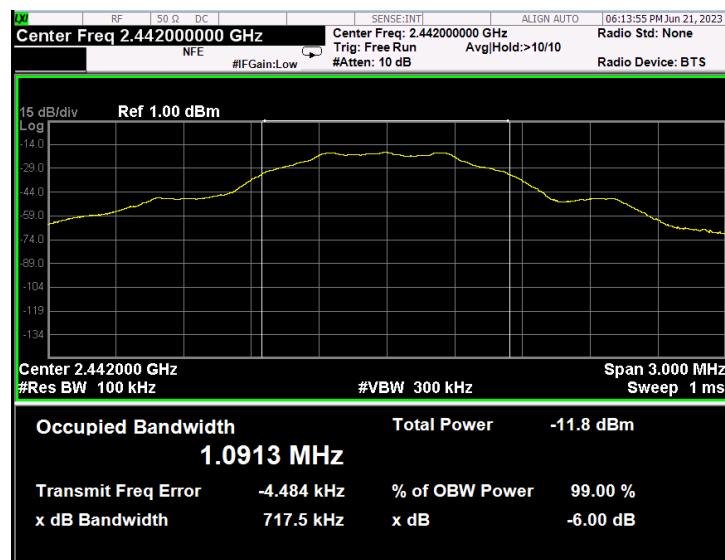

Mid Channel 20: 2442 MHz

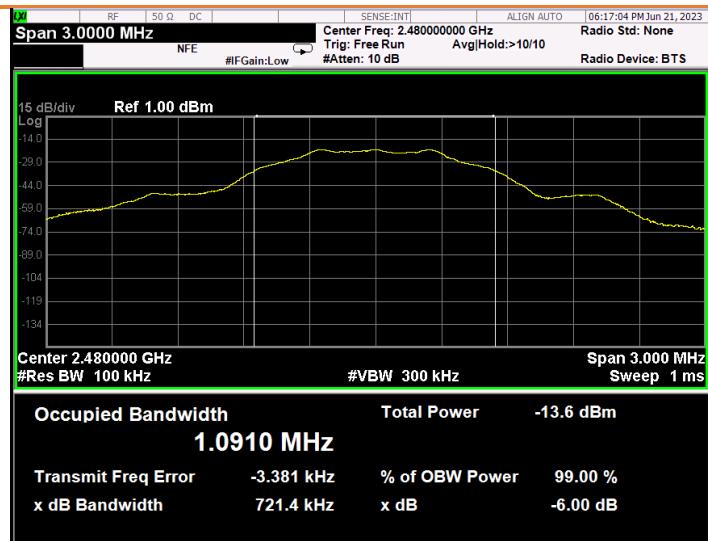

Channel 39: 2480 MHz

3- Radiated Peak Power Measurement

Standard	FCC 15.247 (b)(3) RSS-247 5.4 (d) RSS Gen, Issue 5	Room Temperature (°C)		24.4	
Test Method	KDB 558074 D01 v05r02 ANSI C63.10:2013	Relative Humidity (%)		45.9	
Test Location	Richmond Lab	Barometric Pressure (hPa)		1013.5	
Test Engineer	Zara Vali	Date of Test		June 19, 2023	
Test Equipment Used	Manufacturer	Model	Identifier	Calibration	Calibration due
EMC Analyzer	Keysight	N9038A	702	02 November, 2022	02 November, 2023
Double-ridged Guide Horn Antenna	A.H.Systems	SAS-571	227C	13 September, 2022	13 September, 2024
RF Cable	MRO	n/a	n/a	IHC ¹	IHC ¹
EMC Shielded Enclosure	USC	USC-26	374	IHC ¹	IHC ¹
Note1) In House Calibration					
According to FCC 15.247 (b)(3) and RSS-247 5.4 (d), the maximum peak conducted output power of the intentional radiator shall not exceed 1 watt. The e.i.r.p. shall not exceed 4 W.					
Compliant <input checked="" type="checkbox"/>	Non-Compliant <input type="checkbox"/>	Not Applicable <input type="checkbox"/>			

Test Method

This test measures the peak power of the EUT in a radiated test configuration according to ANSI C63.10: 2013 Annex G. The EUT is set 3 meters away from the testing antenna, which is varied from 1- 4 meters. The EUT is placed on a turntable, which is 1.5 meters above the ground plane. The table shall be rotated 360 degrees to find the highest radiated peak power and the worst-case results are shown. The measurement is repeated for both vertical and horizontal polarization of the receiving antenna. RBW and VBW are set to 10 MHz and 50 MHz, respectively. Spectrum analyzer is set to peak detection mode.

The EIRP is obtained according to the below formulas:

$$E \text{ (dBuV/m)} = \text{Detected level (dBuV)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

$$\text{EIRP} = p_t \times g_t = (E \times d)^2/30.$$

Where,

p_t is the transmitter output power in watts

g_t is the numeric gain of the transmitting antenna


E is the electric field strength in V/m

d is the measurement distance in meters

$$\text{EIRP (dBm)} = \text{Peak power (dBm)} + \text{Antenna Gain (dBi)}, \text{Antenna Gain} = 3 \text{ dBi}$$

Test Setup

Description of test set-up:

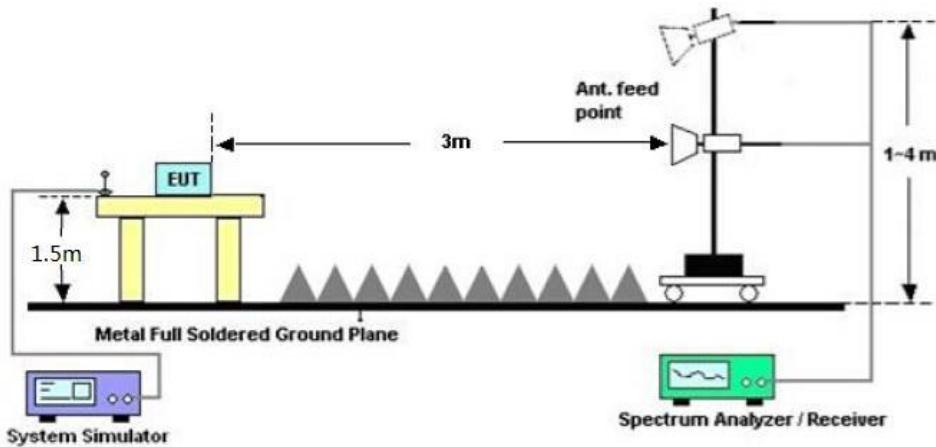

The EUT was set to **Operation Mode #1 with configuration Mode #1**.

Test Results

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Polarization	Detected Level (dBuV)	E (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)
BLE	1	00	2402	V	54.051	90.051	6.5	29.5
				H	52.953	88.953		
BLE	1	20	2442	V	58.968	94.968	6.5	29.5
				H	55.026	91.026		
BLE	1	39	2480	V	55.842	91.842	6.5	29.5
				H	53.435	89.435		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Polarization	Peak Power Limit (dBm)	EIRP (mW)	EIRP Limit (W)
BLE	1	00	2402	-8.18	V	30	0.30354372	4
				-9.28	H		0.23573347	
BLE	1	20	2442	-3.26	V	30	0.94171883	4
				-7.2	H		0.37994546	
BLE	1	39	2480	-6.39	V	30	0.45848091	4
				-8.79	H		0.26340333	

4- Power Spectral Density

Standard	FCC 15.247(e) RSS-247 5.2 RSS Gen, Issue 5		Room Temperature (°C)		24.4
Test Method	KDB 558074 D01 v05r02 ANSI C63.10: 2013		Relative Humidity (%)		45.9
Test Location	Richmond Lab		Barometric Pressure (hPa)		1013.5
Test Engineer	Zara Vali		Date of Test		June 21, 2023
Test Equipment Used	Manufacturer	Model	Identifier	Calibration date	Calibration due
Spectrum Analyzer	Keysight	N9038A	702	02 November, 2022	02 November, 2023
Attenuator	Mini-Circuit	VAT-20+	n/a	IHC ¹	IHC ¹
Note1) In House Calibration					
According to FCC 15.247 (e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.					
Compliant <input checked="" type="checkbox"/>		Non-Compliant <input type="checkbox"/>		Not Applicable <input type="checkbox"/>	


Test Method

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of FCC 15.247. The same method of determining the conducted output power shall be used to determine the power spectral density.

- 1- Analyser is set to the centre frequency of the channel under investigation.
- 2- Span is set to 1.5 MHz.
- 3- RBW is set to 3 kHz.
- 4- VBW is set to 10 kHz.
- 5- Detector is set to peak mode.
- 6- Trace mode is Max Hold.
- 7- Trace is set to stabilized.

Test Setup

Description of test set-up:

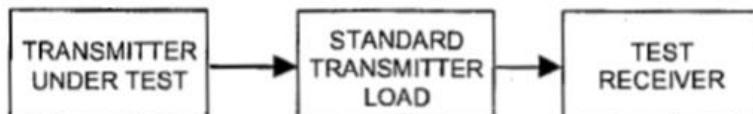




The EUT was connected directly to the spectrum analyzer/receiver with appropriate attenuation.

The EUT was set to **Operation Mode #1 with configuration Mode #1**.

Test Results

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Un-Corrected PSD (dBm)	System Loss (dB)	PSD Result (dBm)	Limit (dBm/3 kHz)
BLE	1	00	2402	-35.182	20.5	-14.682	≤ 8
BLE	1	20	2440	-34.410	20.5	-13.91	≤ 8
BLE	1	39	2480	-36.105	20.5	-15.605	≤ 8

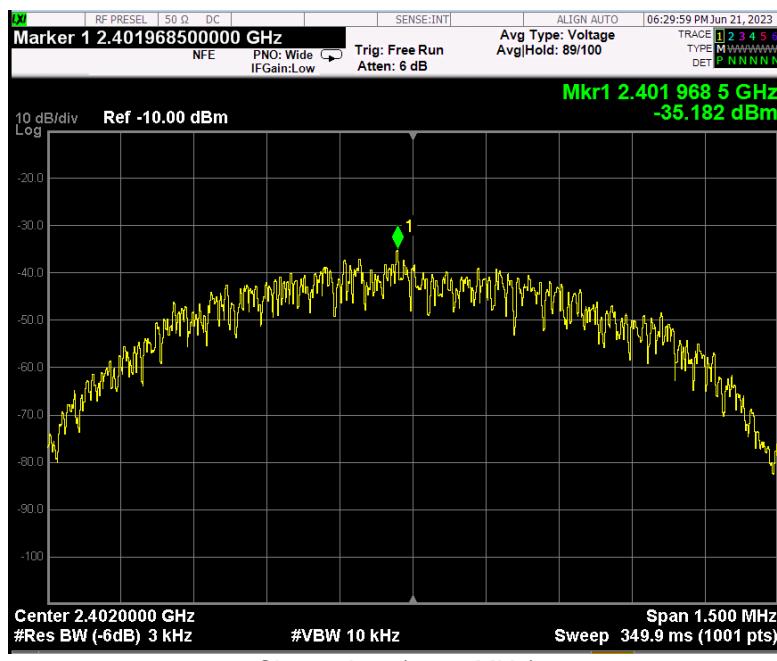

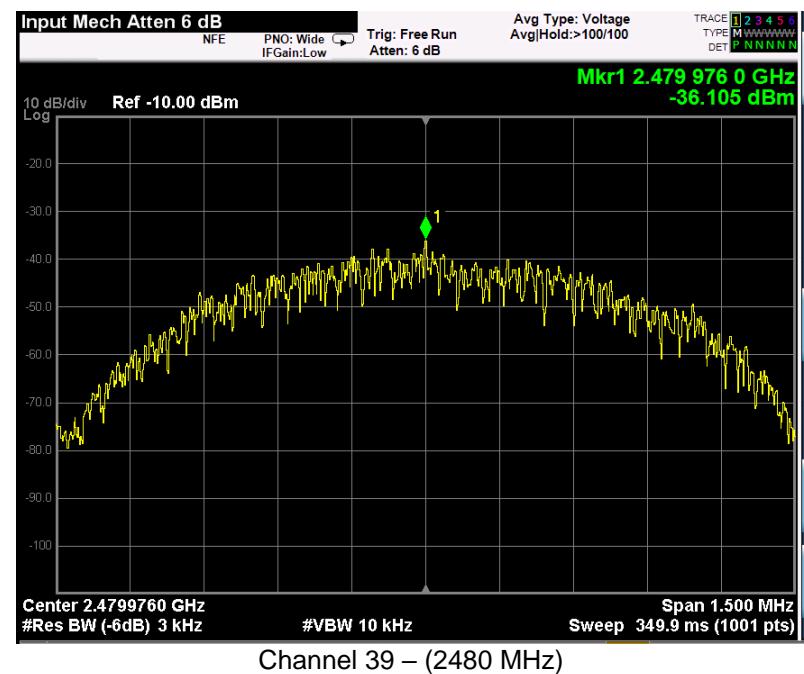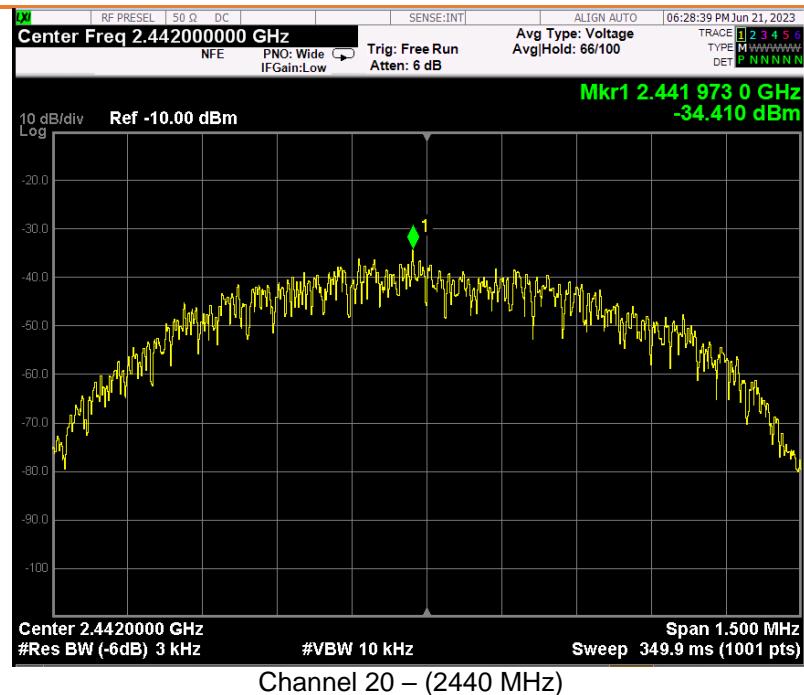

5- Band Edge and Out of Band Emissions

Standard	FCC Part 15.247 (d) RSS-247 5.5 RSS Gen, Issue 5	Room Temperature (°C)	25		
Test Method	KDB 558074 D01 v05r02 ANSI C63.10: 2013	Relative Humidity (%)	46.1		
Test Location	Richmond Lab	Barometric Pressure (hPa)	1013.7		
Test Engineer	Zara Vali	Date of Test	June 22, 2023		
Test Equipment Used					
Spectrum Analyzer	Keysight	N9038A	702	02 November, 2022	02 November, 2023
Attenuator	Mini-Circuit	VAT-20+	N/A	IHC ¹	IHC ¹
Note1) In House Calibration					
According to FCC 15. 247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.					
Compliant <input checked="" type="checkbox"/>		Non-Compliant <input type="checkbox"/>		Not Applicable <input type="checkbox"/>	

Test Method


Reference Level Measurement

1. Set instrument center frequency to the channel center frequency.
2. Set the span to 1.5 MHz.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Set the detector to peak mode.
6. Set the trace mode to Max Hold.
7. Allow trace to fully stabilize.

Emission Level Measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the detector to peak mode.
5. Set the trace mode to Max Hold.
6. Allow trace to fully stabilize.

Test Setup

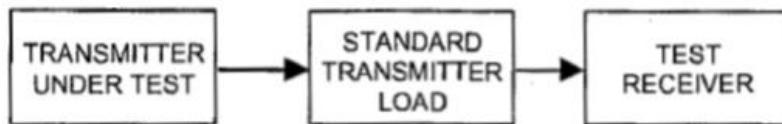


The EUT was connected directly to the spectrum analyser/receiver with appropriate attenuation.
The EUT was set to **Operation Mode #1 with configuration Mode #1**.

Test Results

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit
BLE	1	00	2402	20 dB
BLE	1	20	2440	20 dB
BLE	1	39	2480	20 dB



Channel 00: (2402 MHz)

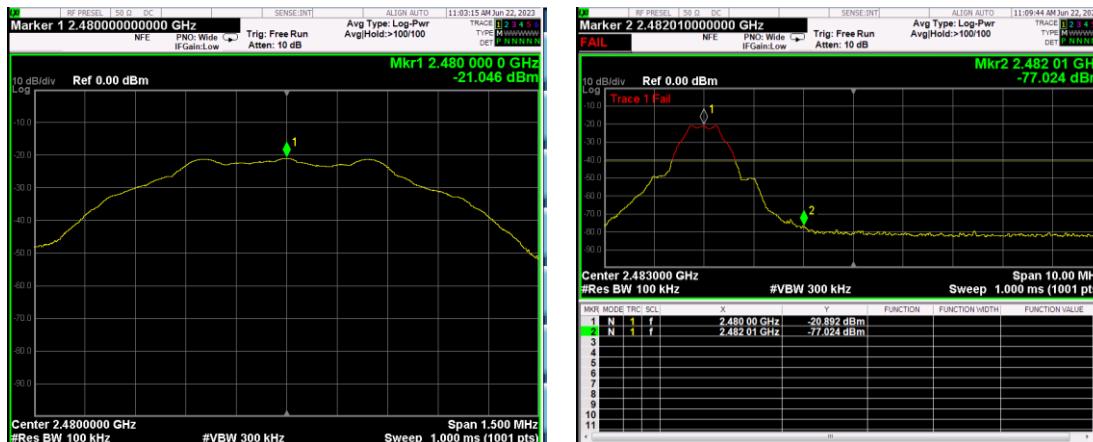

Channel 39: (2480 MHz)

6- Radiated Spurious Emissions

Standard	FCC Part 15.209 RSS-Gen Issue 5	Room Temperature (°C)	24.4		
Basic Standard	ANSI C63.10: 2013	Relative Humidity (%)	46		
Test Location	Richmond Lab	Barometric Pressure (hPa)	1013		
Test Engineer	Zara Vali	Date of Test	19-29 June 2023		
Test Equipment Used	Manufacturer	Model	Identifier	Calibration	Calibration due
Spectrum Analyzer	Keysight	N9038A	702	02 November, 2022	02 November, 2023
Double-ridged Guide Horn Antenna	A.H.Systems	SAS-571	227C	13 September, 2022	13 September, 2024
Horn Antenna	A.H.Systems	SAS-572	227D	NA	NA
Broadband Antenna	Sunol Sciences Co.	JB1	371	24 October, 2022	24 October, 2024
Loop Antenna	ComPower	AL-130	241	12 Jan 2022	12 Jan 2024
RF Preamplifier	Agilent	8449B	273	IHC ¹	IHC ¹
High Pass Filter	Mini-Circuits	VHF-3100+	NA	IHC ¹	IHC ¹
RF Cable	MRO	n/a	n/a	IHC ¹	IHC ¹
EMC Shielded Enclosure	USC	USC-26	374	IHC ¹	IHC ¹
Used Template of Tile 7!					
Note1) In House Calibration					
Detector:	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> Quasi-Peak/AVG			
Frequency Range:	<input checked="" type="checkbox"/> 150kHz-30MHz	<input checked="" type="checkbox"/> 30-1000MHz	<input checked="" type="checkbox"/> 1-18 GHz	<input checked="" type="checkbox"/> 18-26.5GHz	
RBW/VBW:	<input checked="" type="checkbox"/> 120/300kHz	<input checked="" type="checkbox"/> 1/3MHz			
Type of Facility:	<input checked="" type="checkbox"/> SAC	<input checked="" type="checkbox"/> FAC	<input type="checkbox"/> in-situ		
Distance:	<input checked="" type="checkbox"/> 3meter	<input type="checkbox"/> 10meter	<input type="checkbox"/> 1meter		
Arrangement of EUT:	<input checked="" type="checkbox"/> Table-top only	<input type="checkbox"/> Floor-standing only	<input type="checkbox"/> Rack Mounted		
Compliant <input checked="" type="checkbox"/>		Non-Compliant <input type="checkbox"/>		Not Applicable <input type="checkbox"/>	

Test Method

This test measures the radiating levels from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Testing was performed in accordance with the test standard(s) referenced in the test summary section of this report. The Equipment Under Test (EUT) was configured based upon the requirements of the applicable test standard. Initially, the primary emission frequencies are identified by positioning a broadband receive antenna three meter from the EUT.

A test was made with an Spectrum Analyzer, controlled by Test Software, Tile7!, for all Harmonics with the Analyzer in the peak mode. The IF bandwidth was 120 kHz(under 1GHz) and 1MHz(over 1GHz). To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to produce horizontal and vertical polarities while the turntable is rotated to determine the worst emitting configuration. Measurements were then made using CISPR quasi peak (under 1GHz) and Averaging (over 1GHz). The numerical results are included herein to demonstrate compliance. For testing above 1GHz, average measurement is not performed if peak level is lower than average limit.

Test Result


Emission level (dBuV/m) = Detected level (dBuV) +Cable Loss (dB) + Antenna Factor (dB/m)

Test Setup

Description of test set-up:


The EUT was placed on a 0.8 m for under 1GHz and 1.5m for over 1GHz non-conducting table above a Turn table in SAC.

The EUT was set to **Operation Mode #1 with configuration Mode #1**.

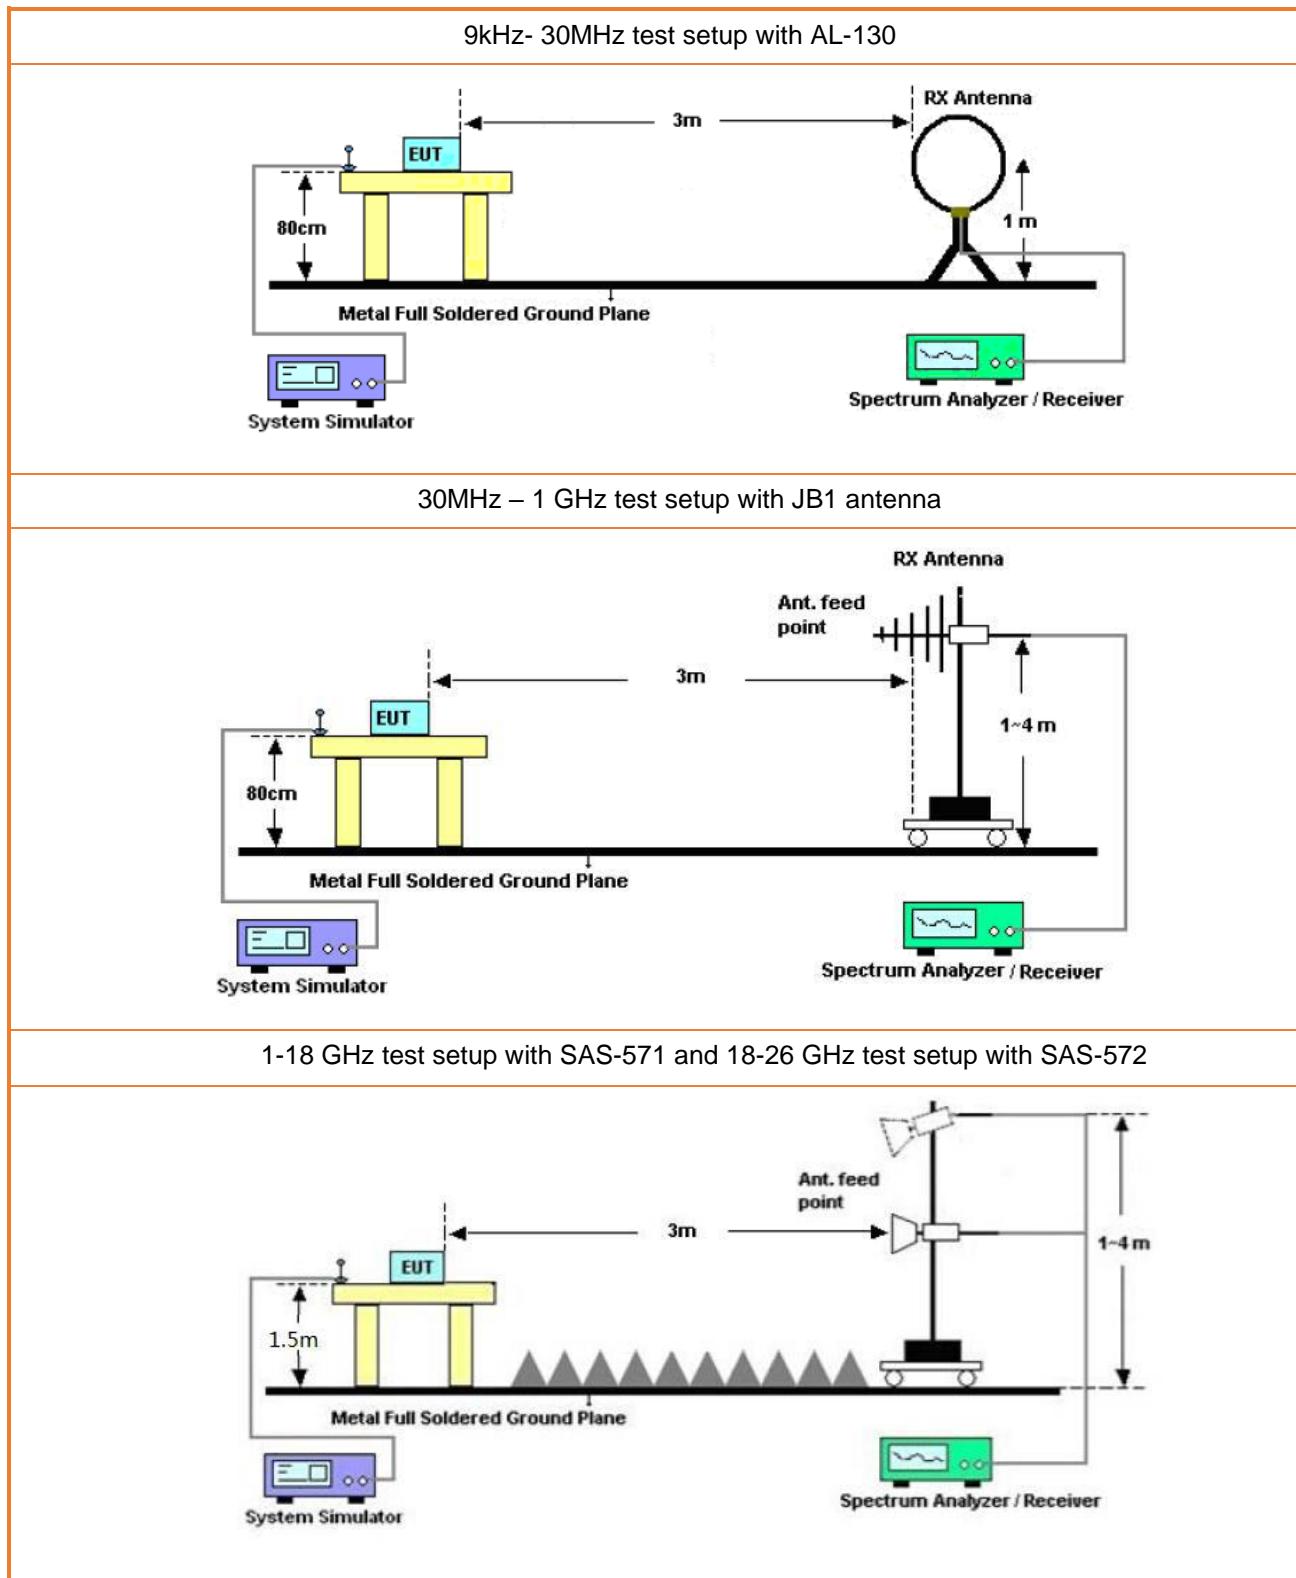


Test Results

Graphical Representation for Radiated Emission 9kHz to 30MHz

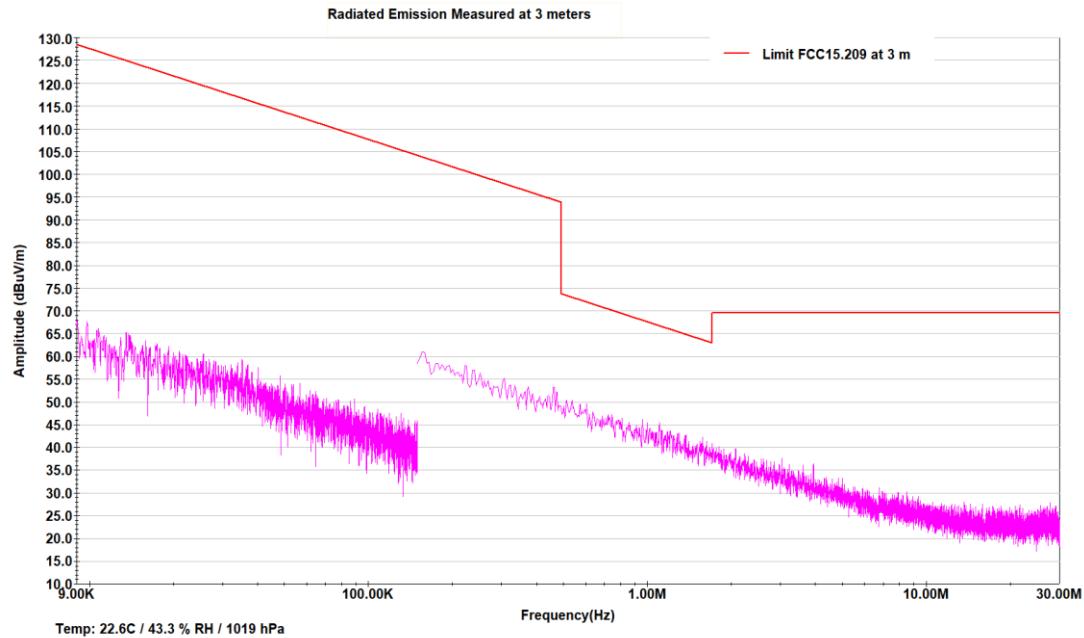

Note. Where the numerical data is not presented, the radiation is more than 20 dB below the limit line or is indicated as background noise.

Graphical Representation fo Radiated Emission 30 MHz to 1 GHz

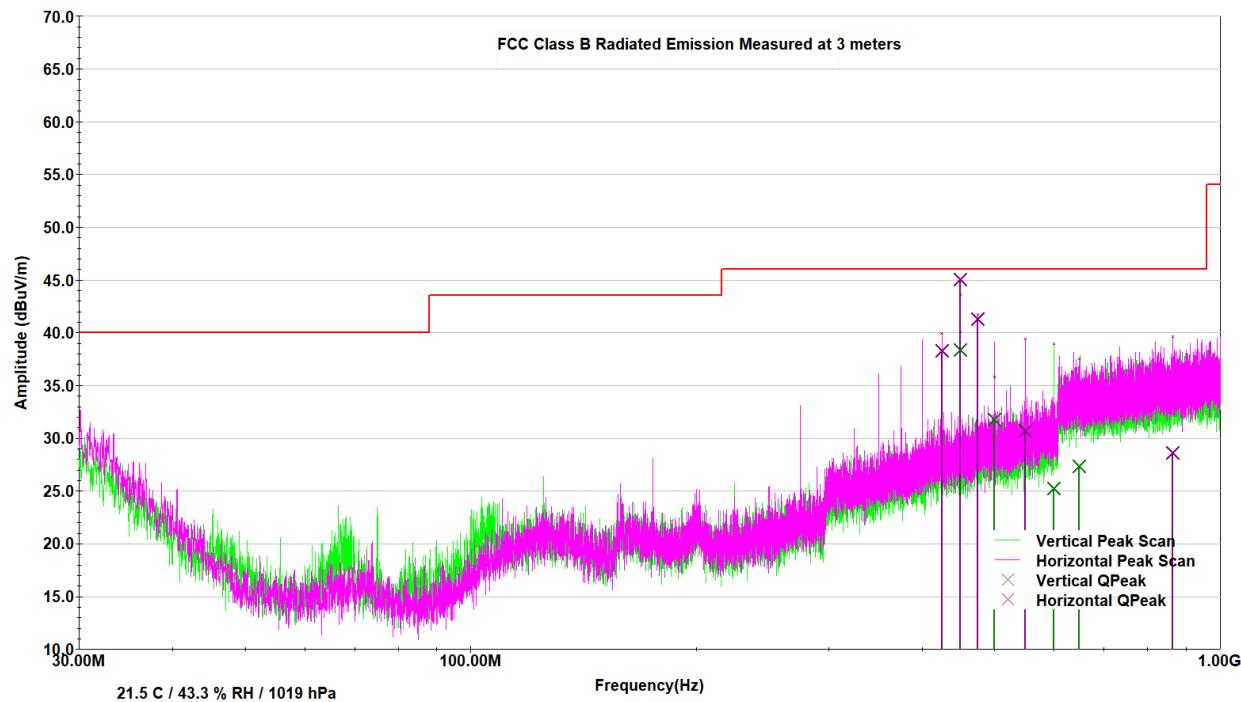


Frequency	Antenna Polarization	Raw QPeak	Antenna Factor	Correction Factor	QPeak	Margin	Limit
MHz	V/H	dBuV	dB/m	dB	dBuV/ m	dB	dBuV/ m
425.024	H	15.5	20.8	2	38.3	7.7	46
449.9958	H	21.8	21.1	2.1	45	1	46
475.0018	H	17.2	21.9	2.2	41.3	4.7	46
549.9985	H	5.5	22.9	2.3	30.7	15.3	46
864.1915	H	-0.9	26.6	2.9	28.6	17.4	46

Frequency	Antenna Polarization	Raw QPeak	Antenna Factor	Correction Factor	QPeak	Margin	Limit
MHz	V/H	dBuV	dB/m	dB	dBuV/ m	dB	dBuV/ m
450.01	V	15.6	20.7	2.1	38.3	7.7	46
500.015	V	7.7	21.9	2.2	31.8	14.2	46
599.9478	V	0	22.9	2.4	25.2	20.8	46
647.7203	V	1	23.8	2.5	27.3	18.7	46

Note. Where the numerical data is not presented, the radiation is more than 20 dB below the limit line or is indicated as background noise.


Graphical Representation for Radiated Emission 1 – 18 GHz, Channel 00

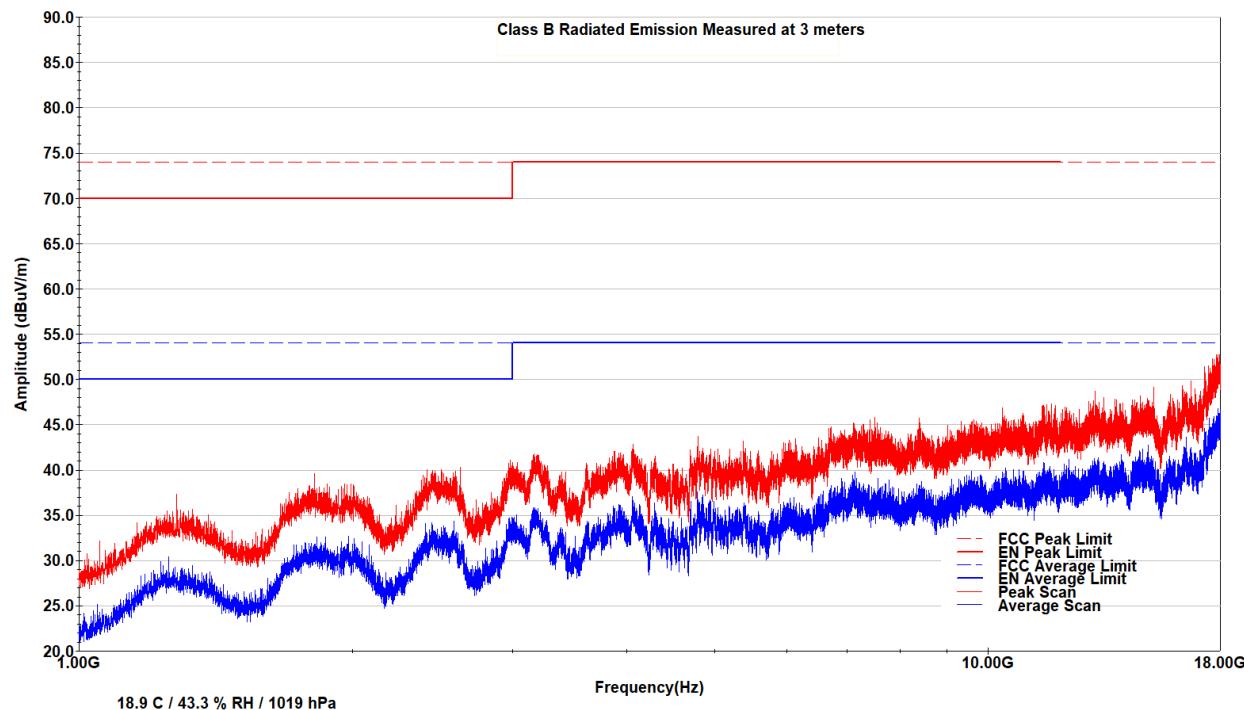

Note. A high-pass filter with a cutoff frequency of approximately 3.4 GHz was placed between the preamplifier and the measurement antenna to attenuate the 2.4 GHz fundamental signal for both vertical and horizontal antenna.

Note. Average measurement is not performed if peak level is lower than average limit.


Graphical Representation for Radiated Emission 1 – 18 GHz, Channel 20

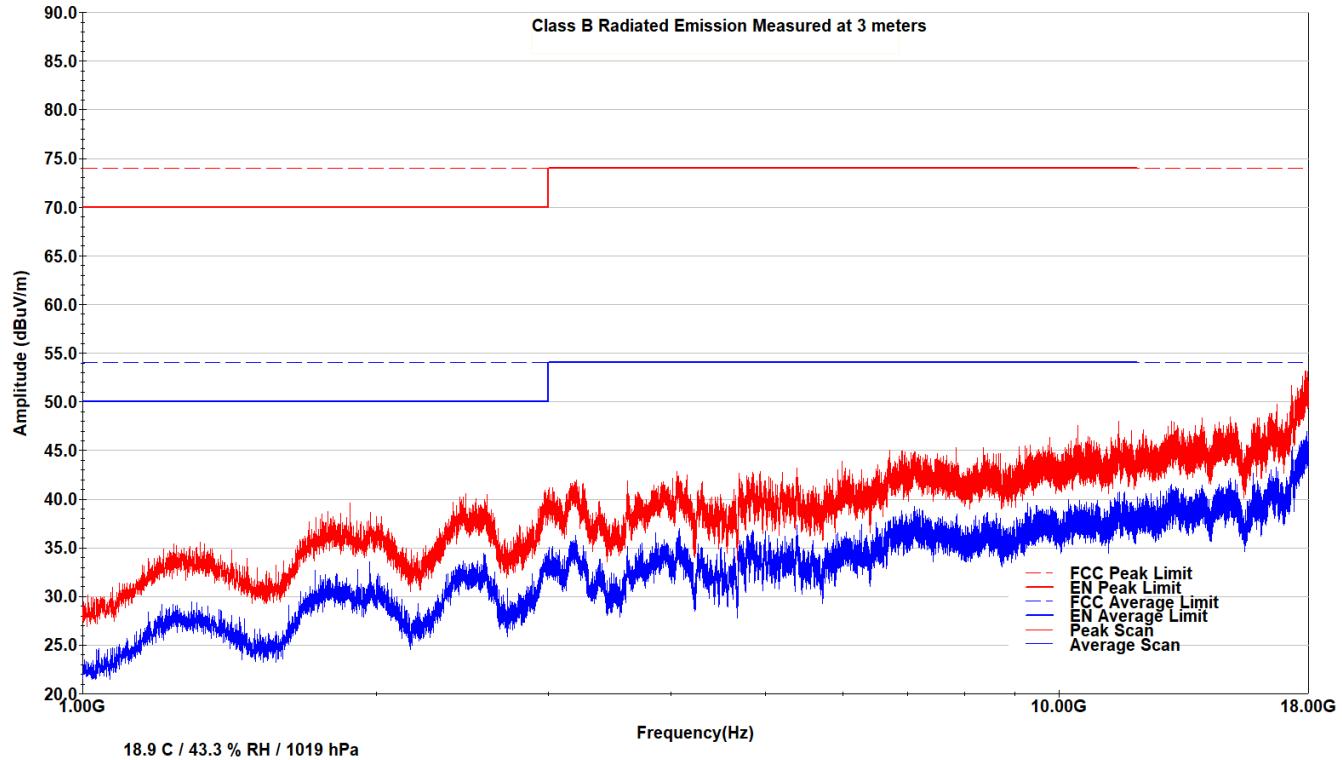

Note. Note. A high-pass filter with a cutoff frequency of approximately 3.4 GHz was placed between the preamplifier and the measurement antenna to attenuate the 2.4 GHz fundamental signal for both vertical and horizontal antenna.

Note. Average measurement is not performed if peak level is lower than average limit.


Graphical Representation for Radiated Emission 1 – 18 GHz, Channel 39

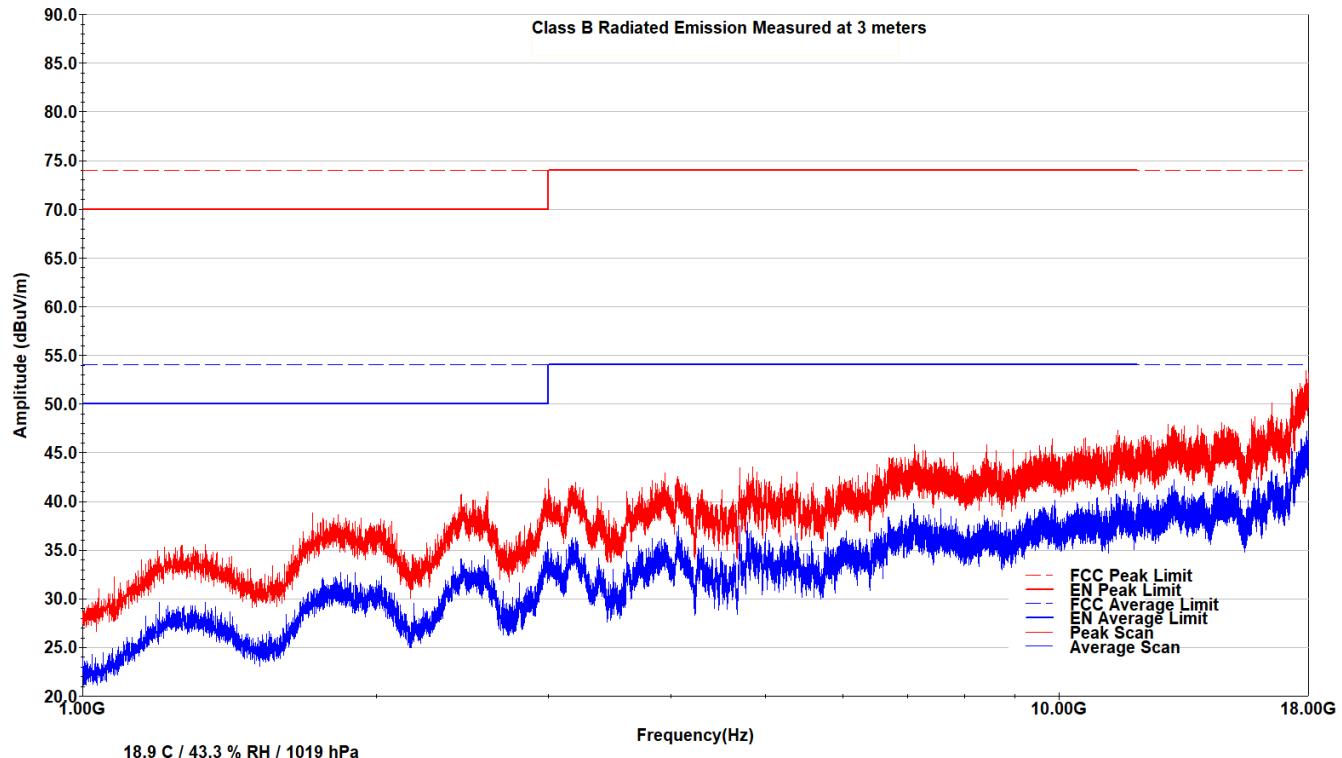

Note. A high-pass filter with a cutoff frequency of approximately 3.4 GHz was placed between the preamplifier and the measurement antenna to attenuate the 2.4 GHz fundamental signal for both vertical and horizontal antenna.

Note. Average measurement is not performed if peak level is lower than average limit.

Graphical Representation for Radiated Emission 18 – 26.5 GHz

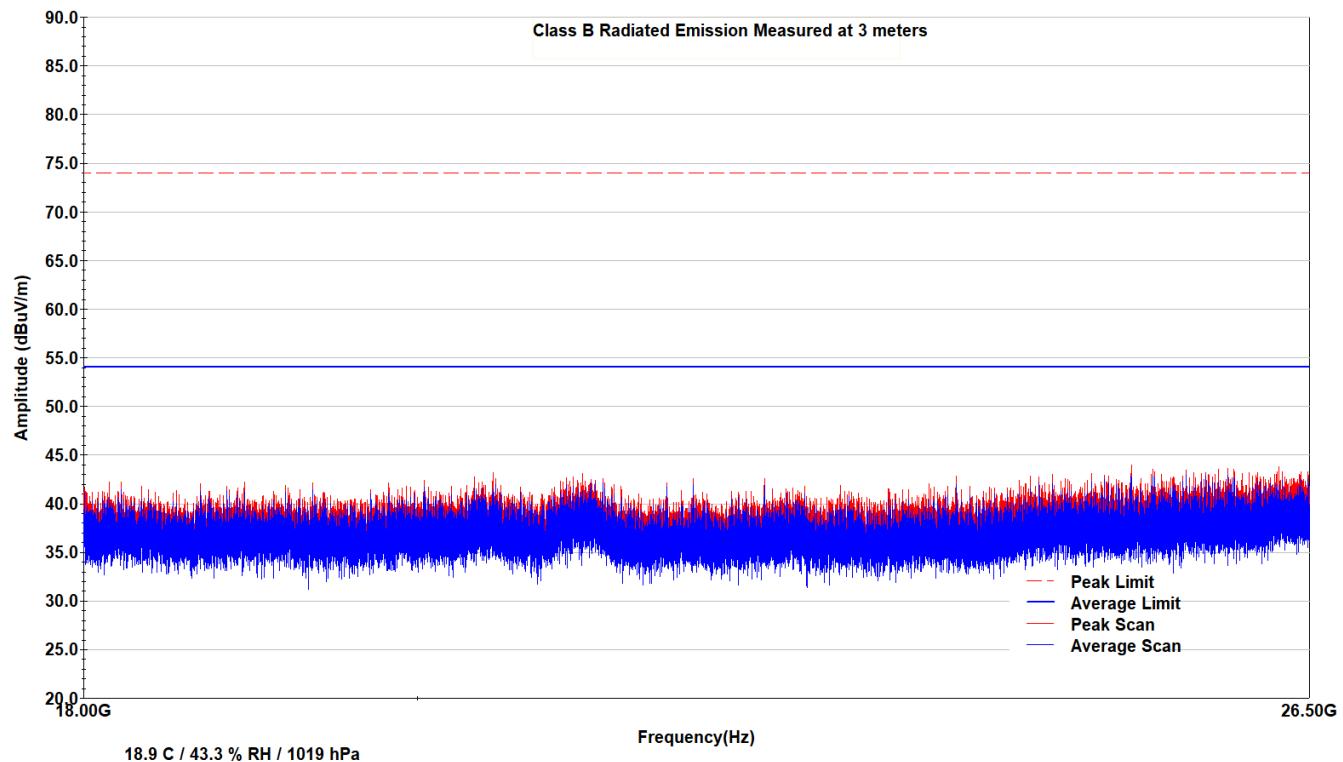

Note. Where the numerical data is not presented, the radiation is more than 20 dB below the limit line or is indicated as background noise.

7- Radiated Restricted Band Edge Measurement

Standard	FCC Part 15. 247 (d) FCC Part 15. 205 FCC Part 15. 209 RSS-247 5.5		Room Temperature (°C)		24.4
Basic Standard	ANSI C63.10: 2013		Relative Humidity (%)		46
Test Location	Richmond Lab		Barometric Pressure (hPa)		1013
Test Engineer	Zara Vali		Date of Test		22 June 2023
Test Equipment Used	Manufacturer	Model	Identifier	Calibration	Calibration due
Spectrum Analyzer	Keysight	N9038A	702	02 November, 2022	02 November, 2023
Double-ridged Guide Horn Antenna	A.H.Systems	SAS-571	227C	13 September, 2022	13 September, 2024
Preamplifier	Agilent Technologies	8449B	273	IHC ¹	IHC ¹
RF Cable	MRO	n/a	n/a	IHC ¹	IHC ¹
EMC Shielded Enclosure	USC	USC-26	374	IHC ²	IHC ²
Used Template of Tile 7!					
Note1) In House Calibration					
Detector:	<input checked="" type="checkbox"/> Peak				
Frequency Range:	<input checked="" type="checkbox"/> 1-18 GHz				
Type of Facility:	<input checked="" type="checkbox"/> FAC <input type="checkbox"/> in-situ				
Distance:	<input checked="" type="checkbox"/> 3meter <input type="checkbox"/> 10meter <input type="checkbox"/> 1meter				
Arrangement of EUT:	<input checked="" type="checkbox"/> Table-top only <input type="checkbox"/> Floor-standing only <input type="checkbox"/> Rack Mounted				
According to §15.247(d), radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).					
Compliant <input checked="" type="checkbox"/>		Non-Compliant <input type="checkbox"/>		Not Applicable <input type="checkbox"/>	

Test Method

Field strength measurements

1. Analyser centre frequency is set to the frequency of the radiated spurious emission of interest.
2. RBW = 1 MHz
3. VBW = Minimum 3 x RBW
4. Detector = Peak
5. Trace mode = Max Hold
6. Trace is set to be stabilized.

Test Result

Corrected Amplitude (dB_{uV/m}) = Reading (dB_{uV}) + Correction Factor (dB/m)

Correction Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)


Margin (dB) = Limit (dB_{uV/m}) – Corrected Amplitude (dB_{uV/m})

Test Setup


Description of test set-up:

The EUT is set 3 meter away from the testing antenna and the antenna is moved from 1-4 meter. The EUT is placed on a turntable, which is 1.5 meter above the ground plane, the table is rotated for 360 degrees to find out the highest emission in the restricted band. The receiving antenna should be changed the polarization both of horizontal and vertical.

The EUT was set to **Operation Mode #1 with configuration Mode #1**.

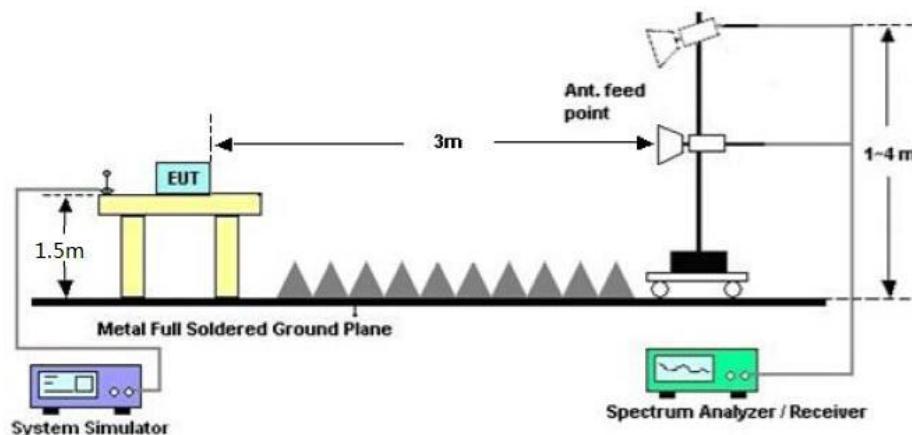

Test Results

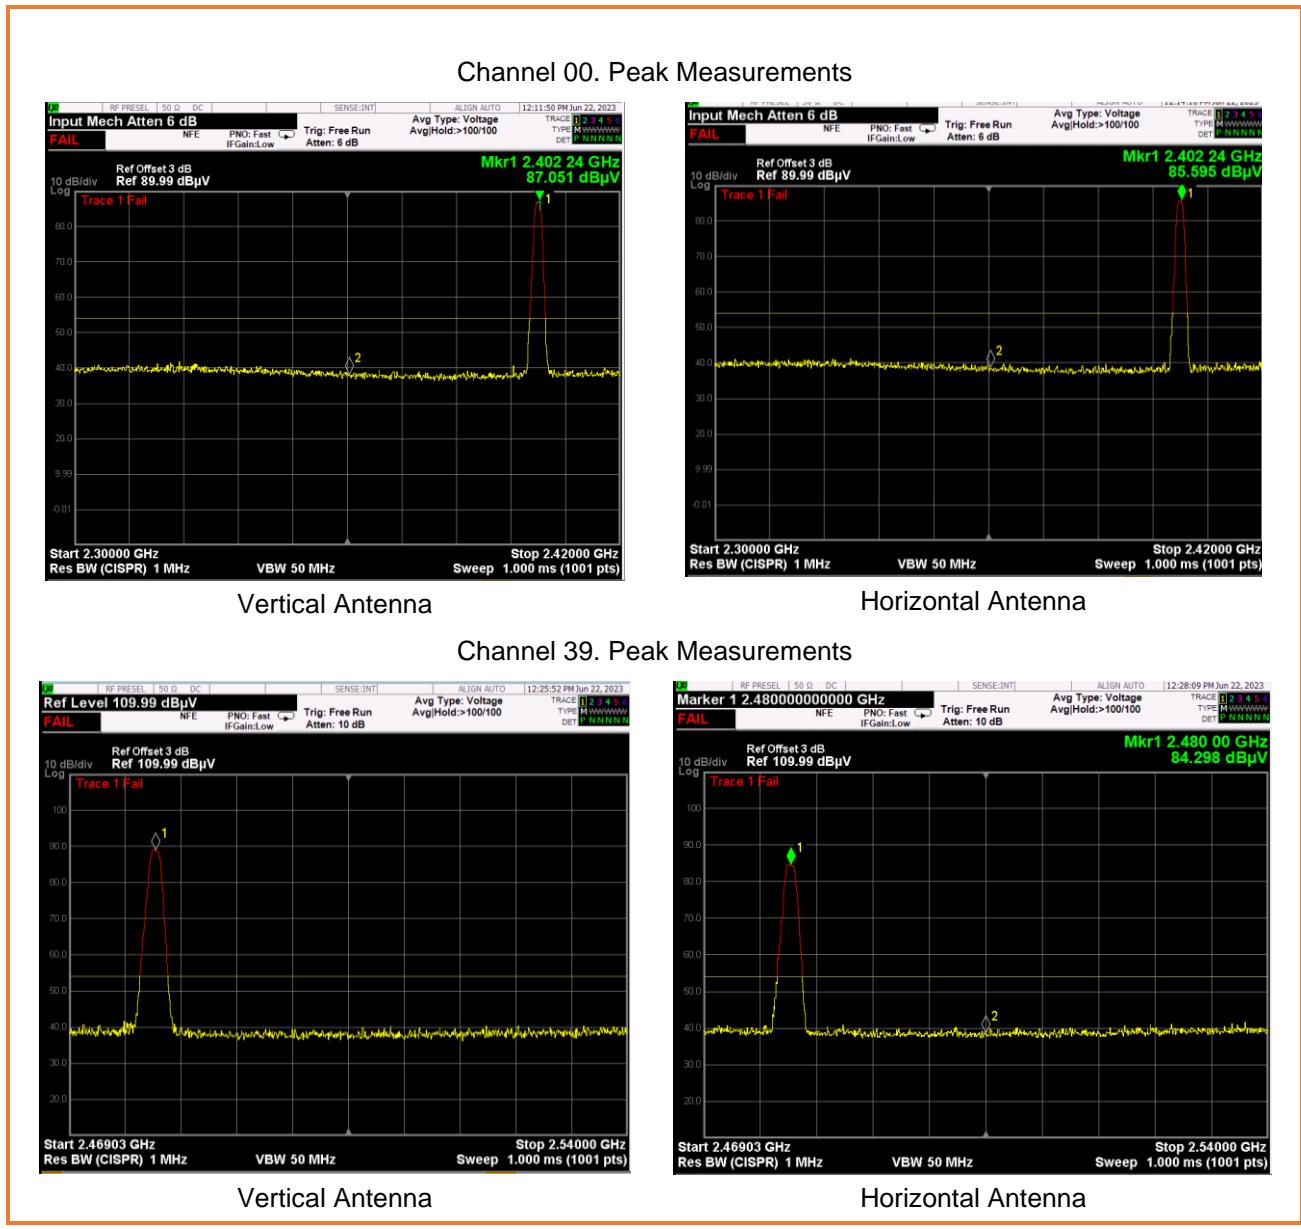

END OF REPORT