


TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5180MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\20
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

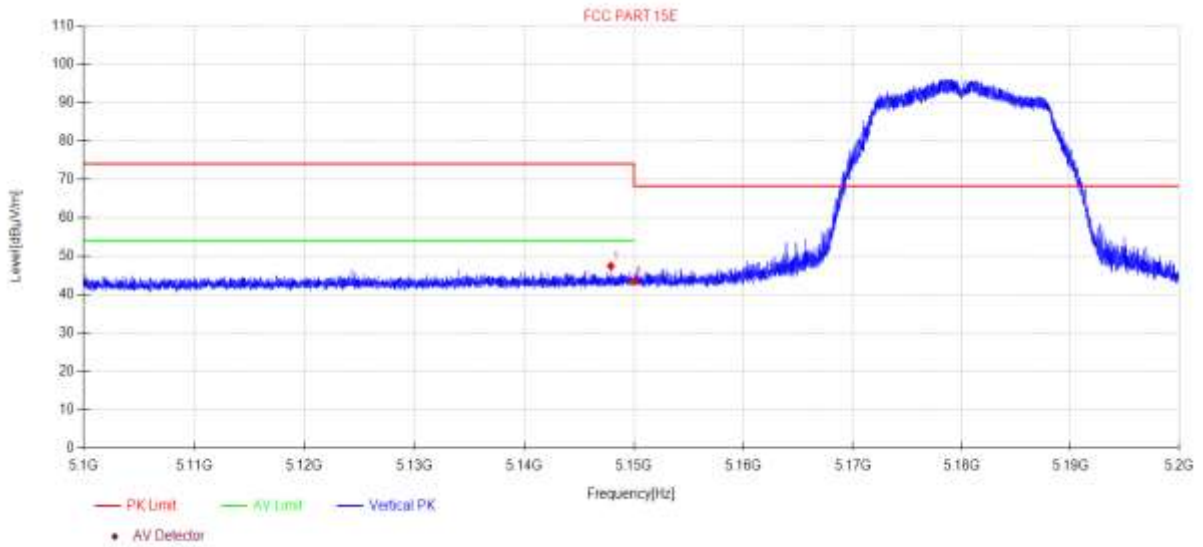

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5147.89	48.43	5.58	33.40	-40.06	47.35	74.00	26.65	PK	Vertical
2	5150.00	44.40	5.59	33.40	-40.06	43.33	68.20	24.87	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5180MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\21
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

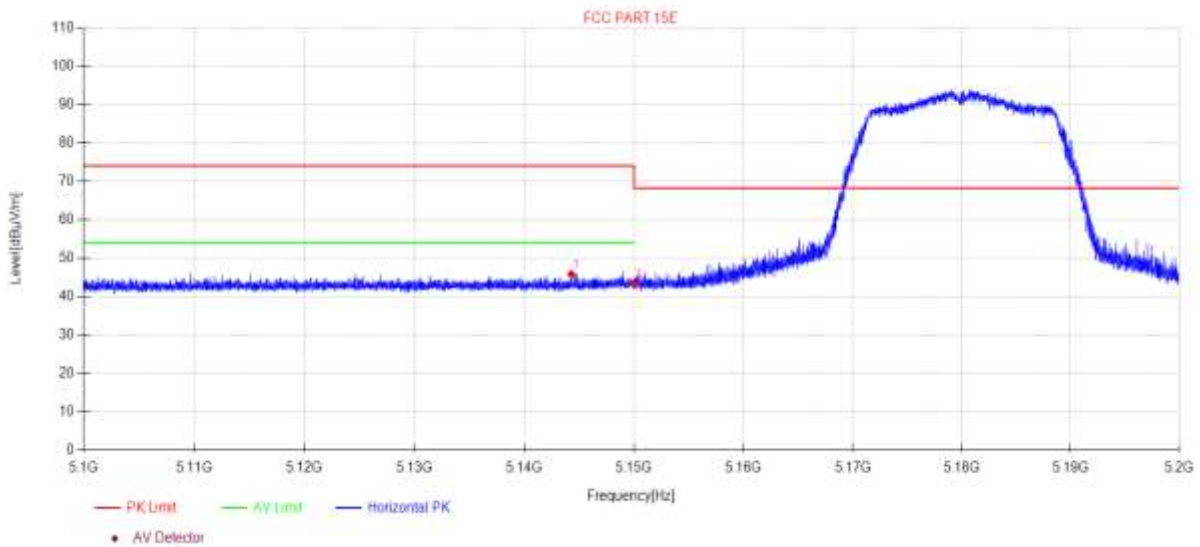

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5144.27	46.82	5.58	33.40	-40.06	45.74	74.00	28.26	PK	Horizontal
2	5150.00	44.27	5.59	33.40	-40.06	43.20	68.20	25.00	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5180MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\22
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

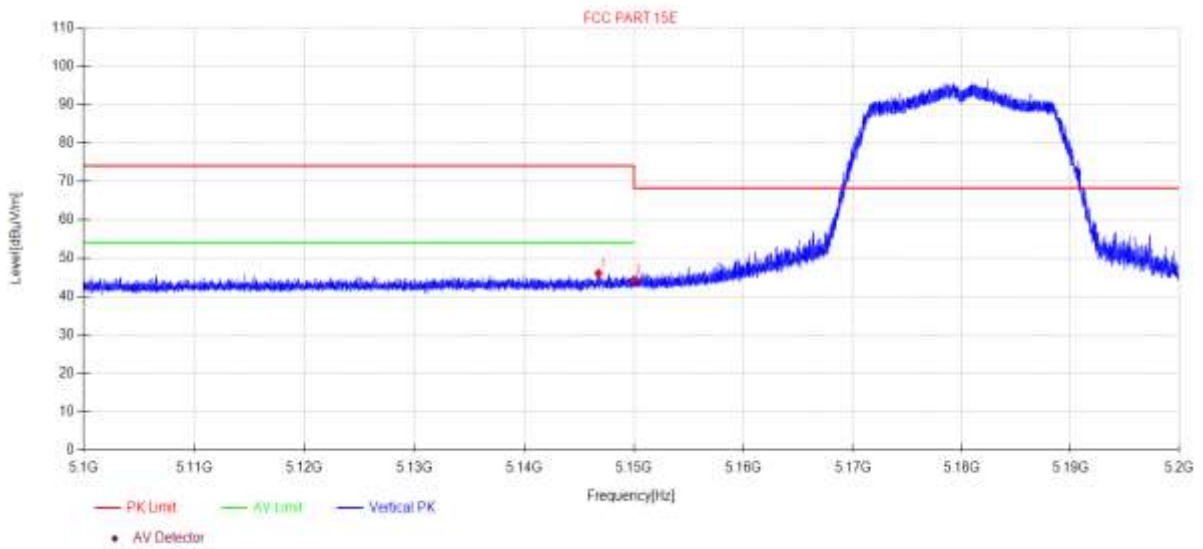

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5146.76	47.08	5.58	33.40	-40.06	46.00	74.00	28.00	PK	Vertical
2	5150.00	45.41	5.59	33.40	-40.06	44.34	68.20	23.86	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5180MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\23
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

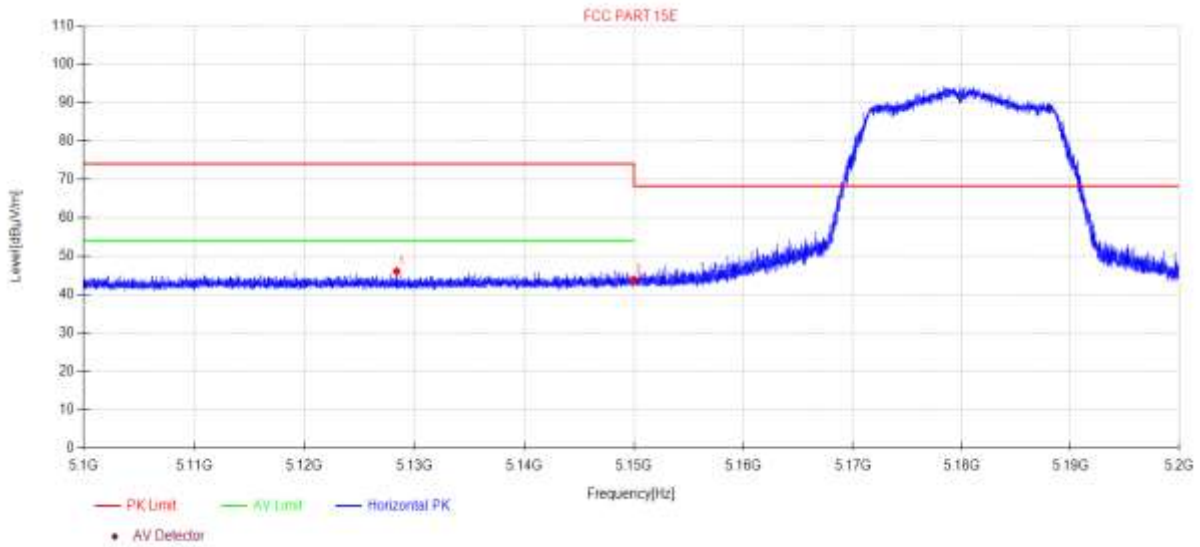

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5128.39	47.08	5.57	33.40	-40.06	45.99	74.00	28.01	PK	Horizontal
2	5150.00	44.88	5.59	33.40	-40.06	43.81	68.20	24.39	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5180MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\24
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

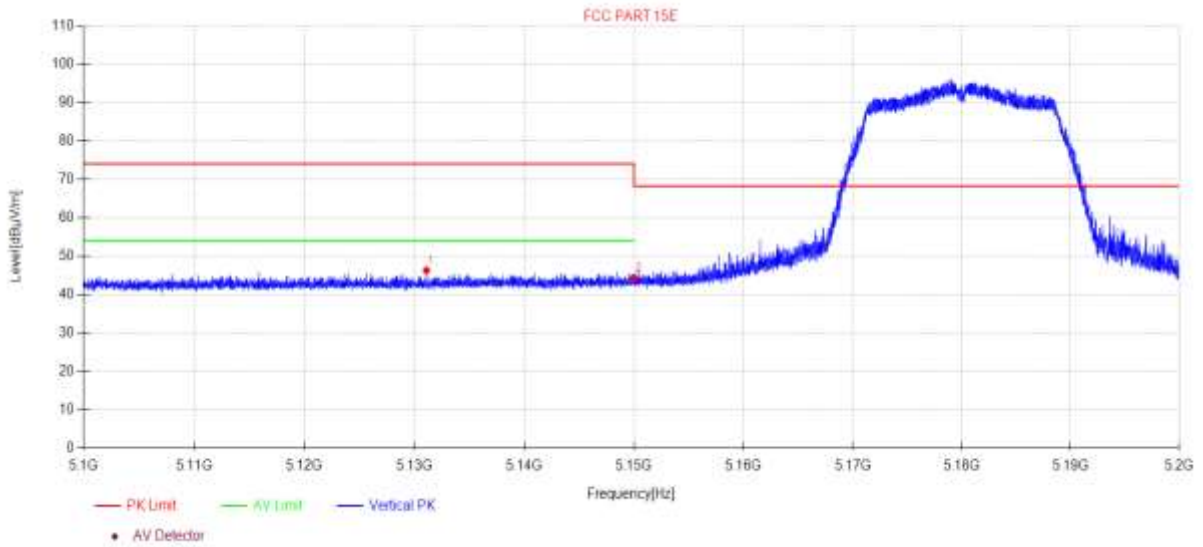

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5131.10	47.31	5.58	33.40	-40.06	46.23	74.00	27.77	PK	Vertical
2	5150.00	45.38	5.59	33.40	-40.06	44.31	68.20	23.89	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5190MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\25
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

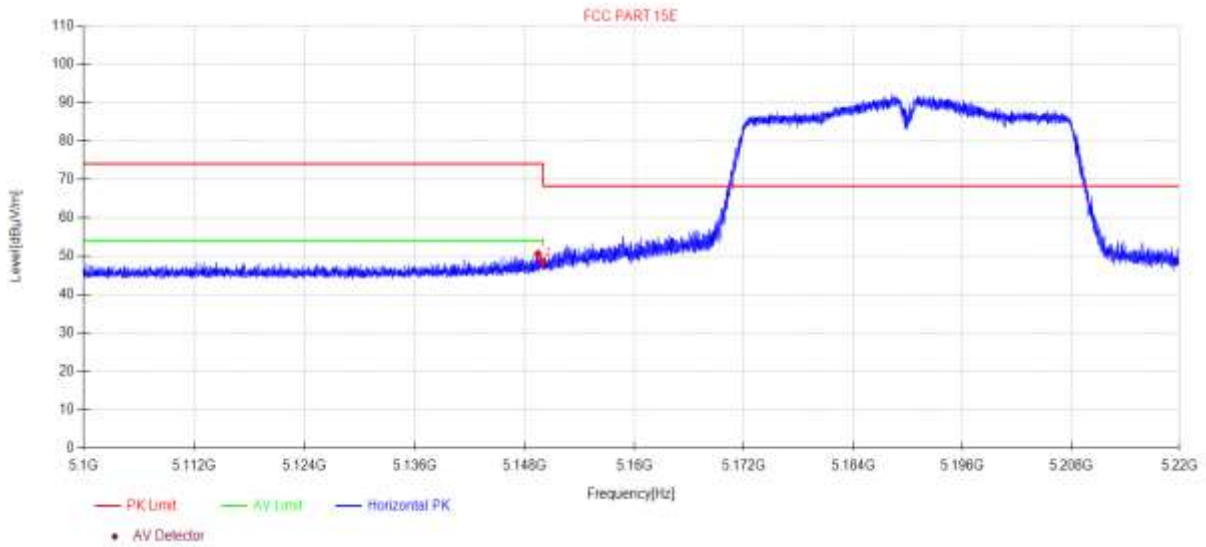

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5149.44	51.64	5.58	33.40	-40.06	50.56	74.00	23.44	PK	Horizontal
2	5150.00	49.33	5.59	33.40	-40.06	48.26	68.20	19.94	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5190MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\26
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

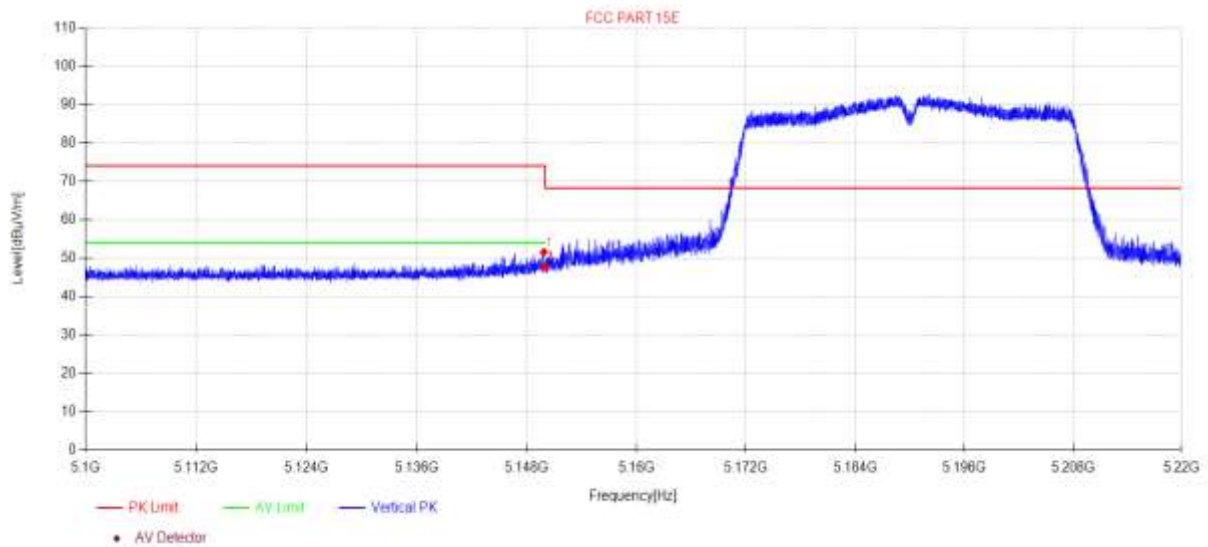

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5149.86	52.57	5.58	33.40	-40.06	51.49	74.00	22.51	PK	Vertical
2	5150.00	48.74	5.59	33.40	-40.06	47.67	68.20	20.53	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5190MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\27
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

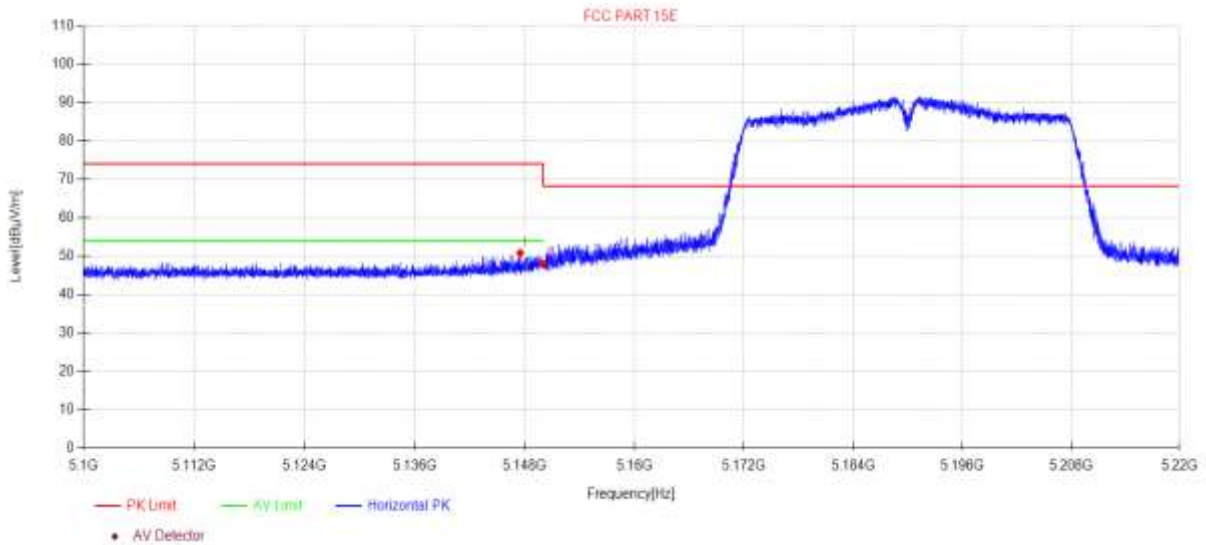

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5147.48	51.81	5.58	33.40	-40.06	50.73	74.00	23.27	PK	Horizontal
2	5150.00	48.97	5.59	33.40	-40.06	47.90	68.20	20.30	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5190MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\28
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

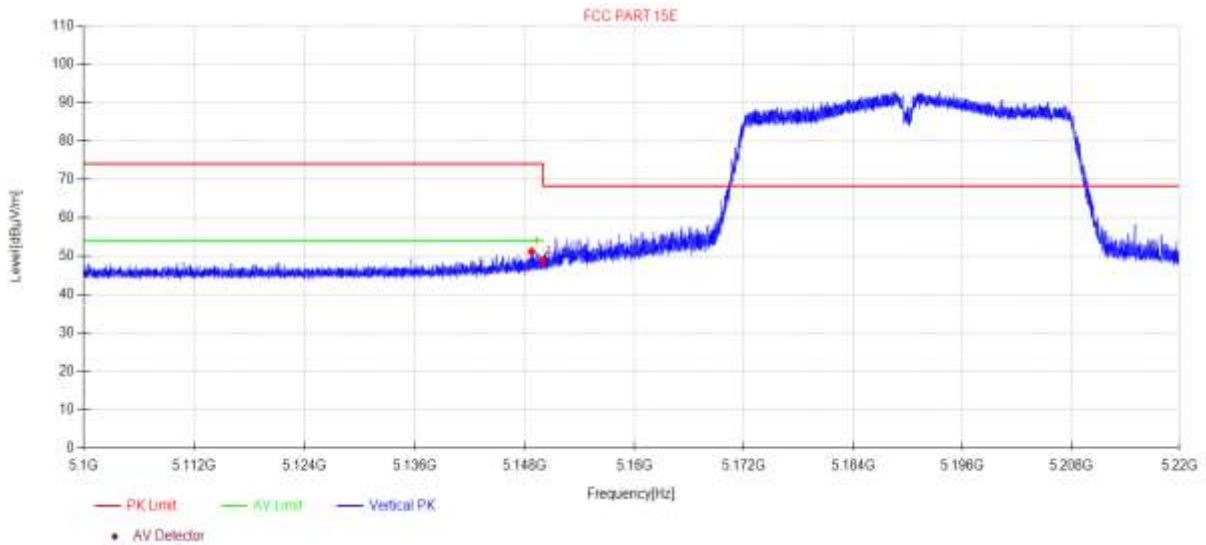

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5148.76	52.19	5.58	33.40	-40.06	51.11	74.00	22.89	PK	Vertical
2	5150.00	49.83	5.59	33.40	-40.06	48.76	68.20	19.44	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5210MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\29
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

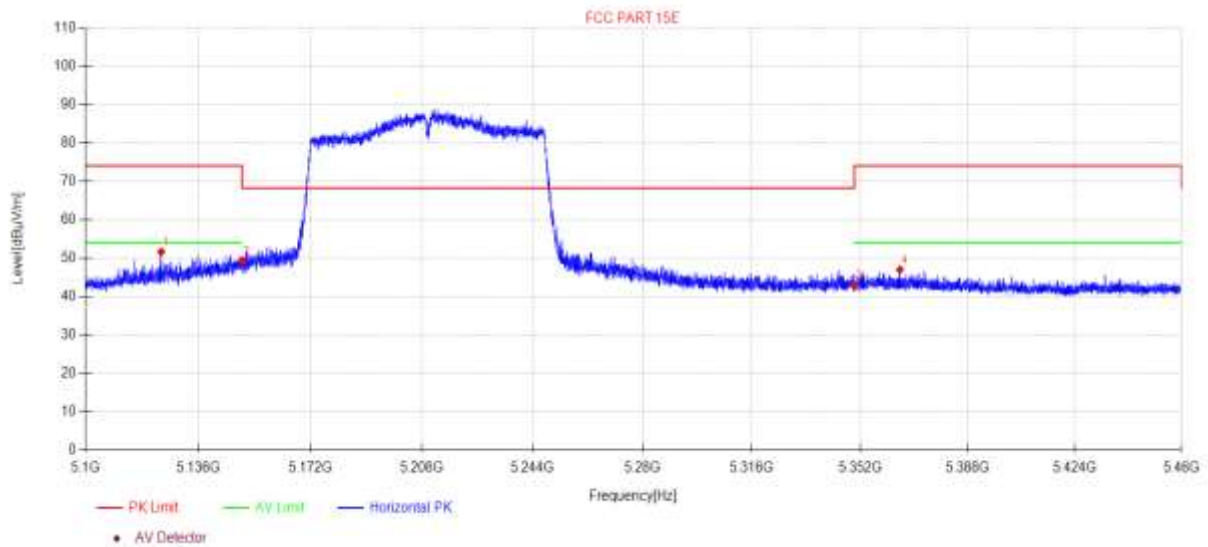

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5124.16	52.68	5.57	33.40	-40.06	51.59	74.00	22.41	PK	Horizontal
2	5150.00	50.32	5.59	33.40	-40.06	49.25	68.20	18.95	PK	Horizontal
3	5350.00	44.07	5.69	33.10	-40.03	42.83	74.00	31.17	PK	Horizontal
4	5365.21	48.16	5.69	33.10	-40.03	46.92	74.00	27.08	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5210MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\30
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

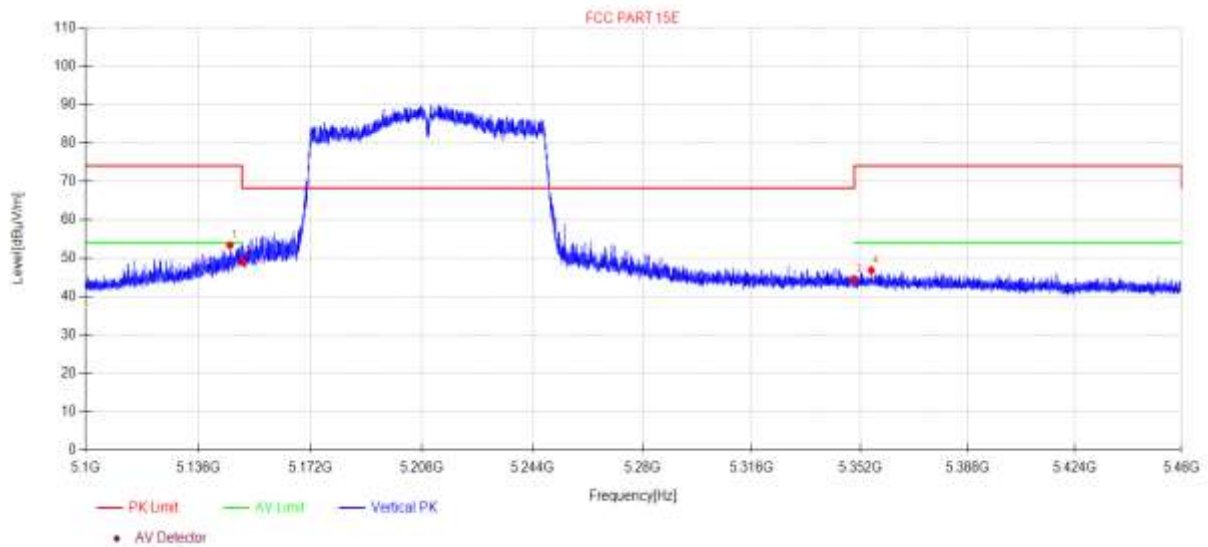

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV /m]	Limit [dBμV /m]	Margin [dB]	Detector	Polarity
1	5146.12	54.33	5.58	33.40	-40.06	53.25	74.00	20.75	PK	Vertical
2	5150.00	50.03	5.59	33.40	-40.06	48.96	68.20	19.24	PK	Vertical
3	5350.00	45.78	5.69	33.10	-40.03	44.54	74.00	29.46	PK	Vertical
4	5355.67	47.98	5.69	33.10	-40.03	46.74	74.00	27.26	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5290MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\31
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

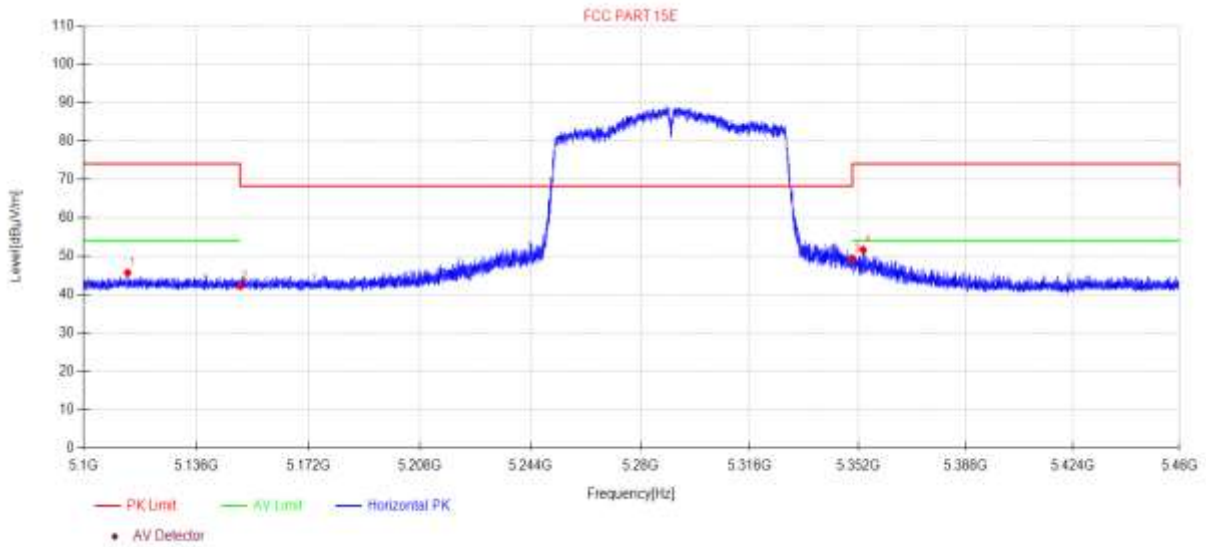

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5114.08	46.72	5.57	33.40	-40.07	45.62	74.00	28.38	PK	Horizontal
2	5150.00	43.18	5.59	33.40	-40.06	42.11	68.20	26.09	PK	Horizontal
3	5350.00	50.54	5.69	33.10	-40.03	49.30	74.00	24.70	PK	Horizontal
4	5353.62	52.84	5.69	33.10	-40.03	51.60	74.00	22.40	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5290MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\32
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

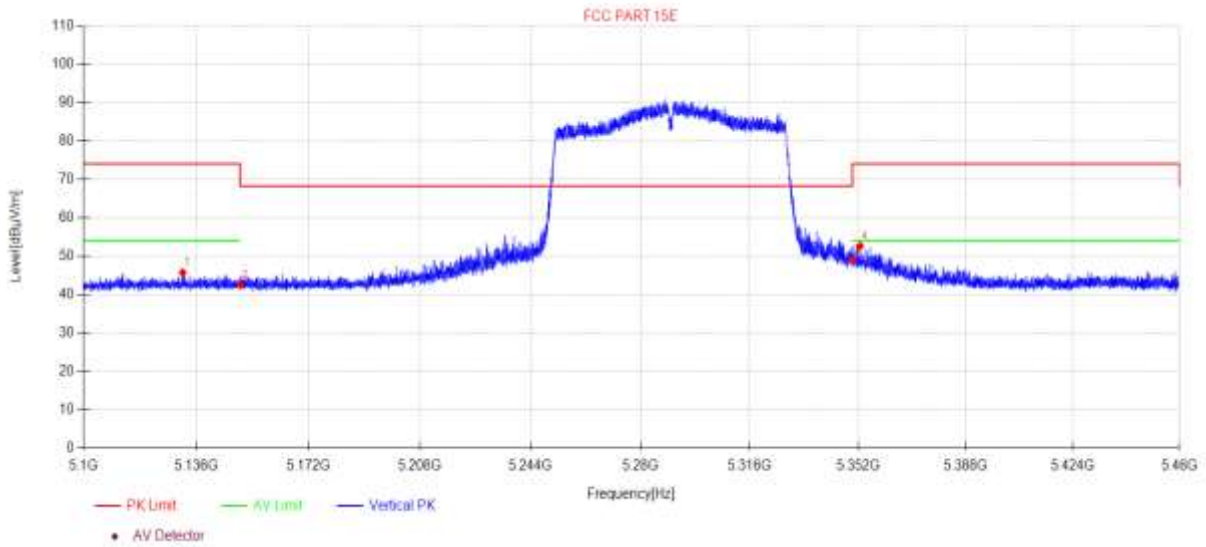

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5131.64	46.72	5.58	33.40	-40.06	45.64	74.00	28.36	PK	Vertical
2	5150.00	43.48	5.59	33.40	-40.06	42.41	68.20	25.79	PK	Vertical
3	5350.00	50.30	5.69	33.10	-40.03	49.06	74.00	24.94	PK	Vertical
4	5352.61	53.83	5.69	33.10	-40.03	52.59	74.00	21.41	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5310MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\33
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

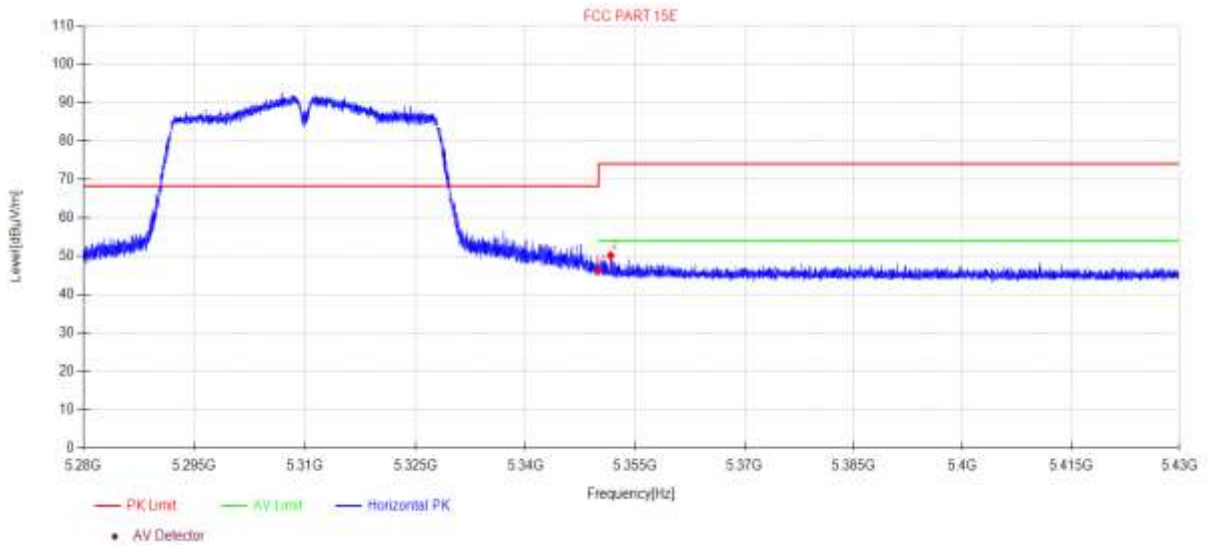

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	47.59	5.69	33.10	-40.03	46.35	74.00	27.65	PK	Horizontal
2	5351.64	51.35	5.69	33.10	-40.03	50.11	74.00	23.89	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5310MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\34
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

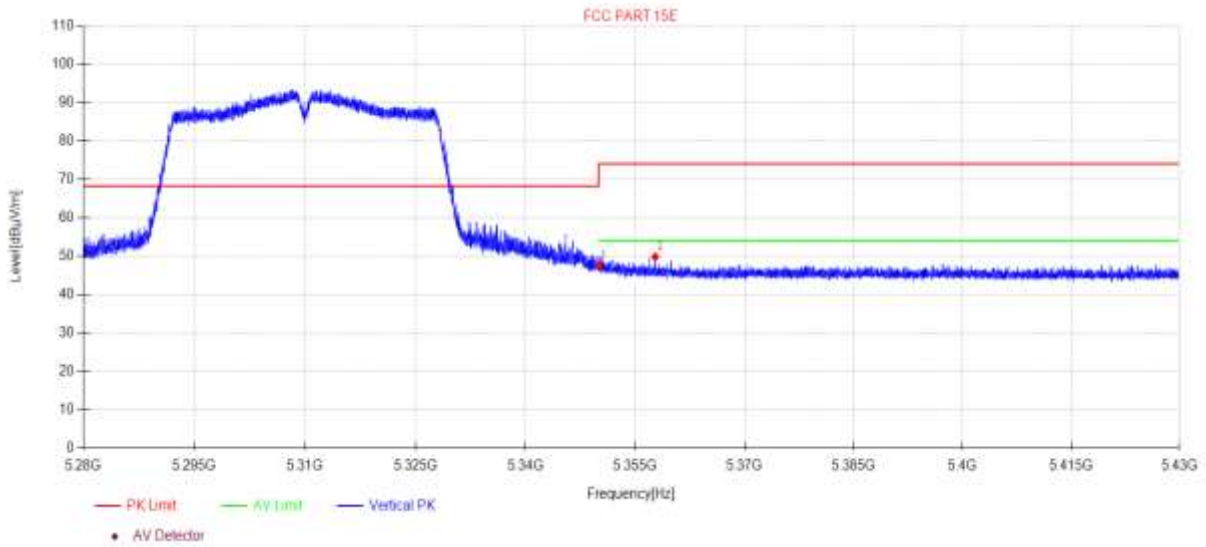

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	48.68	5.69	33.10	-40.03	47.44	74.00	26.56	PK	Vertical
2	5357.75	51.01	5.69	33.10	-40.03	49.77	74.00	24.23	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5310MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\35
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

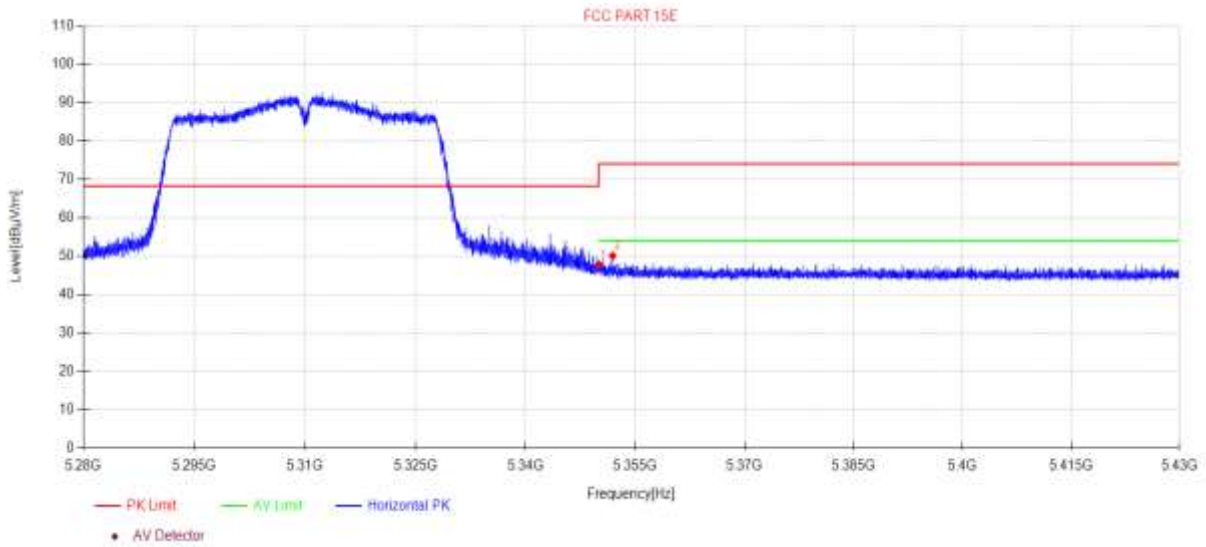

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	48.79	5.69	33.10	-40.03	47.55	74.00	26.45	PK	Horizontal
2	5351.91	51.25	5.69	33.10	-40.03	50.01	74.00	23.99	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5310MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\36
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

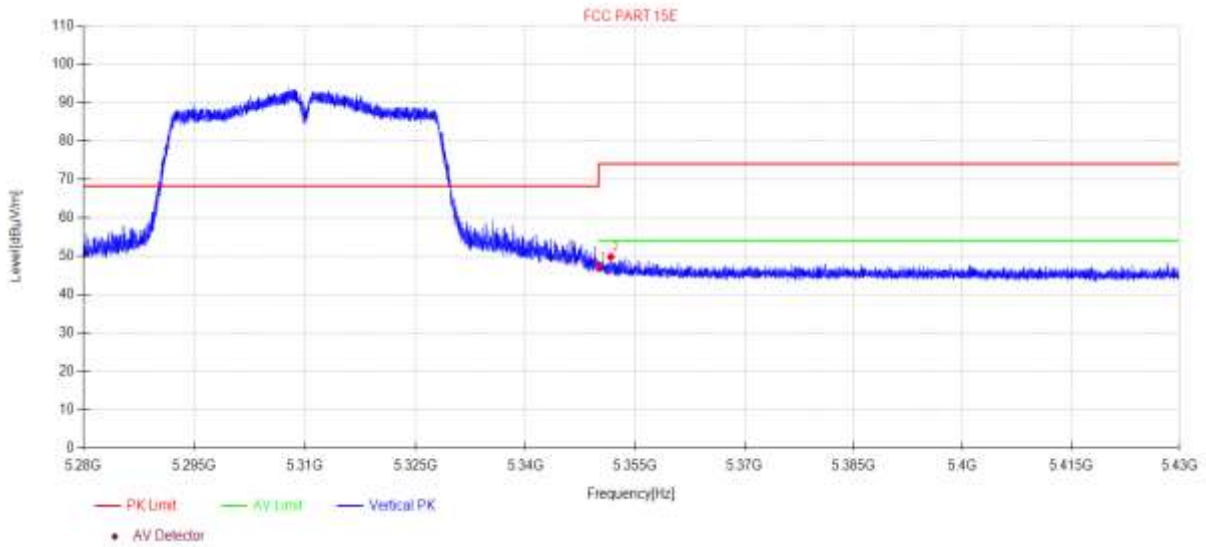

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	48.33	5.69	33.10	-40.03	47.09	74.00	26.91	PK	Vertical
2	5351.67	50.95	5.69	33.10	-40.03	49.71	74.00	24.29	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5320MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\37
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

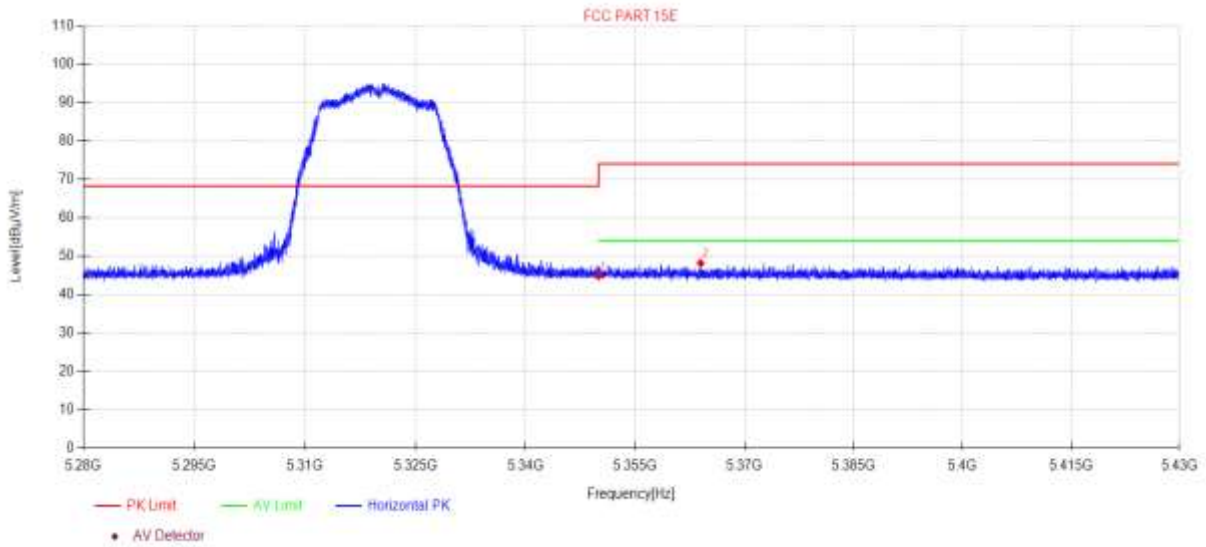

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	45.98	5.69	33.10	-40.03	44.74	74.00	29.26	PK	Horizontal
2	5363.97	49.34	5.69	33.10	-40.03	48.10	74.00	25.90	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5320MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\38
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

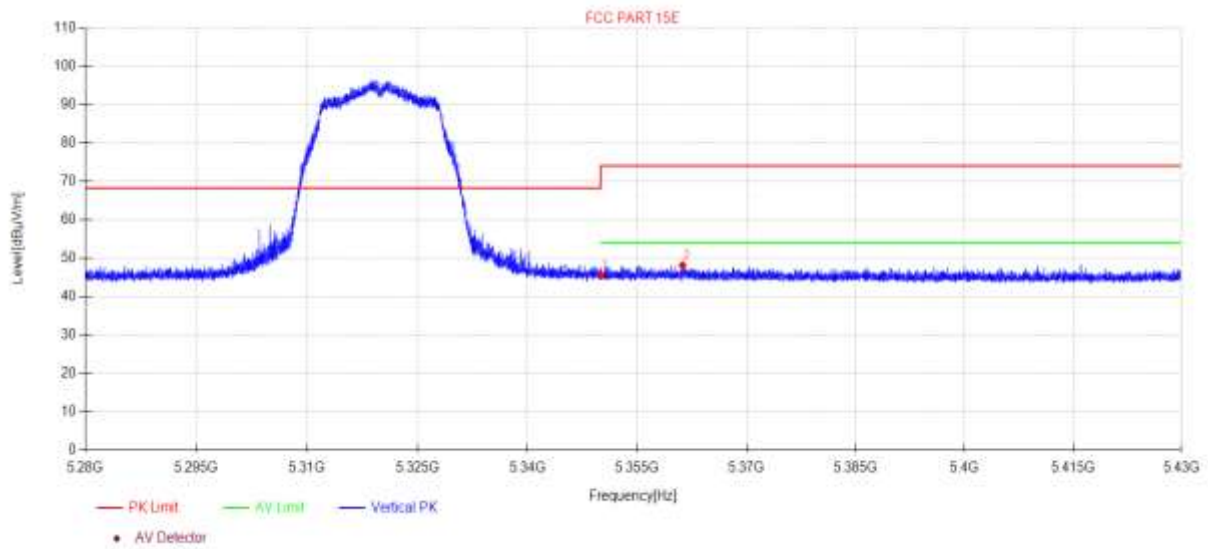

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	46.65	5.69	33.10	-40.03	45.41	74.00	28.59	PK	Vertical
2	5361.21	49.33	5.69	33.10	-40.03	48.09	74.00	25.91	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5320MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\39
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

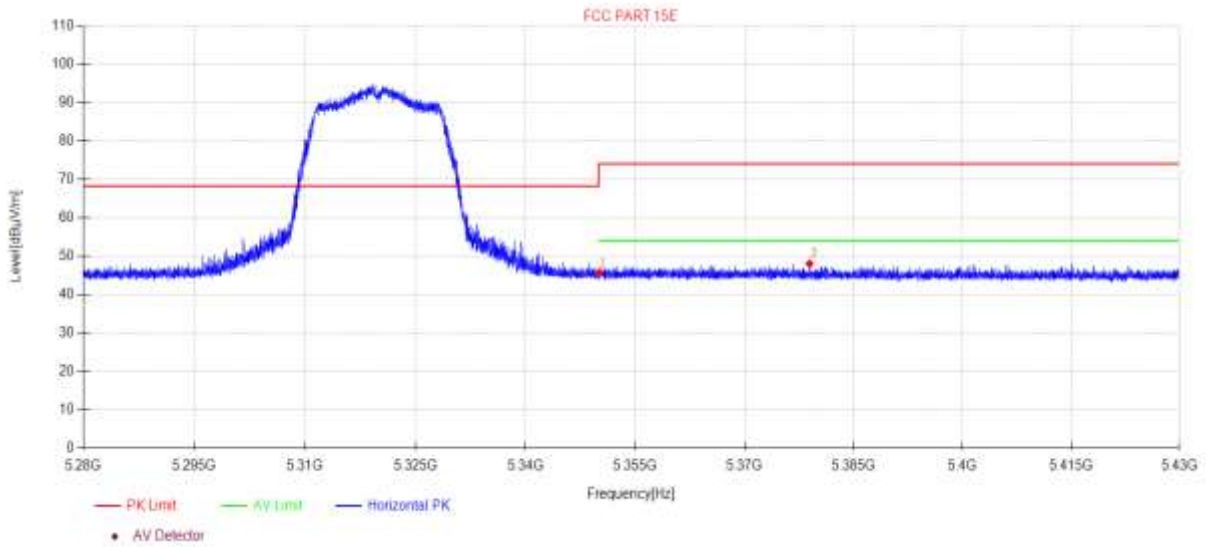

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	46.74	5.69	33.10	-40.03	45.50	74.00	28.50	PK	Horizontal
2	5378.93	49.18	5.70	33.10	-40.03	47.95	74.00	26.05	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5320MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\40
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

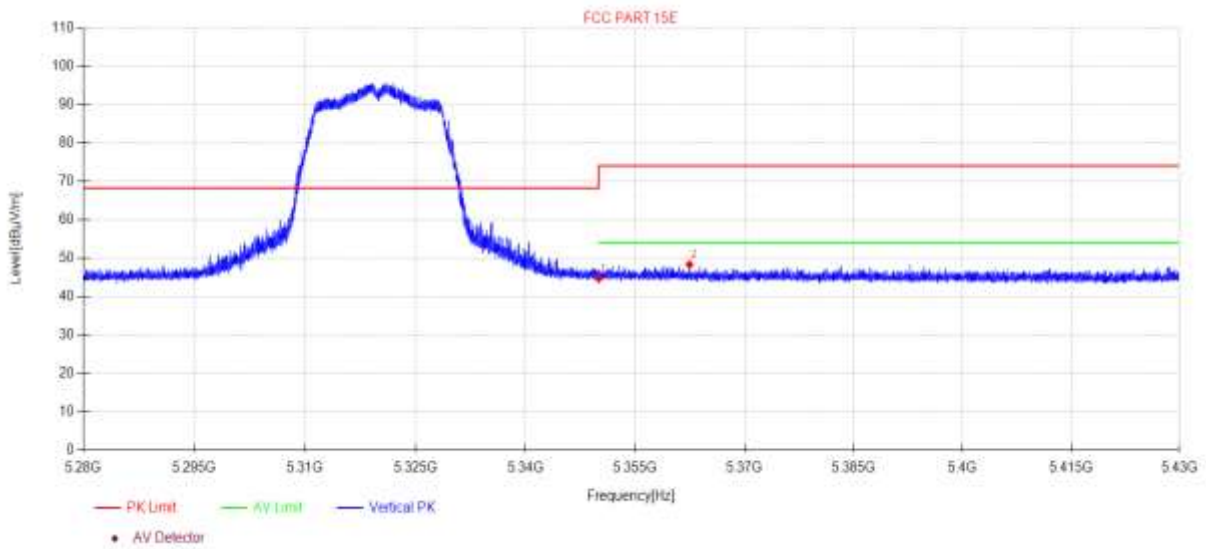

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	45.84	5.69	33.10	-40.03	44.60	74.00	29.40	PK	Vertical
2	5362.44	49.50	5.69	33.10	-40.03	48.26	74.00	25.74	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5320MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\41
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

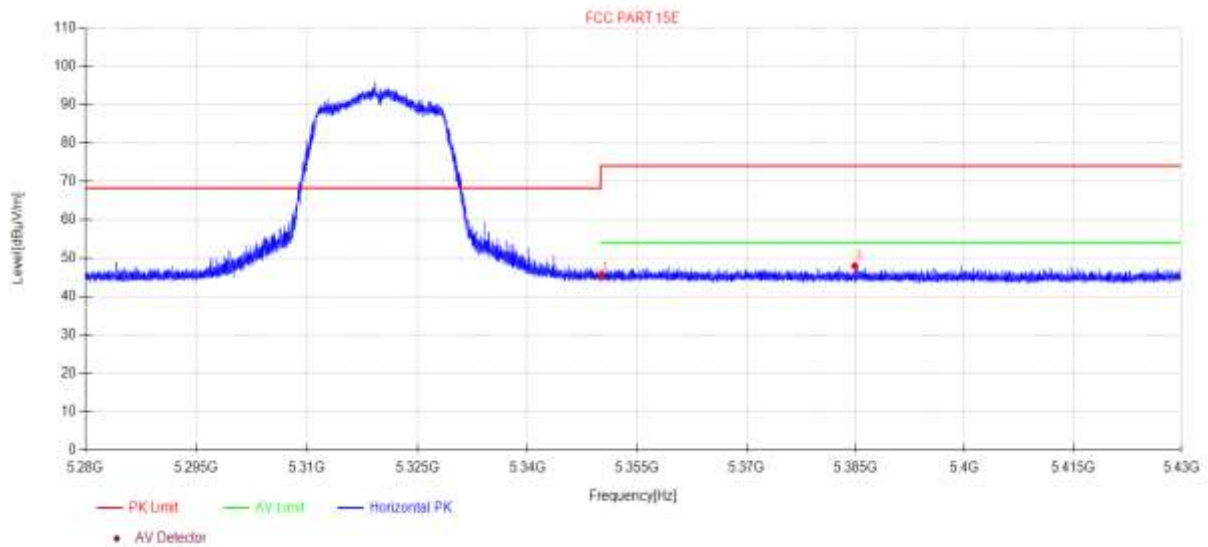

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	46.52	5.69	33.10	-40.03	45.28	74.00	28.72	PK	Horizontal
2	5384.88	49.12	5.70	33.10	-40.03	47.89	74.00	26.11	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5320MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\42
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

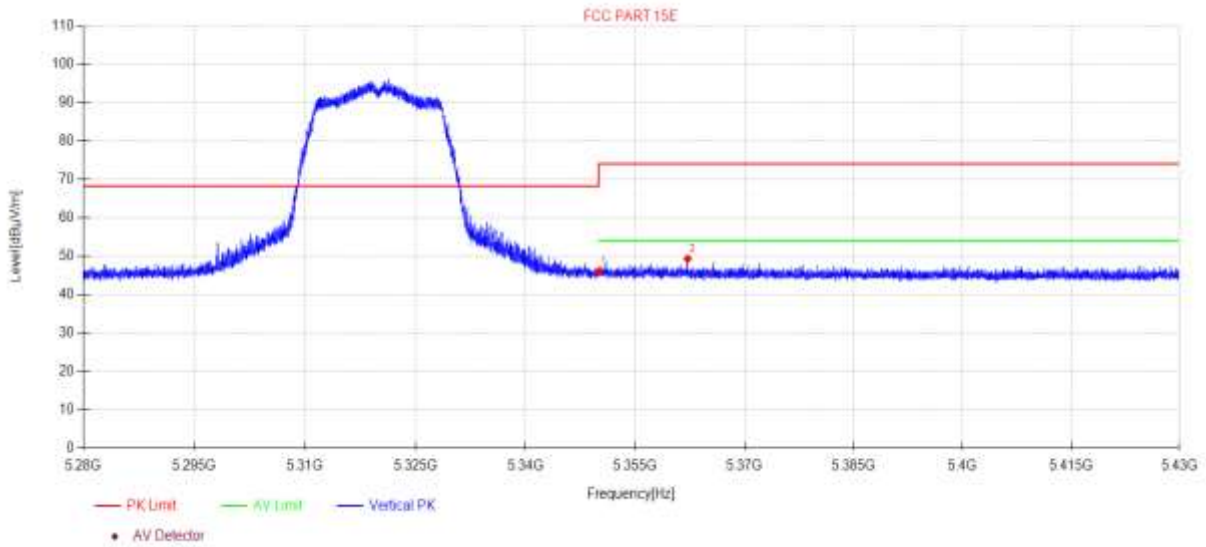

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5350.00	47.14	5.69	33.10	-40.03	45.90	74.00	28.10	PK	Vertical
2	5362.19	50.47	5.69	33.10	-40.03	49.23	74.00	24.77	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\43
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

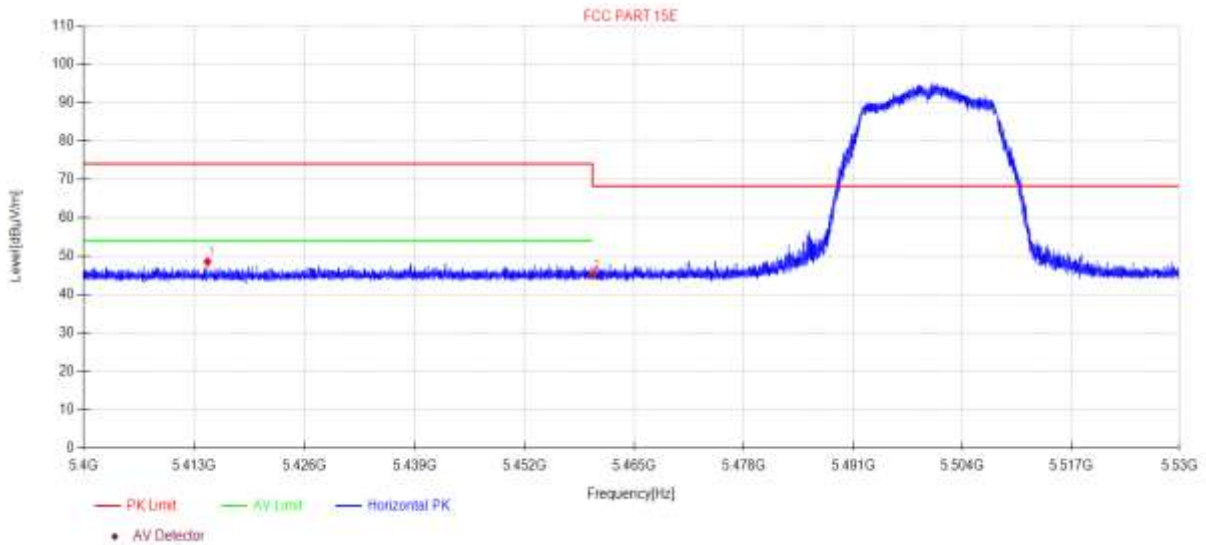

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5414.57	49.73	5.72	33.07	-40.03	48.49	74.00	25.51	PK	Horizontal
2	5460.00	46.23	5.74	33.00	-40.02	44.95	68.20	23.25	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\44
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

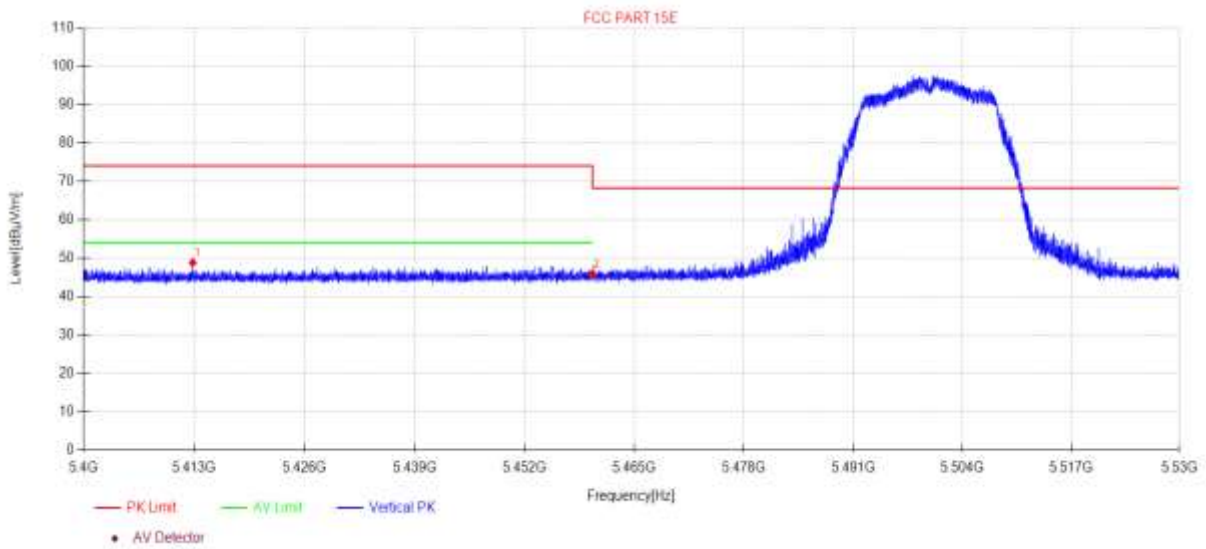

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5412.84	49.98	5.72	33.07	-40.03	48.74	74.00	25.26	PK	Vertical
2	5460.00	46.91	5.74	33.00	-40.02	45.63	68.20	22.57	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\45
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

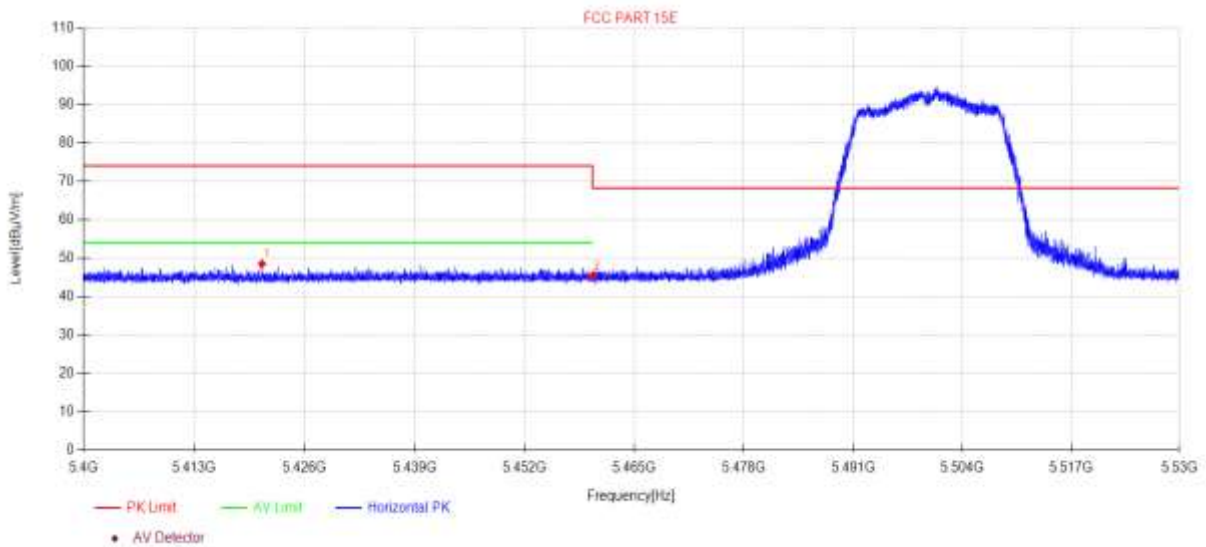

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5420.98	49.69	5.72	33.06	-40.03	48.44	74.00	25.56	PK	Horizontal
2	5460.00	46.53	5.74	33.00	-40.02	45.25	68.20	22.95	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\46
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

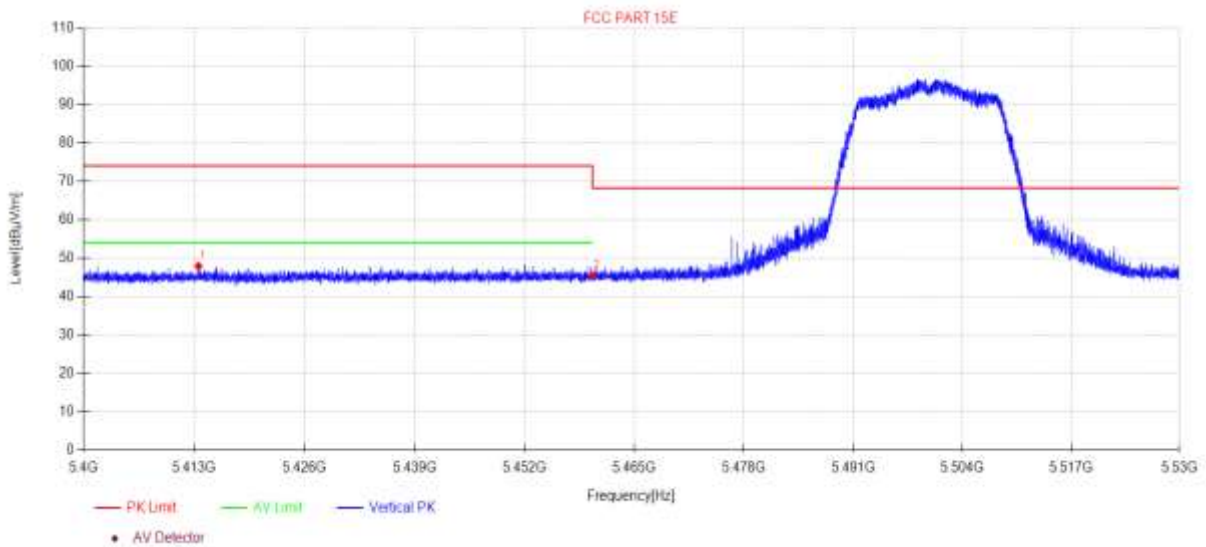

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5413.51	49.13	5.72	33.07	-40.03	47.89	74.00	26.11	PK	Vertical
2	5460.00	46.64	5.74	33.00	-40.02	45.36	68.20	22.84	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\47
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

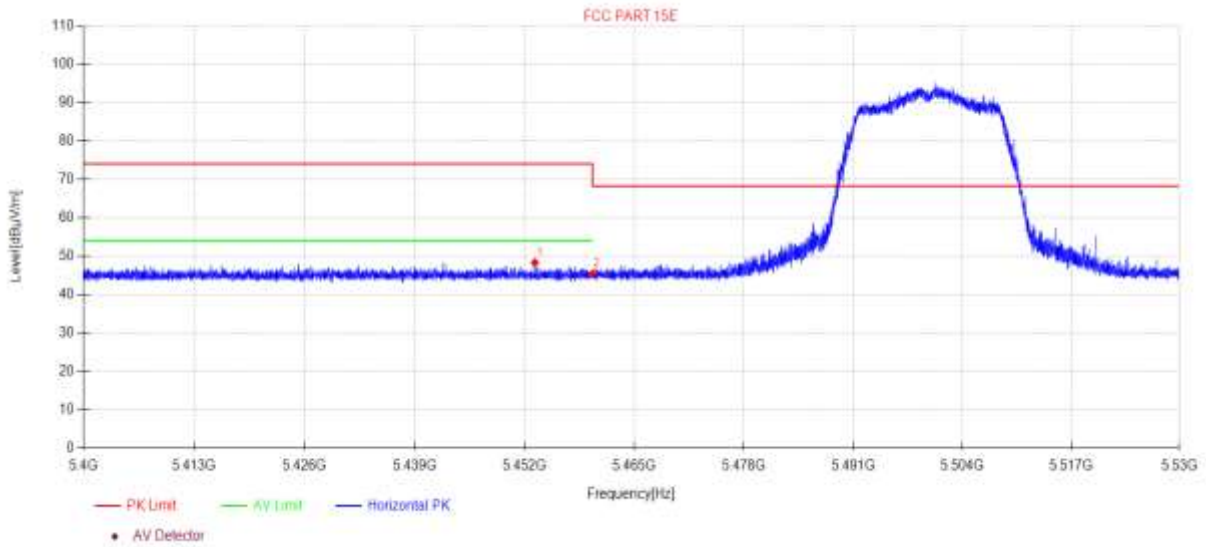

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5453.18	49.53	5.74	33.00	-40.02	48.25	74.00	25.75	PK	Horizontal
2	5460.00	46.61	5.74	33.00	-40.02	45.33	68.20	22.87	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\48
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

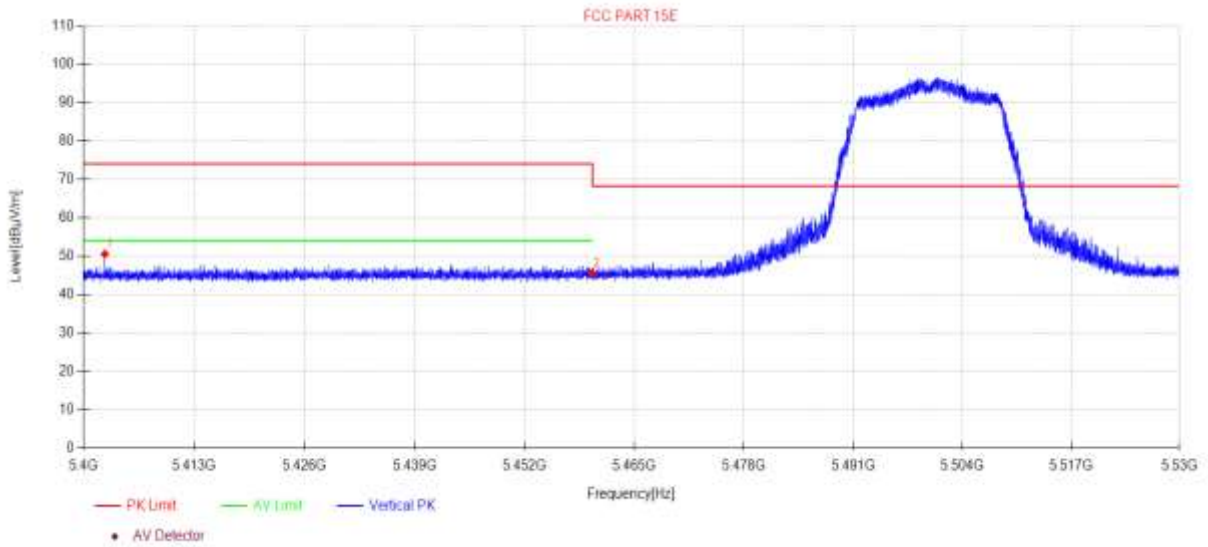

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5402.52	51.72	5.71	33.09	-40.03	50.49	74.00	23.51	PK	Vertical
2	5460.00	46.65	5.74	33.00	-40.02	45.37	68.20	22.83	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5510MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\49
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

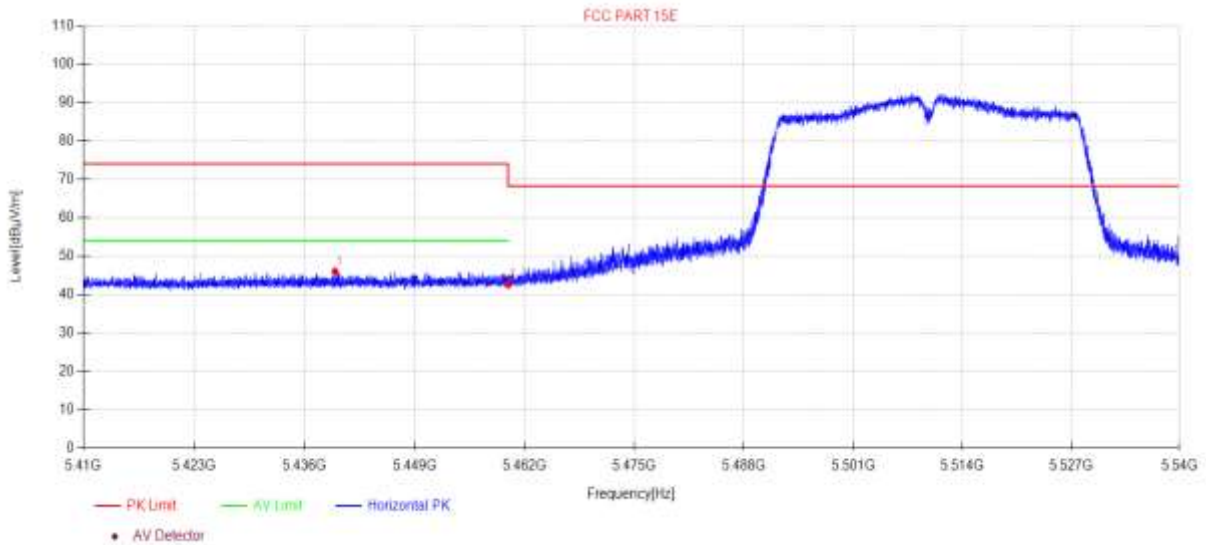

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5439.59	47.19	5.73	33.02	-40.02	45.92	74.00	28.08	PK	Horizontal
2	5460.00	43.81	5.74	33.00	-40.02	42.53	68.20	25.67	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5510MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\50
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

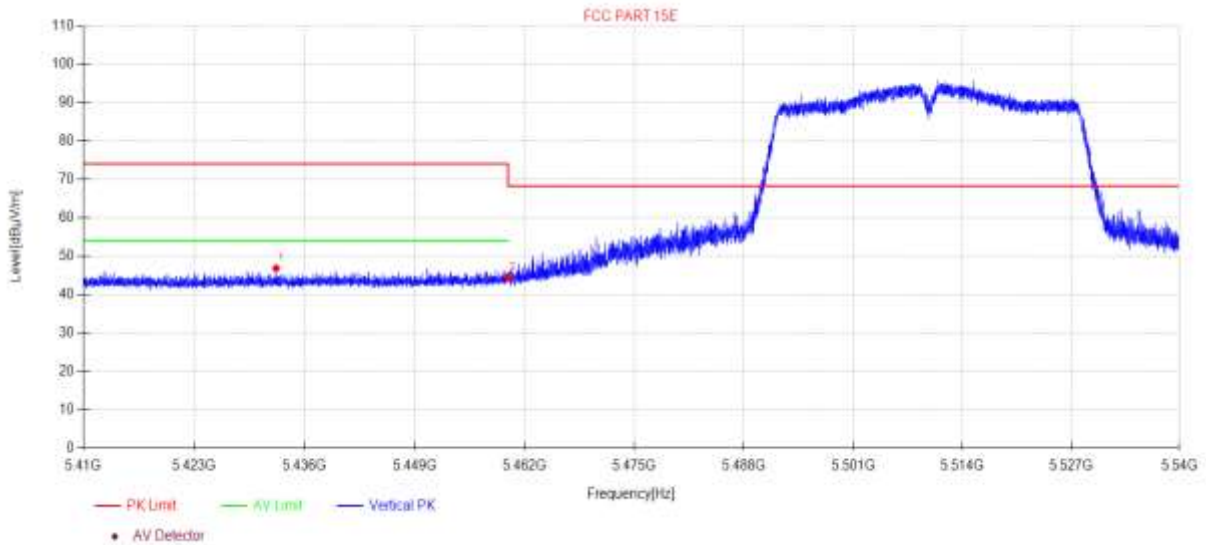

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV /m]	Limit [dBμV /m]	Margin [dB]	Detector	Polarity
1	5432.65	48.03	5.73	33.03	-40.02	46.77	74.00	27.23	PK	Vertical
2	5460.00	45.69	5.74	33.00	-40.02	44.41	68.20	23.79	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5510MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\51
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

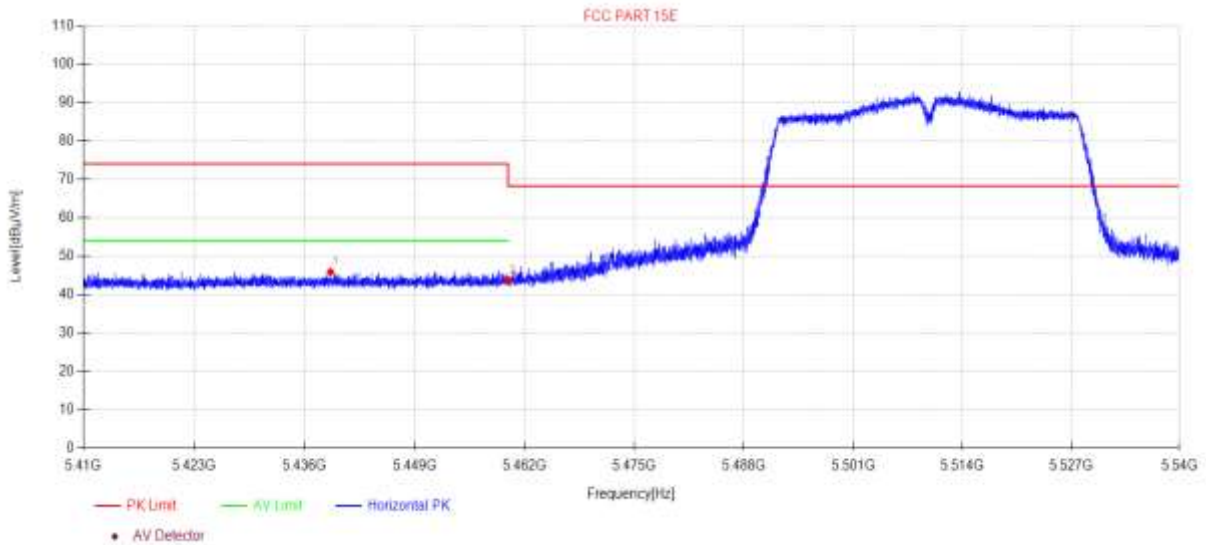

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5439.04	47.06	5.73	33.02	-40.02	45.79	74.00	28.21	PK	Horizontal
2	5460.00	44.85	5.74	33.00	-40.02	43.57	68.20	24.63	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5510MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\52
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

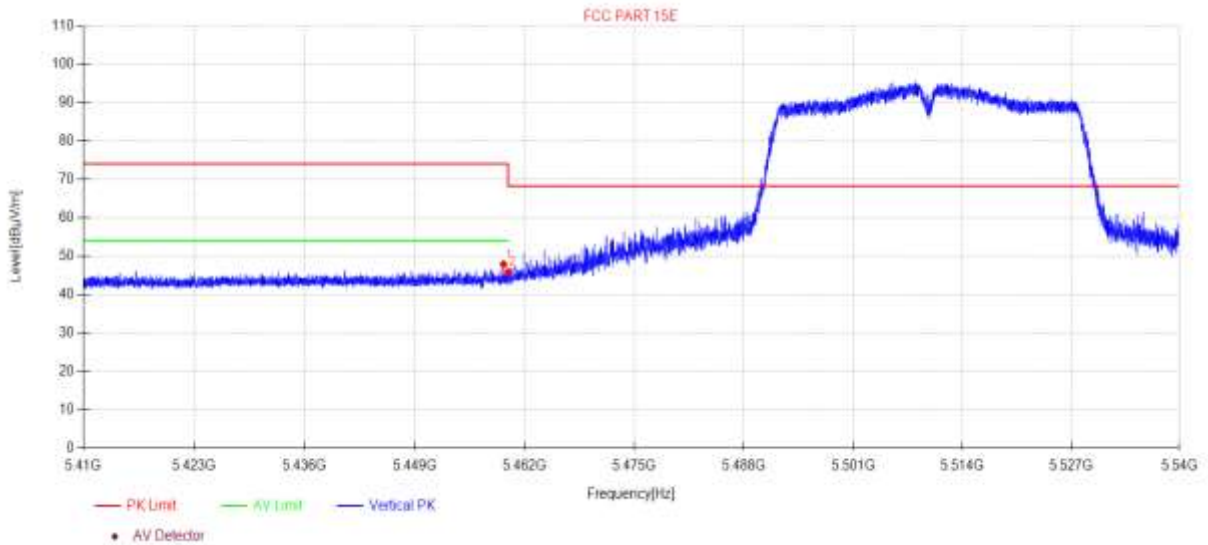

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5459.48	49.09	5.74	33.00	-40.02	47.81	74.00	26.19	PK	Vertical
2	5460.00	47.08	5.74	33.00	-40.02	45.80	68.20	22.40	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5530MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\53
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

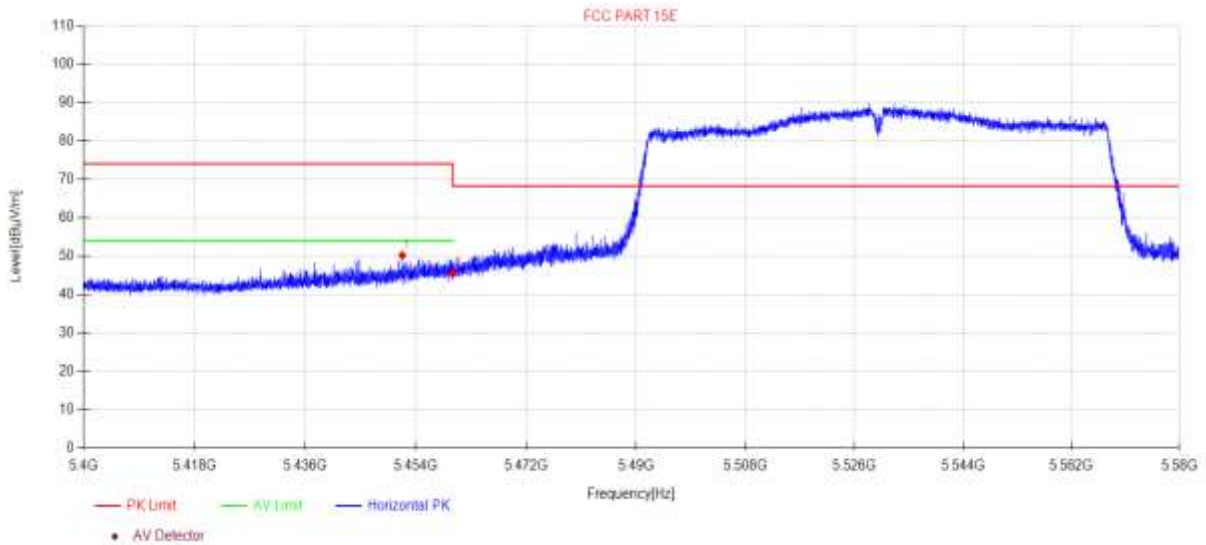

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5451.79	51.41	5.74	33.00	-40.02	50.13	74.00	23.87	PK	Horizontal
2	5460.00	46.60	5.74	33.00	-40.02	45.32	68.20	22.88	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5530MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\54
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

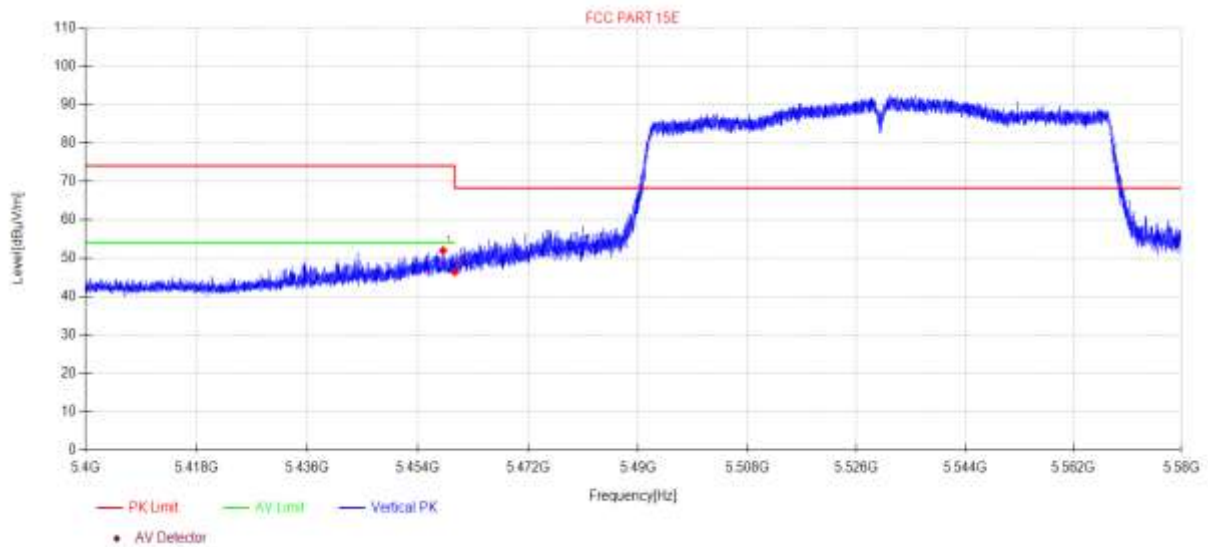

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5458.10	53.17	5.74	33.00	-40.02	51.89	74.00	22.11	PK	Vertical
2	5460.00	47.64	5.74	33.00	-40.02	46.36	68.20	21.84	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5610MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\55
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

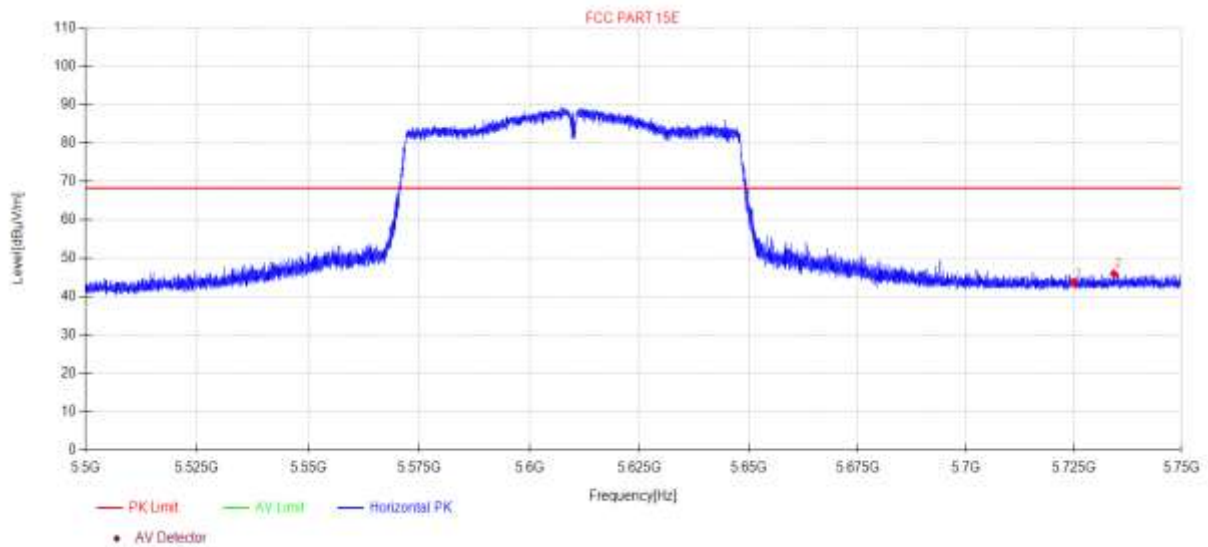

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV /m]	Limit [dBμV /m]	Margin [dB]	Detector	Polarity
1	5725.00	44.00	5.87	33.75	-39.99	43.63	68.20	24.57	PK	Horizontal
2	5734.30	46.20	5.88	33.81	-39.98	45.91	68.20	22.29	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5610MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\56
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

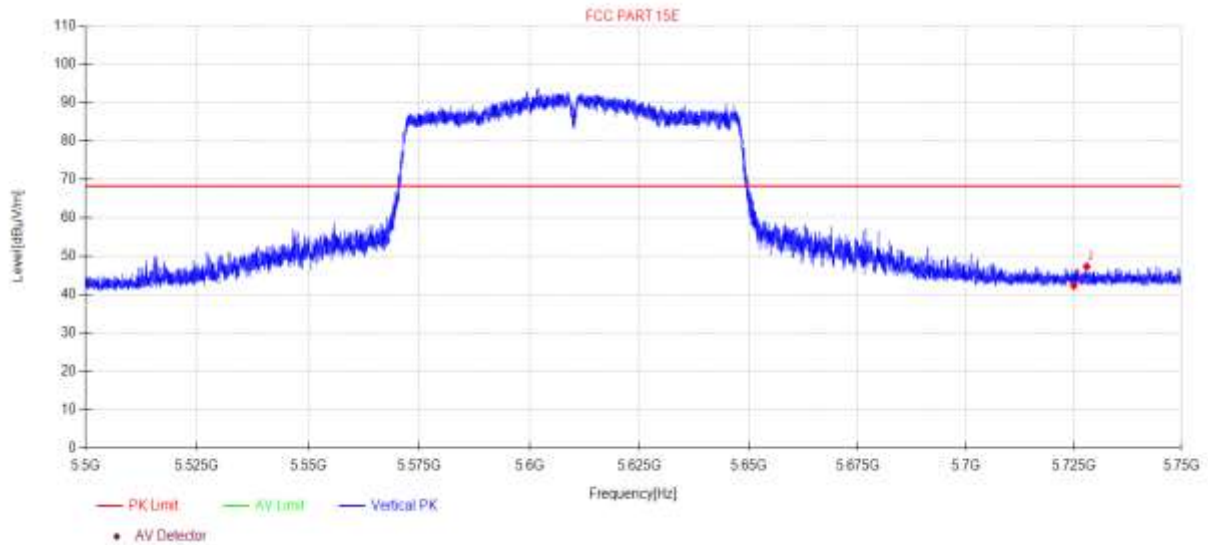

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV /m]	Limit [dBμV /m]	Margin [dB]	Detector	Polarity
1	5725.00	42.67	5.87	33.75	-39.99	42.30	68.20	25.90	PK	Vertical
2	5727.98	47.56	5.87	33.77	-39.99	47.21	68.20	20.99	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5670MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\57
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

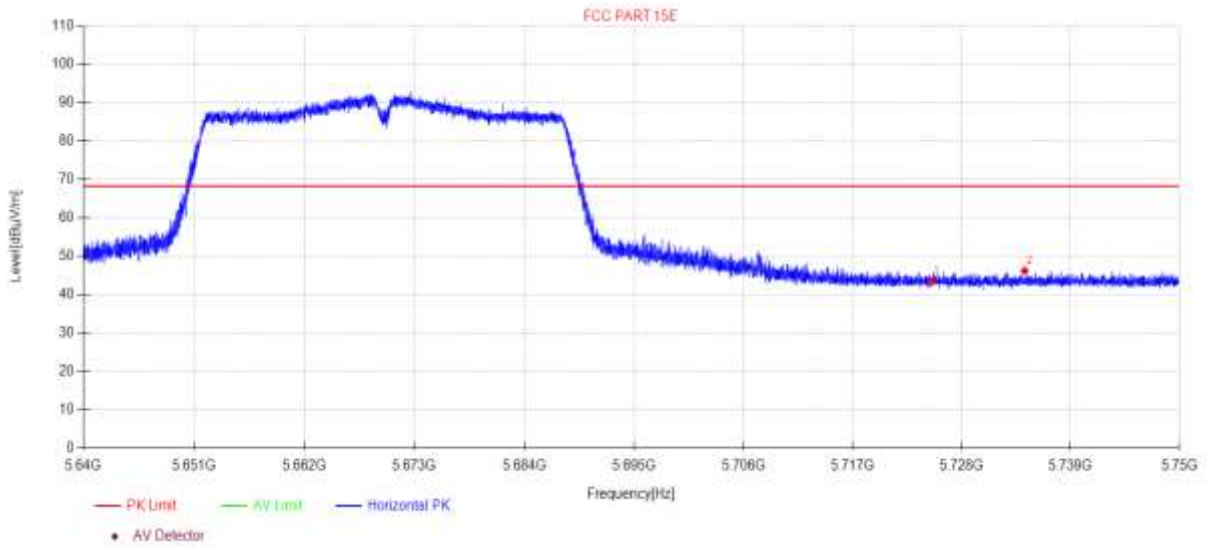

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	43.76	5.87	33.75	-39.99	43.39	68.20	24.81	PK	Horizontal
2	5734.35	46.41	5.88	33.81	-39.98	46.12	68.20	22.08	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5670MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\58
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

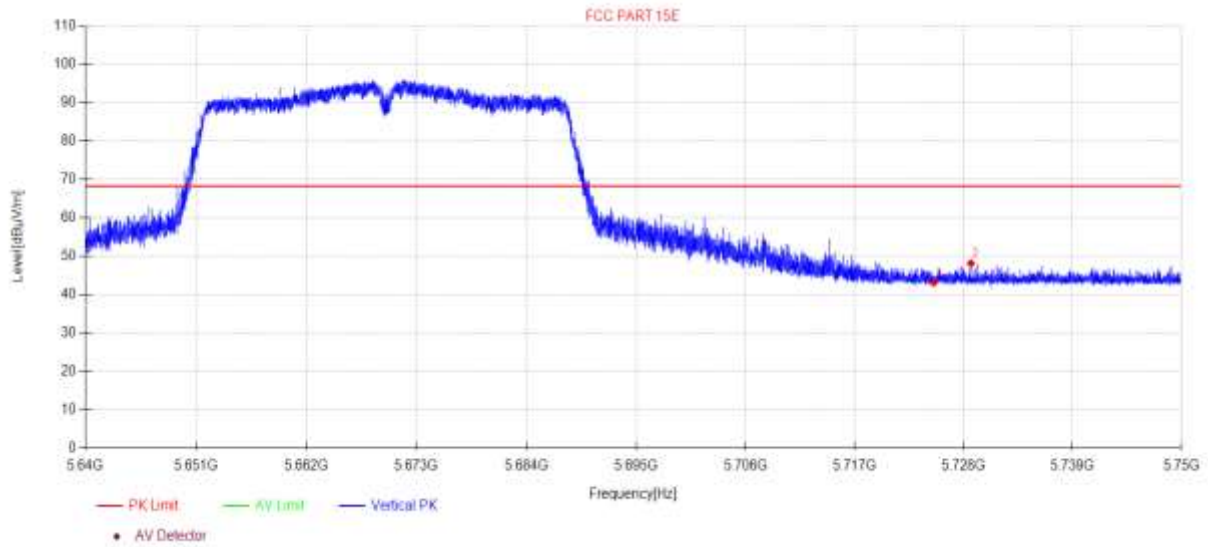

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	43.46	5.87	33.75	-39.99	43.09	68.20	25.11	PK	Vertical
2	5728.72	48.40	5.87	33.77	-39.99	48.05	68.20	20.15	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5670MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\59
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

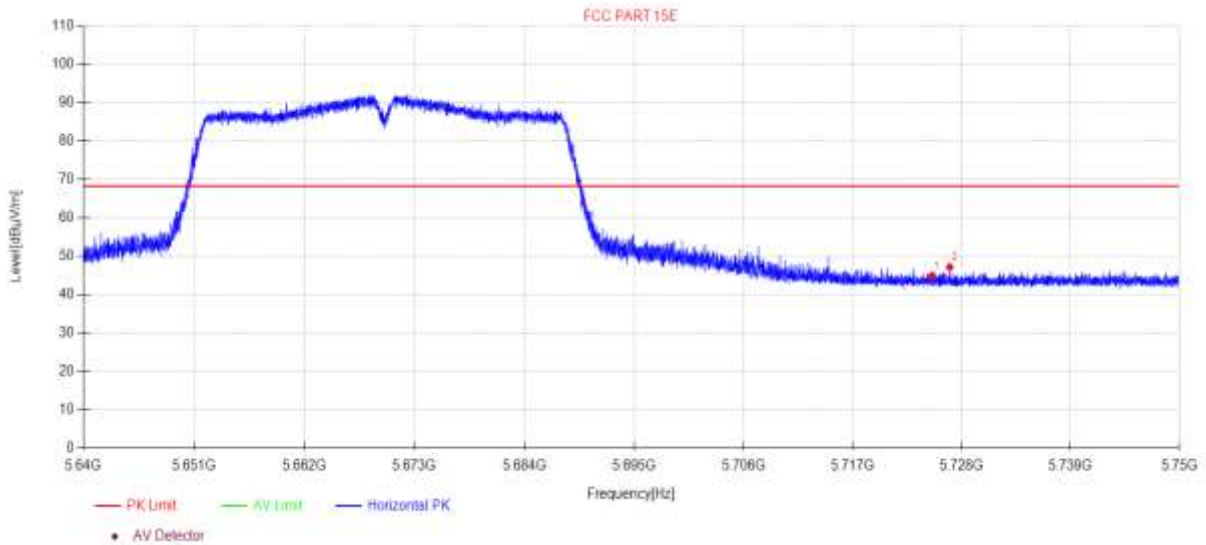

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	45.19	5.87	33.75	-39.99	44.82	68.20	23.38	PK	Horizontal
2	5726.79	47.42	5.87	33.76	-39.99	47.06	68.20	21.14	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5670MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\60
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

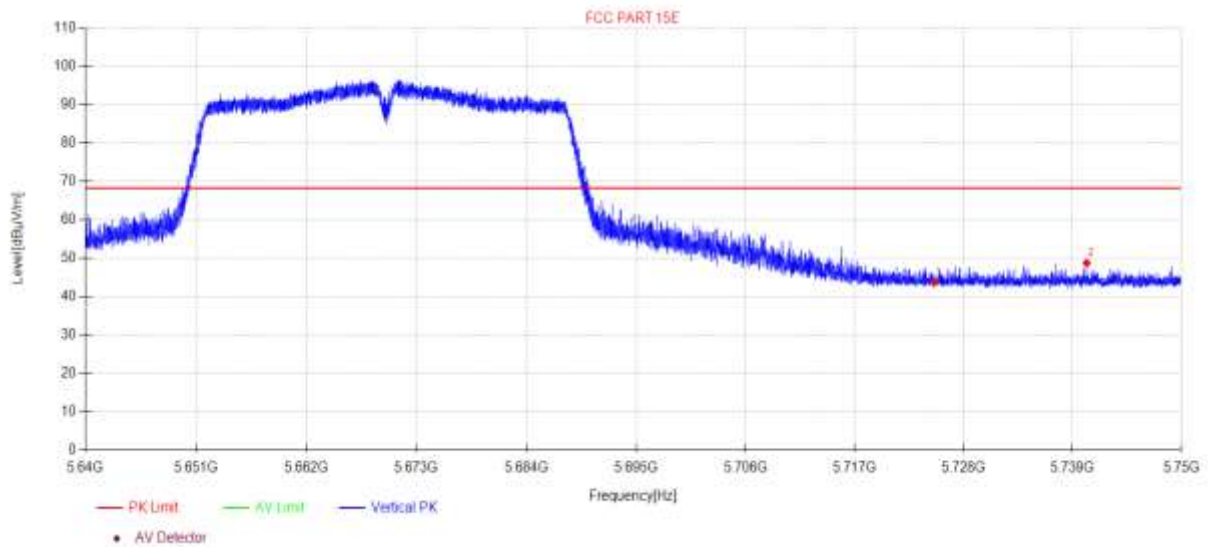

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	43.90	5.87	33.75	-39.99	43.53	68.20	24.67	PK	Vertical
2	5740.42	48.90	5.88	33.84	-39.98	48.64	68.20	19.56	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5700MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\61
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

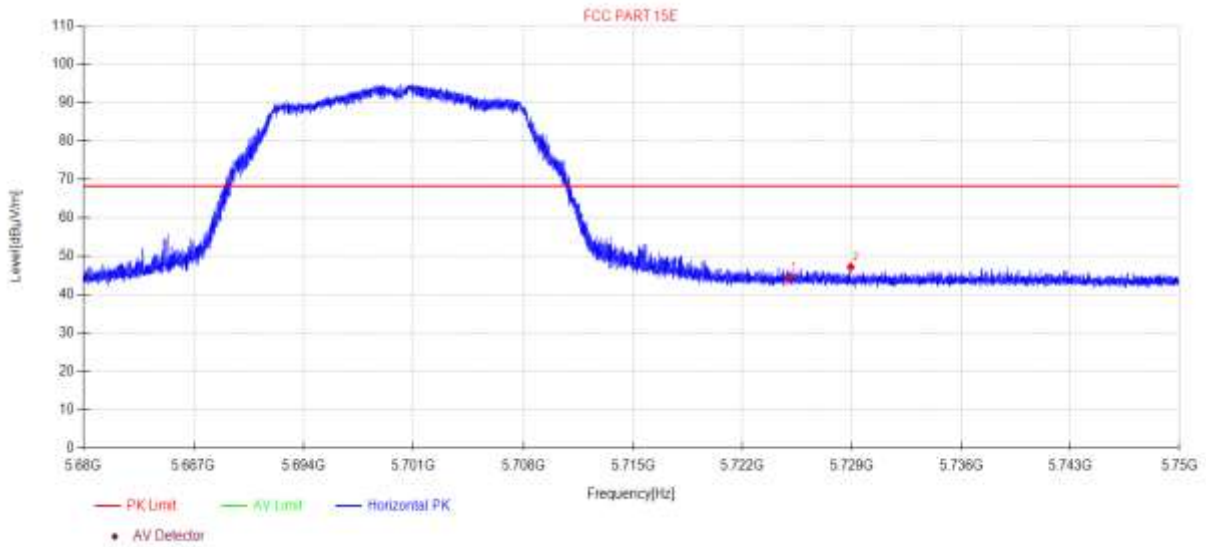

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	44.94	5.87	33.75	-39.99	44.57	68.20	23.63	PK	Horizontal
2	5728.93	47.48	5.87	33.77	-39.99	47.13	68.20	21.07	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5700MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\62
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

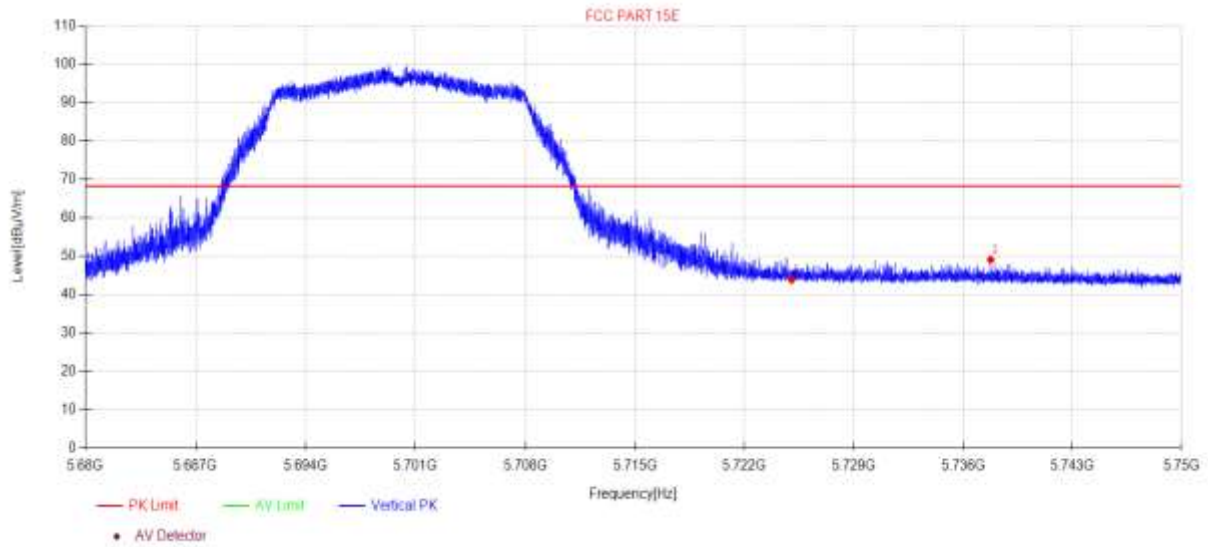

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	44.26	5.87	33.75	-39.99	43.89	68.20	24.31	PK	Vertical
2	5737.76	49.26	5.88	33.83	-39.98	48.99	68.20	19.21	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5700MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\63
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

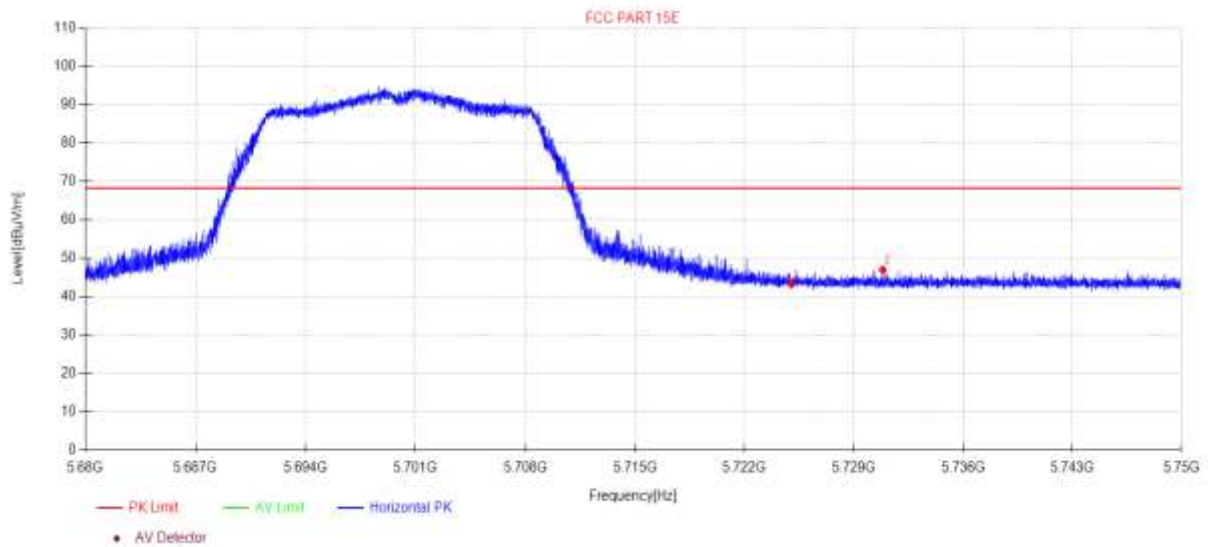

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	43.54	5.87	33.75	-39.99	43.17	68.20	25.03	PK	Horizontal
2	5730.85	47.20	5.88	33.79	-39.98	46.89	68.20	21.31	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5700MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\65
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

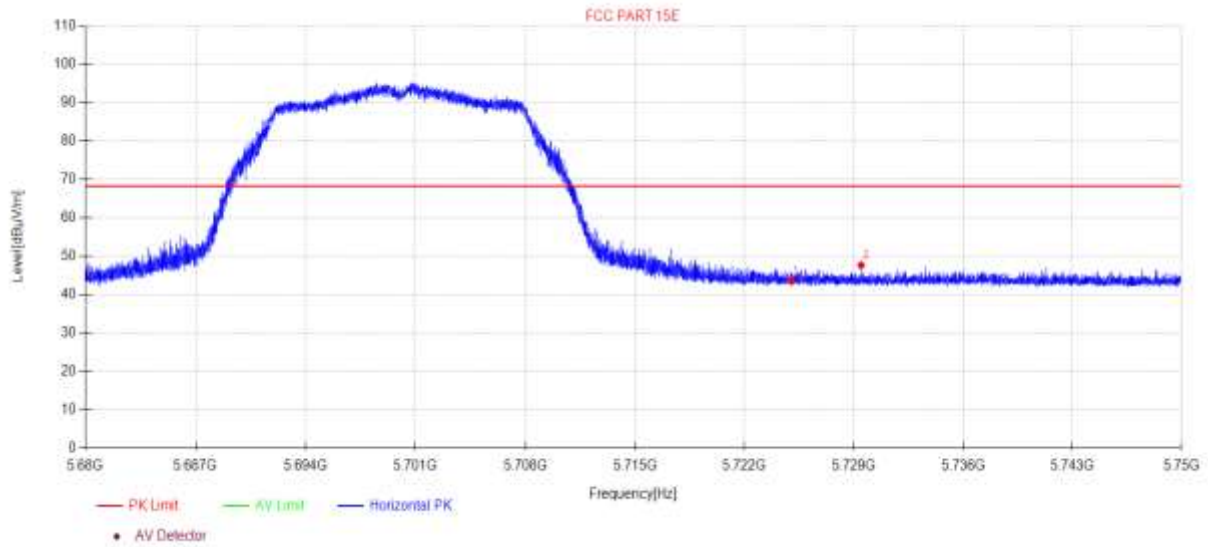

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5725.00	43.74	5.87	33.75	-39.99	43.37	68.20	24.83	PK	Horizontal
2	5729.46	47.90	5.87	33.78	-39.99	47.56	68.20	20.64	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5720MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\69
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

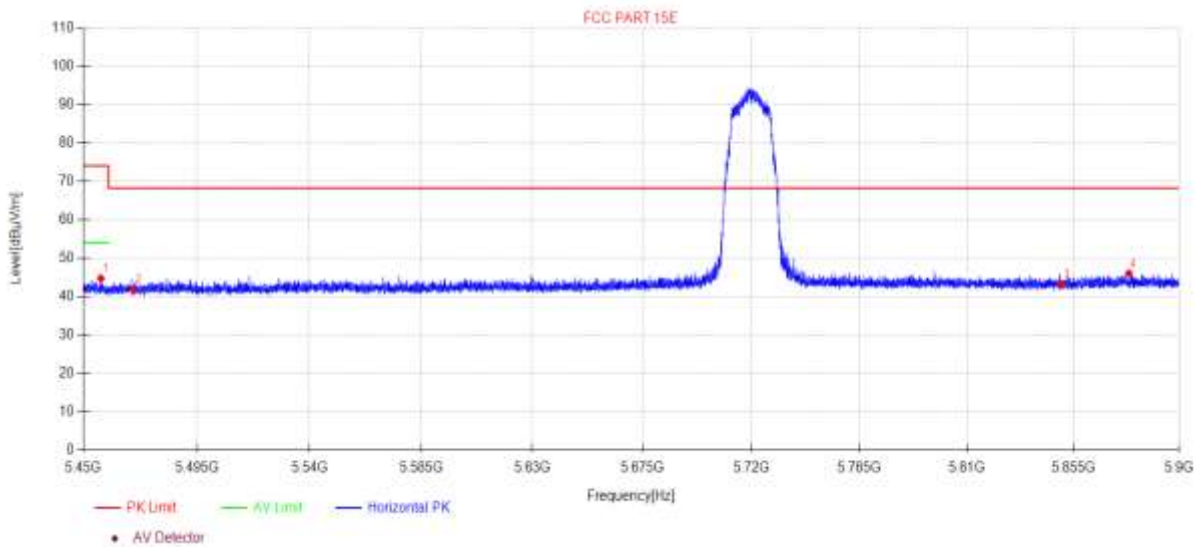

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5456.93	45.92	5.74	33.00	-40.02	44.64	74.00	29.36	PK	Horizontal
2	5470.00	42.88	5.75	33.00	-40.02	41.61	68.20	26.59	PK	Horizontal
3	5850.00	43.08	5.94	34.00	-39.97	43.05	68.20	25.15	PK	Horizontal
4	5878.54	45.95	5.95	34.06	-39.97	45.99	68.20	22.21	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5720MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\71
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

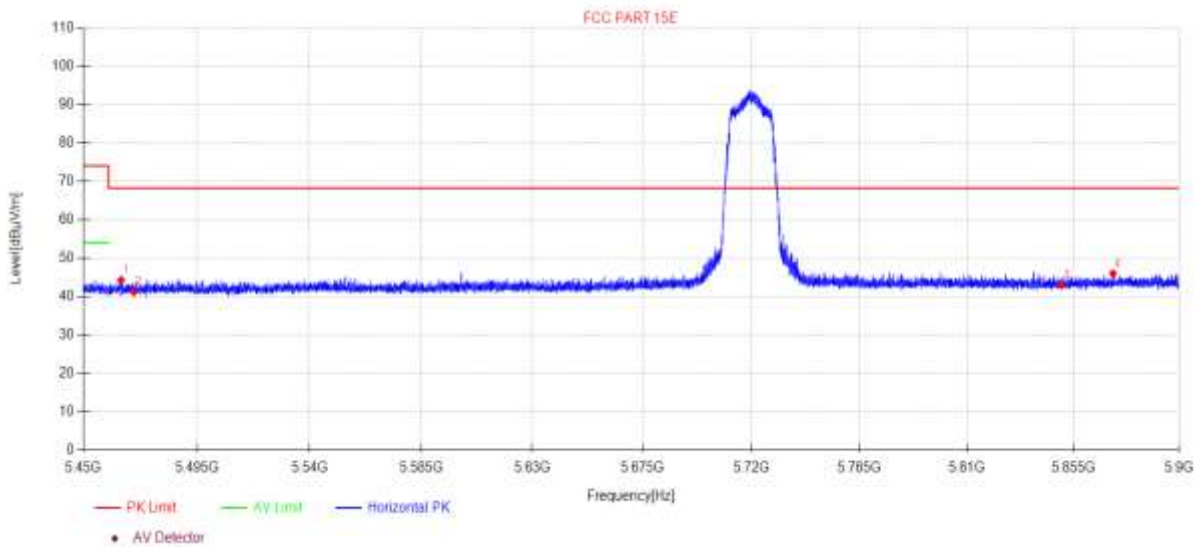

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5464.94	45.46	5.74	33.00	-40.02	44.18	68.20	24.02	PK	Horizontal
2	5470.00	42.41	5.75	33.00	-40.02	41.14	68.20	27.06	PK	Horizontal
3	5850.00	42.97	5.94	34.00	-39.97	42.94	68.20	25.26	PK	Horizontal
4	5871.74	45.90	5.95	34.04	-39.97	45.92	68.20	22.28	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5720MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\72
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

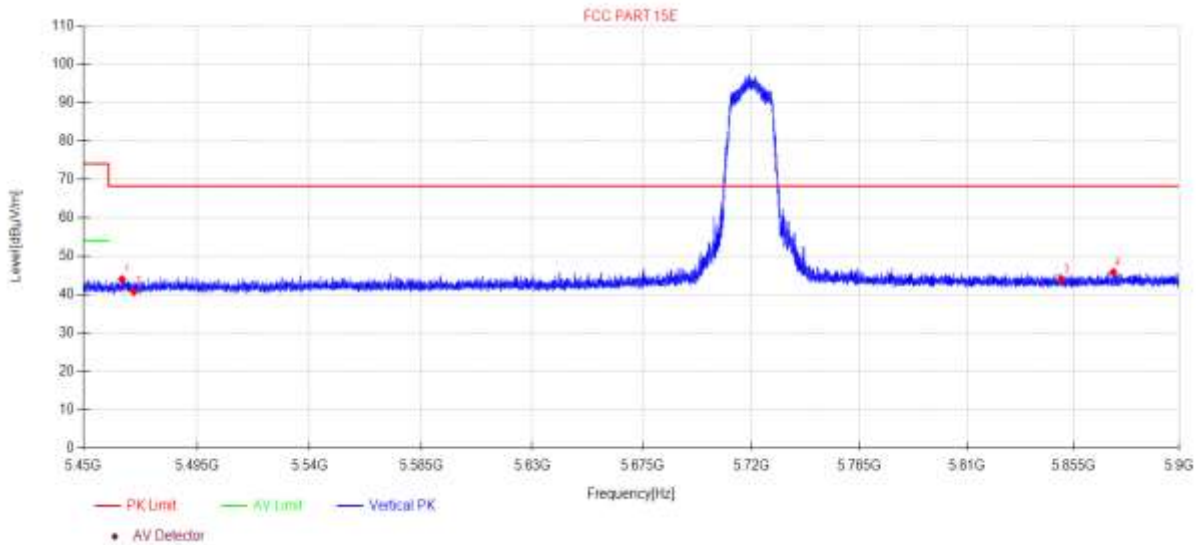

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5465.26	45.18	5.74	33.00	-40.02	43.90	68.20	24.30	PK	Vertical
2	5470.00	41.94	5.75	33.00	-40.02	40.67	68.20	27.53	PK	Vertical
3	5850.00	43.89	5.94	34.00	-39.97	43.86	68.20	24.34	PK	Vertical
4	5871.92	45.71	5.95	34.04	-39.97	45.73	68.20	22.47	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5720MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\73
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

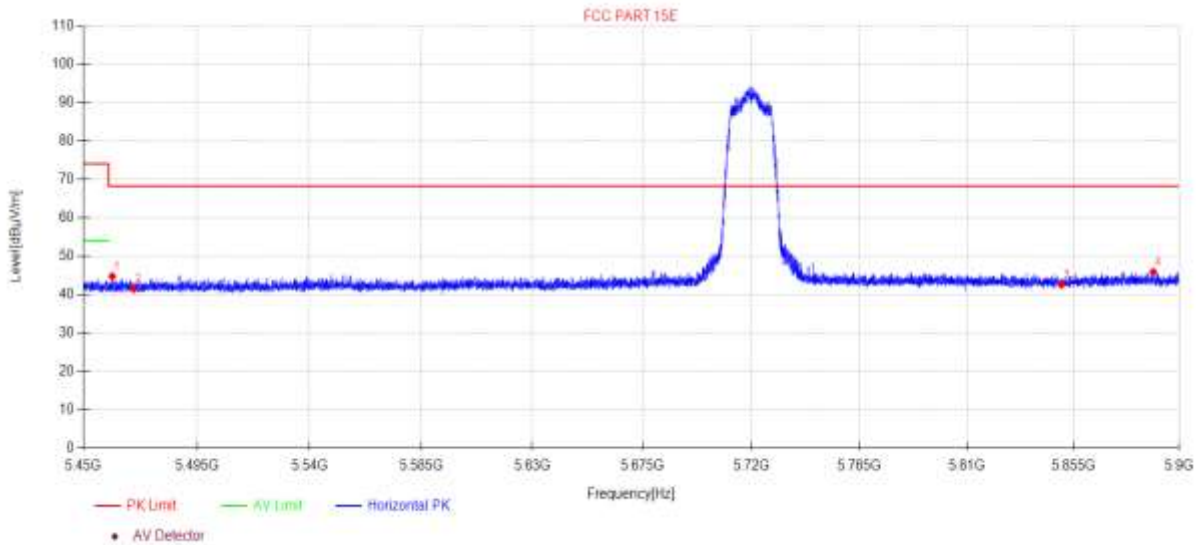

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5461.43	45.95	5.74	33.00	-40.02	44.67	68.20	23.53	PK	Horizontal
2	5470.00	42.65	5.75	33.00	-40.02	41.38	68.20	26.82	PK	Horizontal
3	5850.00	42.55	5.94	34.00	-39.97	42.52	68.20	25.68	PK	Horizontal
4	5888.89	45.74	5.95	34.08	-39.96	45.81	68.20	22.39	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5720MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\74
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

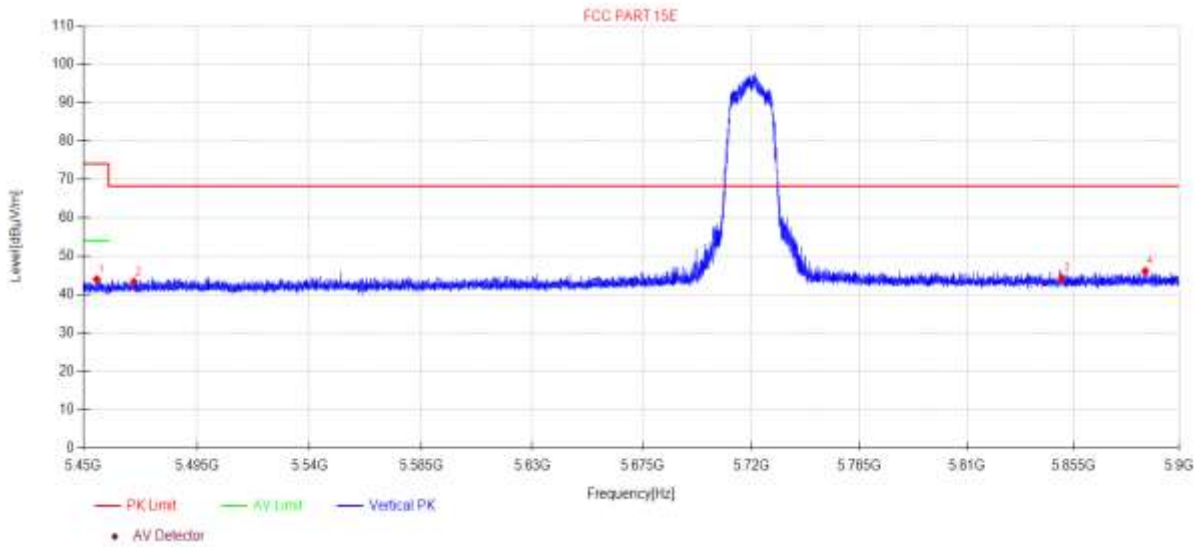

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5455.27	45.17	5.74	33.00	-40.02	43.89	74.00	30.11	PK	Vertical
2	5470.00	44.45	5.75	33.00	-40.02	43.18	68.20	25.02	PK	Vertical
3	5850.00	44.28	5.94	34.00	-39.97	44.25	68.20	23.95	PK	Vertical
4	5885.47	45.96	5.95	34.07	-39.96	46.02	68.20	22.18	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5710MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\75
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

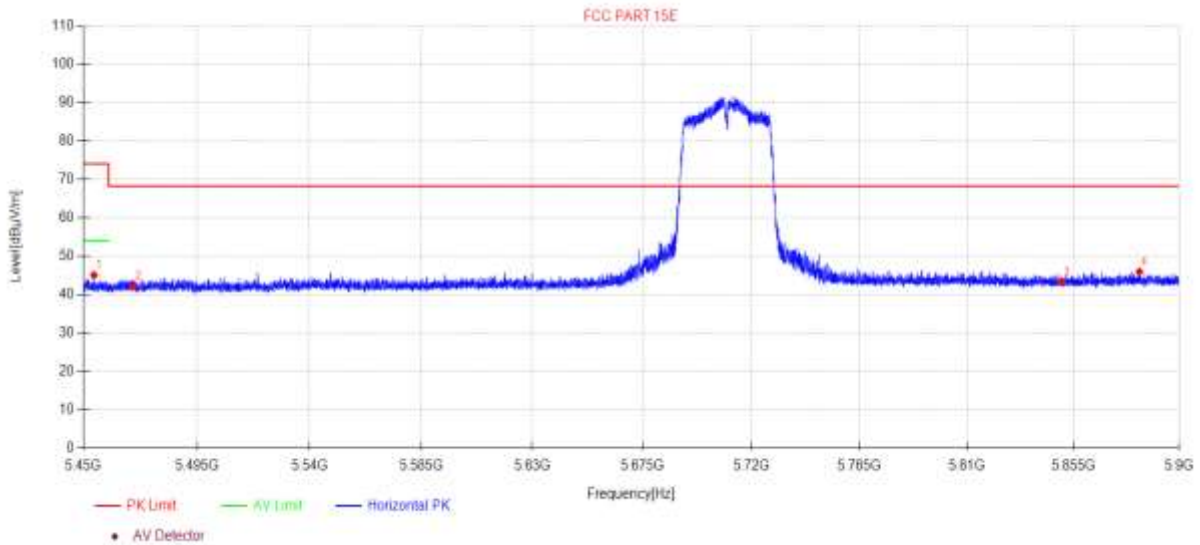

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5454.19	46.25	5.74	33.00	-40.02	44.97	74.00	29.03	PK	Horizontal
2	5470.00	43.43	5.75	33.00	-40.02	42.16	68.20	26.04	PK	Horizontal
3	5850.00	43.24	5.94	34.00	-39.97	43.21	68.20	24.99	PK	Horizontal
4	5882.99	45.83	5.95	34.07	-39.97	45.88	68.20	22.32	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5710MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\76
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

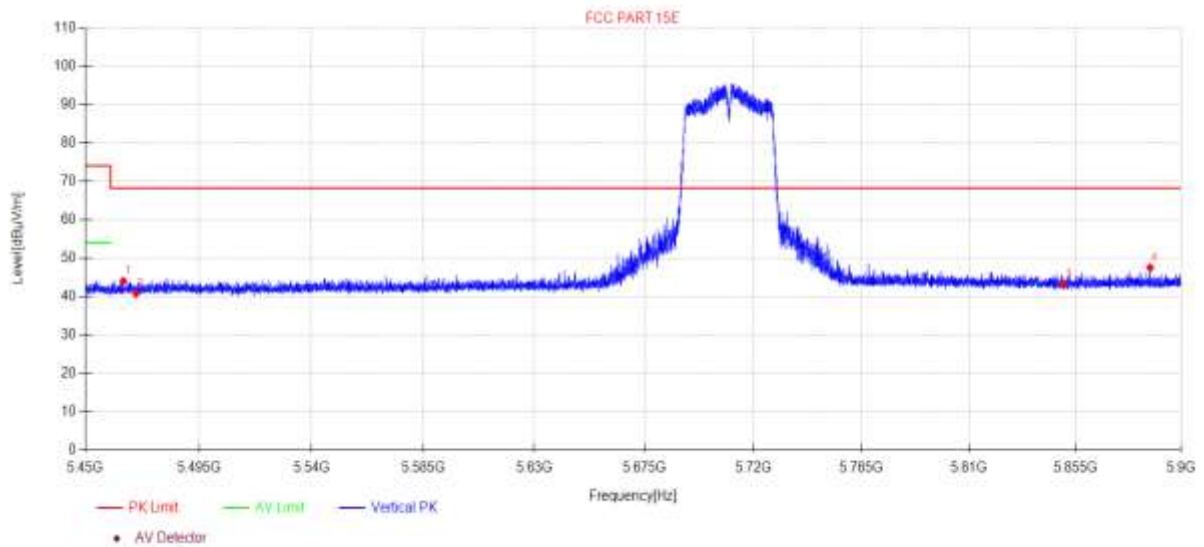

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5464.99	45.25	5.74	33.00	-40.02	43.97	68.20	24.23	PK	Vertical
2	5470.00	41.95	5.75	33.00	-40.02	40.68	68.20	27.52	PK	Vertical
3	5850.00	43.07	5.94	34.00	-39.97	43.04	68.20	25.16	PK	Vertical
4	5886.68	47.38	5.95	34.07	-39.96	47.44	68.20	20.76	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5710MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\77
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

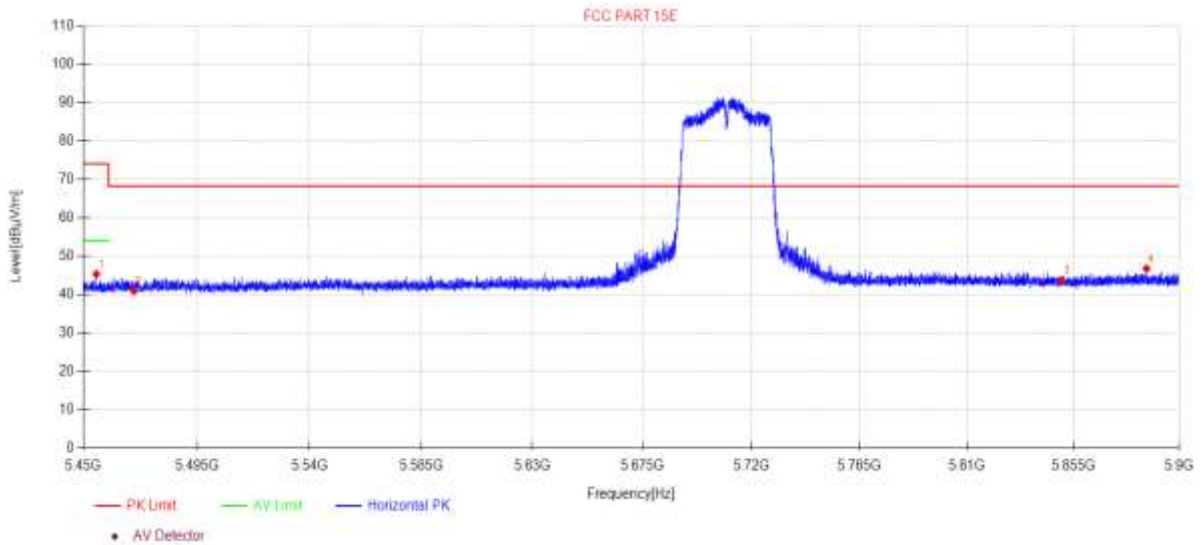

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5455.13	46.52	5.74	33.00	-40.02	45.24	74.00	28.76	PK	Horizontal
2	5470.00	42.14	5.75	33.00	-40.02	40.87	68.20	27.33	PK	Horizontal
3	5850.00	43.52	5.94	34.00	-39.97	43.49	68.20	24.71	PK	Horizontal
4	5886.01	46.61	5.95	34.07	-39.96	46.67	68.20	21.53	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5690MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\79
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

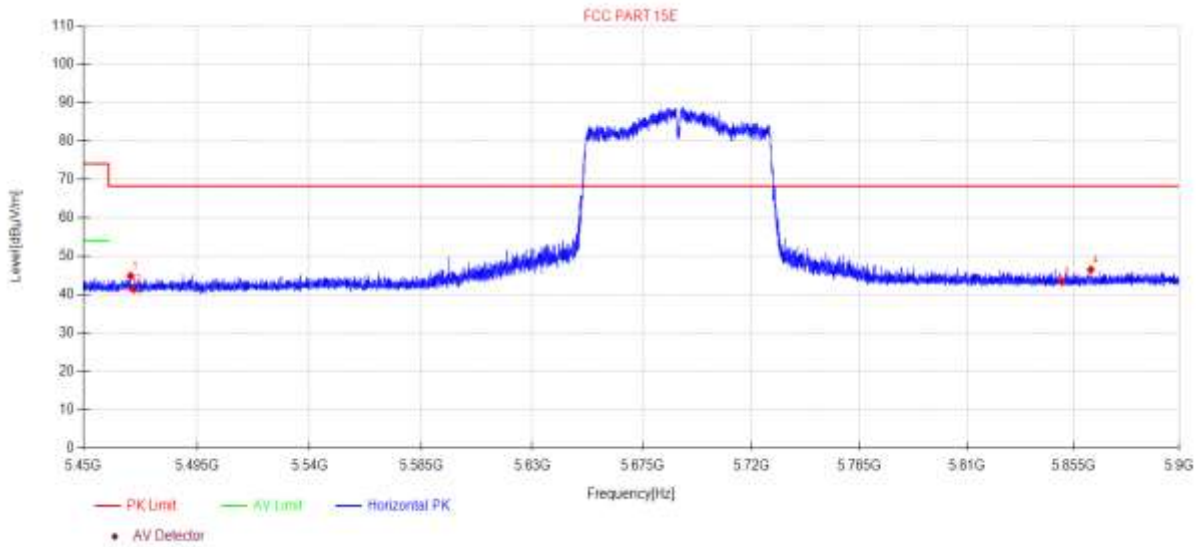

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5468.68	46.03	5.74	33.00	-40.02	44.75	68.20	23.45	PK	Horizontal
2	5470.00	42.63	5.75	33.00	-40.02	41.36	68.20	26.84	PK	Horizontal
3	5850.00	43.25	5.94	34.00	-39.97	43.22	68.20	24.98	PK	Horizontal
4	5862.34	46.43	5.94	34.02	-39.97	46.42	68.20	21.78	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5690MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5GWIFI\80
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

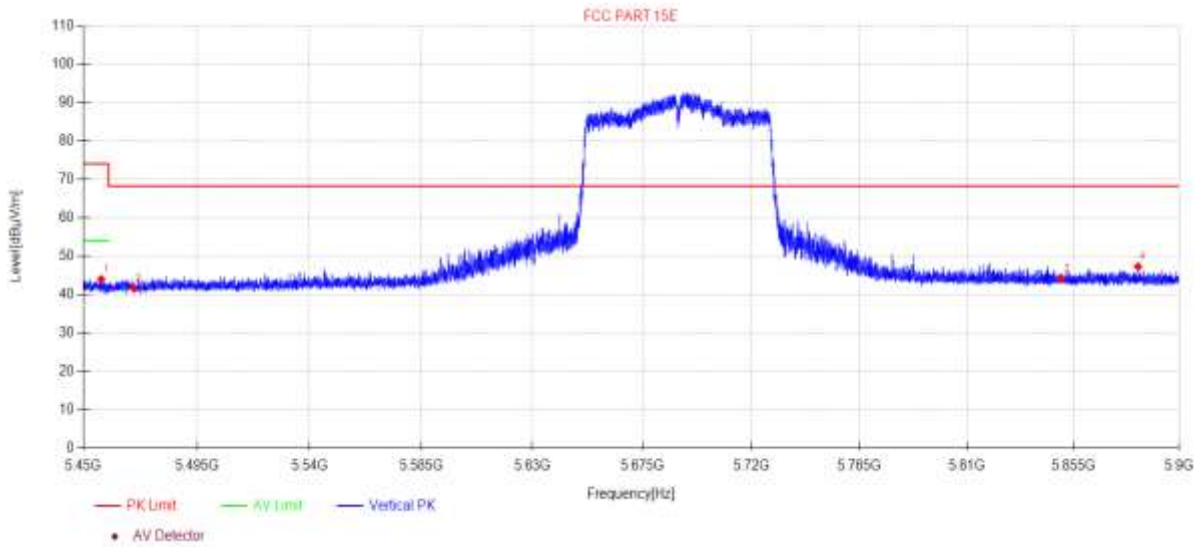

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV /m]	Limit [dBµV /m]	Margin [dB]	Detector	Polarity
1	5457.07	45.20	5.74	33.00	-40.02	43.92	74.00	30.08	PK	Vertical
2	5470.00	42.79	5.75	33.00	-40.02	41.52	68.20	26.68	PK	Vertical
3	5850.00	44.09	5.94	34.00	-39.97	44.06	68.20	24.14	PK	Vertical
4	5882.41	47.14	5.95	34.06	-39.97	47.18	68.20	21.02	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5745MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\7
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

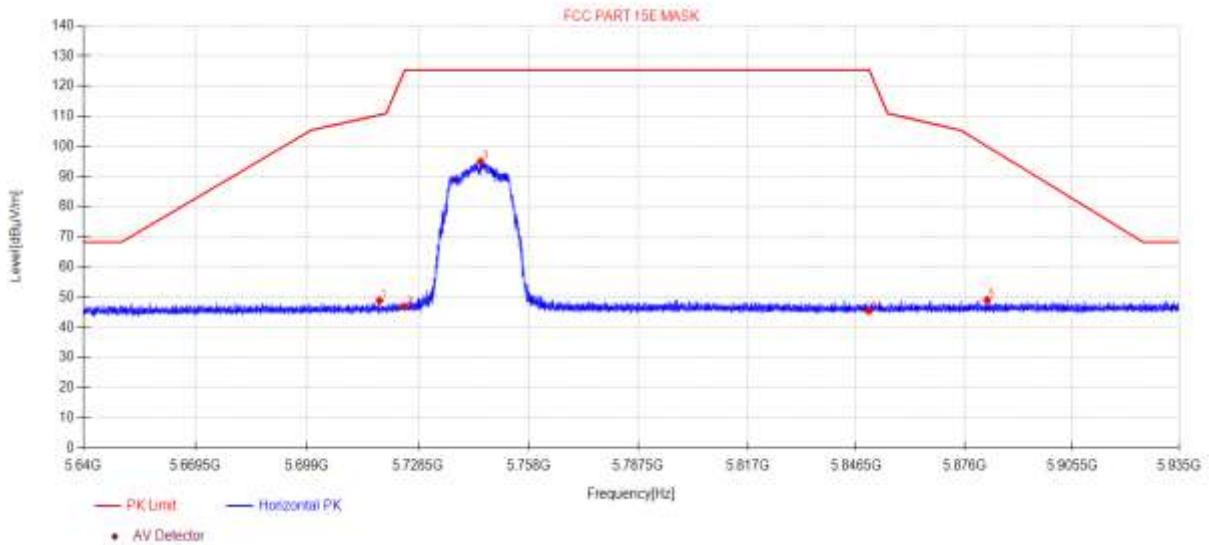

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5718.26	49.23	5.87	33.71	-39.99	48.82	110.41	61.59	PK	Horizontal
2	5725.00	47.06	5.87	33.75	-39.99	46.69	125.30	78.61	PK	Horizontal
3	5745.20	95.14	5.88	33.87	-39.98	94.91	125.30	30.39	PK	Horizontal
4	5850.00	45.43	5.94	34.00	-39.97	45.40	125.27	79.87	PK	Horizontal
5	5882.17	48.97	5.95	34.06	-39.97	49.01	99.98	50.97	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5745MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\8
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

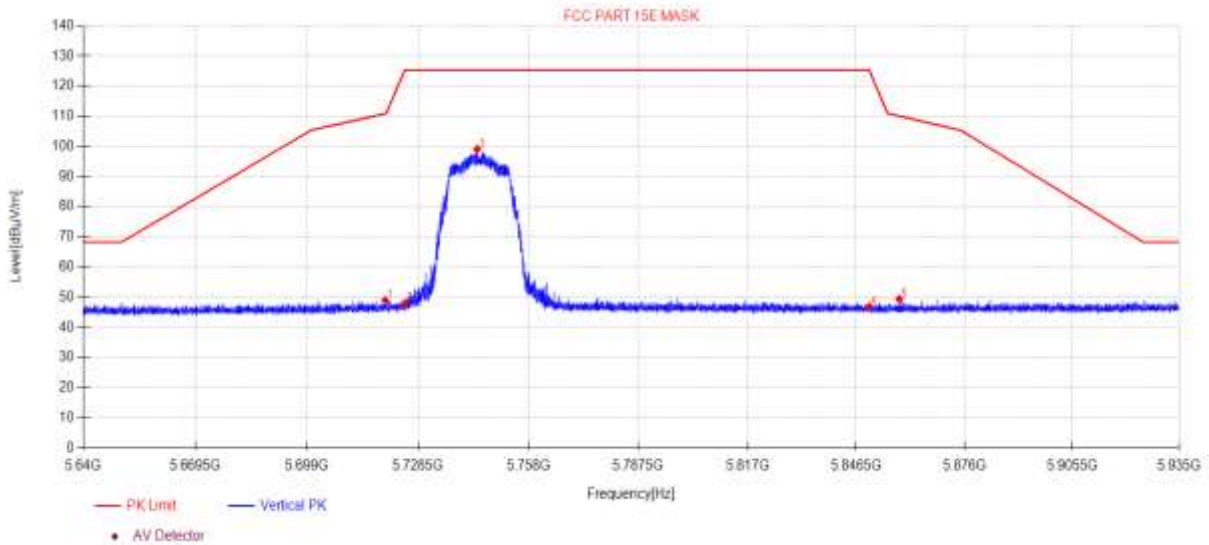

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5719.77	49.28	5.87	33.72	-39.99	48.88	110.84	61.96	PK	Vertical
2	5725.00	48.23	5.87	33.75	-39.99	47.86	125.30	77.44	PK	Vertical
3	5744.28	99.23	5.88	33.87	-39.98	99.00	125.30	26.30	PK	Vertical
4	5850.00	46.75	5.94	34.00	-39.97	46.72	125.27	78.55	PK	Vertical
5	5858.18	49.26	5.94	34.02	-39.97	49.25	110.01	60.76	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5785MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\9
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

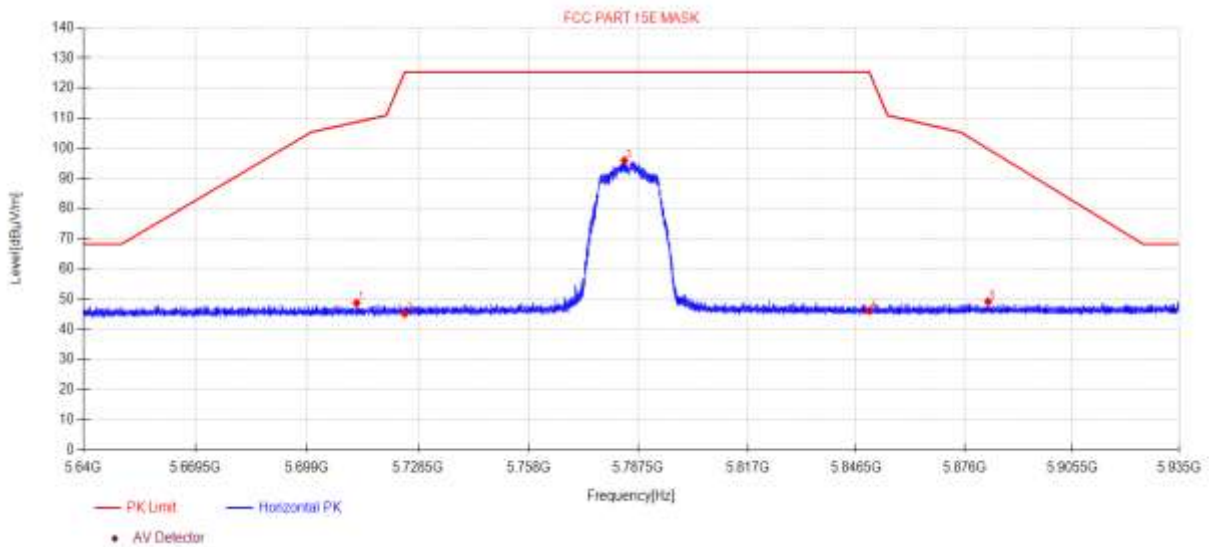

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5712.16	49.14	5.87	33.67	-39.99	48.69	108.70	60.01	PK	Horizontal
2	5725.00	45.55	5.87	33.75	-39.99	45.18	125.30	80.12	PK	Horizontal
3	5783.75	95.89	5.90	34.10	-39.98	95.91	125.30	29.39	PK	Horizontal
4	5850.00	46.23	5.94	34.00	-39.97	46.20	125.27	79.07	PK	Horizontal
5	5882.43	49.08	5.95	34.06	-39.97	49.12	99.79	50.67	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5785MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\10
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

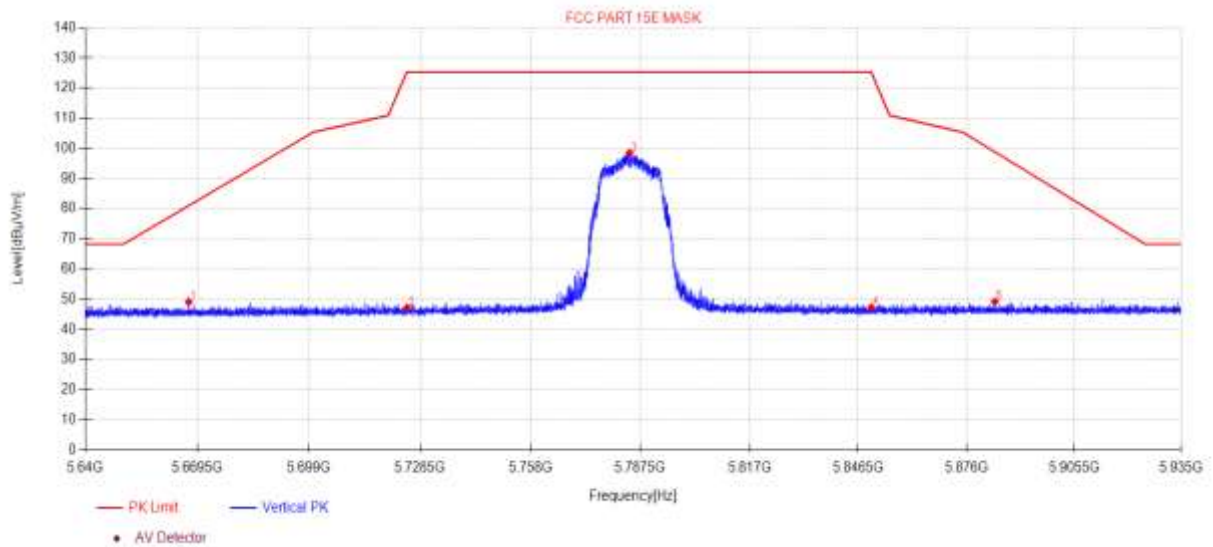

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5667.20	49.71	5.84	33.47	-39.99	49.03	80.96	31.93	PK	Vertical
2	5725.00	47.39	5.87	33.75	-39.99	47.02	125.30	78.28	PK	Vertical
3	5784.61	98.38	5.90	34.11	-39.98	98.41	125.30	26.89	PK	Vertical
4	5850.00	47.25	5.94	34.00	-39.97	47.22	125.27	78.05	PK	Vertical
5	5883.76	49.10	5.95	34.07	-39.97	49.15	98.80	49.65	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5825MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\11
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

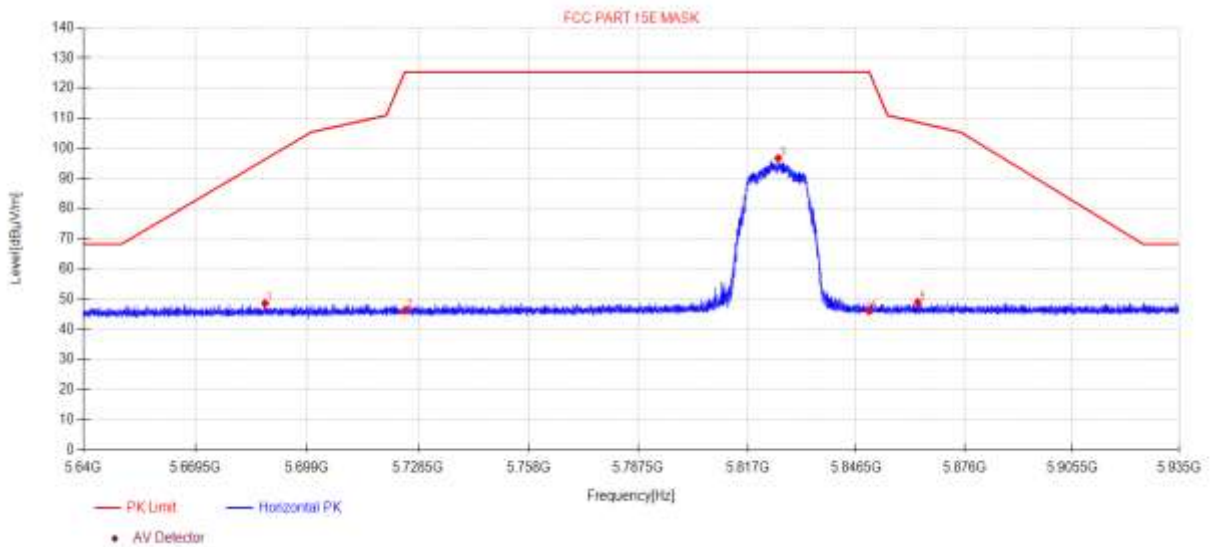

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5687.88	49.15	5.85	33.55	-39.99	48.56	96.31	47.75	PK	Horizontal
2	5725.00	46.55	5.87	33.75	-39.99	46.18	125.30	79.12	PK	Horizontal
3	5825.26	96.62	5.92	34.10	-39.97	96.67	125.30	28.63	PK	Horizontal
4	5850.00	46.13	5.94	34.00	-39.97	46.10	125.27	79.17	PK	Horizontal
5	5863.23	48.87	5.94	34.03	-39.97	48.87	108.60	59.73	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11A TX 5825MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\12
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

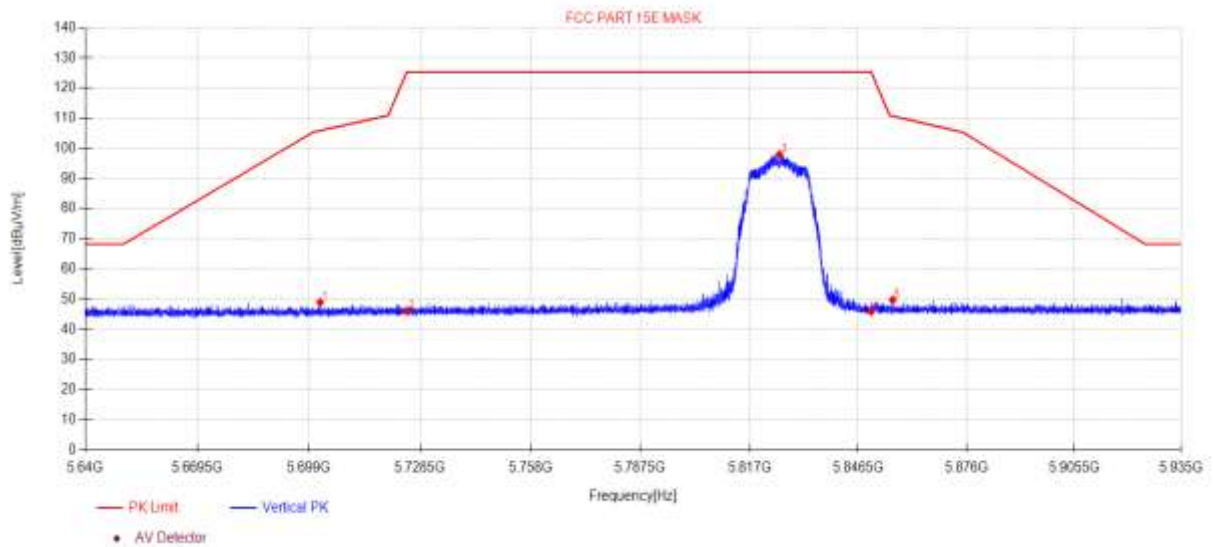

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5701.95	49.41	5.86	33.61	-39.99	48.89	105.85	56.96	PK	Vertical
2	5725.00	46.33	5.87	33.75	-39.99	45.96	125.30	79.34	PK	Vertical
3	5825.05	97.88	5.92	34.10	-39.97	97.93	125.30	27.37	PK	Vertical
4	5850.00	45.85	5.94	34.00	-39.97	45.82	125.27	79.45	PK	Vertical
5	5855.85	49.68	5.94	34.01	-39.97	49.66	110.66	61.00	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5745MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\13
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

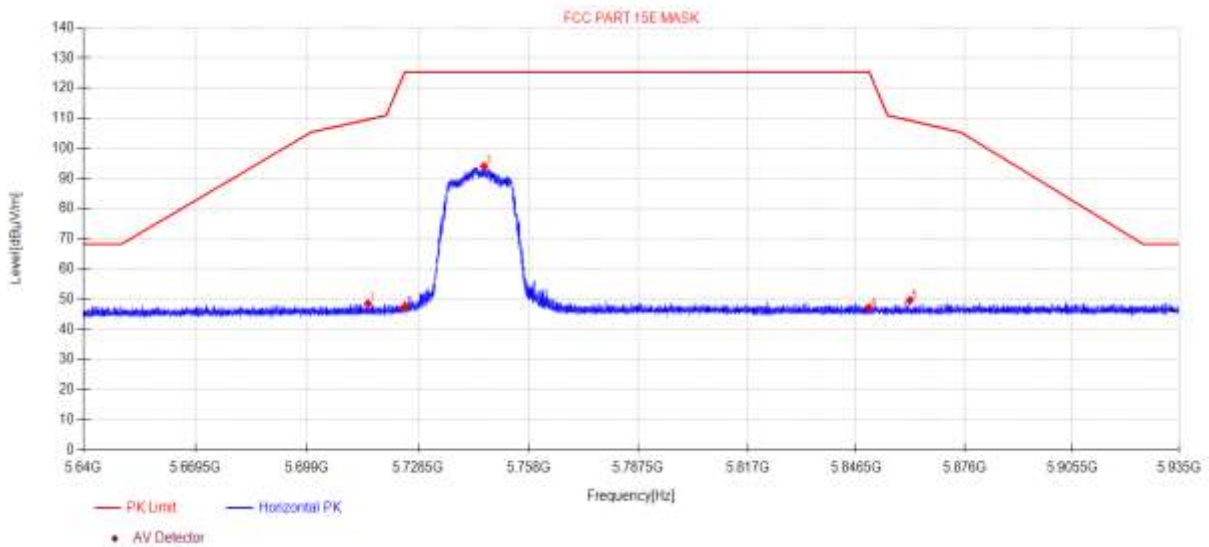

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.17	48.91	5.87	33.69	-39.99	48.48	109.55	61.07	PK	Horizontal
2	5725.00	47.67	5.87	33.75	-39.99	47.30	125.30	78.00	PK	Horizontal
3	5746.11	94.24	5.88	33.88	-39.98	94.02	125.30	31.28	PK	Horizontal
4	5850.00	47.08	5.94	34.00	-39.97	47.05	125.27	78.22	PK	Horizontal
5	5861.07	49.56	5.94	34.02	-39.97	49.55	109.20	59.65	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5745MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\14
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

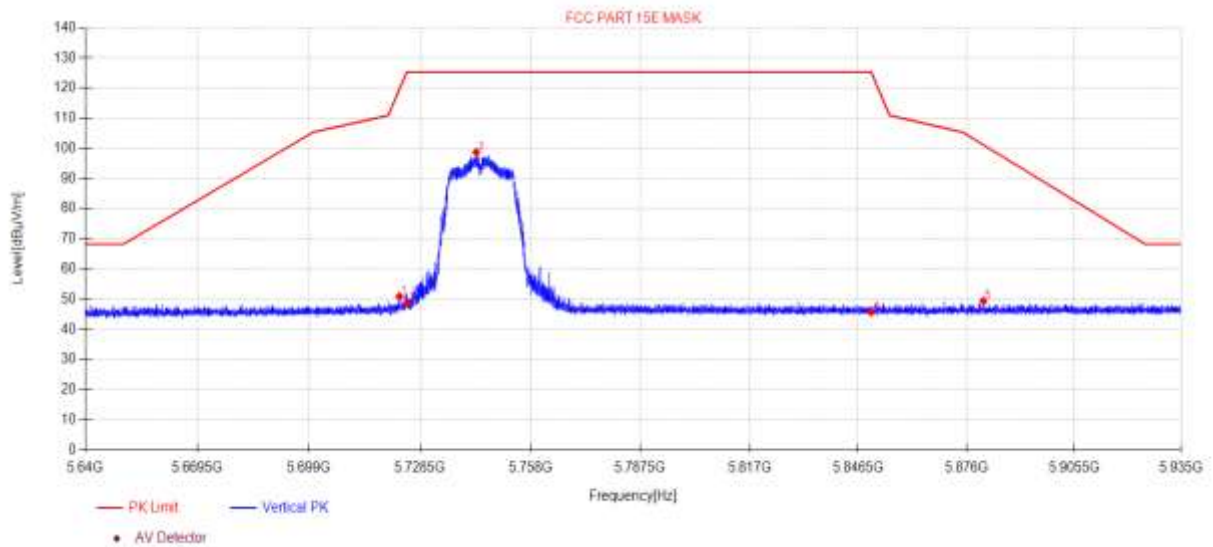

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.01	51.24	5.87	33.74	-39.99	50.86	119.58	68.72	PK	Vertical
2	5725.00	48.97	5.87	33.75	-39.99	48.60	125.30	76.70	PK	Vertical
3	5743.49	98.92	5.88	33.86	-39.98	98.68	125.30	26.62	PK	Vertical
4	5850.00	45.68	5.94	34.00	-39.97	45.65	125.27	79.62	PK	Vertical
5	5880.63	49.29	5.95	34.06	-39.97	49.33	101.12	51.79	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5785MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\15
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

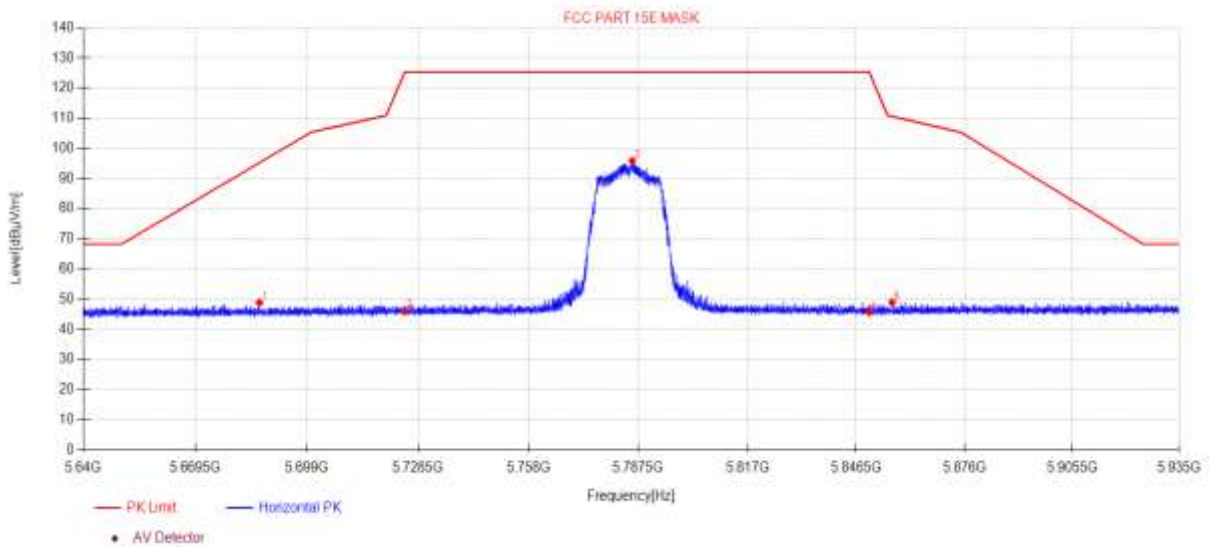

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5686.40	49.37	5.85	33.55	-39.99	48.78	95.21	46.43	PK	Horizontal
2	5725.00	46.42	5.87	33.75	-39.99	46.05	125.30	79.25	PK	Horizontal
3	5785.85	95.74	5.90	34.12	-39.98	95.78	125.30	29.52	PK	Horizontal
4	5850.00	45.67	5.94	34.00	-39.97	45.64	125.27	79.63	PK	Horizontal
5	5856.24	48.87	5.94	34.01	-39.97	48.85	110.55	61.70	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5785MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\16
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

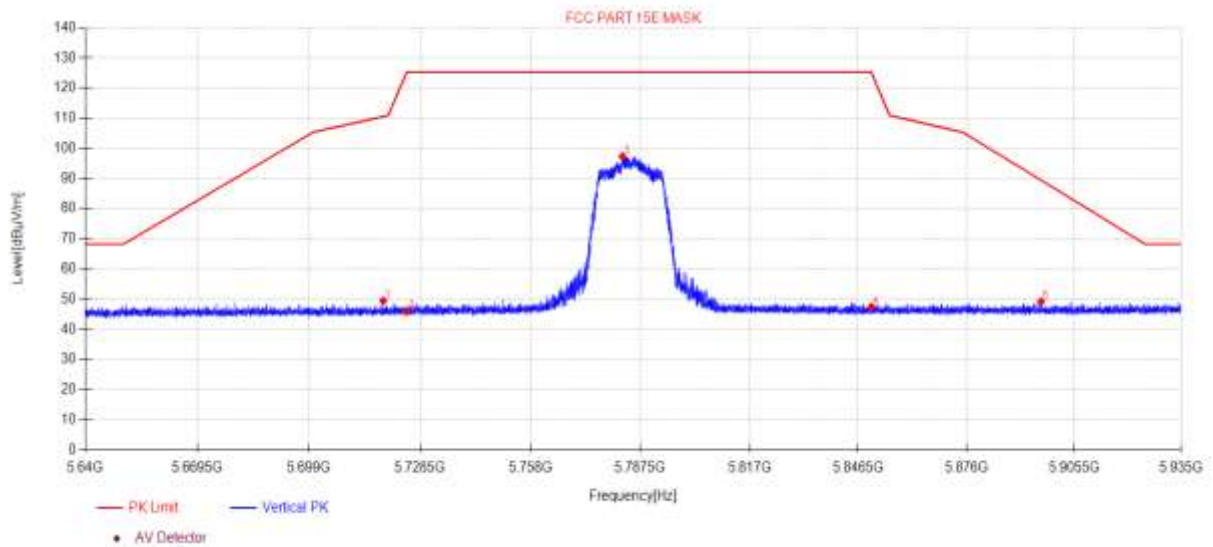

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.71	49.82	5.87	33.71	-39.99	49.41	110.54	61.13	PK	Vertical
2	5725.00	46.31	5.87	33.75	-39.99	45.94	125.30	79.36	PK	Vertical
3	5782.69	97.22	5.90	34.10	-39.98	97.24	125.30	28.06	PK	Vertical
4	5850.00	47.44	5.94	34.00	-39.97	47.41	125.27	77.86	PK	Vertical
5	5896.38	49.05	5.96	34.09	-39.96	49.14	89.43	40.29	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5825MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\17
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

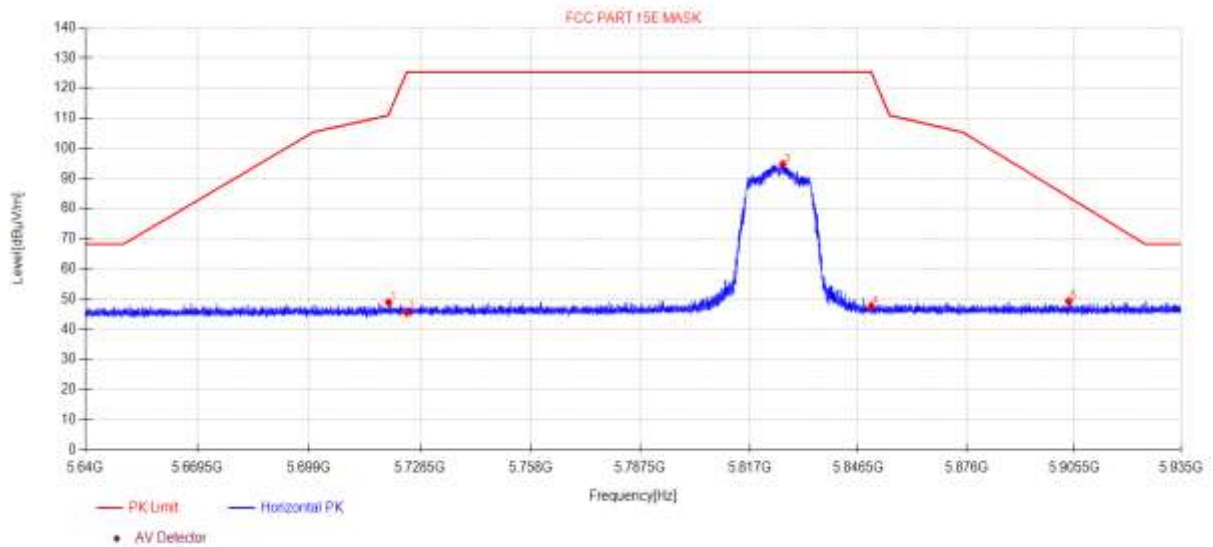

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.12	49.25	5.87	33.72	-39.99	48.85	111.25	62.40	PK	Horizontal
2	5725.00	45.88	5.87	33.75	-39.99	45.51	125.30	79.79	PK	Horizontal
3	5826.00	94.66	5.92	34.10	-39.97	94.71	125.30	30.59	PK	Horizontal
4	5850.00	47.72	5.94	34.00	-39.97	47.69	125.27	77.58	PK	Horizontal
5	5904.00	49.10	5.96	34.11	-39.96	49.21	83.79	34.58	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N20 TX 5825MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\18
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

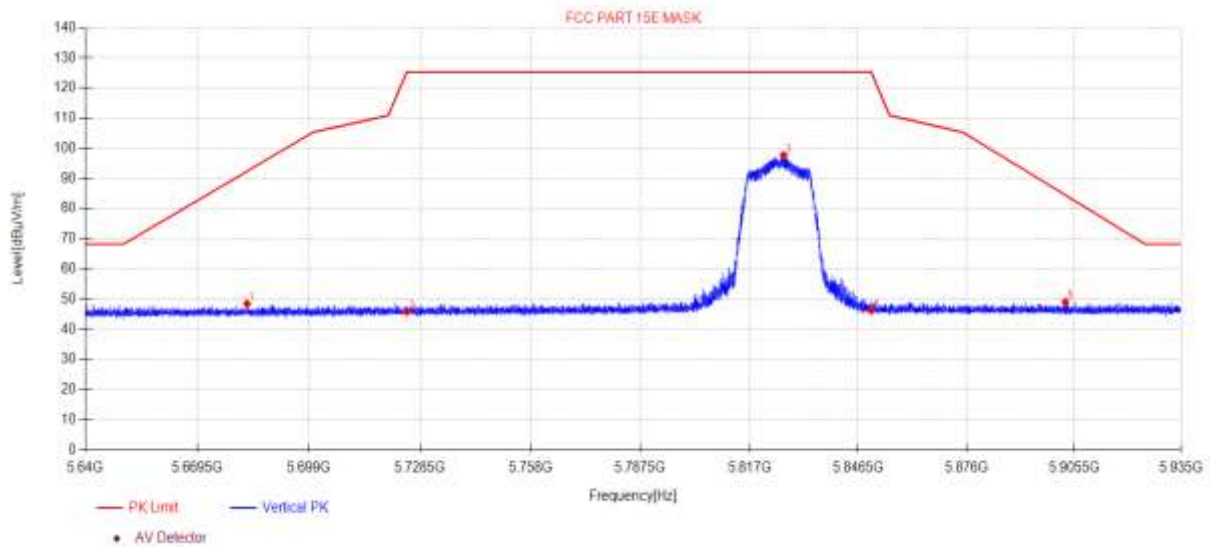

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5682.63	49.02	5.85	33.53	-39.99	48.41	92.41	44.00	PK	Vertical
2	5725.00	46.14	5.87	33.75	-39.99	45.77	125.30	79.53	PK	Vertical
3	5826.20	97.62	5.92	34.10	-39.97	97.67	125.30	27.63	PK	Vertical
4	5850.00	46.21	5.94	34.00	-39.97	46.18	125.27	79.09	PK	Vertical
5	5903.11	48.89	5.96	34.11	-39.96	49.00	84.44	35.44	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5755MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\19
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

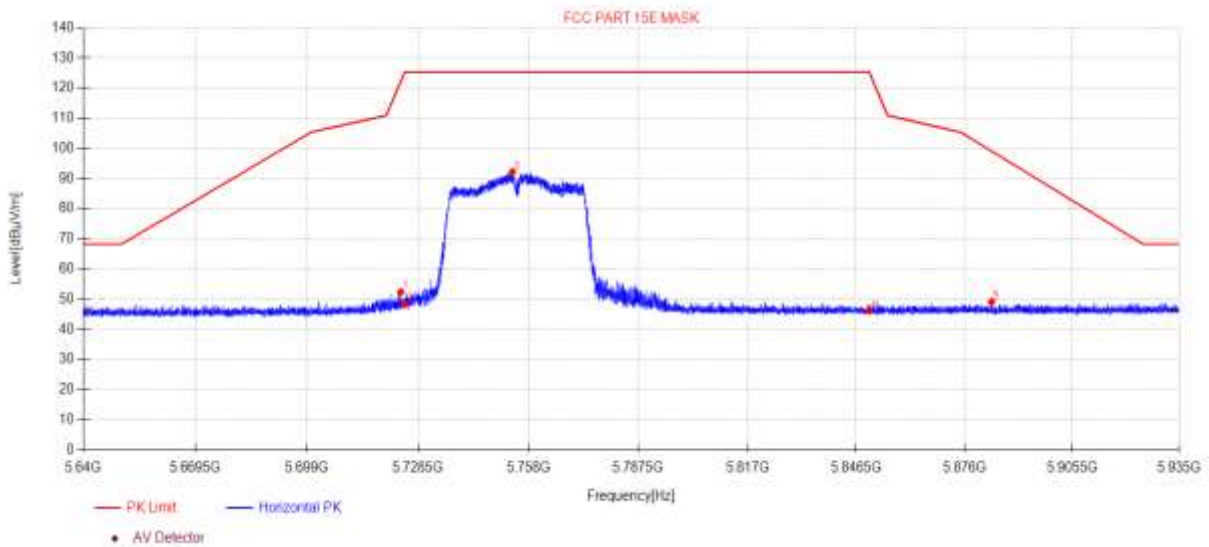

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5723.90	52.67	5.87	33.74	-39.99	52.29	122.13	69.84	PK	Horizontal
2	5725.00	48.62	5.87	33.75	-39.99	48.25	125.30	77.05	PK	Horizontal
3	5753.66	92.22	5.89	33.92	-39.98	92.05	125.30	33.25	PK	Horizontal
4	5850.00	46.20	5.94	34.00	-39.97	46.17	125.27	79.10	PK	Horizontal
5	5883.38	48.94	5.95	34.07	-39.97	48.99	99.09	50.10	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5755MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\20
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

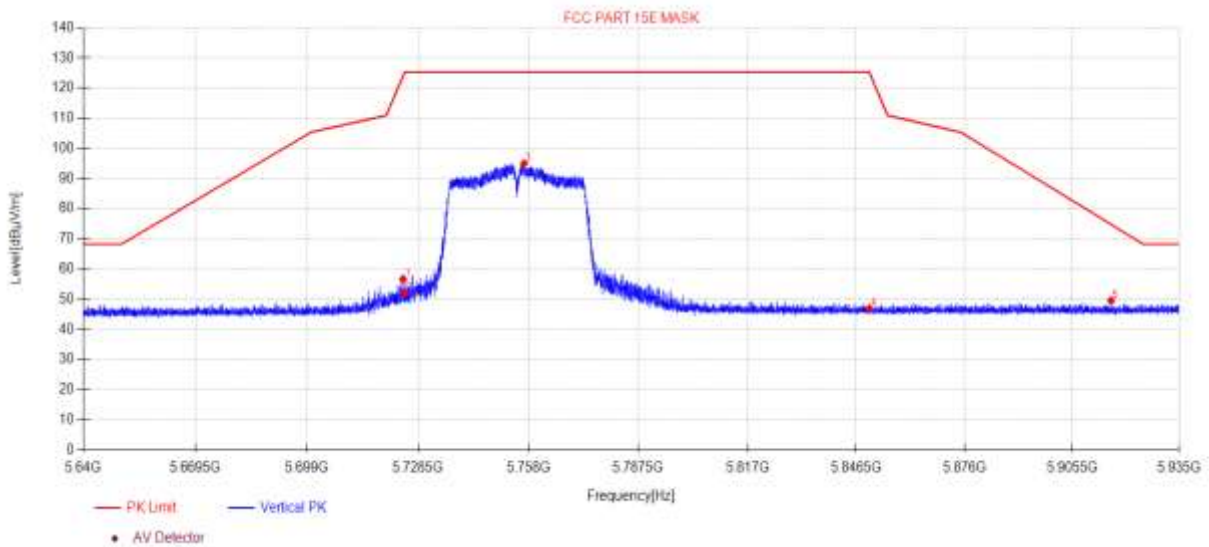

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.52	57.03	5.87	33.75	-39.99	56.66	123.91	67.25	PK	Vertical
2	5725.00	52.33	5.87	33.75	-39.99	51.96	125.30	73.34	PK	Vertical
3	5756.82	95.06	5.89	33.94	-39.98	94.91	125.30	30.39	PK	Vertical
4	5850.00	46.84	5.94	34.00	-39.97	46.81	125.27	78.46	PK	Vertical
5	5916.18	49.31	5.97	34.13	-39.96	49.45	74.75	25.30	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5795MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\21
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

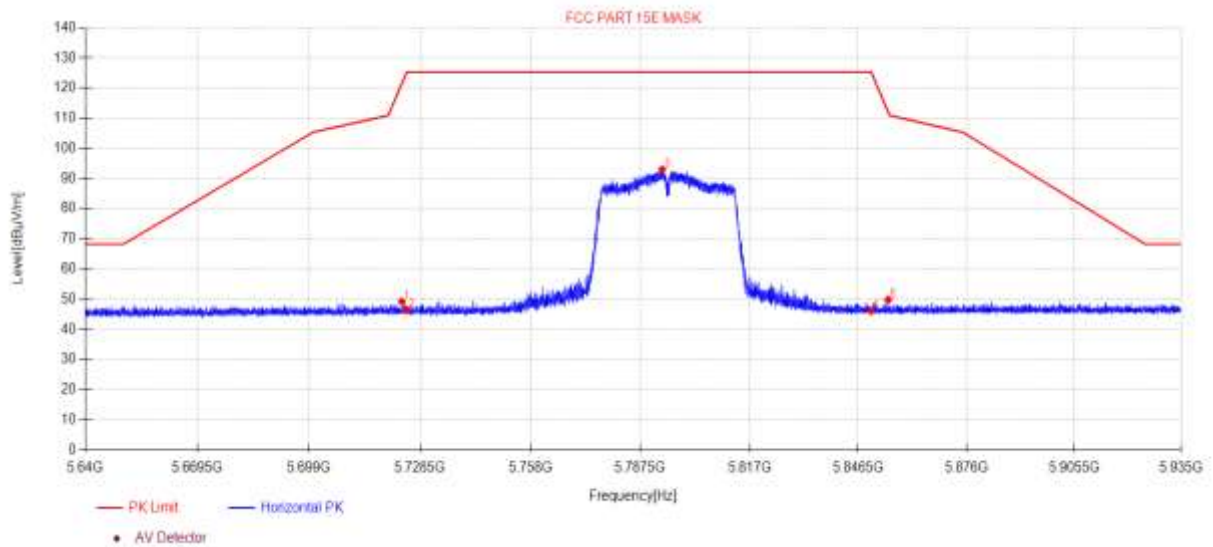

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.66	49.56	5.87	33.74	-39.99	49.18	121.45	72.27	PK	Horizontal
2	5725.00	46.70	5.87	33.75	-39.99	46.33	125.30	78.97	PK	Horizontal
3	5793.40	92.86	5.91	34.16	-39.98	92.95	125.30	32.35	PK	Horizontal
4	5850.00	46.06	5.94	34.00	-39.97	46.03	125.27	79.24	PK	Horizontal
5	5854.61	49.73	5.94	34.01	-39.97	49.71	112.02	62.31	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11N40 TX 5795MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\22
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

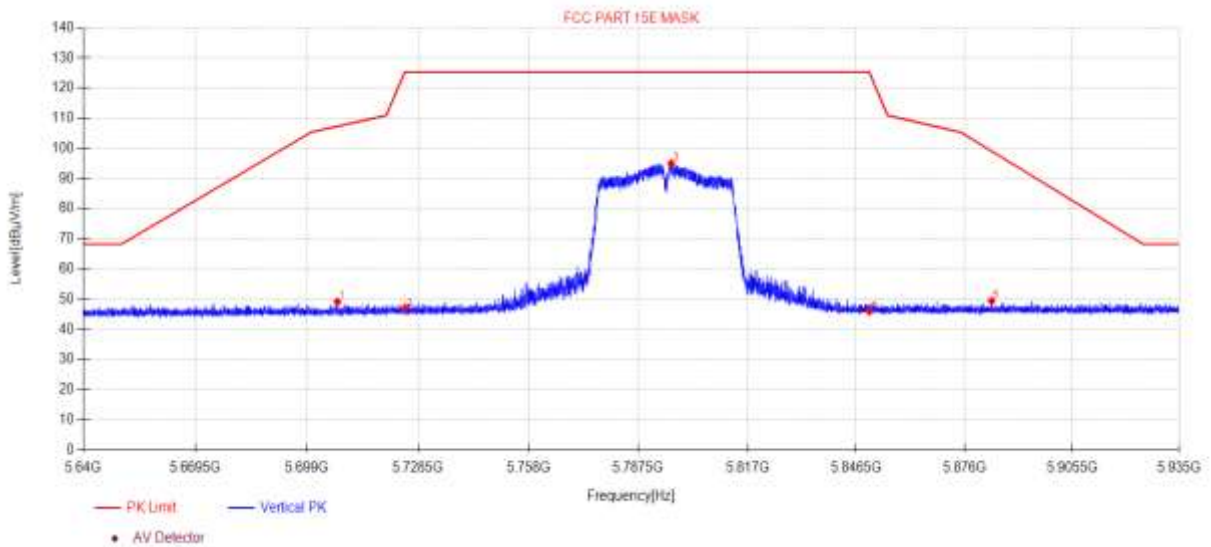

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5707.08	49.57	5.86	33.64	-39.99	49.08	107.28	58.20	PK	Vertical
2	5725.00	47.23	5.87	33.75	-39.99	46.86	125.30	78.44	PK	Vertical
3	5796.35	94.84	5.91	34.18	-39.98	94.95	125.30	30.35	PK	Vertical
4	5850.00	46.00	5.94	34.00	-39.97	45.97	125.27	79.30	PK	Vertical
5	5883.38	49.26	5.95	34.07	-39.97	49.31	99.09	49.78	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5745MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\23
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

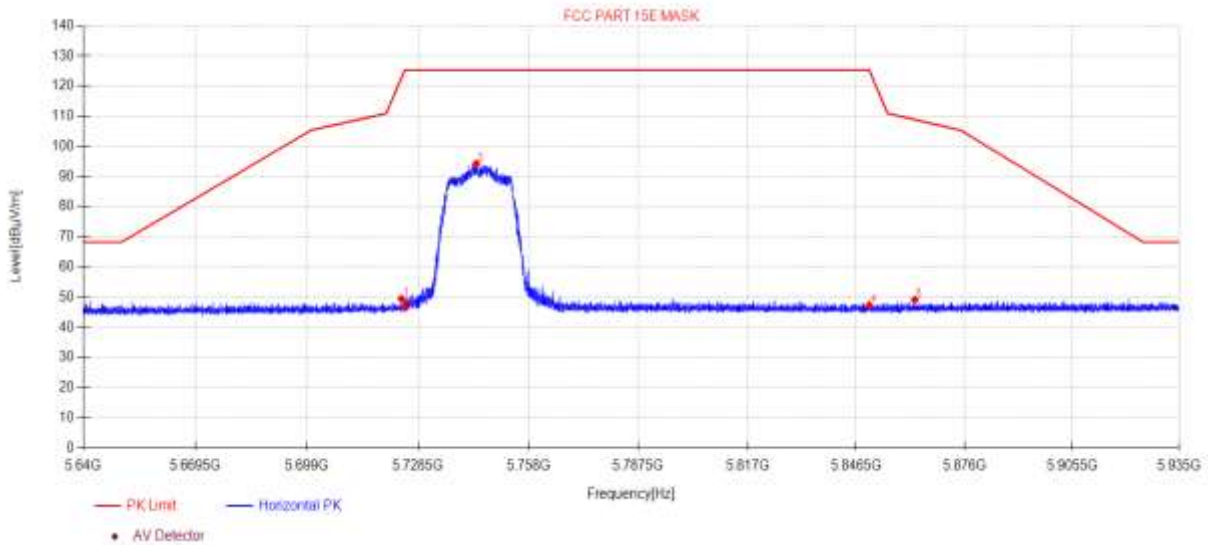

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5724.08	49.78	5.87	33.74	-39.99	49.40	122.64	73.24	PK	Horizontal
2	5725.00	46.90	5.87	33.75	-39.99	46.53	125.30	78.77	PK	Horizontal
3	5744.05	94.45	5.88	33.86	-39.98	94.21	125.30	31.09	PK	Horizontal
4	5850.00	47.25	5.94	34.00	-39.97	47.22	125.27	78.05	PK	Horizontal
5	5862.40	49.07	5.94	34.02	-39.97	49.06	108.83	59.77	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5745MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\24
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

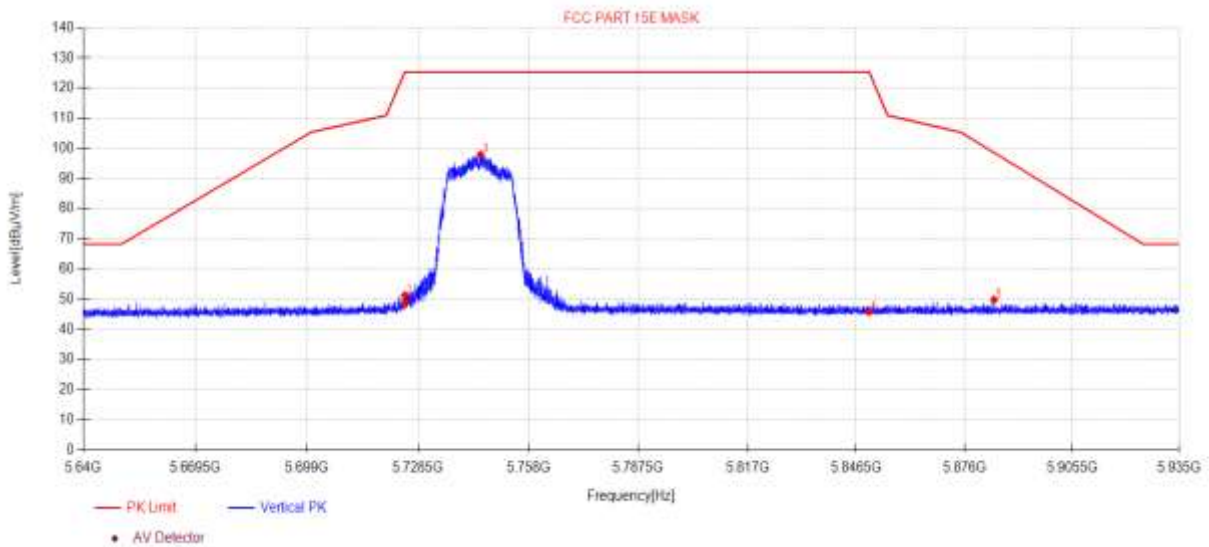

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.96	51.59	5.87	33.75	-39.99	51.22	125.18	73.96	PK	Vertical
2	5725.00	48.90	5.87	33.75	-39.99	48.53	125.30	76.77	PK	Vertical
3	5745.20	98.06	5.88	33.87	-39.98	97.83	125.30	27.47	PK	Vertical
4	5850.00	45.77	5.94	34.00	-39.97	45.74	125.27	79.53	PK	Vertical
5	5884.08	49.69	5.95	34.07	-39.97	49.74	98.56	48.82	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5785MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\25
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

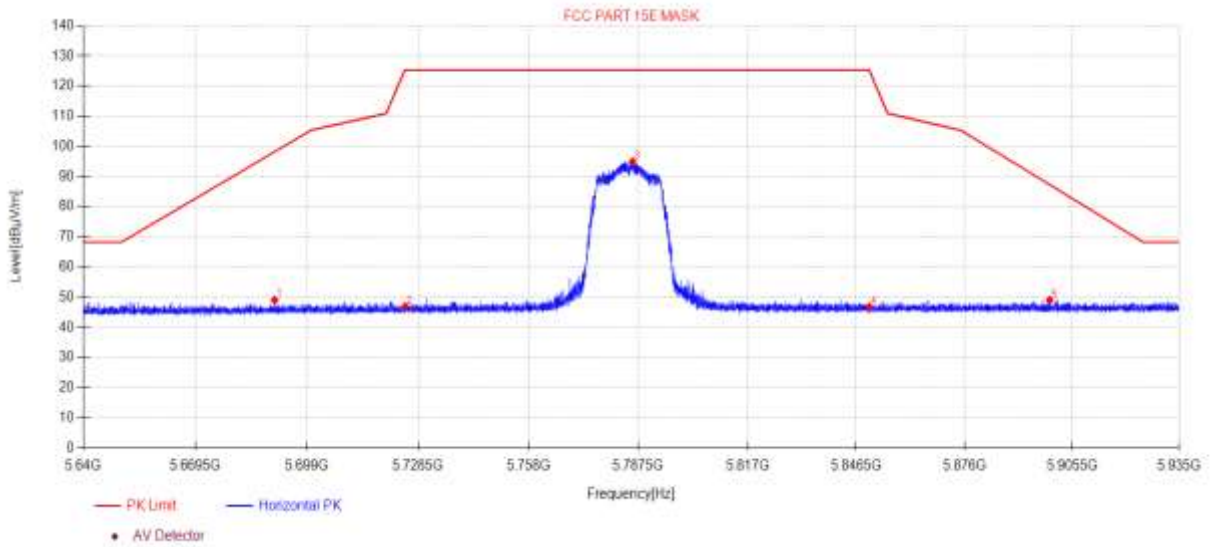

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5690.42	49.55	5.86	33.56	-39.99	48.98	98.19	49.21	PK	Horizontal
2	5725.00	47.13	5.87	33.75	-39.99	46.76	125.30	78.54	PK	Horizontal
3	5785.97	94.84	5.90	34.12	-39.98	94.88	125.30	30.42	PK	Horizontal
4	5850.00	46.73	5.94	34.00	-39.97	46.70	125.27	78.57	PK	Horizontal
5	5899.33	48.85	5.96	34.10	-39.96	48.95	87.24	38.29	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5785MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\26
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

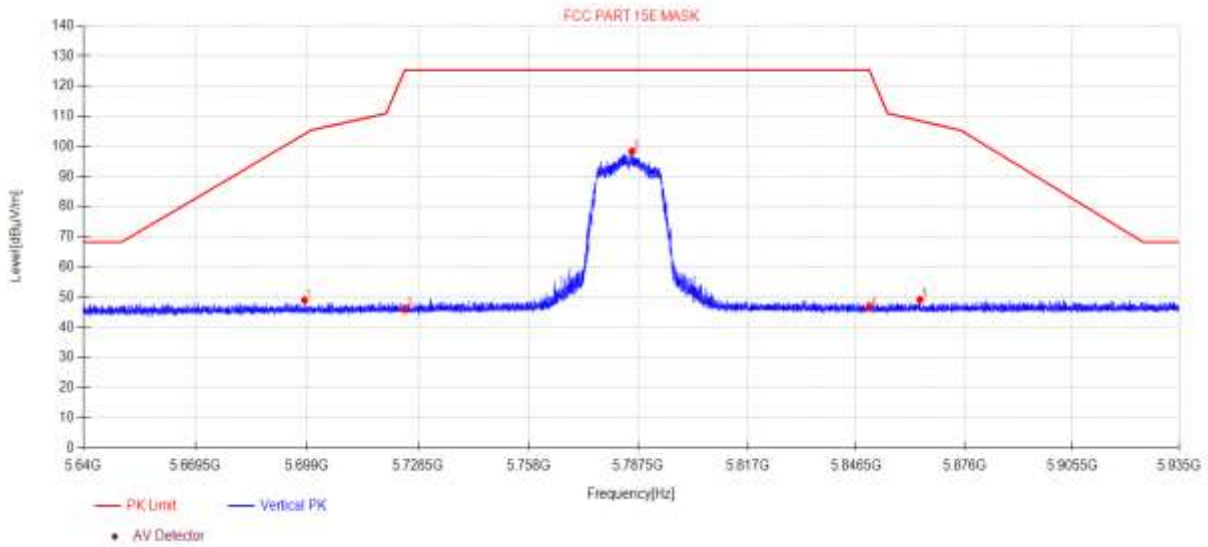

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5698.35	49.48	5.86	33.59	-39.99	48.94	104.08	55.14	PK	Vertical
2	5725.00	46.46	5.87	33.75	-39.99	46.09	125.30	79.21	PK	Vertical
3	5785.82	98.28	5.90	34.11	-39.98	98.31	125.30	26.99	PK	Vertical
4	5850.00	46.55	5.94	34.00	-39.97	46.52	125.27	78.75	PK	Vertical
5	5863.82	49.06	5.94	34.03	-39.97	49.06	108.43	59.37	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC20 TX 5825MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\28
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

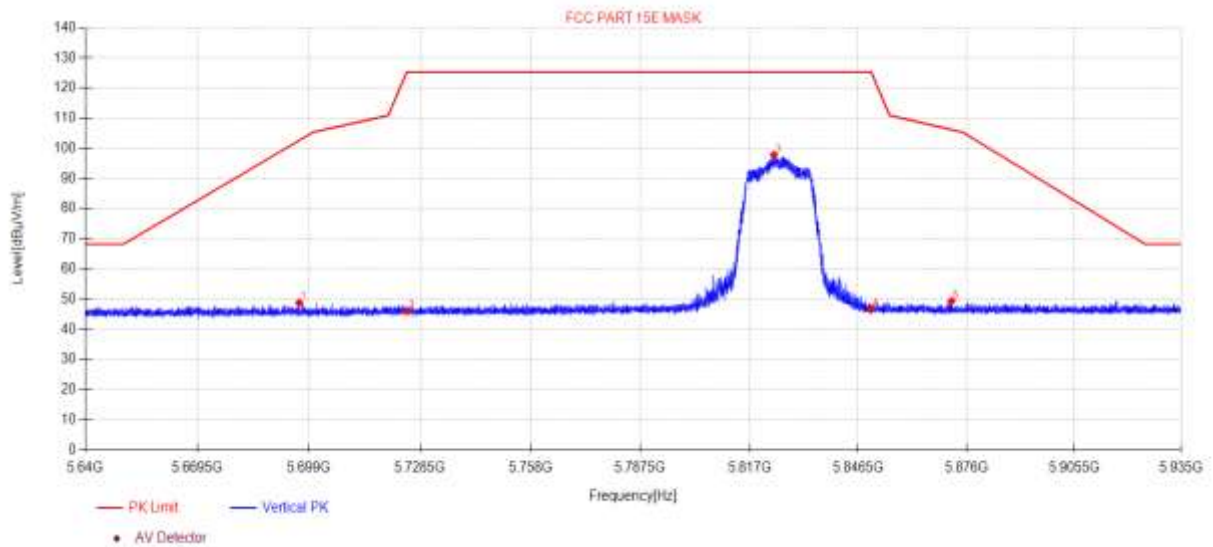

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5696.40	49.28	5.86	33.59	-39.99	48.74	102.63	53.89	PK	Vertical
2	5725.00	46.28	5.87	33.75	-39.99	45.91	125.30	79.39	PK	Vertical
3	5823.58	97.74	5.92	34.11	-39.97	97.80	125.30	27.50	PK	Vertical
4	5850.00	46.64	5.94	34.00	-39.97	46.61	125.27	78.66	PK	Vertical
5	5871.84	49.22	5.95	34.04	-39.97	49.24	106.18	56.94	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5755MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\29
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

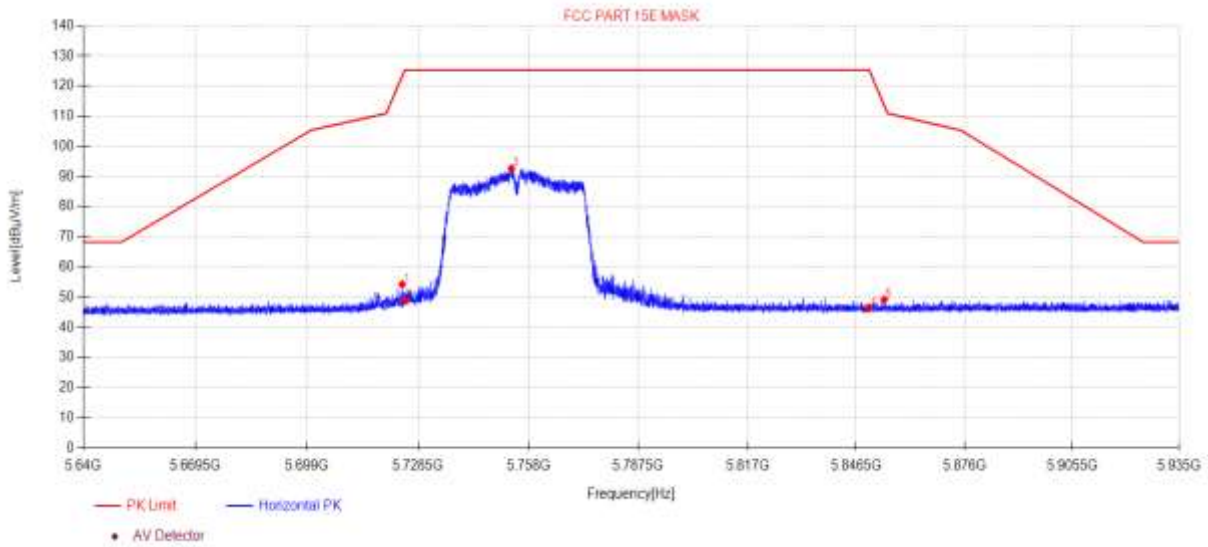

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5724.28	54.57	5.87	33.75	-39.99	54.20	123.23	69.03	PK	Horizontal
2	5725.00	49.12	5.87	33.75	-39.99	48.75	125.30	76.55	PK	Horizontal
3	5753.43	92.81	5.89	33.92	-39.98	92.64	125.30	32.66	PK	Horizontal
4	5850.00	46.38	5.94	34.00	-39.97	46.35	125.27	78.92	PK	Horizontal
5	5854.08	49.14	5.94	34.01	-39.97	49.12	113.55	64.43	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5755MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\30
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

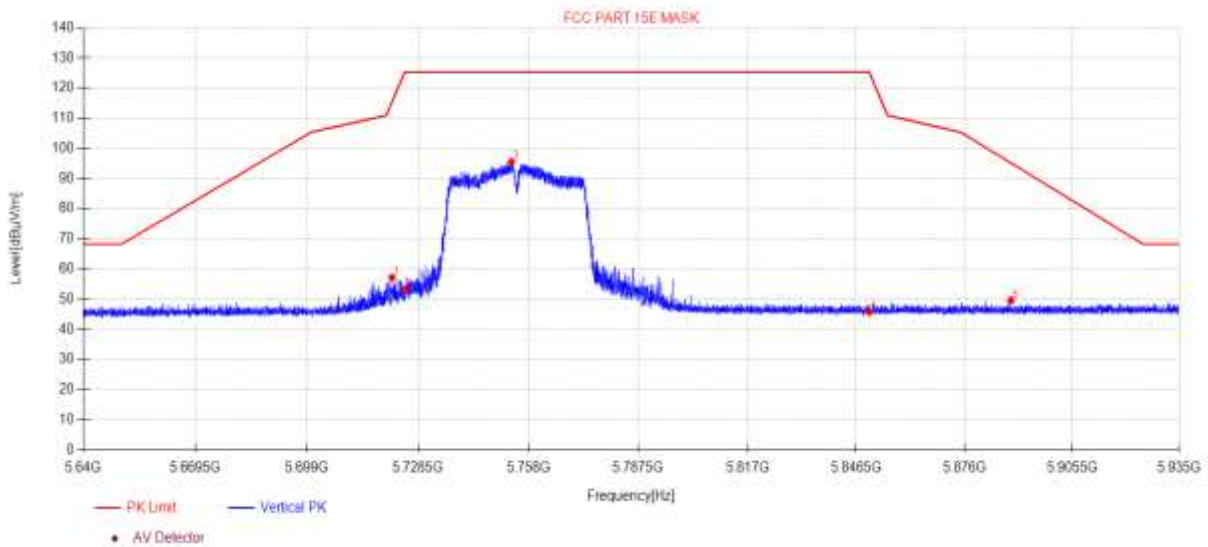

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5721.57	57.54	5.87	33.73	-39.99	57.15	115.41	58.26	PK	Vertical
2	5725.00	53.46	5.87	33.75	-39.99	53.09	125.30	72.21	PK	Vertical
3	5753.40	95.63	5.89	33.92	-39.98	95.46	125.30	29.84	PK	Vertical
4	5850.00	45.78	5.94	34.00	-39.97	45.75	125.27	79.52	PK	Vertical
5	5888.69	49.46	5.95	34.08	-39.96	49.53	95.15	45.62	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5795MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\31
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

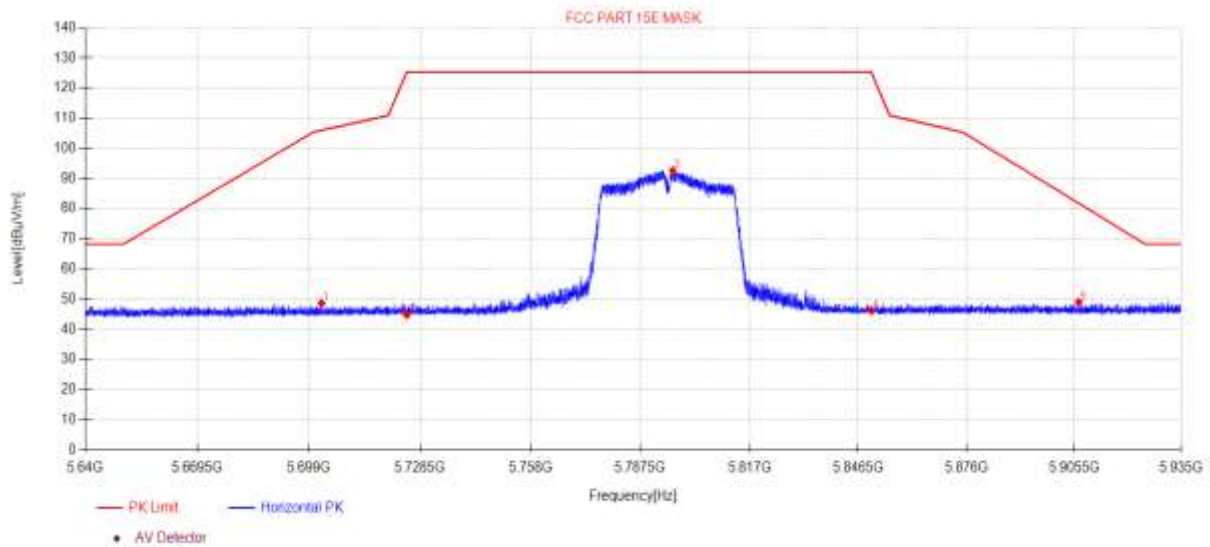

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5702.30	49.10	5.86	33.61	-39.99	48.58	105.95	57.37	PK	Horizontal
2	5725.00	45.10	5.87	33.75	-39.99	44.73	125.30	80.57	PK	Horizontal
3	5796.23	92.47	5.91	34.18	-39.98	92.58	125.30	32.72	PK	Horizontal
4	5850.00	46.14	5.94	34.00	-39.97	46.11	125.27	79.16	PK	Horizontal
5	5906.71	48.83	5.96	34.11	-39.96	48.94	81.77	32.83	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC40 TX 5795MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\32
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

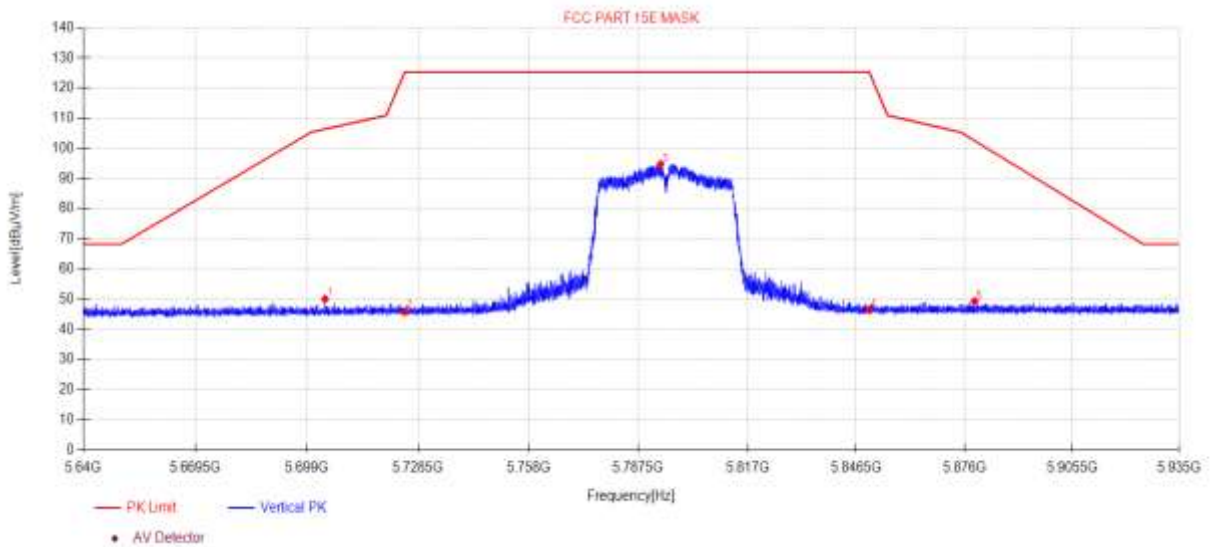

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5703.78	50.47	5.86	33.62	-39.99	49.96	106.36	56.40	PK	Vertical
2	5725.00	46.09	5.87	33.75	-39.99	45.72	125.30	79.58	PK	Vertical
3	5793.49	94.61	5.91	34.16	-39.98	94.70	125.30	30.60	PK	Vertical
4	5850.00	46.39	5.94	34.00	-39.97	46.36	125.27	78.91	PK	Vertical
5	5878.74	49.19	5.95	34.06	-39.97	49.23	102.52	53.29	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5775MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\33
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

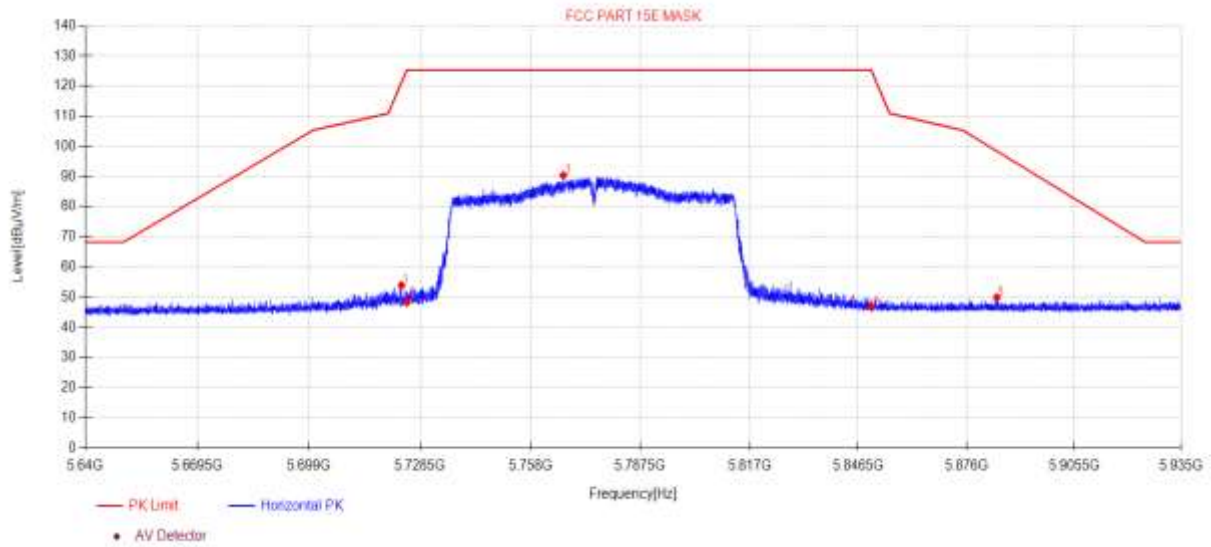

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5723.57	54.29	5.87	33.74	-39.99	53.91	121.19	67.28	PK	Horizontal
2	5725.00	48.53	5.87	33.75	-39.99	48.16	125.30	77.14	PK	Horizontal
3	5766.79	90.43	5.89	34.00	-39.98	90.34	125.30	34.96	PK	Horizontal
4	5850.00	46.67	5.94	34.00	-39.97	46.64	125.27	78.63	PK	Horizontal
5	5884.26	49.79	5.95	34.07	-39.97	49.84	98.43	48.59	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-19 **Tested By:** Bairong
EUT: WiiM Amp **Model Number:** AMP001
Test Mode: 11AC80 TX 5775MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.9°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061614-2E AMP001\FCC ABOVE 1G 5.8GWIFI\34
Memo: Sample Number:S23061614-05 Power Setting:NA

Test Graph

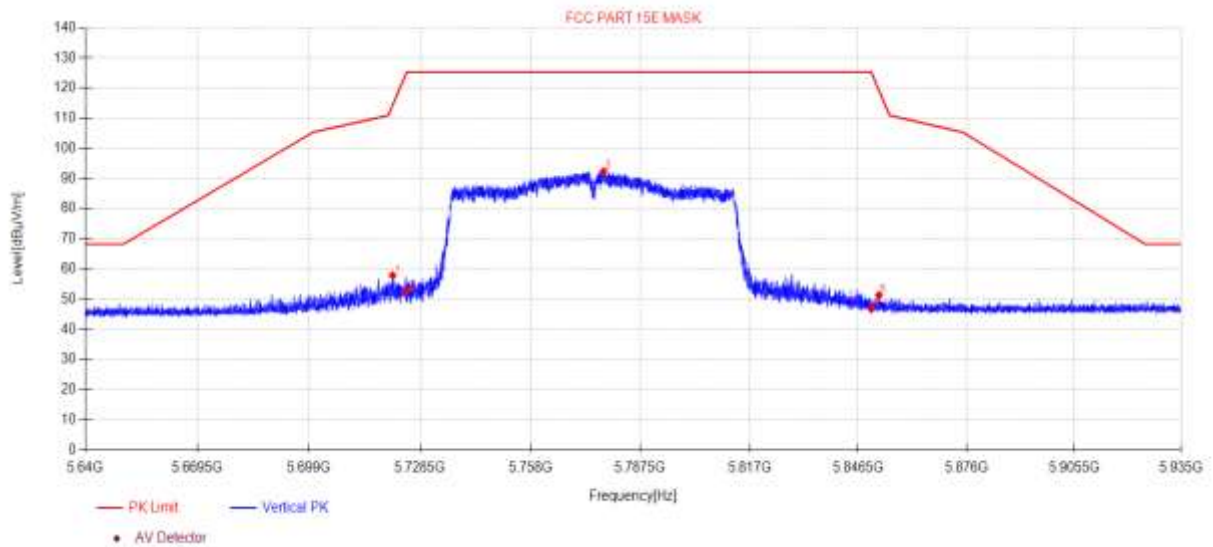

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.18	58.20	5.87	33.73	-39.99	57.81	114.31	56.50	PK	Vertical
2	5725.00	53.14	5.87	33.75	-39.99	52.77	125.30	72.53	PK	Vertical
3	5777.62	92.28	5.90	34.07	-39.98	92.27	125.30	33.03	PK	Vertical
4	5850.00	46.71	5.94	34.00	-39.97	46.68	125.27	78.59	PK	Vertical
5	5852.11	51.26	5.94	34.00	-39.97	51.23	119.24	68.01	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emission

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒ Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Jul. 11, 2023	1 Year
LISN 1	R&S	ENV216	101109	Jul. 11, 2023	1 Year
LISN 2	R&S	ESH2-Z5	100309	Jul. 12, 2023	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Jul. 15, 2023	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Jul. 15, 2023	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Measurement uncertainty: 3.72dB (9 kHz to 150 kHz), 3.34dB (150 kHz to 30 MHz).					

14.2. Block diagram of test setup

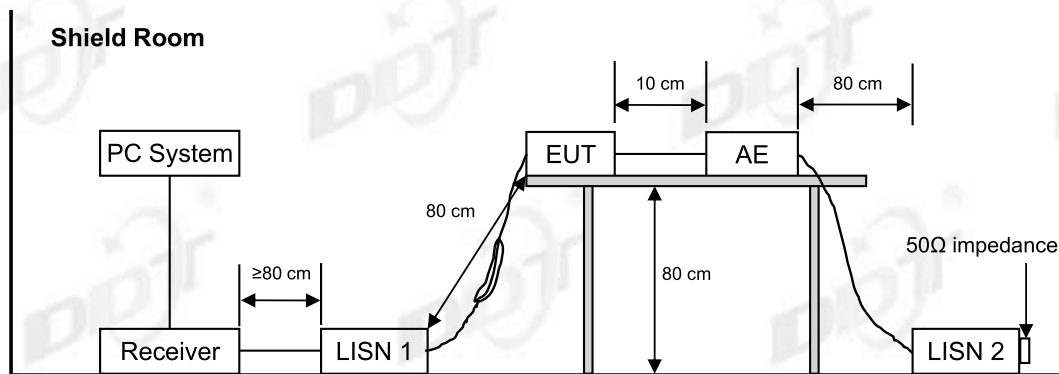

14.3. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.5. Test Result

Pass. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means peak detection; “-----” means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2023 CE report data\Q23061614-2E\FCC CE.EM6
Test Date : 2023-10-20 **Tested By** : Junchang Du
EUT : WiiM Amp **Model Number** : AMP001
Power Supply : AC 120V/60Hz **Test Mode** : TX Mode
Condition : TEMP:23.4°C, RH:52.6% **LISN** : 2023 1# ENV216/NEUTRAL
Memo :

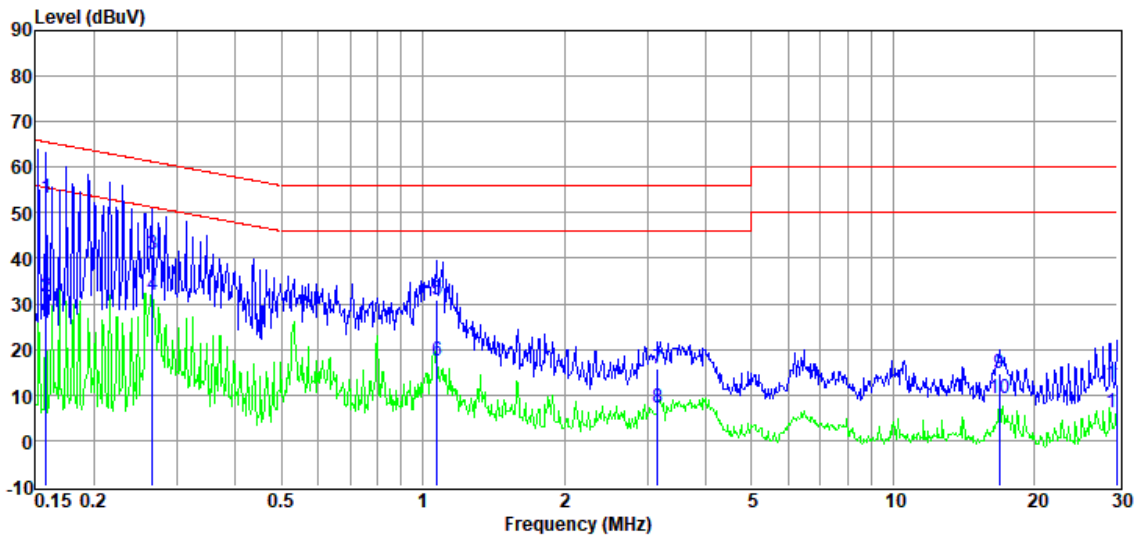


Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	32.63	9.86	0.92	9.68	53.09	65.56	-12.47	QP	NEUTRAL
2	0.16	11.25	9.86	0.92	9.68	31.71	55.56	-23.85	Average	NEUTRAL
3	0.27	20.57	9.74	0.89	9.70	40.90	61.25	-20.35	QP	NEUTRAL
4	0.27	11.53	9.74	0.89	9.70	31.86	51.25	-19.39	Average	NEUTRAL
5	1.07	10.79	9.74	0.67	9.73	30.93	56.00	-25.07	QP	NEUTRAL
6	1.07	-2.80	9.74	0.67	9.73	17.34	46.00	-28.66	Average	NEUTRAL
7	3.16	-4.42	9.72	0.58	9.77	15.65	56.00	-40.35	QP	NEUTRAL
8	3.16	-13.01	9.72	0.58	9.77	7.06	46.00	-38.94	Average	NEUTRAL
9	16.84	-5.43	9.82	0.34	9.90	14.63	60.00	-45.37	QP	NEUTRAL
10	16.84	-10.76	9.82	0.34	9.90	9.30	50.00	-40.70	Average	NEUTRAL
11	29.84	-8.35	10.12	0.50	9.91	12.18	60.00	-47.82	QP	NEUTRAL
12	29.84	-14.43	10.12	0.50	9.91	6.10	50.00	-43.90	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2023 CE report data\Q23061614-2E\FCC CE.EM6
Test Date : 2023-10-20 **Tested By** : Junchang Du
EUT : WiiM Amp **Model Number** : AMP001
Power Supply : AC 120V/60Hz **Test Mode** : TX Mode
Condition : TEMP:23.4°C, RH:52.6% **LISN** : 2023 1# ENV216/LINE
Memo :

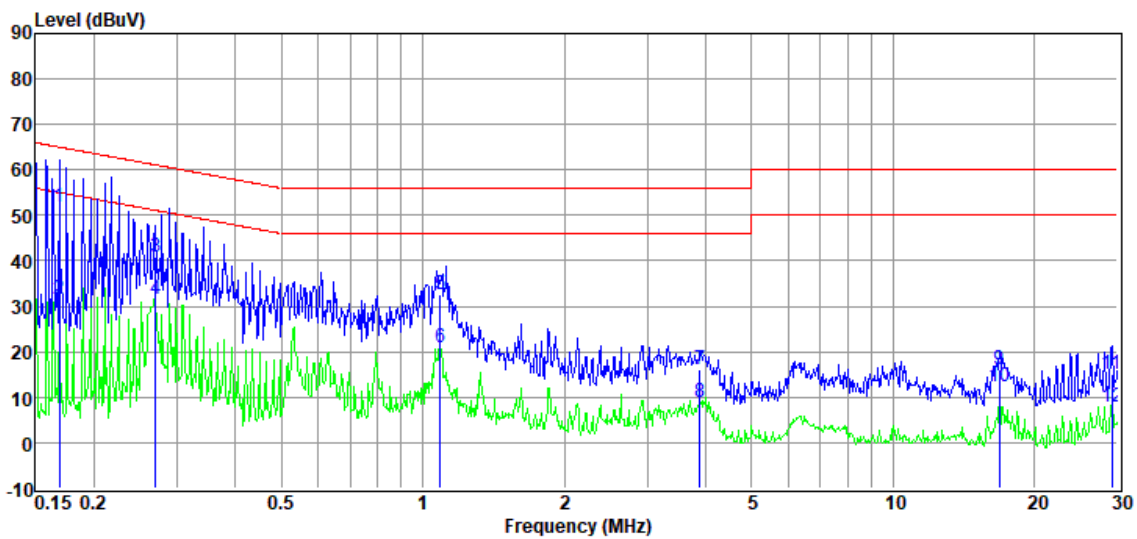

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	31.65	9.75	0.92	9.68	52.00	65.03	-13.03	QP	LINE
2	0.17	11.38	9.75	0.92	9.68	31.73	55.03	-23.30	Average	LINE
3	0.27	20.52	9.81	0.89	9.70	40.92	61.12	-20.20	QP	LINE
4	0.27	11.06	9.81	0.89	9.70	31.46	51.12	-19.66	Average	LINE
5	1.09	12.50	9.66	0.67	9.73	32.56	56.00	-23.44	QP	LINE
6	1.09	0.75	9.66	0.67	9.73	20.81	46.00	-25.19	Average	LINE
7	3.88	-3.93	9.65	0.56	9.78	16.06	56.00	-39.94	QP	LINE
8	3.88	-11.16	9.65	0.56	9.78	8.83	46.00	-37.17	Average	LINE
9	16.84	-3.84	9.83	0.34	9.90	16.23	60.00	-43.77	QP	LINE
10	16.84	-7.88	9.83	0.34	9.90	12.19	50.00	-37.81	Average	LINE
11	29.22	-5.53	10.18	0.52	9.91	15.08	60.00	-44.92	QP	LINE
12	29.22	-12.72	10.18	0.52	9.91	7.89	50.00	-42.11	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

15. Antenna Requirements

15.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

15.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

17. Photos of the EUT

Please refer to appendix I.

END OF REPORT