

FCC Test Report

Report No.: AGC11532230504FE02

FCC ID : 2BAE5-SATU01

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Window cleaner robot

BRAND NAME : SATUO

MODEL NAME : π , π 1, π 2, π 3, π 4, π 5

APPLICANT: Shanxi Jiashida Robot Technology Co., Ltd

DATE OF ISSUE : Jul. 11, 2023

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 60

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 11, 2023	Valid	Initial Release





Report No.: AGC11532230504FE02 Page 3 of 60

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	24
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT EQUIPMENT USED	24
9.4. LIMITS AND MEASUREMENT RESULT	24
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	mped by the "Dedicated Testing/Inspection he written authorization of AGC. The test results



Page 4 of 60

10.1. MEASUREMENT PROCEDURE	36
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	36
11. RADIATED EMISSION	40
11.1. MEASUREMENT PROCEDURE	40
11.2. TEST SETUP	41
11.3. LIMITS AND MEASUREMENT RESULT	42
11.4. TEST RESULT	
12. LINE CONDUCTED EMISSION TEST	56
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	56
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	56
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	58
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	60
APPENDIX B: PHOTOGRAPHS OF EUT	60



Page 5 of 60

1. VERIFICATION OF COMPLIANCE

Shanxi Jiashida Robot Technology Co., Ltd		
17/f, huanneng tech block, no17, Gaoxin St., Zonggai shifan dist., Taiyuan, CHINA		
Shanxi Jiashida Robot Technology Co., Ltd		
17/f, huanneng tech block, no17, Gaoxin St., Zonggai shifan dist., Taiyuan, CHINA		
Shanxi Jiashida Robot Technology Co., Ltd		
17/f, huanneng tech block, no17, Gaoxin St., Zonggai shifan dist., Taiyuan, CHINA		
Window cleaner robot		
SATUO		
π		
π1, π2, π3, π4, π5		
All the same except for the model name		
May 12, 2023		
May 12, 2023 to Jul. 10, 2023		
No any deviation from the test method		
Normal		
Pass		
AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Cocili	
	Cici Li (Project Engineer)	Jul. 11, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jul. 11, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Jul. 11, 2023



Page 6 of 60

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Window cleaner robot". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402GHz to 2.480GHz		
RF Output Power	BLE_GFSK 1Mbps:3.683dBm (Max) BLE_GFSK 2Mbps:3.674dBm (Max)		
Bluetooth Version	V5.0		
Modulation	BR□GFSK, EDR□π /4-DQPSK, □8DPSK BLE☑GFSK 1Mbps ☑GFSK 2Mbps		
Number of channels	40 Channels		
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	2.5dBi		
Hardware Version	1.0.0		
Software Version	1.0.0		
Power Supply	DC 14.8V by battery or DC 24.0V by adapter		

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
2400~2483.5MHz	:	:
	38	2478 MHz
	39	2480 MHz



Page 7 of 60

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2BAE5-SATUO1** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 8 of 60

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$






4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2402MHz_GFSK_1Mbps
2	Middle channel TX_2440MHz_GFSK_1Mbps
3	High channel TX_2480MHz_GFSK_1Mbps
4	Low channel TX_2402MHz_GFSK_2Mbps
5	Middle channel TX_2440MHz_GFSK_2Mbps
6	High channel TX_2480MHz_GFSK_2Mbps

Note: 1. Only the result of the worst case was recorded in the report, if no other cases.

- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- ${\it 3.} \ {\it For Conducted Test method}, a temporary antenna connector is provided by the manufacture.$

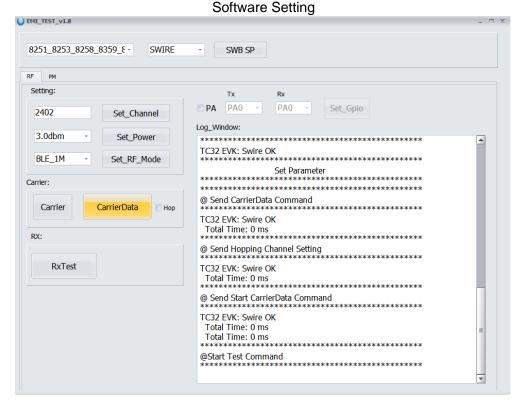



Page 10 of 60

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:

|--|

Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Window cleaner robot	π	2BAE5-SATUO1	EUT
2	Control Box	Telink	N/A	AE
3	Charger line	N/A	5.5m unshielded	Accessories
4	Adapter GM130-2400500-4F		Input: AC 100-240V, 50/60Hz, 2.5A Output: DC 24.0V, 5.0A, 120.0W	Accessories

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 11 of 60

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

1201 2 2 3 1 1 2 1 2 1 2 2 1 2 2 1 2 2 2 2					
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test Software	R&S	V1.71	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	100034	Aug. 03, 2022	Aug. 02, 2023
Wideband Antenna	SCHWARZBECK	VULB9168	D69250	May 11, 2022	May 10, 2025
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifer	ETS	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
Test software	FARA	V.RA-03A	N/A	N/A	N/A



Page 12 of 60

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth.
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

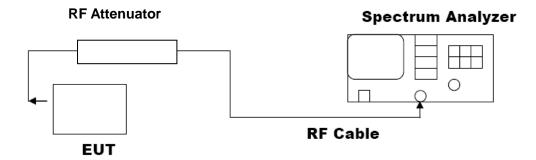





Page 13 of 60

7.3. LIMITS AND MEASUREMENT RESULT

7.5. EIMITO AND MEAGONEMENT NEGGET						
Test Data of Conducted Output Power						
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	3.394	≤30	Pass		
GFSK 1M	2440	3.673	≤30	Pass		
	2480	3.683	≤30	Pass		
	2402	3.305	≤30	Pass		
GFSK 2M	2440	3.659	≤30	Pass		
	2480	3.674	≤30	Pass		


Test Graphs of Conducted Output Power

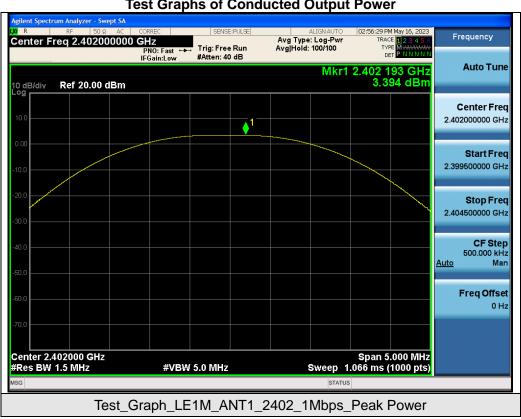









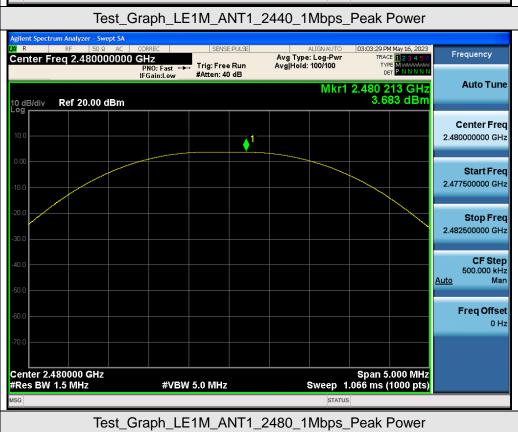








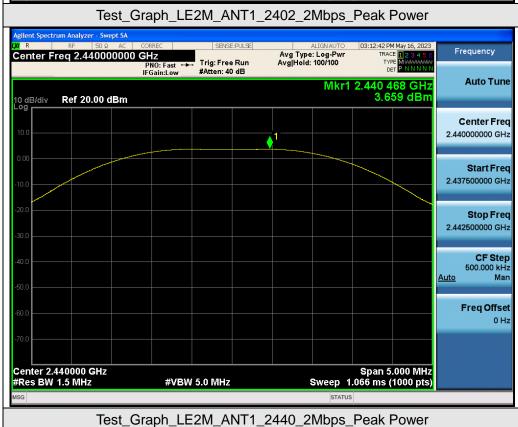









Page 17 of 60

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2402	1.031	0.683	≥0.5	Pass
GFSK 1M	2440	1.025	0.670	≥0.5	Pass
	2480	1.024	0.683	≥0.5	Pass
	2402	2.047	1.390	≥0.5	Pass
GFSK 2M	2440	2.056	1.305	≥0.5	Pass
	2480	2.067	1.365	≥0.5	Pass



<u>Auto</u>

11.5 dBm

99.00 %

-26.00 dB

Mar

Freq Offset 0 Hz



Test Graphs of Occupied Bandwidth 02:56:17 PM May 16, 2023 Radio Std: None Frequency Center Freq: 2.402000000 GHz
Trig: Free Run Avg|Hold: 10/10 Center Freg 2.402000000 GHz Trig: Free Run #Atten: 30 dB Radio Device: BTS #IFGain:Low Ref 30.00 dBm 2.402000000 GHz Span 3 MHz Sweep 4.133 ms Center 2.402 GHz #Res BW 30 kHz **CF Step #VBW** 100 kHz <u>Auto</u> Man **Total Power** 11.2 dBm Occupied Bandwidth 1.0309 MHz Freq Offset 0 Hz -24.619 kHz 99.00 % **Transmit Freq Error OBW Power** x dB Bandwidth 1.290 MHz x dB -26.00 dB Test_Graph_LE1M_ANT1_2402_1Mbps_OBW 03:01:29 PM May 16, 2023 Radio Std: None Frequency Center Freq: 2.440000000 GHz Center Freg 2.440000000 GHz Avg|Hold: 10/10 #IFGain:Low #Atten: 30 dB Radio Device: BTS Ref 30.00 dBm Center Freq 2.440000000 GHz Span 3 MHz Sweep 4.133 ms Center 2.44 GHz #Res BW 30 kHz **CF Step #VBW 100 kHz**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_OBW

Total Power

OBW Power

x dB

Occupied Bandwidth


Transmit Freq Error

x dB Bandwidth

1.0250 MHz


-23.286 kHz


1.296 MHz







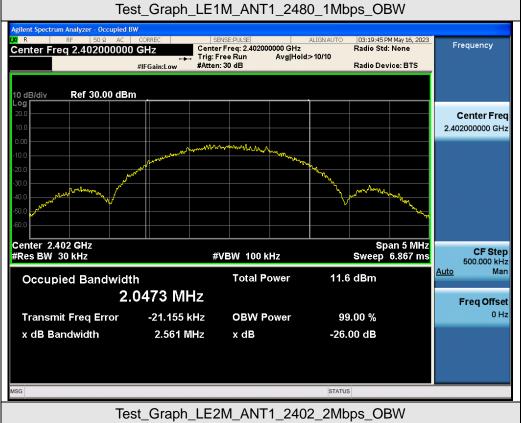












Freq Offset 0 Hz



Test Graphs of DTS Bandwidth



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_DTSBW

OBW Power

x dB

99.00 %

-6.00 dB


Transmit Freq Error

x dB Bandwidth

1.0374 MHz


-20.242 kHz


669.6 kHz








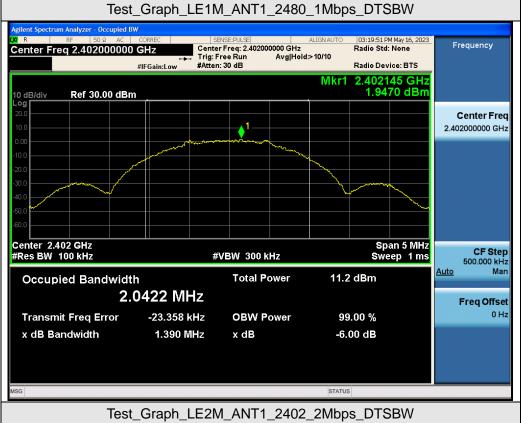







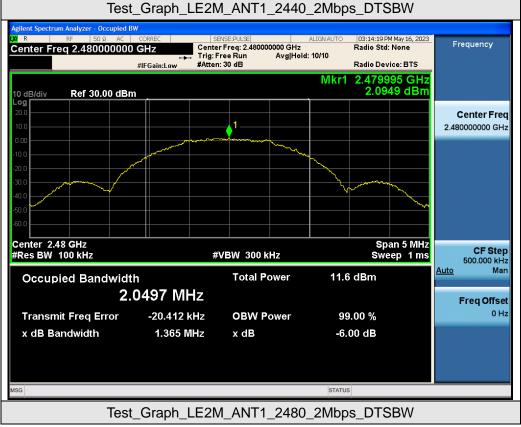



Page 24 of 60

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Applicable Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions
















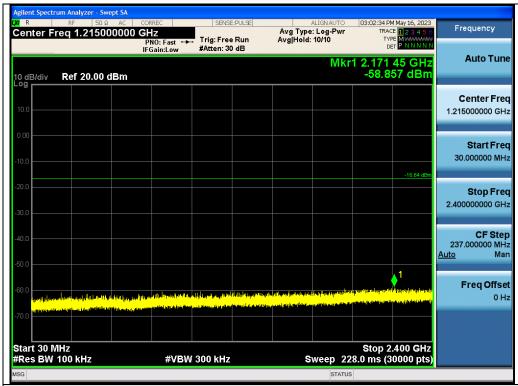


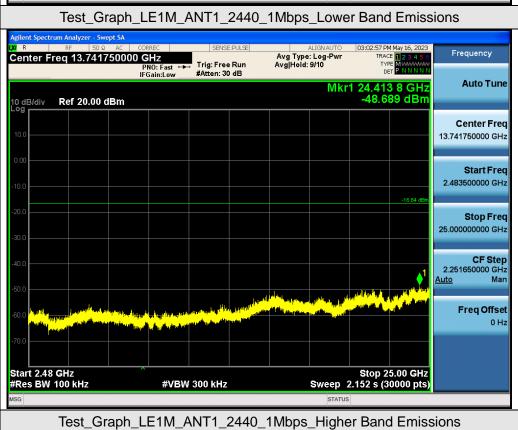








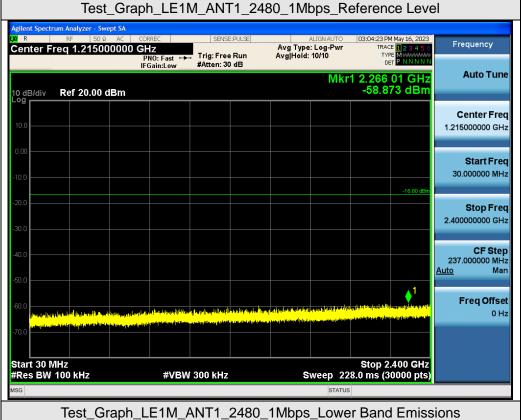

















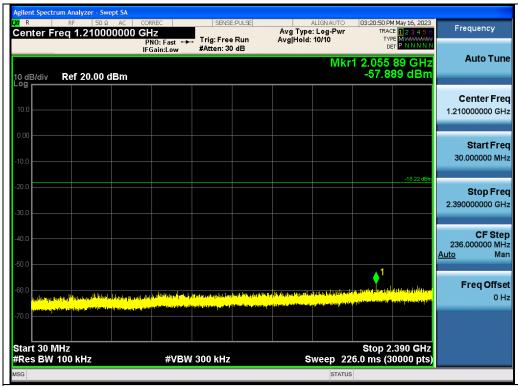


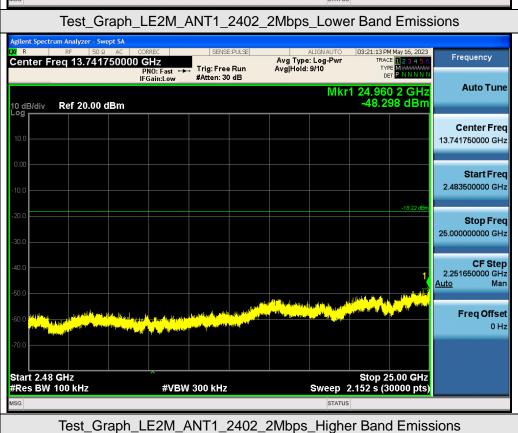








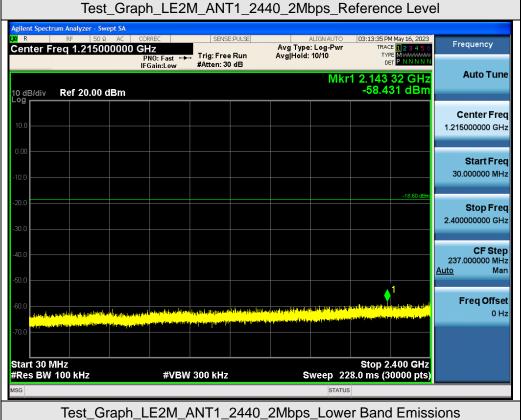



















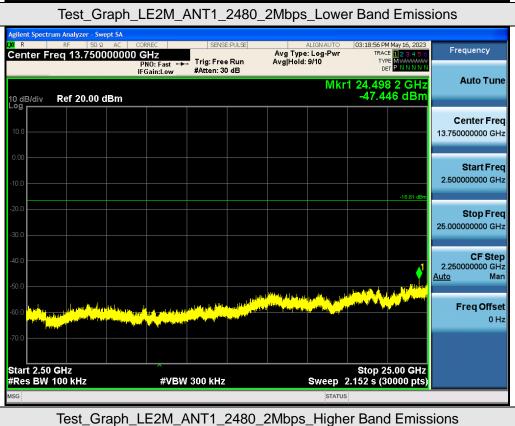







Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

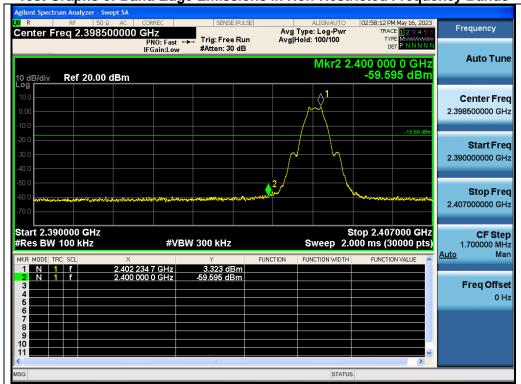




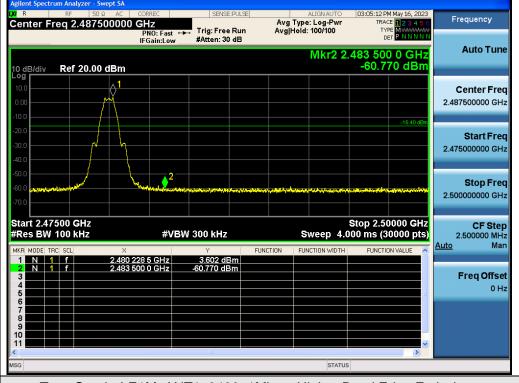


Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Edge Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





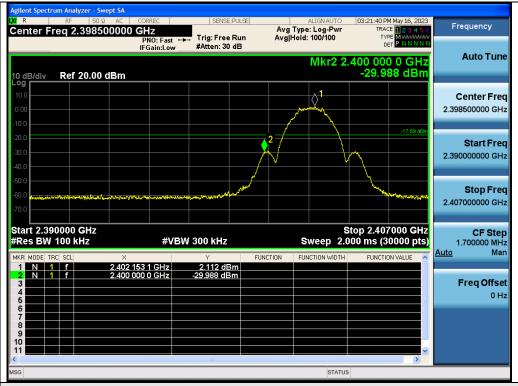

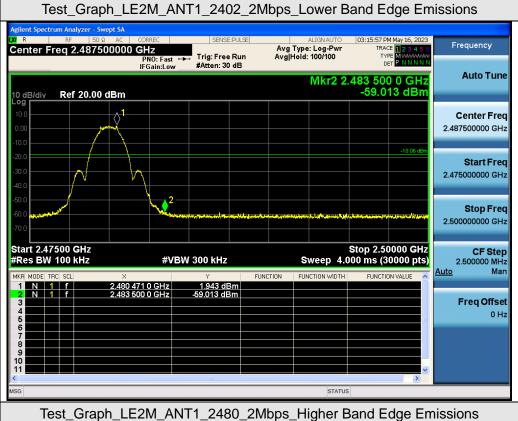



Page 36 of 60

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

-						
Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-5.164	≪8	Pass		
GFSK 1M	2440	-5.572	≤8	Pass		
	2480	-4.569	≪8	Pass		
	2402	-8.525	≪8	Pass		
GFSK 2M	2440	-7.816	≤8	Pass		
	2480	-9.341	≪8	Pass		






Test Graphs of Conducted Output Power Spectral Density Frequency Center Freq 2.402000000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run PNO: Wide * IFGain:Low **Auto Tune** Mkr1 2.402 070 2 GHz -5.164 dBm Ref 20.00 dBm 2.402000000 GHz Start Freq 2.401487750 GHz Stop Freq 2.402512250 GHz **CF Step** <u>Auto</u> Man Freq Offset 0 Hz Center 2.4020000 GHz #Res BW 3.0 kHz Span 1.025 MHz Sweep 108.0 ms (1000 pts) **#VBW** 10 kHz Test_Graph_LE1M_ANT1_2402_1Mbps_PSD Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Center Freq 2.440000000 GHz Trig: Free Run PNO: Wide ' IFGain:Low **Auto Tune** Mkr1 2.439 757 0 GHz -5.572 dBm Ref 20.00 dBm 2.440000000 GHz Start Freq 2.439497500 GHz Stop Freq 2.440502500 GHz **CF Step** 100.500 kHz <u>Auto</u> Man Freq Offset Center 2.4400000 GHz #Res BW 3.0 kHz Span 1.005 MHz Sweep 106.0 ms (1000 pts) **#VBW 10 kHz**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2440_1Mbps_PSD








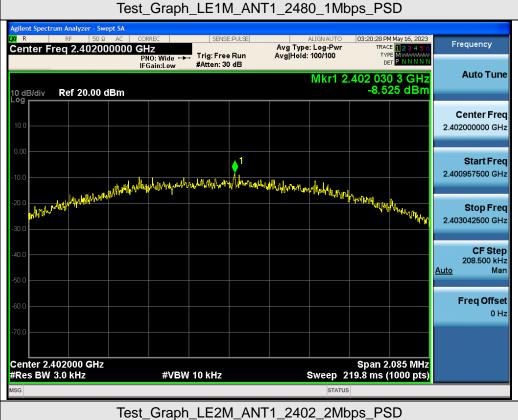







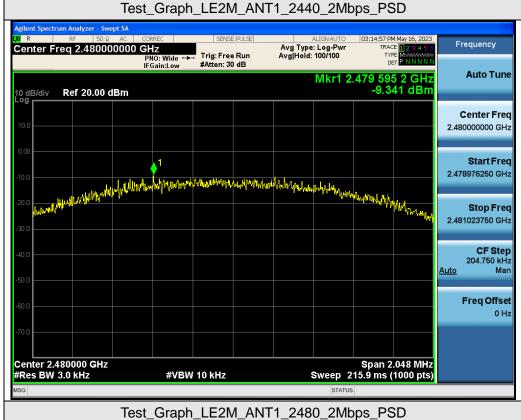




Page 40 of 60

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

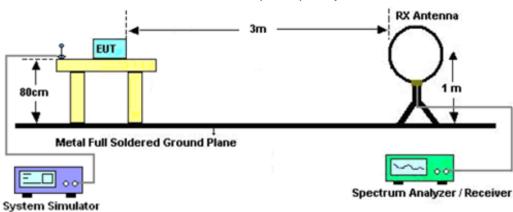

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

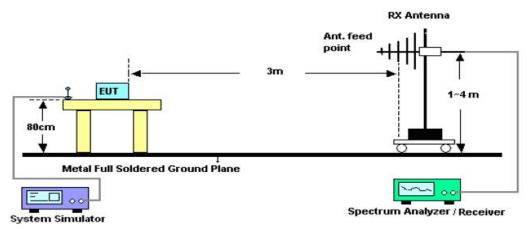

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

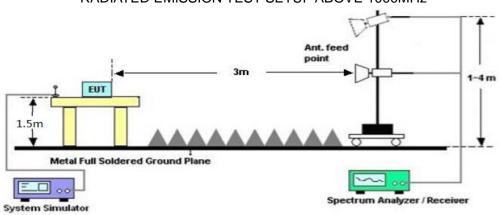



Page 42 of 60

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.





Radiated emission from 30MHz to 1000MHz

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal



No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		196.5167	18.59	18.00	36.59	43.50	-6.91	QP
2		209.4500	18.89	17.19	36.08	43.50	-7.42	QP
3	!	505.3000	18.08	23.86	41.94	46.00	-4.06	QP
4	*	757.5000	14.28	28.04	42.32	46.00	-3.68	QP
5	!	793.0667	13.89	27.66	41.55	46.00	-4.45	QP
6	!	869.0500	14.57	27.74	42.31	46.00	-3.69	QP

RESULT: PASS



Page 44 of 60

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



No).	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		!	49.4000	18.68	16.99	35.67	40.00	-4.33	QP
2	2	!	196.5167	21.61	18.00	39.61	43.50	-3.89	peak
3	3	!	639.4833	15.36	26.15	41.51	46.00	-4.49	QP
4	1	!	699.3000	14.32	28.09	42.41	46.00	-3.59	QP
5	5	*	796.3000	14.92	27.73	42.65	46.00	-3.35	peak
6	6	!	956.3500	12.02	30.35	42.37	46.00	-3.63	QP

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been tested. The GFSK 1Mbps mode 3 is the worst case and recorded in the report.



Page 45 of 60

Radiated emission above 1GHz

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4804.000	49.67	0.08	49.75	74	-24.25	peak	
4804.000	37.51	0.08	37.59	54	-16.41	AVG	
7206.000	46.85	2.21	49.06	74	-24.94	peak	
7206.000	35.27	2.21	37.48	54	-16.52	AVG	
Remark:							
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.				

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4804.000	47.68	0.08	47.76	74	-26.24	peak		
4804.000	38.27	0.08	38.35	54	-15.65	AVG		
7206.000	46.82	2.21	49.03	74	-24.97	peak		
7206.000	36.04	2.21	38.25	54	-15.75	AVG		
Remark:								
Factor = Anter	actor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 46 of 60

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4880.000	50.37	0.14	50.51	74	-23.49	peak	
4880.000	39.18	0.14	39.32	54	-14.68	AVG	
7320.000	47.55	2.36	49.91	74	-24.09	peak	
7320.000	36.57	2.36	38.93	54	-15.07	AVG	
emark:							

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
4880.000	48.78	0.14	48.92	74	-25.08	peak			
4880.000	36.94	0.14	37.08	54	-16.92	AVG			
7320.000	46.12	2.36	48.48	74	-25.52	peak			
7320.000	34.97	2.36	37.33	54	-16.67	AVG			
Remark:									
Factor = Antenna Factor + Cable Loss - Pre-amplifier.									



Page 47 of 60

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	51.03	0.22	51.25	74	-22.75	peak
4960.000	40.32	0.22	40.54	54	-13.46	AVG
7440.000	48.27	2.64	50.91	74	-23.09	peak
7440.000	37.53	2.64	40.17	54	-13.83	AVG
om orle						
emark:	na Fastan i Cabi		lifi			

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Window cleaner robot	Model Name	π
Temperature	22.9°C	Relative Humidity	65.0%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Volue Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type				
4960.000	50.65	0.22	50.87	74	-23.13	peak				
4960.000	39.57	0.22	39.79	54	-14.21	AVG				
7440.000	47.04	2.64	49.68	74	-24.32	peak				
7440.000		2.64	40.28	54	-13.72	AVG				
Remark:										
Factor = Antenna Factor + Cable Loss - Pre-amplifier.										

RESULT: PASS


Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK 1Mbps modulation is the worst case and recorded in the report.







Test result for band edge emission at restricted bands (GFSK 1Mbps)

EUT	Window cleaner robot	Model Name	π
Temperature	25°C	Relative Humidity	63%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

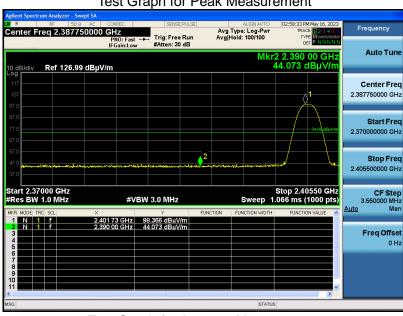

Test Graph for Average Measurement

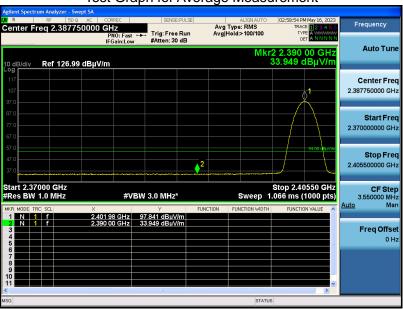

RESULT: PASS






 EUT
 Window cleaner robot
 Model Name
 π

 Temperature
 25°C
 Relative Humidity
 63%


 Pressure
 985hPa
 Test Voltage
 Normal Voltage

 Test Mode
 Mode 1
 Antenna
 Vertical


Test Graph for Peak Measurement

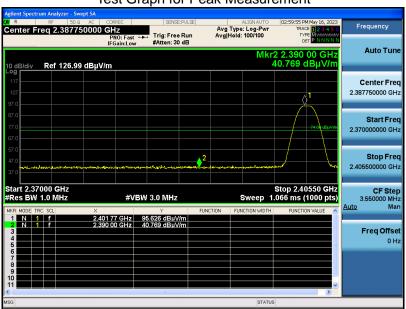

Test Graph for Average Measurement

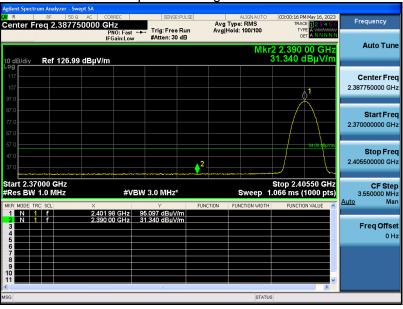


RESULT: PASS






EUTWindow cleaner robotModel NameπTemperature25°CRelative Humidity63%Pressure985hPaTest VoltageNormal VoltageTest ModeMode 3AntennaHorizontal


Test Graph for Peak Measurement

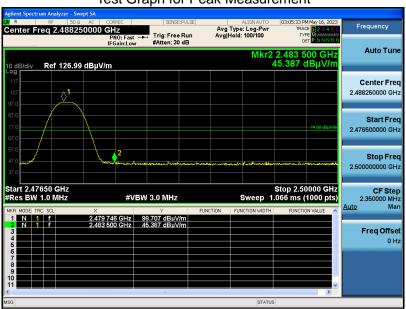

Test Graph for Average Measurement

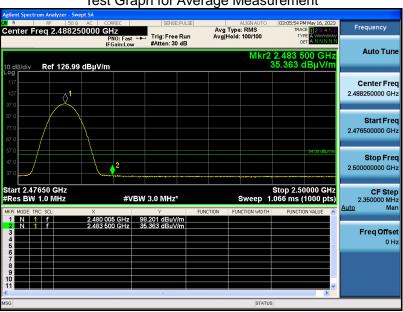


RESULT: PASS






EUTWindow cleaner robotModel NameπTemperature25°CRelative Humidity63%Pressure985hPaTest VoltageNormal VoltageTest ModeMode 3AntennaVertical

Test Graph for Peak Measurement

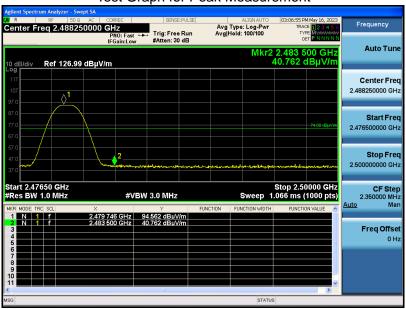


Test Graph for Average Measurement

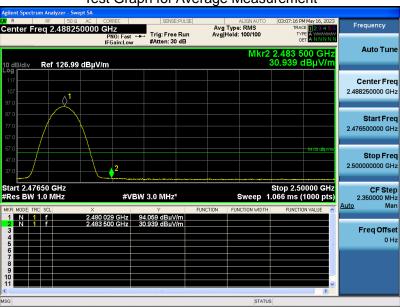

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.







Test result for band edge emission at restricted bands (GFSK 2Mbps)

EUT	Window cleaner robot	Model Name	π
Temperature	25°C	Relative Humidity	63%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal


Test Graph for Peak Measurement

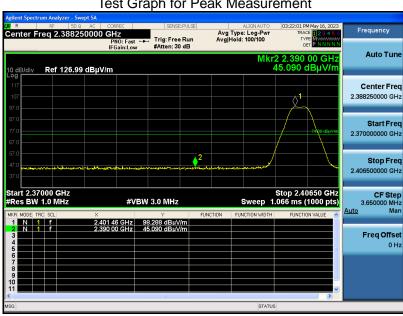

Test Graph for Average Measurement

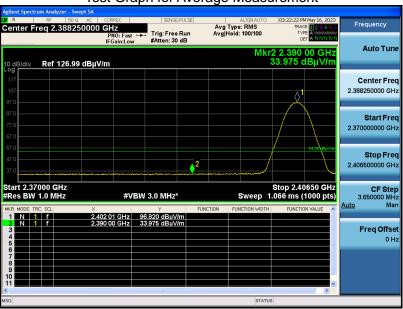


RESULT: PASS






EUTWindow cleaner robotModel NameπTemperature25°CRelative Humidity63%Pressure985hPaTest VoltageNormal VoltageTest ModeMode 4AntennaVertical


Test Graph for Peak Measurement

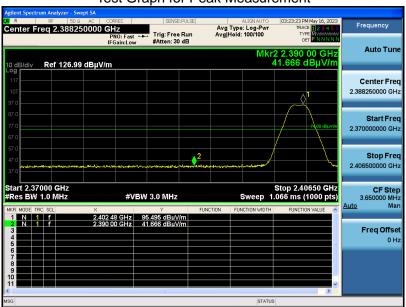



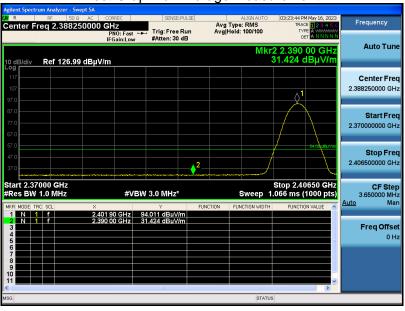

RESULT: PASS






 EUT
 Window cleaner robot
 Model Name
 π


 Temperature
 25°C
 Relative Humidity
 63%


 Pressure
 985hPa
 Test Voltage
 Normal Voltage

 Test Mode
 Mode 6
 Antenna
 Horizontal


Test Graph for Peak Measurement

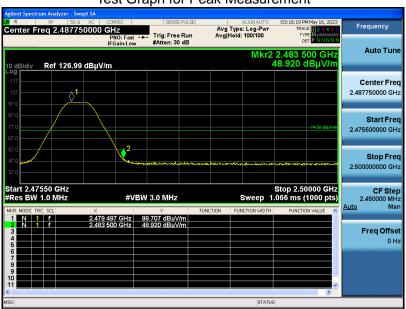



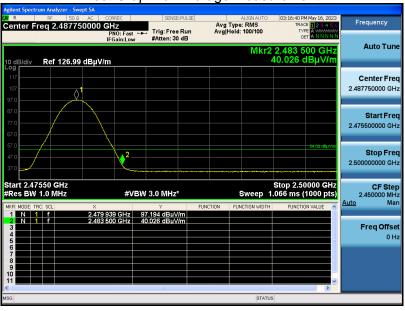

RESULT: PASS






EUTWindow cleaner robotModel NameπTemperature25°CRelative Humidity63%Pressure985hPaTest VoltageNormal VoltageTest ModeMode 6AntennaVertical

Test Graph for Peak Measurement





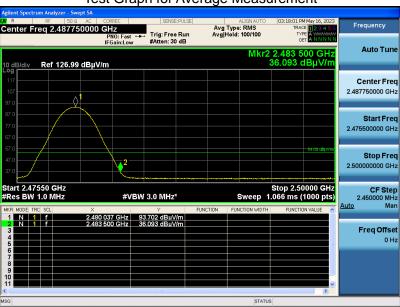

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 56 of 60

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguenov	Maximum RF	Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

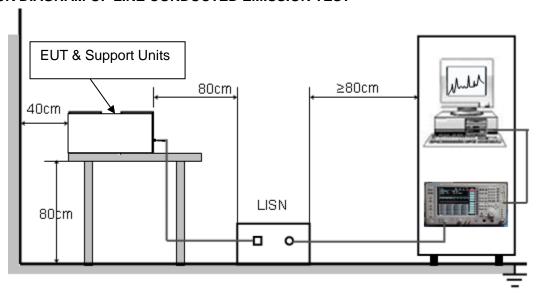



Page 57 of 60

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 24.0V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L1

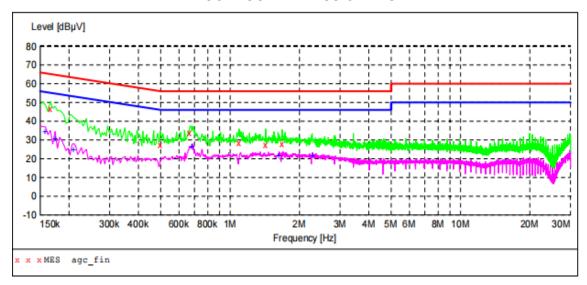

MEASUREMENT RESULT: "agc_fin"

2023/6/14 17 Frequency MHz	1:58 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.166000	46.40	4.5	65	18.8	QP	L1	GND
0.498000	27.50	4.5	56	28.5	QP	L1	GND
0.670000	34.00	4.5	56	22.0	QP	L1	GND
1.094000	28.40	4.6	56	27.6	QP	L1	GND
1.426000	27.50	4.6	56	28.5	QP	L1	GND
1.682000	27.80	4.6	56	28.2	QP	L1	GND


MEASUREMENT RESULT: "agc fin2"

20	023/6/14 17:	58						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dΒμV	dB	dΒμV	dB			
	0.158000	34.50	4.5	56	21.1	AV	L1	GND
	0.174000	30.60	4.5	55	24.2	AV	L1	GND
	0.210000	25.00	4.5	53	28.2	AV	L1	GND
	0.686000	26.30	4.5	46	19.7	AV	L1	GND
	1.630000	21.70	4.6	46	24.3	AV	L1	GND
	2.282000	21.40	4.6	46	24.6	AV	L1	GND

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

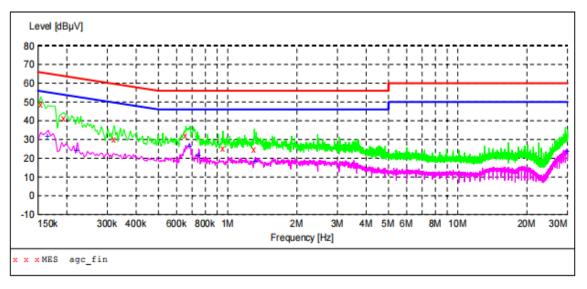

MEASUREMENT RESULT: "agc fin"

20	23/6/14 17:							
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.154000	48.80	4.5	66	17.0	OP	N	GND
	0.194000	41.20	4.5	64	22.7	QP	N	GND
	0.322000	30.00	4.5	60	29.7	QP	N	GND
	0.658000	32.30	4.5	56	23.7	QP	N	GND
	0.954000	25.30	4.5	56	30.7	QP	N	GND
	1.306000	24.80	4.6	56	31.2	QP	N	GND

MEASUREMENT RESULT: "agc_fin2"

2023/6/14 17	7:55						
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dΒμV	dB	dΒμV	dB			
0.166000	31.70	4.5	55	23.5	AV	N	GND
0.222000	24.30	4.5	53	28.4	AV	N	GND
0.682000	26.50	4.5	46	19.5	AV	N	GND
0.750000	21.40	4.5	46	24.6	AV	N	GND
1.318000	18.20	4.6	46	27.8	AV	N	GND
29.978000	23.80	7.5	50	26.2	AV	N	GND

RESULT: PASS



Page 60 of 60

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC11532230504AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC11532230504AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.