

EMC Test Report***Application for FCC Grant of Equipment Authorization
Canada Certification******Innovation, Science and Economic Development Canada
RSS-Gen Issue 5 / RSS-210 Issue 10
FCC Part 15 Subpart C******Model: SSEN-2MP***

ISED CERTIFICATION #: 30107-SSEN2MP
FCC ID: 2BAE8-SSEN2MP

APPLICANT: wtec GmbH
Dornbachstrasse 1a
61352 Bad Homburg, Germany

TEST SITE(S): NTS Labs LLC
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5, 2845B-7

PROJECT NUMBER: PR168321

REPORT DATE: January 27, 2023

RE-ISSUED DATE: May 30, 2023

FINAL TEST DATES: September 9, 2022, January 13, 16 and 17, 2023

TOTAL NUMBER OF PAGES: 44



This report and the information contained herein represent the results of testing of only those articles / products identified in this document and selected by the client. The tests were performed to specifications and/or procedures selected by the client. NTS Labs LLC makes no representations expressed or implied that such testing fully demonstrates efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS Labs LLC of the equipment tested, nor does it present any statement whatsoever as to its merchantability or fitness of the test article or similar products, for a particular purpose. This report shall not be reproduced except in full without written approval from NTS Labs LLC.



NTS Labs LLC

Project number PR168321

Report Date: January 27, 2023, Re-Issued: May 30, 2023

VALIDATING SIGNATORIES

PROGRAM MGR

David W. Bare

David W. Bare
Chief Engineer

TECHNICAL REVIEWER:

David W. Bare

David W. Bare
Chief Engineer

FINAL REPORT PREPARER:

David Guidotti

David Guidotti
Senior Technical Writer

QUALITY ASSURANCE DELEGATE

Gary Izard

Gary Izard
Senior Technical Writer



NTS Labs LLC

Project number PR168321

Report Date: January 27, 2023, Re-Issued: May 30, 2023

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	January 27, 2023	First release	
1	May 30, 2023	Revised to add support equipment used for CE, remove description of SSEN-2 variant, and corrected standard references	dwb

TABLE OF CONTENTS

COVER PAGE	1
VALIDATING SIGNATORIES	2
REVISION HISTORY	3
TABLE OF CONTENTS	4
SCOPE	5
OBJECTIVE	6
STATEMENT OF COMPLIANCE	6
DEVIATIONS FROM THE STANDARDS	6
TEST RESULTS SUMMARY	7
DEVICES OPERATING IN THE 902 – 928 / 2400 – 2483.5 / 5725 – 5850 MHZ BANDS	7
MEASUREMENT UNCERTAINTIES	7
EQUIPMENT UNDER TEST (EUT) DETAILS	8
GENERAL.....	8
ANTENNA SYSTEM	8
ENCLOSURE	8
MODIFICATIONS	8
SUPPORT EQUIPMENT	9
EUT INTERFACE PORTS	9
EUT OPERATION	9
TEST SITE	10
GENERAL INFORMATION	10
CONDUCTED EMISSIONS CONSIDERATIONS.....	10
RADIATED EMISSIONS CONSIDERATIONS	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM	11
INSTRUMENT CONTROL COMPUTER	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN)	11
FILTERS/ATTENUATORS.....	12
ANTENNAS	12
ANTENNA MAST AND EQUIPMENT TURNTABLE	12
INSTRUMENT CALIBRATION	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
CONDUCTED EMISSIONS	13
RADIATED EMISSIONS	13
BANDWIDTH MEASUREMENTS	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	17
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; RSS GEN	17
RADIATED FUNDAMENTAL & SPURIOUS EMISSIONS SPECIFICATION LIMITS – 15.249 AND RSS-210 B.10.....	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS.....	18
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS	19
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	20
APPENDIX B TEST DATA	22
END OF REPORT	44

SCOPE

Electromagnetic emissions tests have been performed on the wtec GmbH model SSEN-2MP, pursuant to the following rules:

RSS-GEN Issue 5 “ General Requirements for Compliance of Radio Apparatus”

RSS 210 Issue 10 “Licence-Exempt Radio Apparatus: Category I Equipment”

FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in NTS Labs LLC test procedures:

ANSI C63.10-2013

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

NTS Labs LLC is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of wtec GmbH model SSEN-2MP complied with the requirements of the following regulations:

RSS-GEN Issue 5 "General Requirements for Compliance of Radio Apparatus"

RSS 210 Issue 10 "Licence-Exempt Radio Apparatus: Category I Equipment"

FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of wtec GmbH model SSEN-2MP and therefore apply only to the tested sample. The sample was selected and prepared by Stewart Findlater of wtec GmbH.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY

DEVICES OPERATING IN THE 902 – 928 / 2400 – 2483.5 / 5725 – 5850 MHz BANDS

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.249 (a)	RSS-210 B.10 (a)	Fundamental Signal Strength	89.4 dB μ V/m @ 2440.2 MHz	50mV/m @ 3m	Complies
15.249 (a) / 15.209	RSS-210 B.10 (a) & RSS-GEN	Radiated Spurious Emissions, 5 – 25,000 MHz	29.1 dB μ V/m @ 66.49 MHz	Harmonics 500 μ V/m @ 3m or general limits (see page 17)	Complies

Note 1 Pass/Fail criteria defined by standards listed above.

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Integral Antenna	Unique or integral antenna required	Complies
15.207	RSS-Gen Table 4	AC Conducted Emissions	9.10 dB μ V @ 0.341 MHz (-40.1 dB)	Refer to page 17	Complies
-	RSS-Gen 8.4	User Manual	See separate exhibit, Installation Guide	Statement for all products	Complies
-	RSP-100 RSS-Gen 6.7	Occupied Bandwidth	1.068 MHz	Information only	N/A

Note 1 Pass/Fail criteria defined by standards listed above.

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The wtec GmbH model SSEN-2MP is a sensor of light, temperature, and motion plus bluetooth beacon generation and detection. Since the EUT would be placed in the ceiling during operation, the EUT was treated as tabletop equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 3.3 Volts DC.

The sample was received on September 9, 2022 and January 13, 2023 and tested on September 9, 2022, January 13, 16 and 17, 2023. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
wtec GmbH	SSEN-2MP	Light, temperature and motion sensor plus BLE beacon	SVS1Y06012232000 40	2BAE8-SSEN2MP

ANTENNA SYSTEM

The antenna system consists of an integral wire with a partial circle turn.

ENCLOSURE

The enclosure is primarily constructed of plastic. It measures approximately 2.5 cm in diameter by 5.2 cm long.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Labs LLC.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
LumaStream	214-0405-MM-C	Luminaire	-	-
Agilent	E3610A	Power Supply	MY40001912	-

Note: The Agilent power supply was used to power the device during the conducted emission tests.

The following equipment was used as remote support equipment for emissions testing:

Company	Model	Description	Serial Number	FCC ID
wtec, Inc.	SENG-1-4834-250	Smartengine	SVS1E1302193600035	-

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
Gateway Smartengine	Smartengine	Multiwire	Unshielded	7.6

EUT OPERATION

During emissions testing the EUT was commanded to transmit a continuous modulated signal on the selected channel at max. power.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 6.2 of RSS-GEN, NTS Labs LLC has been recognized as an accredited test laboratory by the Commission and Innovation, Science and Economic Development Canada. A description of the facilities employed for testing is maintained by NTS Labs LLC.

Site	Company / Registration Numbers FCC	Canada	Location
Chamber 4 & 7	US1031	2845B (Wireless Test Lab #US0027)	41039 Boyce Road Fremont, CA 94538-2435

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Results from testing performed in this chamber have been correlated with results from an open area test site. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

Software is used to view and convert receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers. The software used for radiated and conducted emissions measurements is NTS Labs LLC EMI Test Software (rev 2.10)

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters for testing below 1 GHz and 1.5m for testing above 1 GHz. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

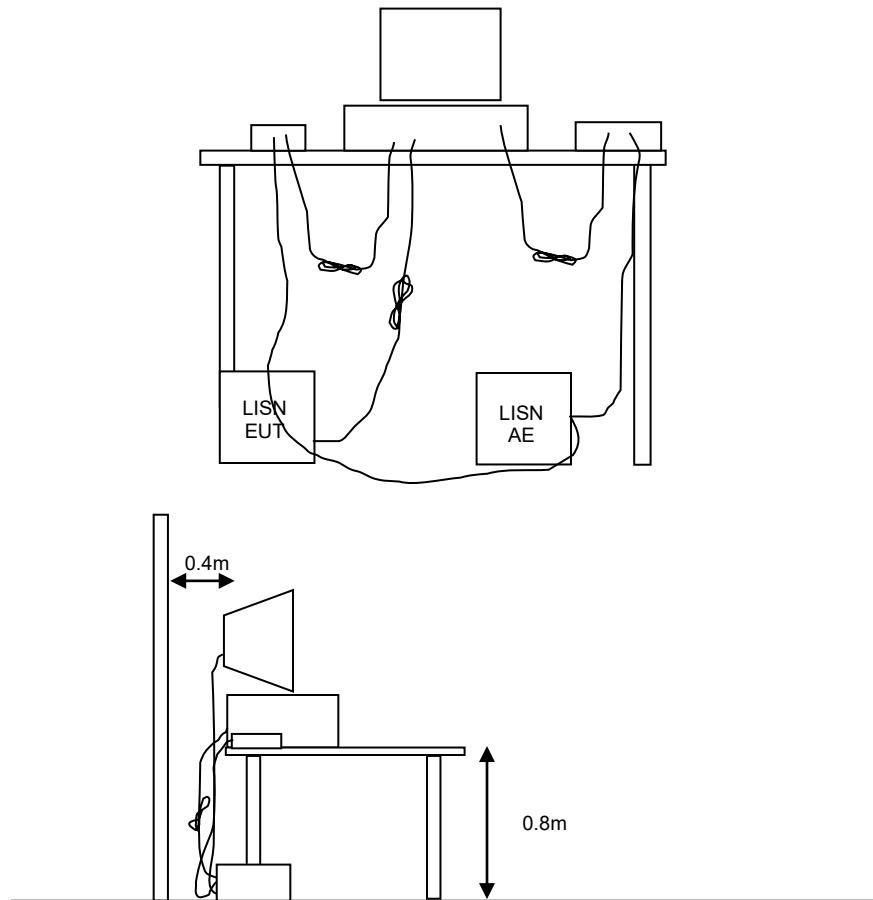


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. This was repeated with the EUT oriented in the 2 other orthogonal orientations. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

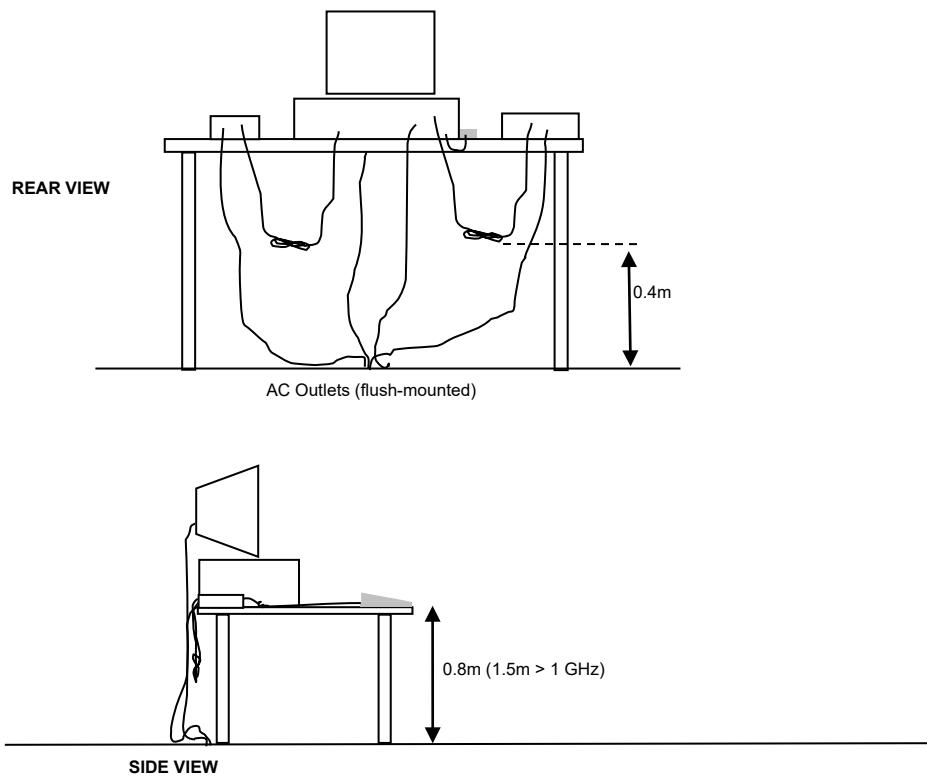


Typical Test Configuration for Radiated Field Strength Measurements

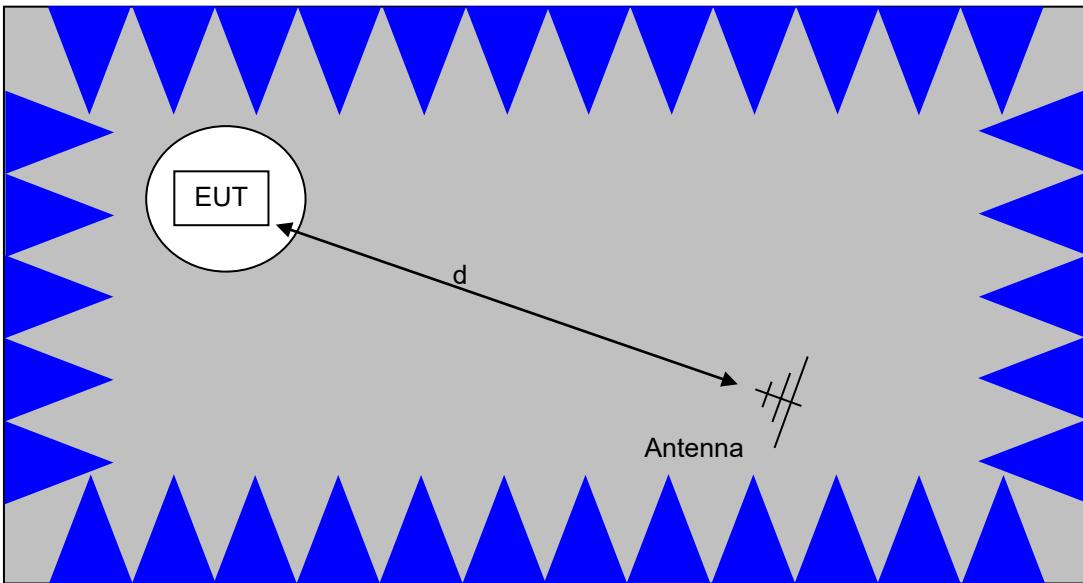

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.

Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

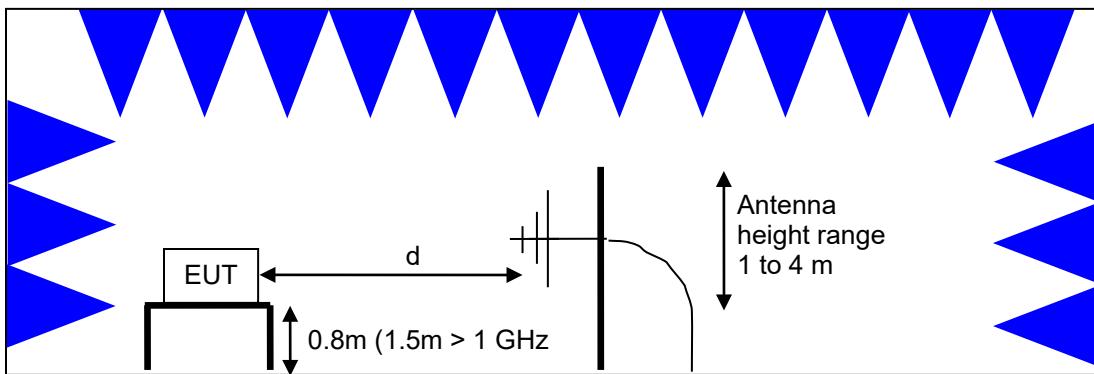

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

RADIATED FUNDAMENTAL & SPURIOUS EMISSIONS SPECIFICATION LIMITS – 15.249 and RSS-210 B.10

The table below shows the limits for the fundamental emission and for its harmonics. Harmonics that fall in restricted bands¹ and all other spurious emissions are subject to the general limits of RSS-210 and FCC Part 15 Subpart C.

Frequency Range (MHz)	Limit for Fundamental @ 3m	Limit for Harmonics @ 3m
902 – 928	50,000 uV/m 94dBuV/m	500 uV/m 54dBuV/m
2400 – 2483.5	50,000 uV/m 94dBuV/m	500 uV/m 54dBuV/m
5725 - 5850	50,000 uV/m 94dBuV/m	500 uV/m 54dBuV/m

¹ The restricted bands are detailed in FCC 15.205, RSS-GEN Table 7

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands².

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

² The restricted bands are detailed in FCC 15.205 and RSS-Gen Table 7

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

A computer program reads the receiver levels and corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. The corrected receiver readings are compared directly to the specification limit (decibel form).

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m / D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG10} (D_m / D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

Appendix A Test Equipment Calibration Data

TL168321-RANA SSEN-2MP

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 1,000 - 25,000 MHz, 13-Jan-23					
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	WC022452	N/A	
National Technical Systems	NTS Capture Analyzer Software (rev 4.0)	N/A	WC022706	N/A	
Hewlett Packard	Microwave Preamplifier Head, 18-40 GHz (Red)	84125C EMI Test Head	WC055586	11/7/2022	11/7/2023
Agilent Technologies	PSA Spectrum Analyzer	E4446A	WC055670	10/24/2022	10/31/2023
Hewlett Packard	High Pass filter, 3.7 GHz	P/N 84300-80038	WC064434	2/9/2022	2/9/2023
A. H. Systems	Antenna, Horn, 18-40GHz	SAS-574	WC064553	12/14/2022	12/14/2024
MITEQ	Preamplifier, 1-18 GHz	AFS44	WC080962	7/18/2022	7/18/2023
EMCO	Horn Antenna, 1-18 GHz (SA40-Purple)	3115	WC062583	9/12/2022	9/12/2024

Radiated Emissions, 30 - 1,000 MHz, 16-Jan-23

National Technical Systems	NTS EMI Software (rev 2.10)	N/A	WC022452	N/A	
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	WC064536	1/29/2021	3/23/2023
Com-Power	Preamplifier, 1-1000 MHz	PAM-103	WC064733	6/2/2022	6/2/2023
Rhode & Schwarz	EMI Test Receiver, 20Hz-26.5GHz	ESI	WC071498	6/20/2022	6/20/2023

Radiated Emissions, 5 - 30 MHz, 16-Jan-23

National Technical Systems	NTS EMI Software (rev 2.10)	N/A	WC022452	N/A	
Rhode & Schwarz	Loop Antenna	HFH2-Z2	WC062457	2/17/2022	2/17/2024
Rhode & Schwarz	EMI Test Receiver, 20Hz-26.5GHz	ESI	WC071498	6/20/2022	6/20/2023

Conducted Emissions - AC Power Ports, 16-Jan-23

National Technical Systems	NTS EMI Software (rev 2.10)	N/A	WC022452	N/A	
Fischer Custom Communications	LISN, 25A, 150kHz to 30MHz, 25 Amp	FCC-LISN-50-25-2-09	WC064531	12/6/2022	12/6/2023
Rhode & Schwarz	EMI Test Receiver, 20Hz-26.5GHz	ESI	WC071498	6/20/2022	6/20/2023
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	WC072358	6/30/2022	6/30/2023

TL164668-EMC
Radio Antenna Port (Power and Spurious Emissions), 09-Sep-22

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
National Technical Systems	NTS EMI Software (rev 2.10)	N/A	WC022452	N/A	
ETS-Lindgren	EMC Chamber #5, Inner Dimensions (LxWxH): 24' x 38' x 20'	CH 5 (FACT-5)	WC055567	10/9/2019	10/9/2022
Agilent Technologies	PSA Spectrum Analyzer	E4446A	WC055650	8/30/2022	8/31/2023
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	WC064478	1/31/2022	1/31/2024
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	WC064481	11/4/2021	11/4/2022
EMCO	Antenna, Horn, 1-18 GHz	3115	WC064707	12/22/2020	12/22/2022
Hewlett Packard	9kHz-1300MHz pre-amp	8447F	WC064718	12/28/2021	12/28/2022
Rohde & Schwarz	EMI Test Receiver, 20Hz-7GHz	ESIB 7	WC064989	12/20/2021	12/20/2022
MITEQ	Preamplifier, 1-18 GHz	AFS44	WC071561	4/22/2022	4/22/2023



NTS Labs LLC

Project number PR168321

Report Date: January 27, 2023, Re-Issued: May 30, 2023

Appendix B Test Data

TL168321-RANA SSEN-2MP Pages 23 – 39
TL164668 WTEC Pages 40 – 43



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Product:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
System Configuration:	-	Project Manager:	Christine Krebill
Contact:	Stewart Findlater	Project Engineer:	David Bare
Emissions Standard(s):	FCC §15.249/RSS-210	Class:	-
Immunity Standard(s):	EN55035, EN 301 489-1, -17	Environment:	Radio

EMC Test Data

For The

wtec, Inc.

Product

SSEN-2MP

Date of Last Test: 2/9/2023



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Conducted Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/16/2023
Test Engineer: M. Birgani
Test Location: Fremont Chamber #7

Config. Used: 1
Config Change: -
Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT was located on a foam table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions: Temperature: 18-19 °C
Rel. Humidity: 48-50 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power,120V/60Hz	Class B	Pass	9.10 dB μ V @ 0.341 MHz (-40.1 dB)



Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: wtec, Inc.	PR Number: PR168321
Model: SSEN-2MP	T-Log Number: TL168321-RANA SSEN
Contact: Stewart Findlater	Project Manager: Christine Krebill
Standard: FCC §15.249/RSS-210	Project Engineer: David Bare
	Class: -

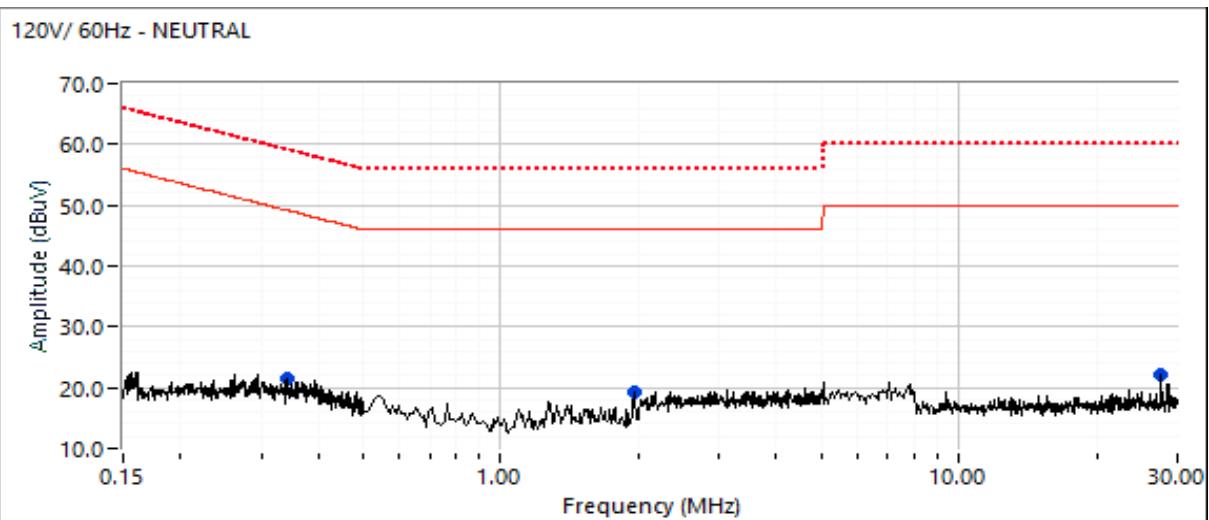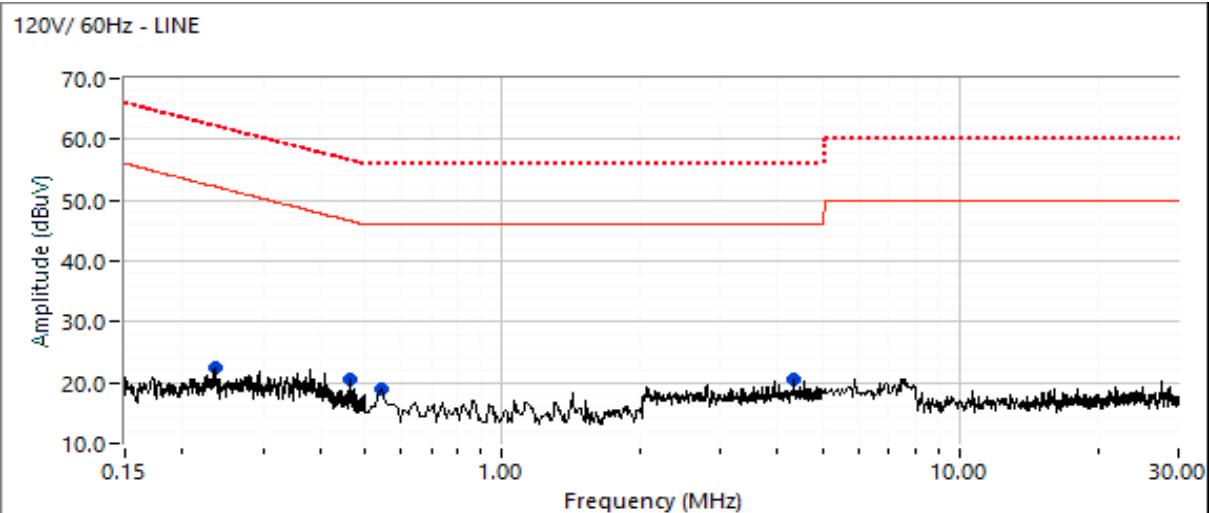Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz




EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.236	22.6	Line	52.3	-29.7	Peak	
0.341	21.4	Neutral	49.2	-27.8	Peak	
0.466	20.5	Line	46.6	-26.1	Peak	
0.545	18.9	Line	46.0	-27.1	Peak	
1.952	19.3	Neutral	46.0	-26.7	Peak	
4.324	20.5	Line	46.0	-25.5	Peak	
27.595	22.0	Neutral	50.0	-28.0	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.341	9.1	Neutral	49.2	-40.1	AVG	AVG (0.10s)
0.466	6.2	Line	46.6	-40.4	AVG	AVG (0.10s)
0.545	5.0	Line	46.0	-41.0	AVG	AVG (0.10s)
4.324	4.9	Line	46.0	-41.1	AVG	AVG (0.10s)
1.952	3.7	Neutral	46.0	-42.3	AVG	AVG (0.10s)
0.236	9.2	Line	52.2	-43.0	AVG	AVG (0.10s)
0.341	14.0	Neutral	59.2	-45.2	QP	QP (1.00s)
27.595	3.8	Neutral	50.0	-46.2	AVG	AVG (0.10s)
0.466	10.4	Line	56.6	-46.2	QP	QP (1.00s)
4.324	9.1	Line	56.0	-46.9	QP	QP (1.00s)
0.545	9.0	Line	56.0	-47.0	QP	QP (1.00s)
0.236	14.1	Line	62.2	-48.1	QP	QP (1.00s)
1.952	7.4	Neutral	56.0	-48.6	QP	QP (1.00s)
27.595	7.4	Neutral	60.0	-52.6	QP	QP (1.00s)



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Radiated Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/16/2023 Config. Used: 1
Test Engineer: Said A. Config Change: none
Test Location: Fremont Chamber #7 Host Unit Voltage

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Remote support equipment was located outside the chamber.

The test distance and extrapolation factor (if used) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 18-19 °C
Rel. Humidity: 50-52 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	5 - 30 MHz	FCC 15.209	Pass	-45.8 dB μ V/m @ 18.352 MHz (-75.3 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1.705 - 30.0 MHz	3	30	-40.0




EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Run #1a: Radiated Emissions, 5- 30 MHz, FCC 15.209

Low Channel Closed loop

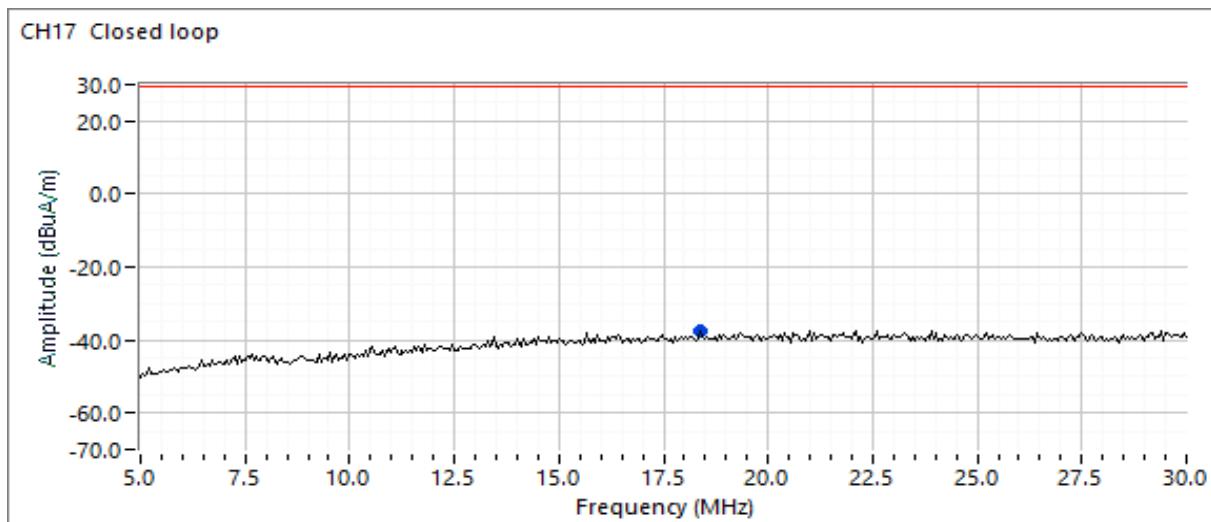

Preliminary readings

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
18.352	-37.4	V	29.5	-66.9	Peak	280	1.1	

Maximized readings (includes manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
18.352	-45.8	V	29.5	-75.3	QP	280	1.1	QP (1.00s)




EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Run #1b: Radiated Emissions, 5- 30 MHz, FCC 15.209

Low Channel Open loop

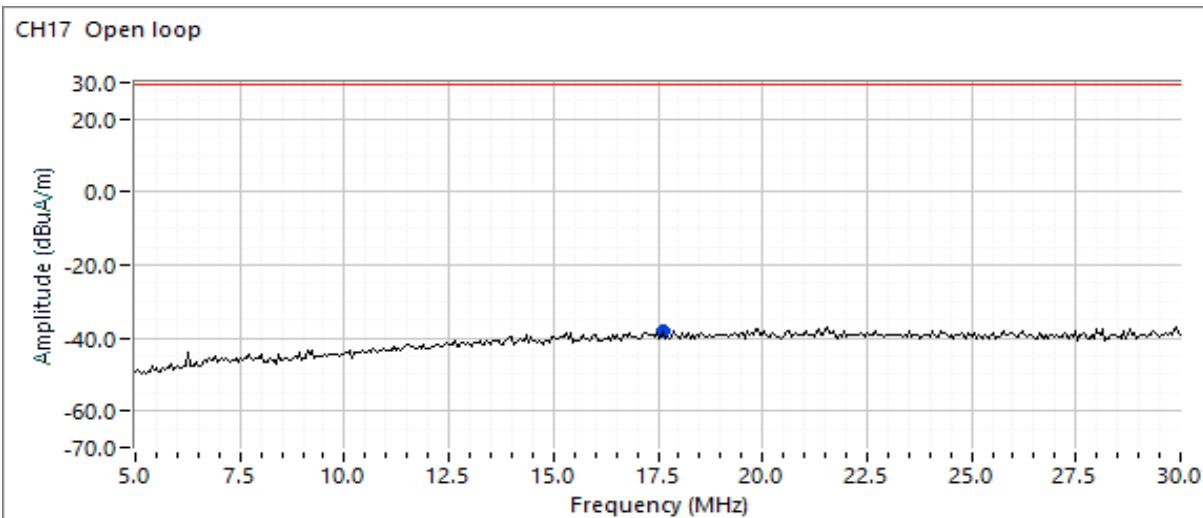

Preliminary readings

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
17.601	-38.0	V	29.5	-67.5	Peak	328	1.1	

Maximized readings (includes manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
17.601	-45.9	V	29.5	-75.4	QP	328	1.1	QP (1.00s)



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
Project Manager:			Christine Krebill
Contact:	Stewart Findlater	Project Engineer:	David Bare
Standard:	FCC §15.249/RSS-210	Class:	-

Radiated Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/16/2023

Config. Used: 1

Test Engineer: Said A.

Config Change: none

Test Location: Fremont Chamber #7

Host Unit Voltage 120V/ 60Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Radiated emissions tests above 1 GHz to FCC Part 15 were performed with floor absorbers in place in accordance with the test methods of ANSI C63.4 and CISPR 16-1-4.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:

Temperature: 19.2 °C

Rel. Humidity: 50 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 - 1000 MHz, Preliminary	FCC §15.209	Eval	Refer to individual runs
2	Radiated Emissions 30 - 1000 MHz, Maximized	FCC §15.209	Pass	29.1 dB μ V/m @ 66.49 MHz (-10.9 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with ANSI C63.10




EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

Test Parameters for Preliminary Scan(s)			
Frequency Range (MHz)	Prescan Distance (meters)	Limit Distance (meters)	Extrapolation Factor (dB, applied to data)
30 - 1000	3	3	0.0

Mid Channel

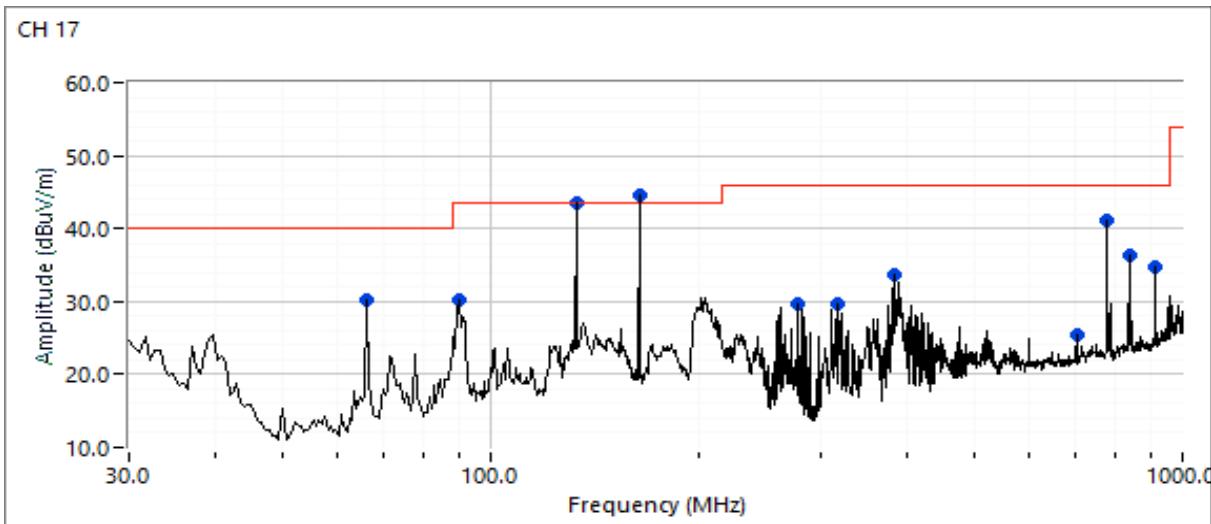

Preliminary peak readings captured during pre-scan

Frequency	Level	Pol	FCC §15.209	Detector	Azimuth	Height	Comments	
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
163.830	44.7	H	43.5	1.2	Peak	6	2.0	Ambient Signal
384.019	33.8	H	46.0	-12.2	Peak	7	1.0	
703.017	25.3	V	46.0	-20.7	Peak	97	1.0	
66.490	30.1	V	40.0	-9.9	Peak	196	1.0	
132.974	43.4	V	43.5	-0.1	Peak	227	3.5	Ambient Signal
836.391	36.2	V	46.0	-9.8	Peak	231	2.0	
914.162	34.8	V	46.0	-11.2	Peak	233	3.0	
278.111	29.8	H	46.0	-16.2	Peak	287	1.0	
777.198	41.1	V	46.0	-4.9	Peak	293	1.5	Ambient Signal
318.038	29.6	H	46.0	-16.4	Peak	313	1.0	
90.319	30.2	V	43.5	-13.3	Peak	345	3.0	



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP		T-Log Number: TL168321-RANA SSEN- 2MP
Contact:	Stewart Findlater		
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

Run #2: Maximized Readings From Run #1


Test Parameters for Maximized Reading(s)				
Frequency Range (MHz)		Test Distance (meters)	Limit Distance (meters)	Extrapolation Factor (dB, applied to data)
30 - 1000		3	3	0.0

Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency	Level	Pol	FCC §15.209	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
66.490	29.1	V	40.0	-10.9	QP	209	1.0
384.019	26.7	H	46.0	-19.3	QP	7	2.0
703.017	17.5	V	46.0	-28.5	QP	97	1.3
66.490	29.1	V	40.0	-10.9	QP	209	1.0
836.391	20.6	V	46.0	-25.4	QP	232	2.2
914.162	22.2	V	46.0	-23.8	QP	242	1.2
278.111	15.5	H	46.0	-30.5	QP	280	1.0
318.038	13.5	H	46.0	-32.5	QP	307	1.0
90.319	25.1	V	43.5	-18.4	QP	360	1.8

Note 1: None of the observed emissions are from the radio.

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	-

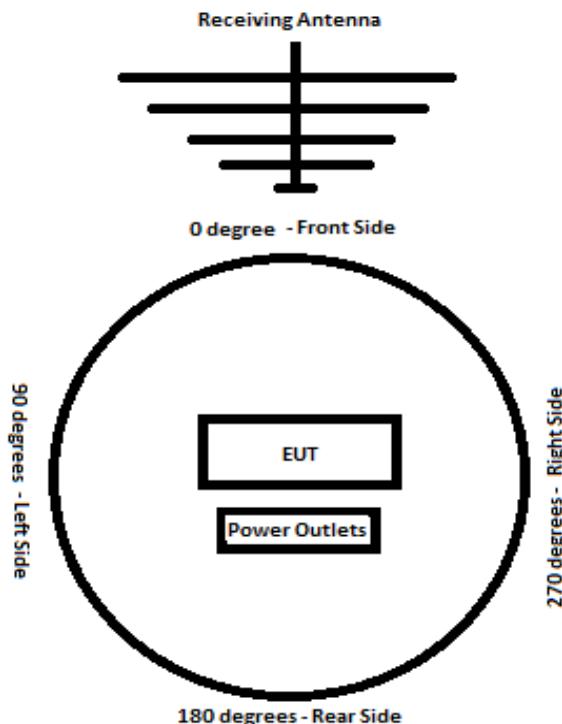



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
		Project Manager:	Christine Krebill
Contact:	Stewart Findlater	Project Engineer:	David Bare
Standard:	FCC §15.249/RSS-210	Class:	N/A

RSS-247 and FCC 15.247 (DTS) Radiated Spurious Emissions, Power, Bandwidth

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT was located on the turntable for radiated emissions testing. The EUT was tested in all three orthogonal orientations.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 20 °C
Rel. Humidity: 51 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel		Power Setting	Test Performed	Limit	Result / Margin
1	BLE	37 - 2402MHz		Max	Radiated Emissions, 10 - 25 GHz	FCC Part 15.209 / 15.249	87.3 dB μ V/m @ 2402.2 MHz (-6.7 dB)
	BLE	17 - 2440MHz		Max	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.249	89.4 dB μ V/m @ 2440.2 MHz (-4.6 dB)
	BLE	39 - 2480MHz		Max	Radiated Emissions, 10 - 25 GHz	FCC Part 15.209 / 15.249	88.8 dB μ V/m @ 2480.2 MHz (-5.2 dB)
2	BLE	See results		Max	99% Bandwidth	RSS GEN	1.068 MHz

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

Sample S/N: SVS1Y0601223200040

Procedure Comments:

Measurements performed in accordance with ANSI C63.10



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	N/A

Run #1: Radiated Fundamental and Spurious Emissions, 1,000 - 25000 MHz

Date of Test: 1/13/2023 8:00

Config. Used: 1

Test Engineer: Said A.

Config Change: None

Test Location: Fremoont Chamber #4


Host Unit Voltage: 120V/60Hz

Run #1a: Low Channel

Channel: 37 Mode: BLE Pwr Setting: Max

Frequency	Level	Pol	15.209 / 15.249		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2402.150	87.3	H	94.0	-6.7	Avg	126	1.6	PK-RB 1 MHz; VB 10 Hz
2402.150	88.1	H	114.0	-25.9	PK	126	1.6	PK-RB 1 MHz; VB 3 MHz
10214.070	32.6	H	54.0	-21.4	Avg	137	1.8	PK -RB 1 MHz; VB: 10 Hz, Note 1
10213.790	43.8	H	74.0	-30.2	PK	137	1.8	PK-RB 1 MHz; VB: 3 MHz, Note 1

Note 1: Noise Floor

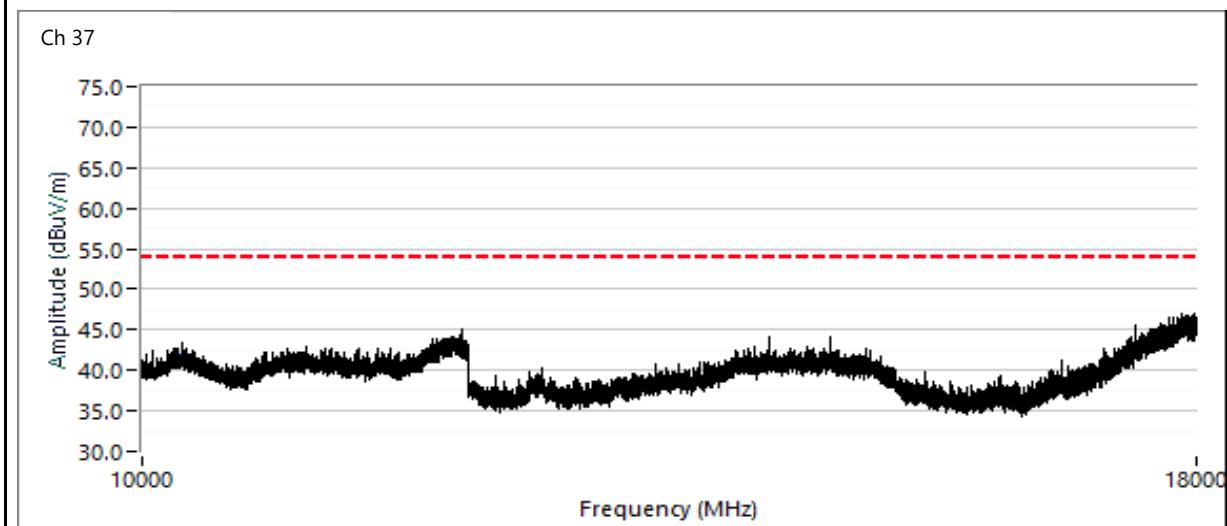



EMC Test Data


Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
		Project Manager:	Christine Krebill
Contact:	Stewart Findlater	Project Engineer:	David Bare
Standard:	FCC §15.249/RSS-210	Class:	N/A

Run #1b: Center Channel

Channel: 17 Mode: BLE Pwr Setting: Max

Frequency	Level	Pol	15.209 / 15.249	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
2440.170	89.4	H	94.0	-4.6	Avg	125	1.8
2440.440	90.2	H	114.0	-23.8	PK	125	1.8
4880.370	39.1	H	54.0	-14.9	Avg	115	1.3
4880.060	46.4	H	74.0	-27.6	PK	115	1.3
8529.580	32.4	V	54.0	-21.6	Avg	101	2.3
8530.550	44.0	V	74.0	-30.0	PK	101	2.3


Note 1: Noise Floor

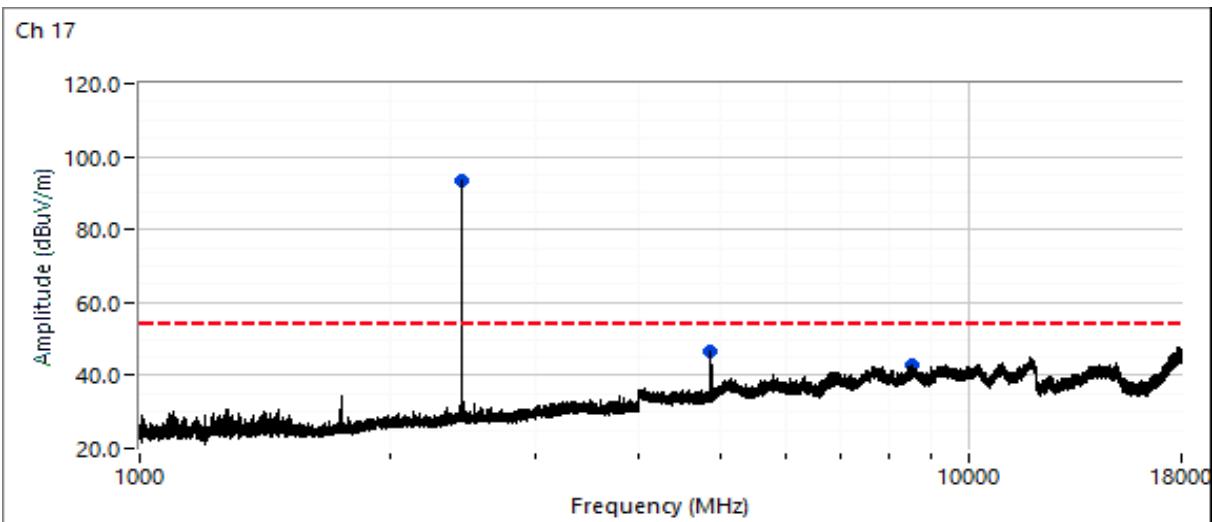



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
		Project Manager:	Christine Krebill
Contact:	Stewart Findlater	Project Engineer:	David Bare
Standard:	FCC §15.249/RSS-210	Class:	N/A

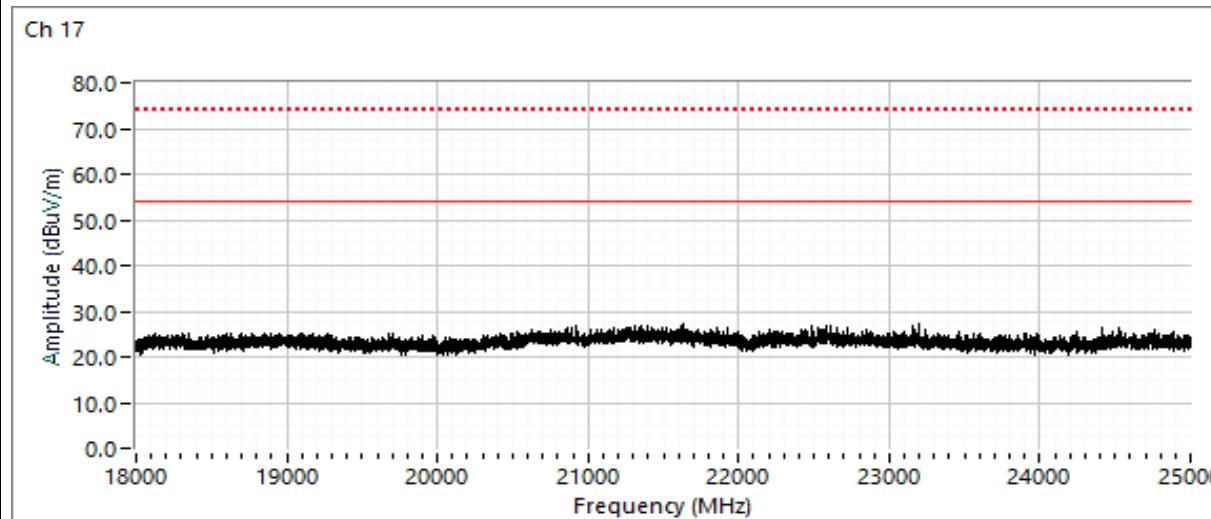

Note:	Scans made between 18 - 25 GHz with the measurement antenna moved around the EUT 30cm from the device indicated there were no significant emissions in this frequency range.
-------	--

Run #1c: High Channel

Channel: 39 Mode: BLE Pwr Setting: Max


Frequency	Level	Pol	15.209 / 15.249		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2480.150	88.8	H	94.0	-5.2	Avg	156	2.1	PK-RB 1 MHz; VB 10 Hz
2480.150	89.6	H	114.0	-24.4	PK	156	2.1	PK-RB 1 MHz; VB 3 MHz
11830.430	35.0	H	54.0	-19.0	Avg	24	1.0	PK -RB 1 MHz; VB: 10 Hz, Note 1
11830.670	46.9	H	74.0	-27.1	PK	24	1.0	PK-RB 1 MHz; VB: 3 MHz, Note 1
17938.450	41.5	H	54.0	-12.5	Avg	111	1.6	PK -RB 1 MHz; VB: 10 Hz, Note 1
17937.790	55.1	H	74.0	-18.9	PK	111	1.6	PK-RB 1 MHz; VB: 3 MHz, Note 1

Note 1: Noise Floor



EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	N/A

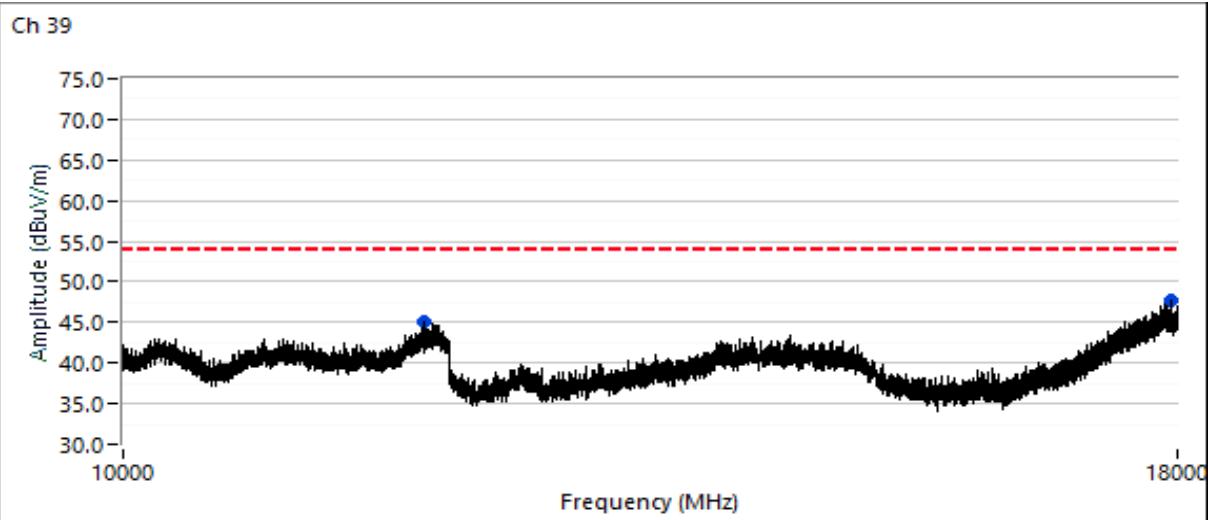




EMC Test Data

Client:	wtec, Inc.	PR Number:	PR168321
Model:	SSEN-2MP	T-Log Number:	TL168321-RANA SSEN-2MP
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	David Bare
		Class:	N/A

Run #2: Signal Bandwidth

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)
		99%	99%	
Max	2402		1.056	0.03
Max	2440		1.060	0.03
Max	2480		1.068	0.03

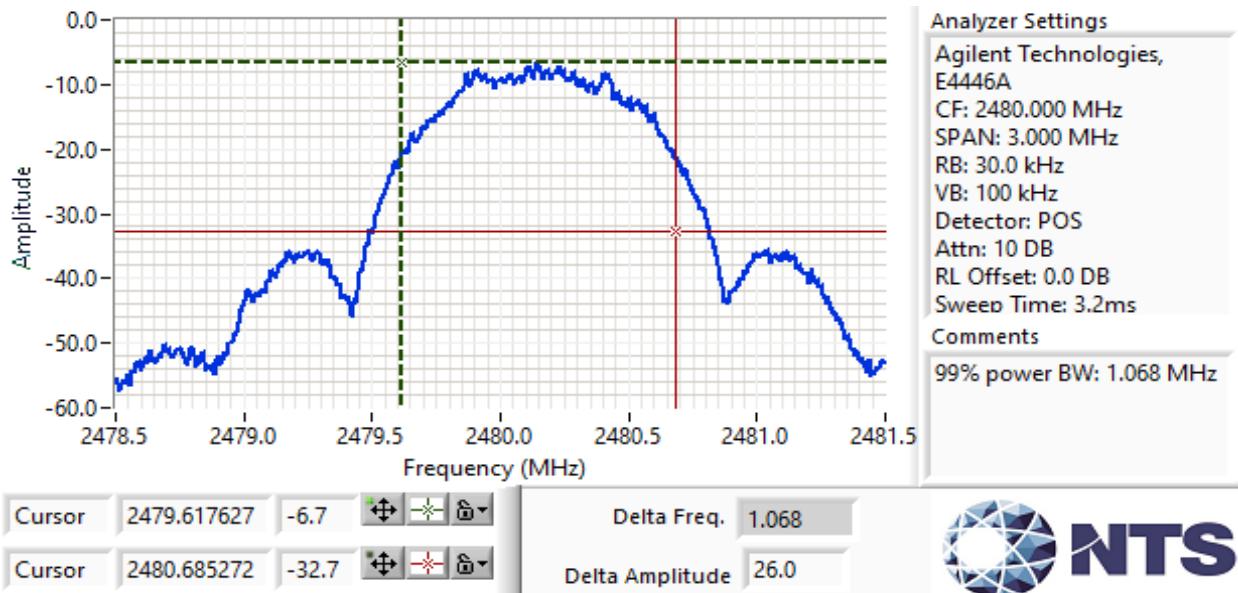



EMC Test Data

Client:	WTEC	PR Number:	PR164668
Product	SSEN-2MP	T-Log Number:	TL164668-EMC
System Configuration:	-	Project Manager:	Christine Krebill
Contact:	Stewart Findlater	Project Engineer:	-
Emissions Standard(s):	FCC §15.249/RSS-210	Class:	-
Immunity Standard(s):		Environment:	Radio

EMC Test Data

For The

WTEC

Product

SSEN-2MP

Date of Last Test: 9/9/2022



EMC Test Data

Client:	WTEC	PR Number:	PR164668
Model:	SSEN-2MP	T-Log Number:	TL164668-EMC
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Class:	N/A

RSS-210 and FCC 15.249 Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform engineering evaluation testing of the EUT with respect to the specification listed above.

Date of Test: 9/9/2022 Config. Used: 1
Test Engineer: Mehran Birgani Config Change: -
Test Location: Fremont Chamber #5 Host Unit Voltage: 120V/60Hz

General Test Configuration

The EUT was located on the turntable for radiated emissions testing. The EUT was tested in all three orthogonal orientations.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions: Temperature: 25-26 °C
Rel. Humidity: 47-49 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Test Performed	Limit	Result / Margin
1	BLE	37 2402MHz	Max	Radiated Emissions, 1 - 10 GHz	FCC Part 15.209 / 15.249	All signals were more than 10dB below the limit
	BLE	39 2480MHz	Max	Radiated Emissions, 1 - 10 GHz	FCC Part 15.209 / 15.249	41.0 dB μ V/m @ 4960.3 MHz (Margin: -13.0 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.


Procedure Comments:

Measurements performed in accordance with ANSI C63.10
A notch filter was used to suppress the fundamental emission.

Client:	WTEC	PR Number:	PR164668
Model:	SSEN-2MP	T-Log Number:	TL164668-EMC
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	-
		Class:	N/A

Run #1: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: BLE
Run #1a: Low Channel

Channel: 37 Mode: BLE Pwr Setting: Max

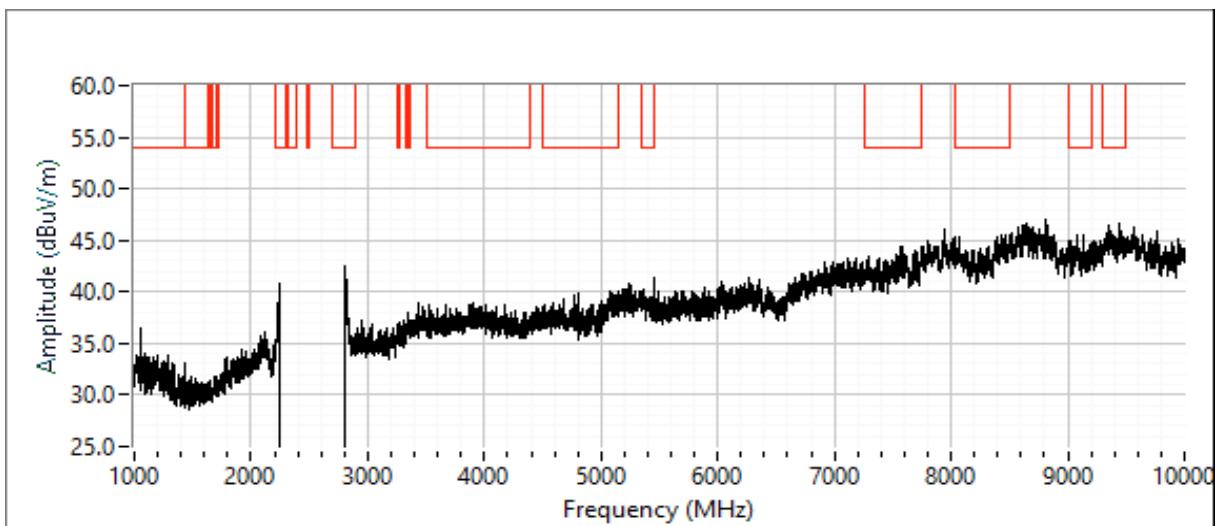




EMC Test Data

Client:	WTEC	PR Number:	PR164668
Model:	SSEN-2MP	T-Log Number:	TL164668-EMC
Contact:	Stewart Findlater	Project Manager:	Christine Krebill
Standard:	FCC §15.249/RSS-210	Project Engineer:	-

Run #1c: High Channel

Channel: 39 Mode: BLE Pwr Setting: Max

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
4960.250	41.0	V	54.0	-13.0	AVG	269	2.0
4960.120	45.0	V	74.0	-29.0	PK	269	2.0

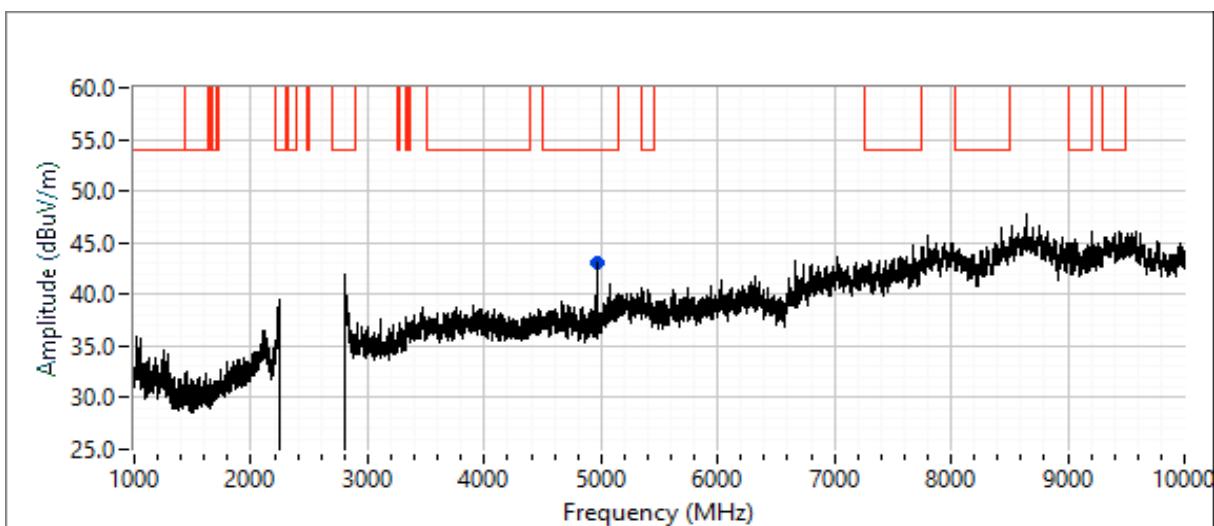



End of Report

This page is intentionally blank and marks the last page of this test report.